
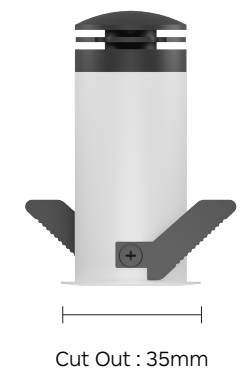
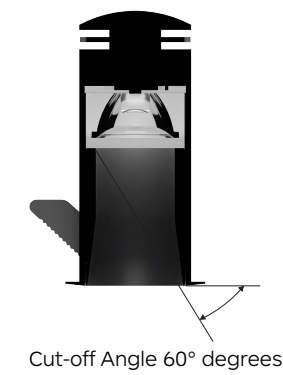


MINI

Recessed Downlight

MINI Recessed Downlight

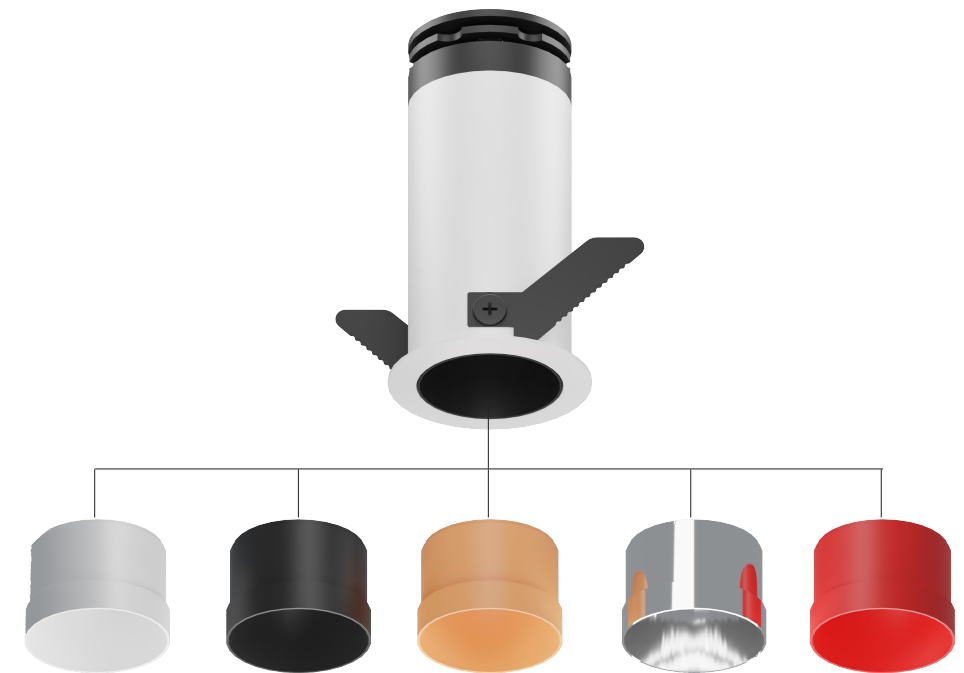

MINI Recessed Downlight

MINI Recessed Downlight



Fixed
Max 8W
Cut Out:35mm



Vertically Adjustable
Max 8W
Cut Out:35mm



Horizontal and Vertical Adjustable
Max 8W
Cut Out:35mm



Anti-glare
Max 8W
Cut Out:30mm



Super Anti-glare
Max 4W
Cut Out:35mm



Flared Anti-glare Fixed
Max 8W
Cut Out:45mm



Drop-down
Max 4W
Cut Out:35mm



Large Angle Adjustable
Max 8W
Cut Out:45mm




Flared Anti-glare Adjustable
Max 8W
Cut Out:45mm



Semi-recessed Fixed
Max 8W
Cut Out:38mm



Semi-recessed Adjustable
Max 8W
Cut Out:40mm



IP65 Fixed
Max 10W
Cut Out:40mm



IP65 Adjustable
Max 10W
Cut Out:40mm




Drop-down
Max 8W
Cut Out:55mm


MINI Recessed Downlight

MINI Recessed Downlight

CE IP20

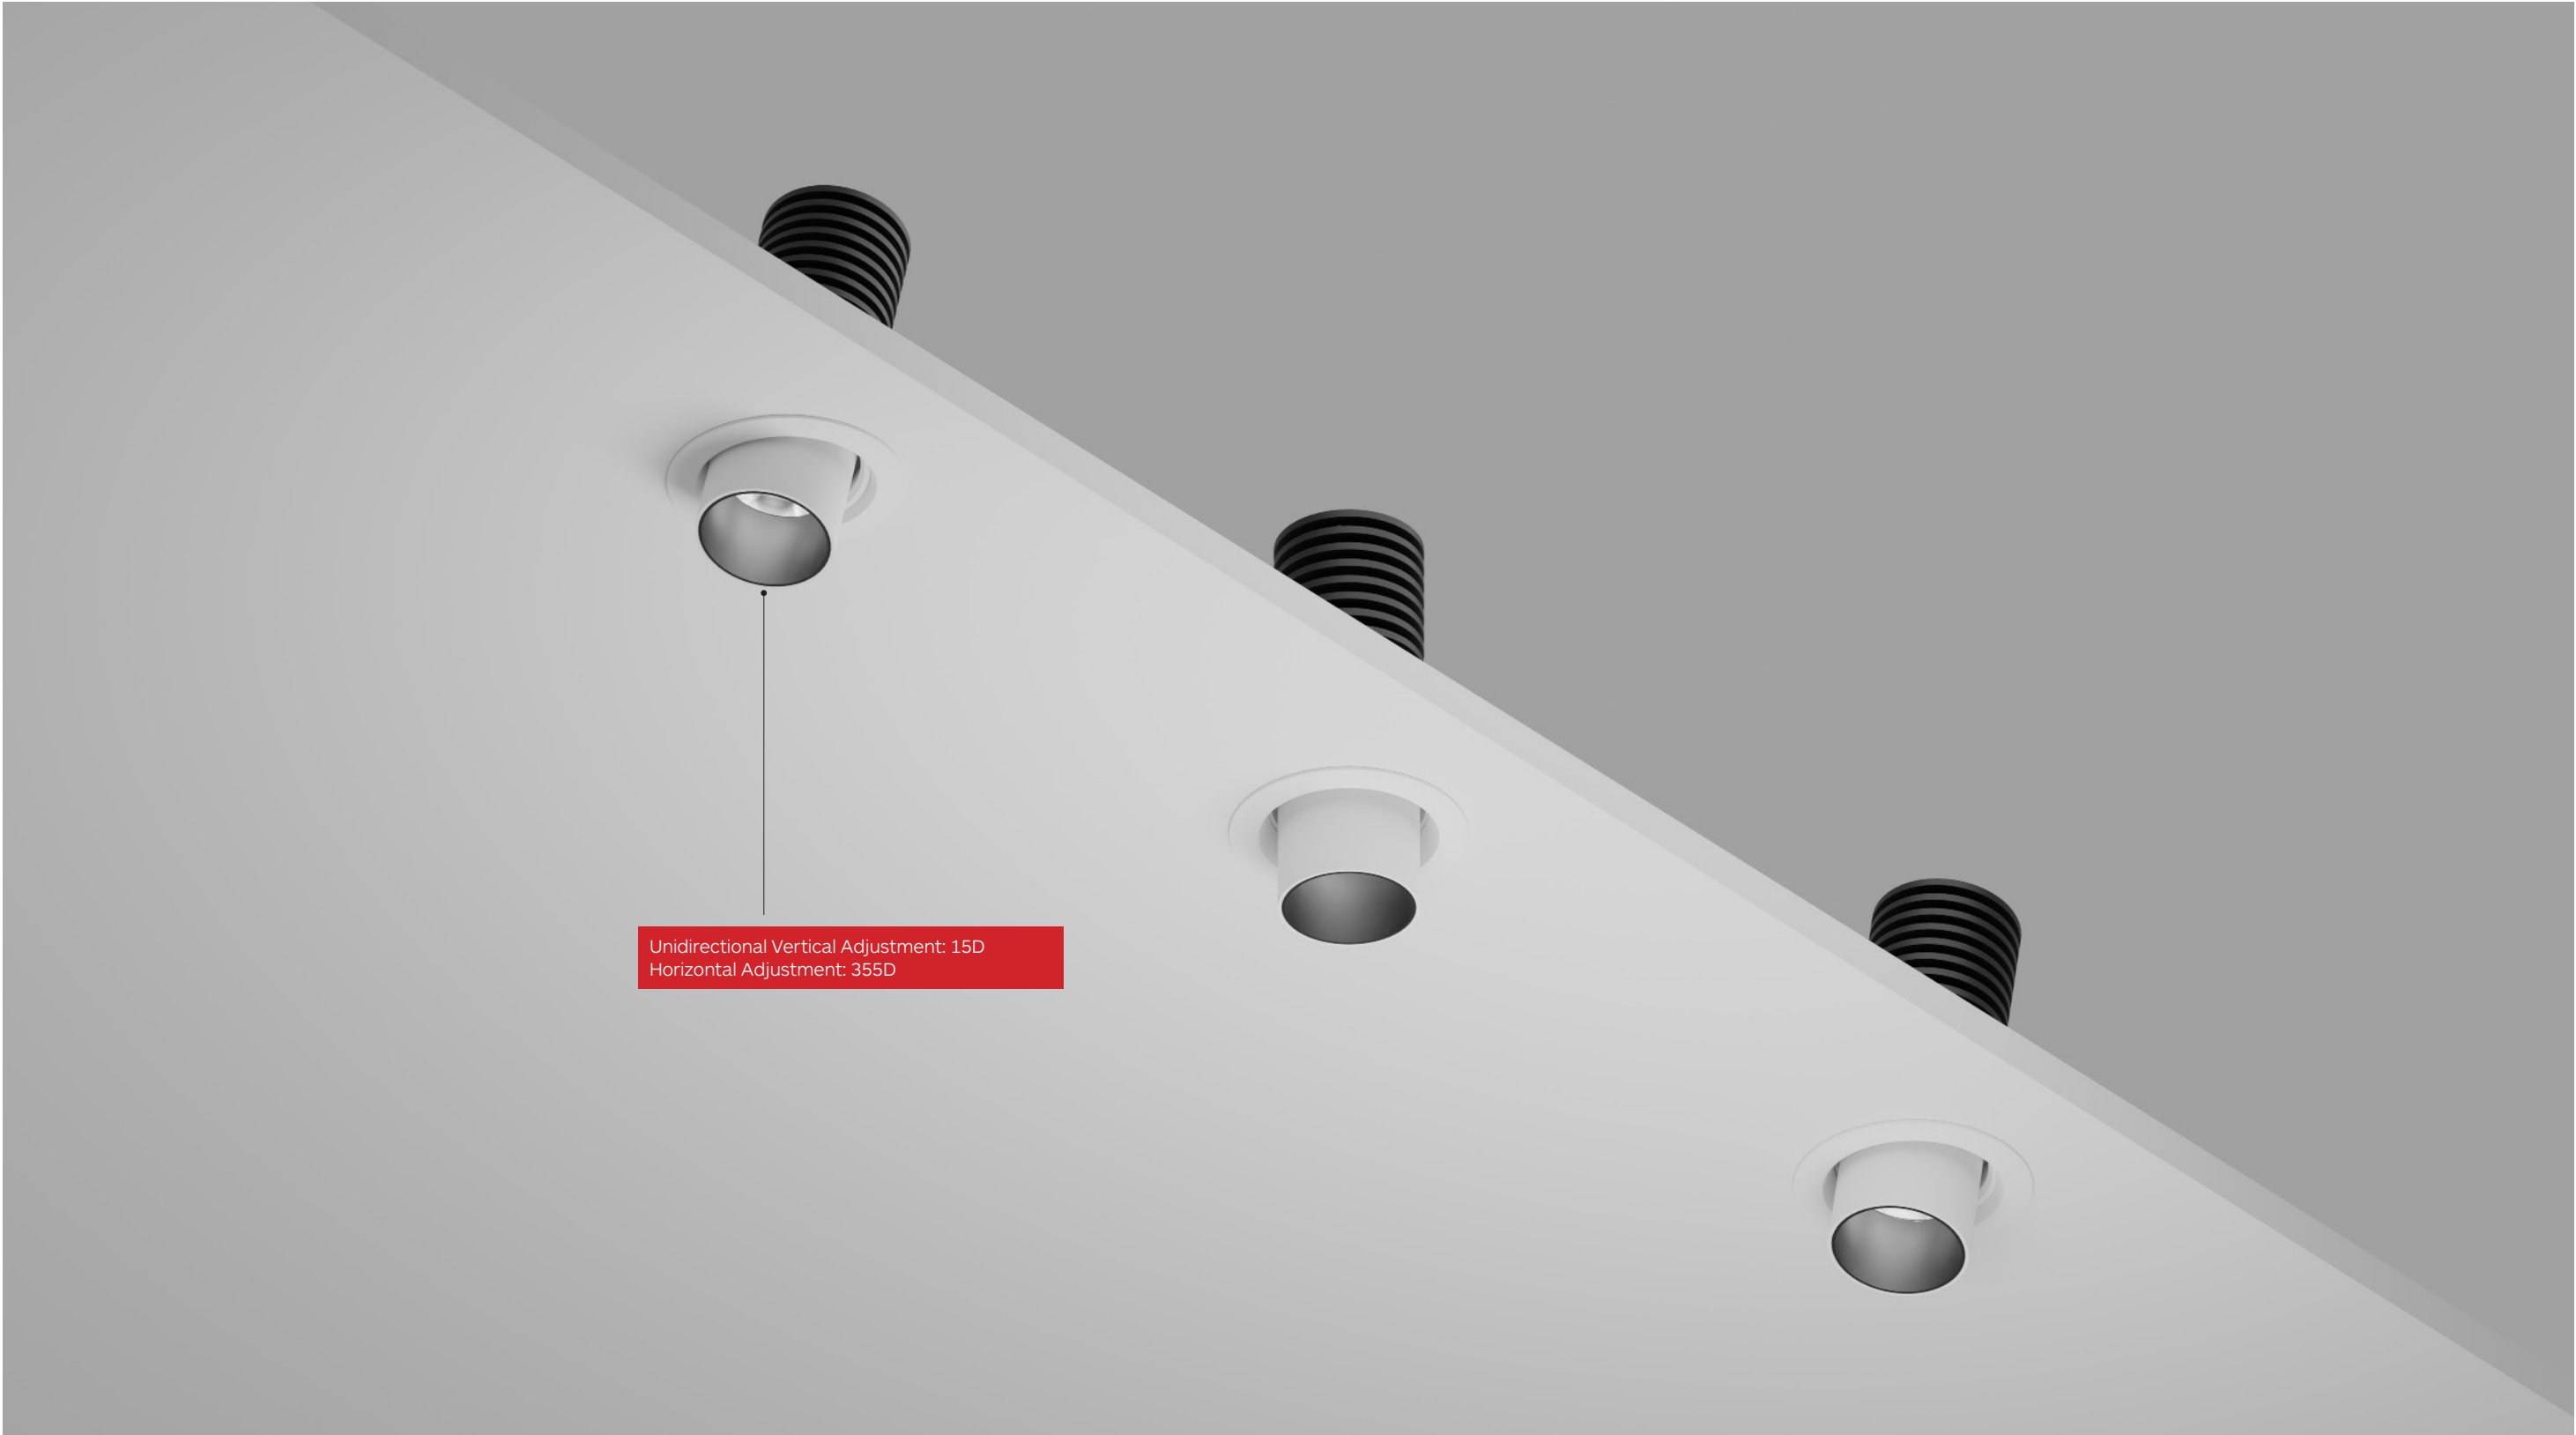

MINI Recessed Downlight

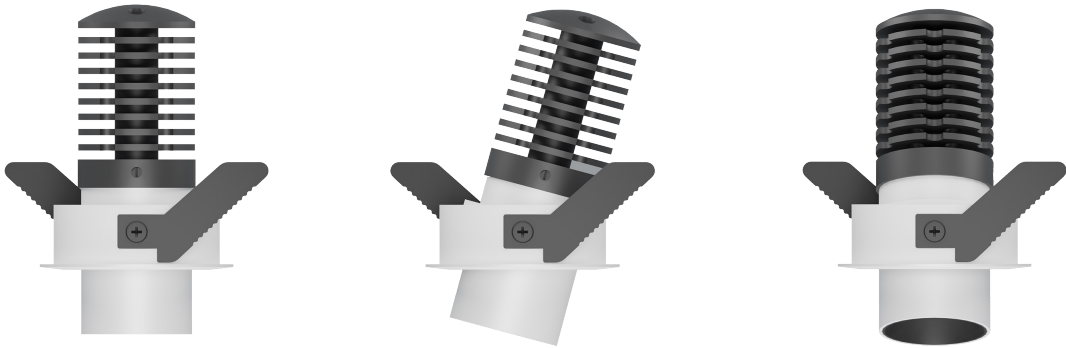

Body

Easier to adjust the angle of illumination, with both fixed and adjustable options, and with a 10d beam angle (Max 3.5W). A variety of decorative colors are available for the inner ring. Also can meet the use of 1-18mm thick ceiling.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

MINI Recessed Downlight

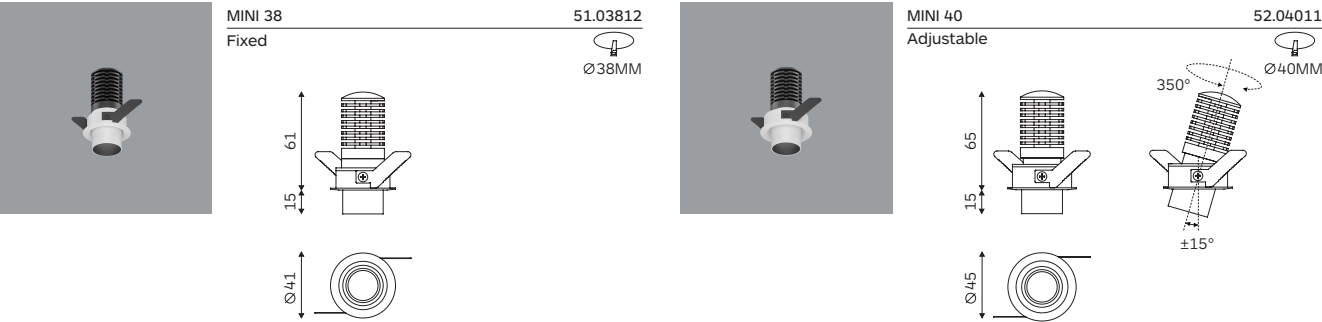


Code Ordering Example: 5 1 . 0 3 8 1 2 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 38 Downlight Fixed	51.03812	CA SMD 5050	90	30 3000K	6W	485 lm	22°/24°/46°	D0 No Dim	10 □ WH
				40 4000k		509 lm		DA Dali Dim	20 ■ BK
MINI 40 Downlight Adjustable	52.04011	CA SMD 5050	90	30 3000K	6W	485 lm	22°/24°/46°	DC 0-10V Dim	
				40 4000k		509 lm			

MINI Recessed Downlight



MINI Recessed Downlight

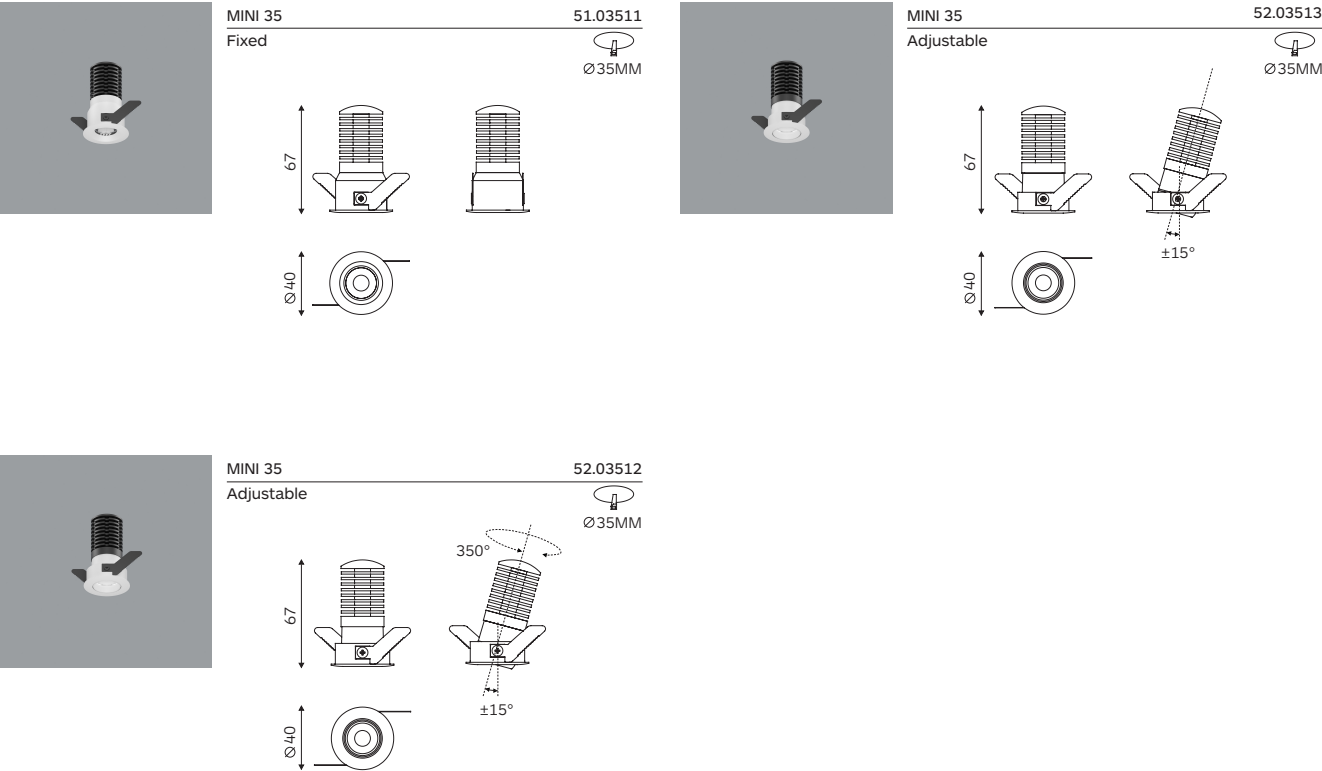

Body

Small size spotlight with cut out 35mm, Max 8W. Also have different control methods is available (SCR, 0-10V, Dali).

Choose high lumen 5050 LED, 6W Max lumen about 550LM

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Accessories

Honeycomb louvre, Linear Spread glass, glass.


Finish

Black or white colour.

Code Ordering Example: 5 1 . 0 3 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 35 Downlight Fixed	51.03511	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°	D0 No Dim	10 □ WH
			40	4000k		509 lm		DA Dali Dim	20 ■ BK
MINI 35 Downlight Adjustable	52.03513	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°	DC 0-10V Dim	
			40	4000k		509 lm			
MINI 35 Downlight Adjustable	52.03512	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°		
			40	4000k		509 lm			

MINI Recessed Downlight

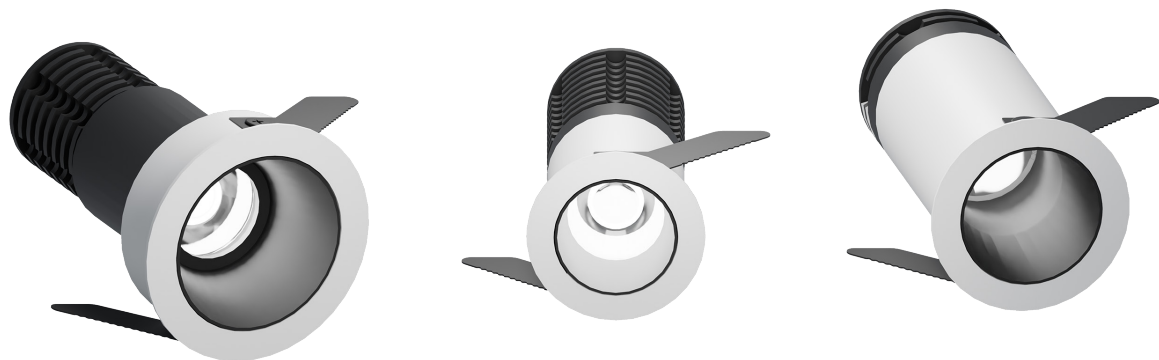

Body

Deeper cut-off angle, up to 40d. More comfortable light, better anti-glare design. And also high lumen output (6W about 500lm)

A wide selection of decorative colors for the inner ring, Also can meet the use of 1-18mm thick ceiling.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre


MINI Recessed Downlight

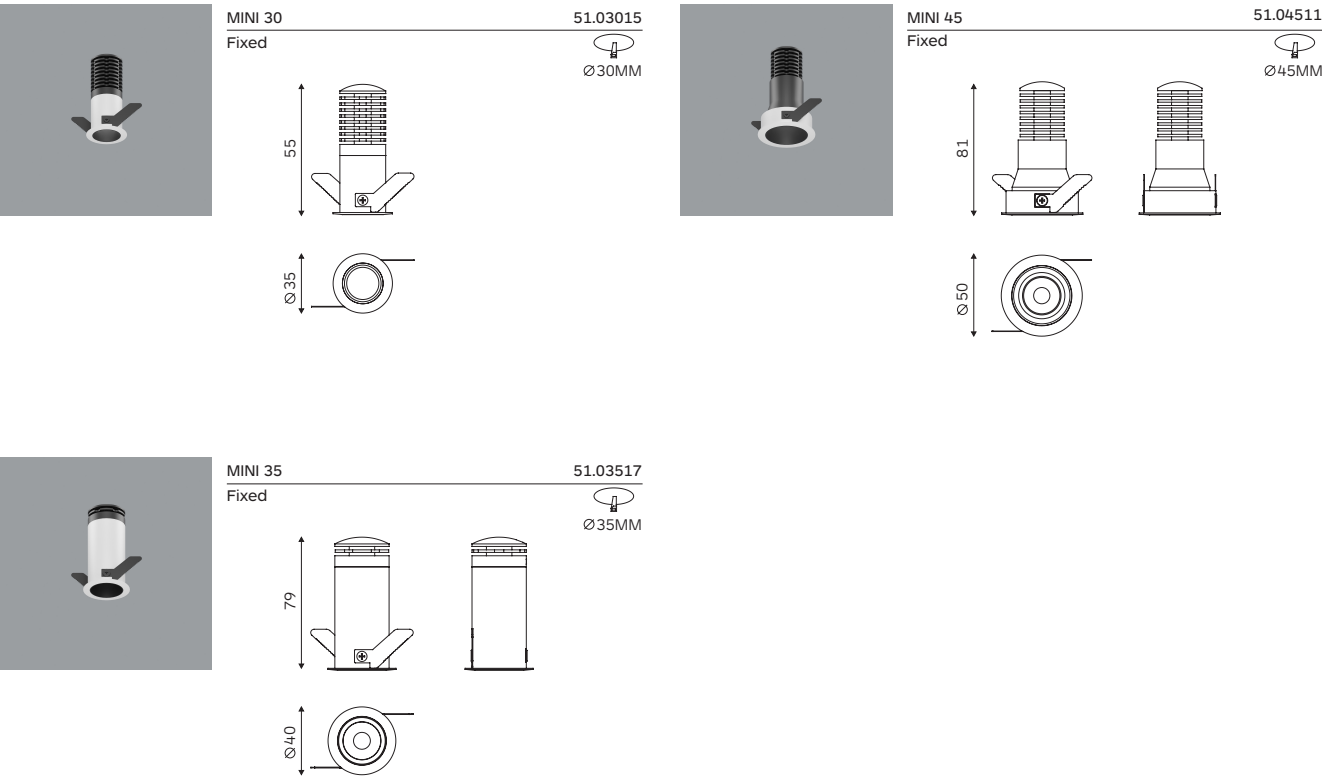

Code Ordering Example: 5 1 . 0 3 0 1 5 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 30 Downlight Fixed	51.03015	CA SMD 5050	90	30 3000K	6W	485 lm	22°/28°/40°	D0 No Dim	10 □ WH
				40 4000k		509 lm			20 ■ BK
MINI 45 Downlight Fixed	51.04511	CA SMD 5050	90	30 3000K	6W	485 lm	22°/28°/40°		
				40 4000k		509 lm			
MINI 35 Downlight Fixed	51.03517	CA SMD 5050	90	30 3000K	4W	221 lm	15°/20°/27°		
				40 4000k		232 lm			

MINI Recessed Downlight

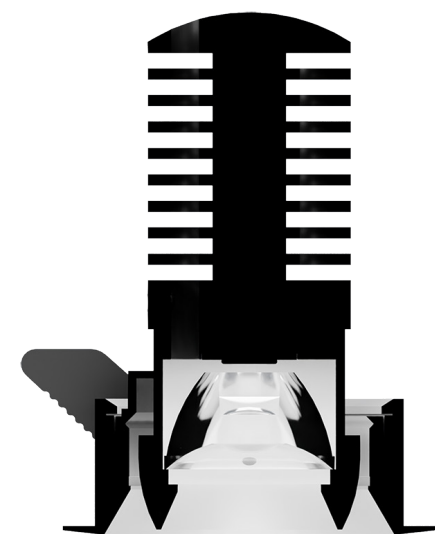

Body

Greater angle adjustment (up to 27d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Selected high-quality LED, SDCM<3.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre

MINI Recessed Downlight

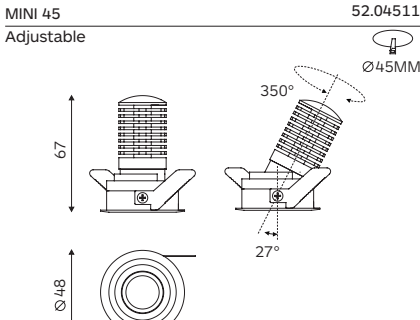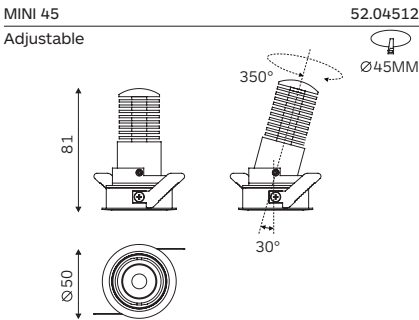

Code Ordering Example: 5 2 . 0 4 5 1 2 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
MINI Downlight Adjustable	52.04512	CA	SMD 5050	90	30	3000K	6W	485 lm	22°/28°/40°	D0	No Dim	10 <input type="checkbox"/> WH
					40	4000k		509 lm		DA	Dali Dim	20 <input checked="" type="checkbox"/> BK
MINI Downlight Adjustable	52.04511	CA	SMD 5050	90	30	3000K	6W	485 lm	22°/28°/40°	DC	0-10V Dim	
					40	4000k		509 lm				


MINI Recessed Downlight

MINI Recessed Downlight

CE | IP20 | □ | ■



MINI Recessed Downlight

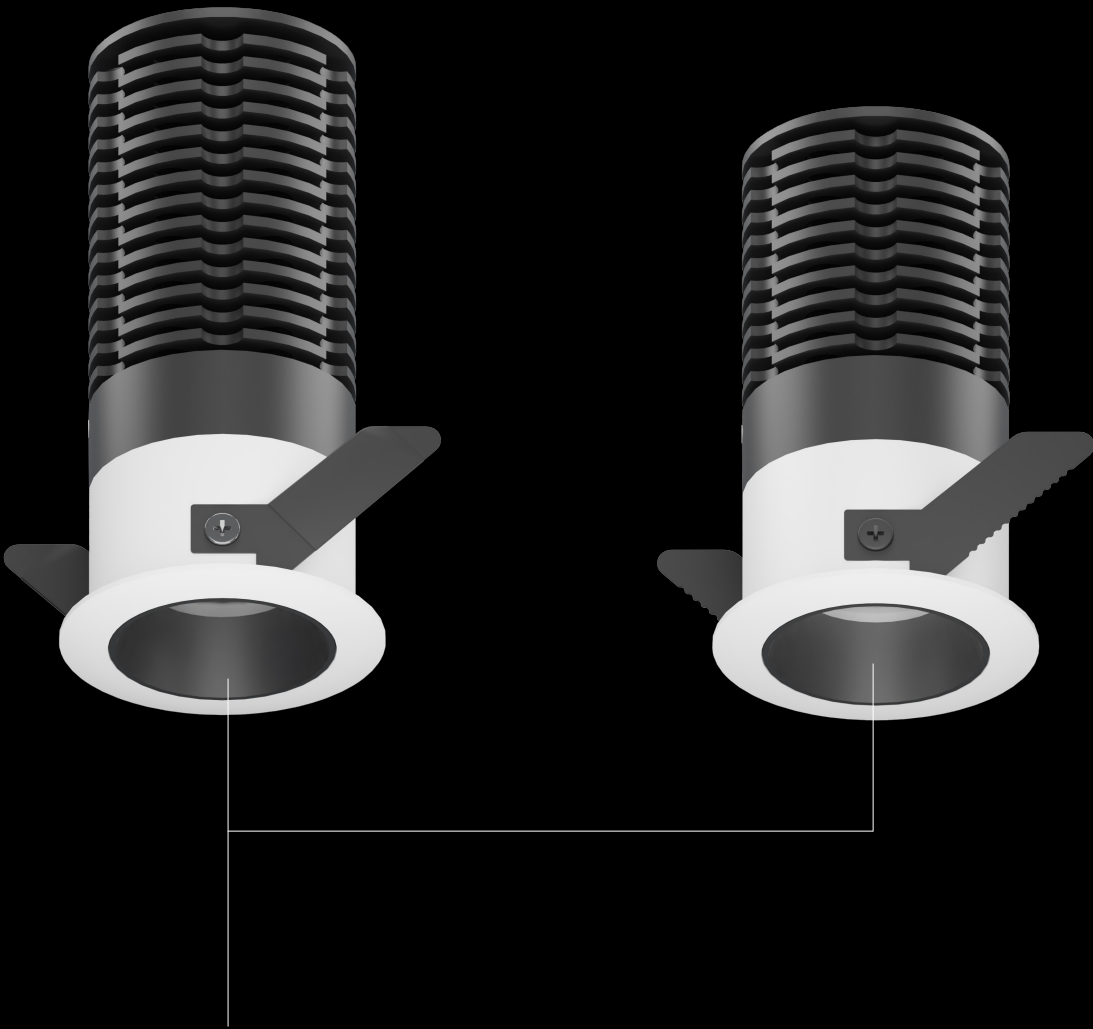


IP54 by adding protective glass.

MINI Recessed Downlight

One-piece carriage with integral heat dissipation and 6 internal circular holes for top and bottom convection. Reduce the number of layers or increase the number of layers of cooling teeth to meet different illumination requirements

New thermal design with convection around the perimeter for higher power in a very small size.

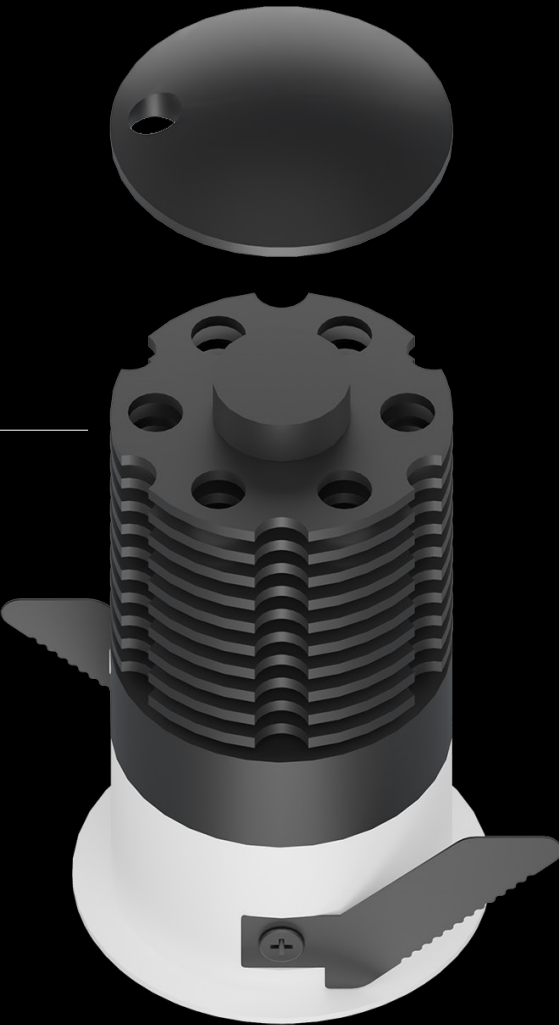

MINI Recessed Downlight



Body

Luminaire with IP44 for use in bathrooms and optionally also with honeycomb at the same time.

Up to 8W, lumen output up to approx. 700lm. Also have different control methods is available (SCR, 0-10V, Dali).

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

MINI Recessed Downlight

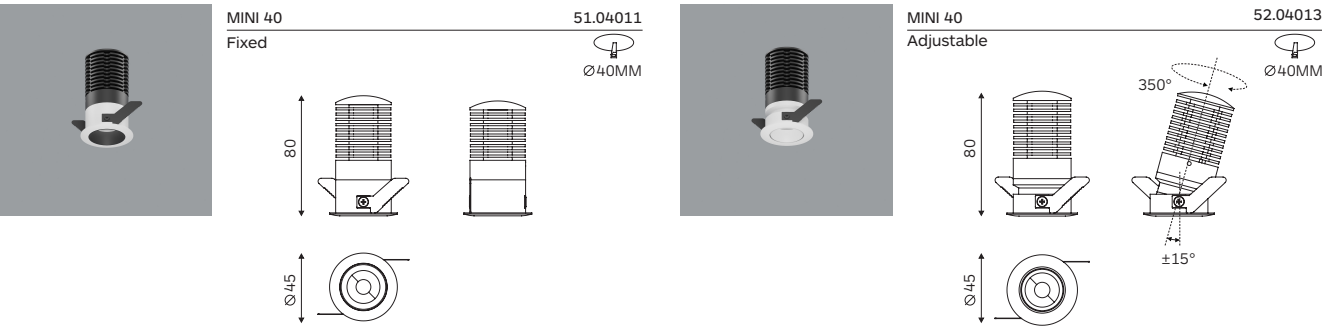


Code Ordering Example: 5 1 . 0 4 0 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI Downlight Fixed	51.04011	CA	90	30	3000K	8W	479 lm	22°/28°/40°	D0 No Dim
				40	4000k		503 lm		DA Dali Dim
MINI Downlight Adjustable	52.04013	CA	90	30	3000K	8W	479 lm	22°/28°/40°	DC 0-10V Dim
				40	4000k		503 lm		

MINI Recessed Downlight

MINI Recessed Downlight


CE IP20

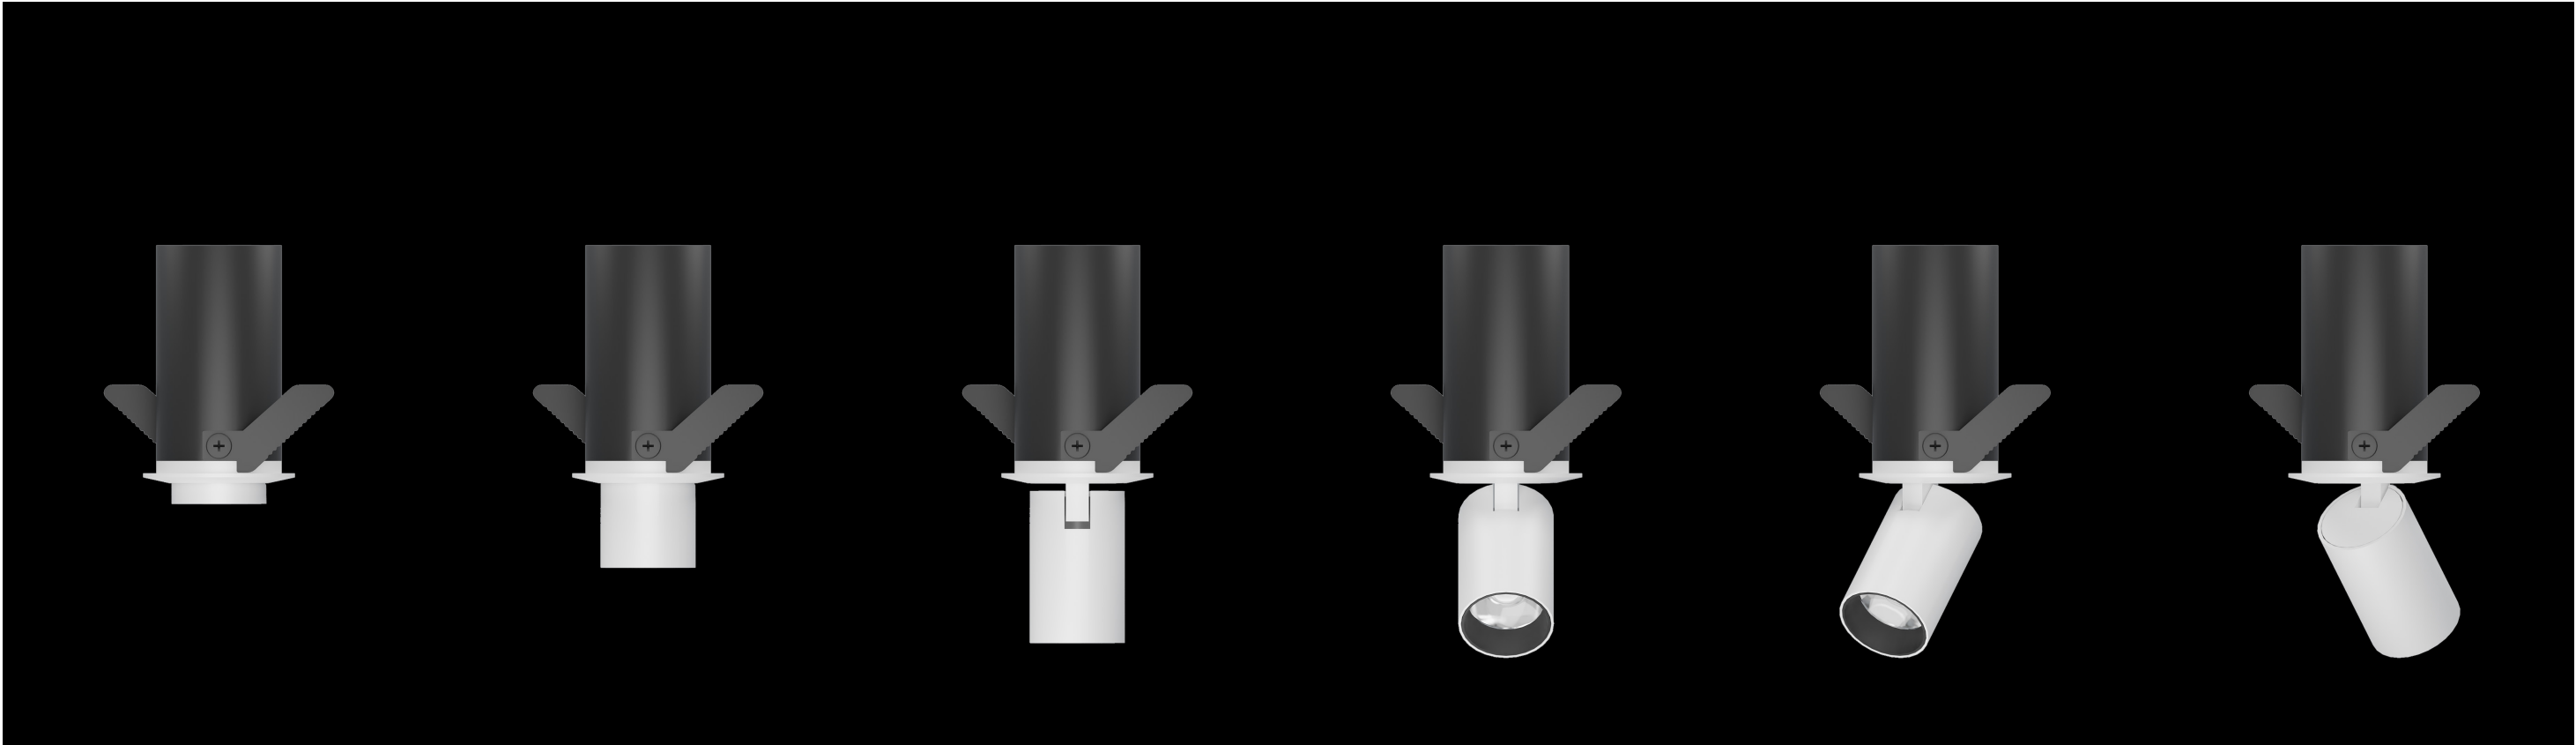

MINI Recessed Downlight



MINI Recessed Downlight

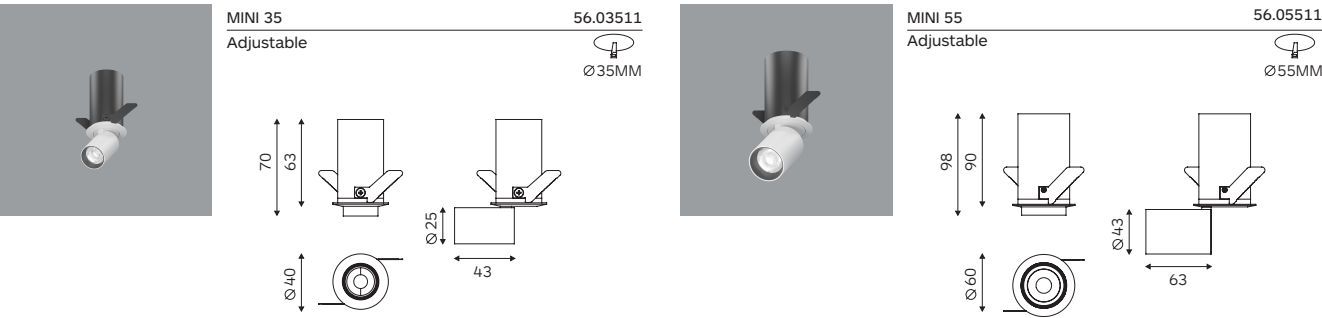

Body

The body head can be up and down and rotated by 350°.

Can be integrated into almost any room architecture.

The round light heads are available in two different diameters and can be inserted into a round recessed housing

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED Or High Power
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Offers a variable and professional lighting solution for illuminating accents in retail areas and exhibition rooms where goods have to be presented in a particularly realistic way.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 5 6 . 0 3 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 35 Downlight Adjustable	56.03511	CA	90	30	3000K	4W	479 lm	22°/28°/40°	D0 No Dim 10 □ WH
				40	4000k		503 lm		DA Dali Dim 20 ■ BK
MINI 55 Downlight Adjustable	56.05511	CA	90	30	3000K	8W	479 lm	22°/28°/40°	DC 0-10V Dim
				40	4000k		503 lm		