


# FOS

Series(Magnetic, AC 220V, Surface Mounted, Pendant Light)

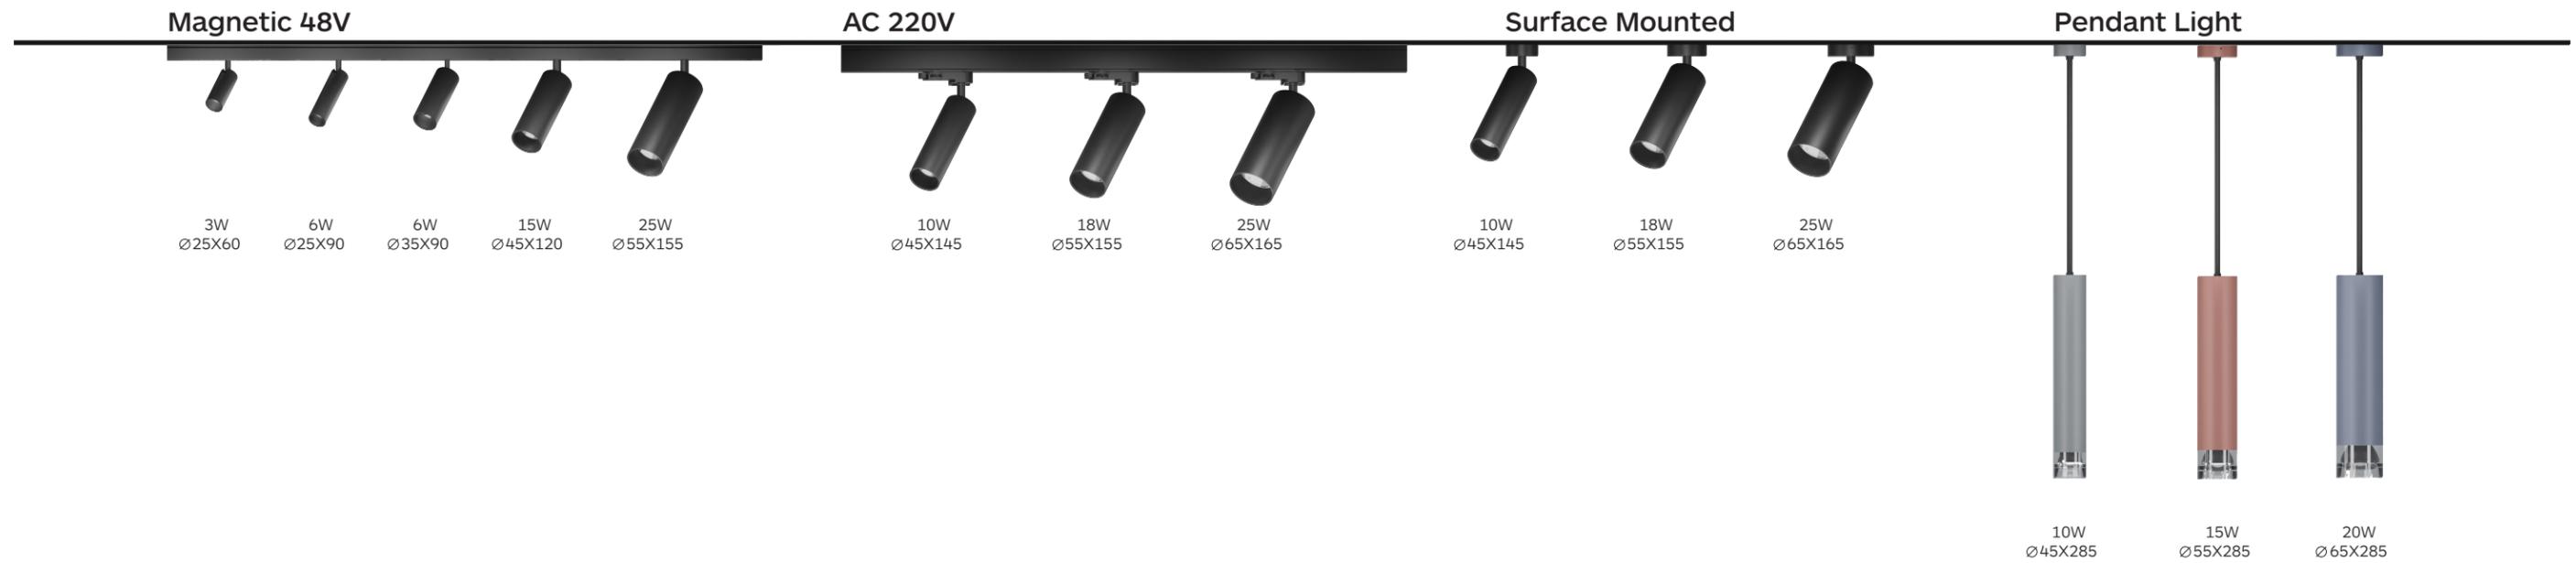

# FOS Track Lighting


Track 45 | 55 | 65



# FOS Track Lighting



FOS 45 32.04519 FOS 55 32.05516 FOS 65 32.06512

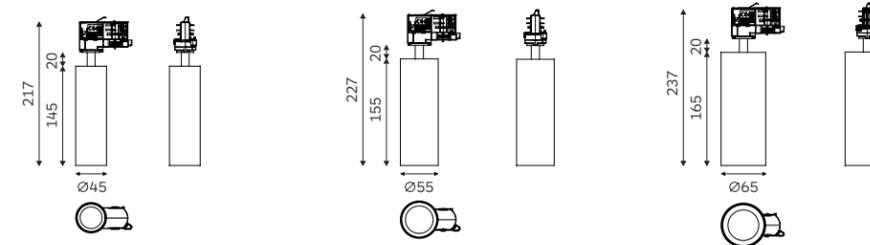

## Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs.

Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

## Accessories

Honeycomb louvre, Linear Spread glass, Spread glass, glass.

## Finish

Black or white colour.

## LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

## Optic

Lens.  
Narrow, medium and wide beam angle available.


## Driver

Supplied with internal driver.

## Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

## Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 3 2 . 0 4 5 1 9 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Track Lighting	32.04519 CA	COB LED	90	30	3000K	10W	720 lm	D0 No Dim	10 <input type="checkbox"/> WH
			40	4000k	756 lm	20 <input type="checkbox"/> BK			
FOS 55 Track Lighting	32.05516 CA	COB LED	90	30	3000K	18W	1296 lm	D0 No Dim	17°/24°/37°
			40	4000k	1360 lm				
FOS 65 Track Lighting	31.06512 CA	COB LED	90	30	3000K	25W	1800 lm	D0 No Dim	17°/24°/37°
			40	4000k	1890 lm				

# FOS Recessed Downlight

## FOS Recessed Downlight

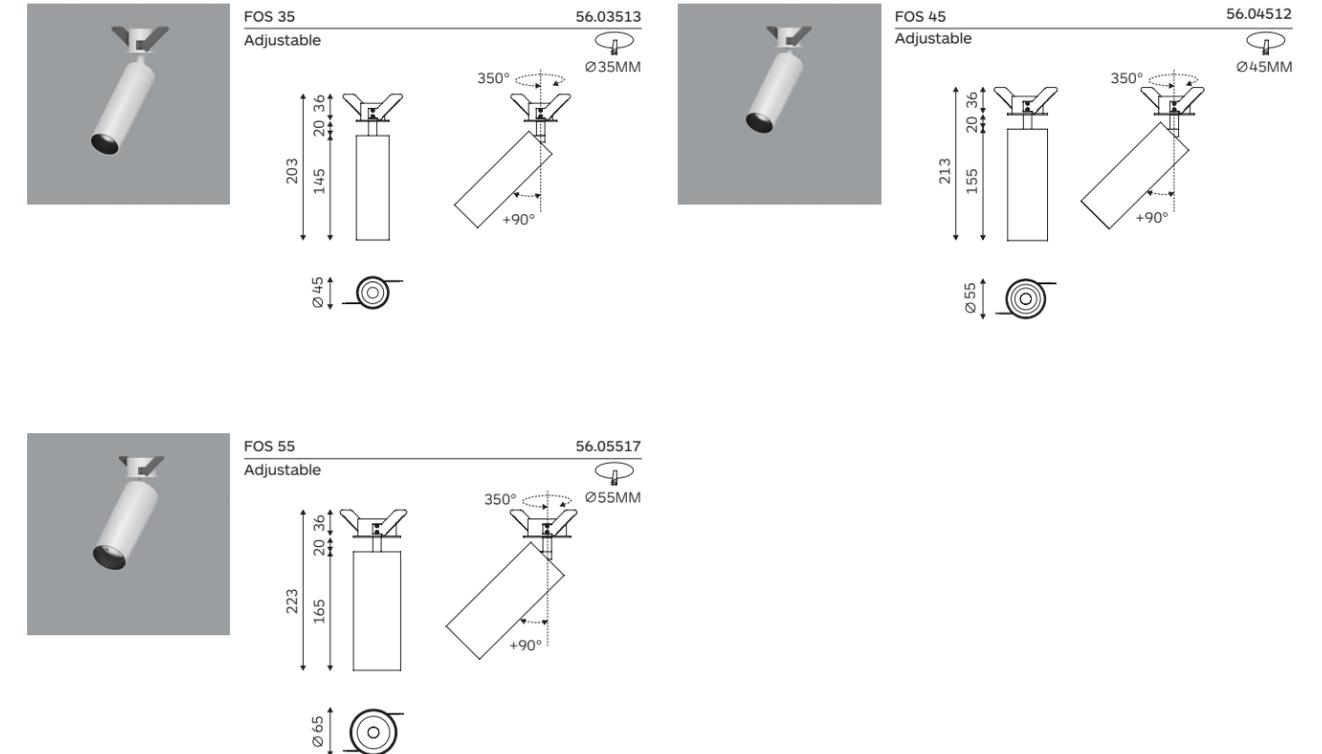

### Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs.

Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

### Accessories

Honeycomb louvre, Linear Spread glass, glass.

### Finish

Black or white colour.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

### Optic

Lens.  
Narrow, medium and wide beam angle available.


### Driver

Supplied with No-dimable remote driver.  
Dimming Options: 0-10V Dim, Dali Dim.

### Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

### Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 5 6 . 0 3 5 1 3 - 9 0 3 0 1 5 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 35 Downlight Adjustable	56.03513 CA	COB LED	90	30	3000K	15W	1729 lm	15°/32°/42°	D0 No Dim 10 □ WH
			40	4000k		1815 lm		DA Dali Dim 20 ■ BK	
FOS 45 Downlight Adjustable	56.04512 CA	COB LED	90	30	3000K	20W	1955 lm	15°/32°/42°	DC 0-10V Dim
			40	4000k		2052 lm			
FOS 55 Downlight Adjustable	56.05517 CA	COB LED	90	30	3000K	25W	2221 lm	19°/29°/38°	
			40	4000k		2332 lm			

# FOS Surface Mounted Lighting


Surface Mounted 45 | 55 | 65

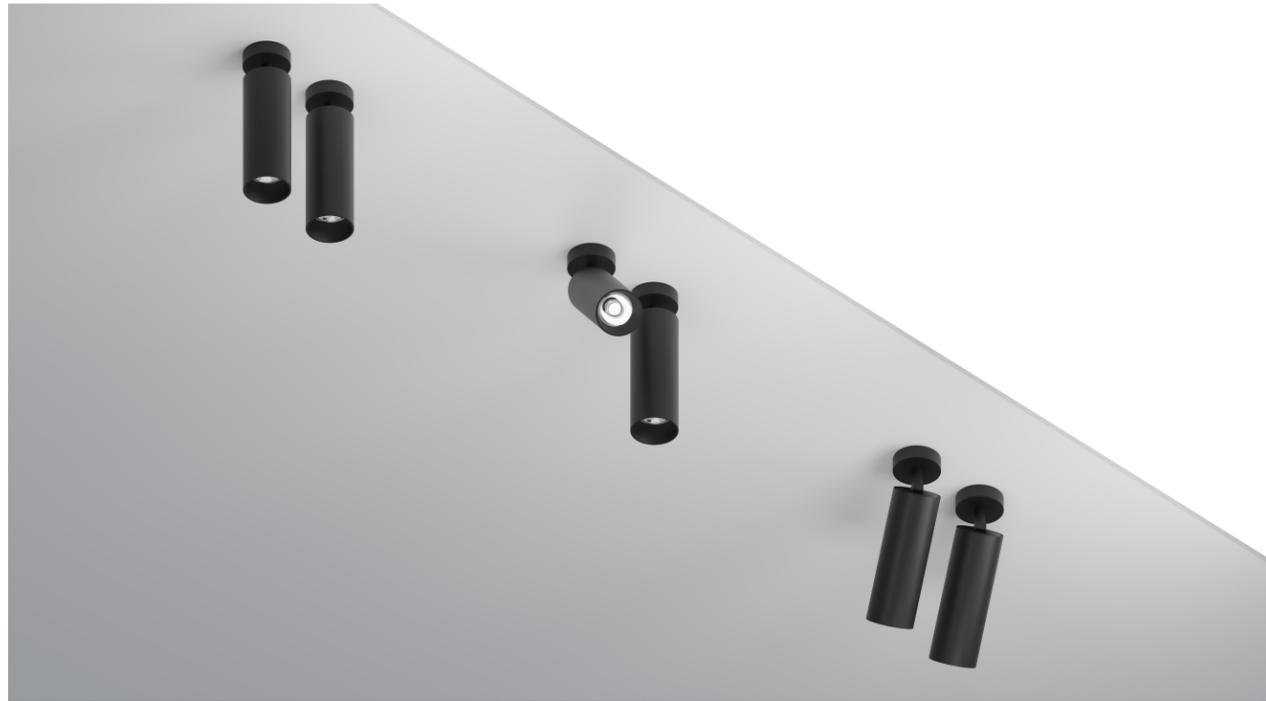

## FOS Surface Mounted Lighting



FOS 45 93.04512 FOS 55 93.05512 FOS 65 93.06511

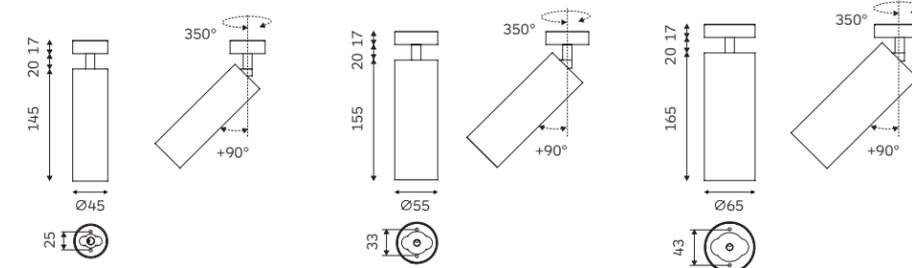


### Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions. Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.


### Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

### Optic

Lens.  
Narrow, medium and wide beam angle available.

### Driver

Supplied with internal driver.

### Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

### Accessories

Honeycomb louvre, Linear Spread glass, glass.

### Finish

Black or white colour.

Code Ordering Example: 9 3 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Surface Mounted Adjustable	93.04512 CA	COB LED	90	30	3000K	10W	749 lm	D0 No Dim	10 <input type="checkbox"/> WH
			40	4000k		786 lm	20 <input type="checkbox"/> BK		
FOS 55 Surface Mounted Adjustable	93.05512 CA	COB LED	90	30	3000K	18W	1500 lm	D0 No Dim	17°/23°/36°
			40	4000k		1575 lm			
FOS 65 Surface Mounted Adjustable	93.06511 CA	COB LED	90	30	3000K	25W	2221 lm	D0 No Dim	17°/23°/36°
			40	4000k		2332 lm			


# FOS Pendant Lighting

Pendant Lighting 45 | 55 | 65



# FOS Pendant Lighting


Pendant Lighting 45 | 55 | 65

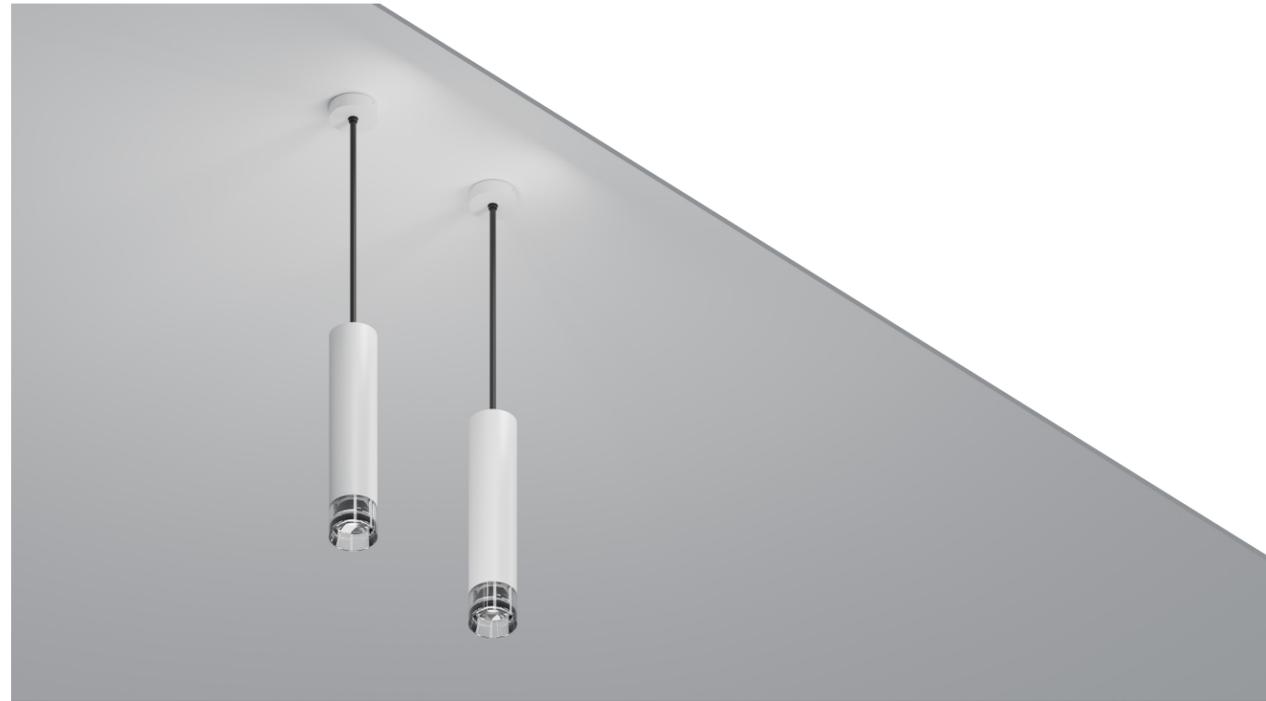

## FOS Pendant Lighting



FOS 45 81.04511 FOS 55 81.05511 FOS 65 81.06511

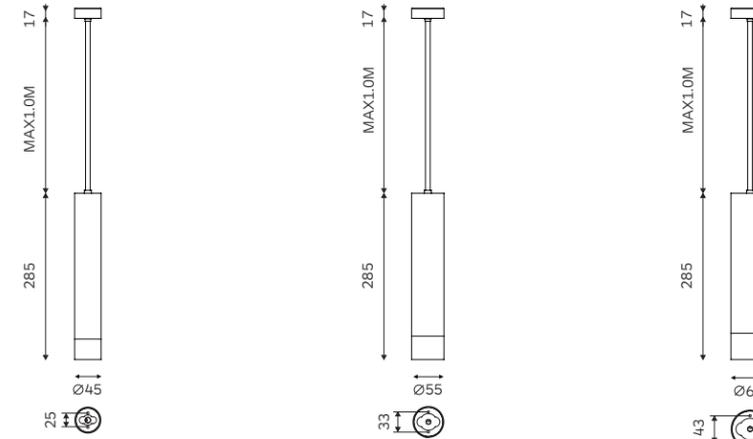

### Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

### Accessories

Honeycomb louvre, Linear Spread glass, glass.

### Finish

Black or white colour.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

### Optic

Lens.  
Narrow, medium and wide beam angle available.


### Driver

Supplied with internal driver.

### Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


### Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 8 1 . 0 4 5 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Pendant Lighting	81.04511 CA	COB LED	90	30	3000K	8W	537 lm	17°/23°/36°	D0 No Dim 10 □ WH
			40	4000k		563 lm		DA Dali Dim 20 ■ BK	
FOS 55 Pendant Lighting	81.05511 CA	COB LED	90	30	3000K	15W	1100 lm	17°/23°/36°	DC 0-10V Dim
			40	4000k		1155 lm			
FOS 65 Pendant Lighting	81.06511 CA	COB LED	90	30	3000K	20W	1400 lm	17°/23°/36°	
			40	4000k		1470 lm			