


# EMMA Track Lighting

Track 45 | 62 | 73 | 90




## EMMA Track Lighting

CE IP20   Rotate 350°  Tilt 90°

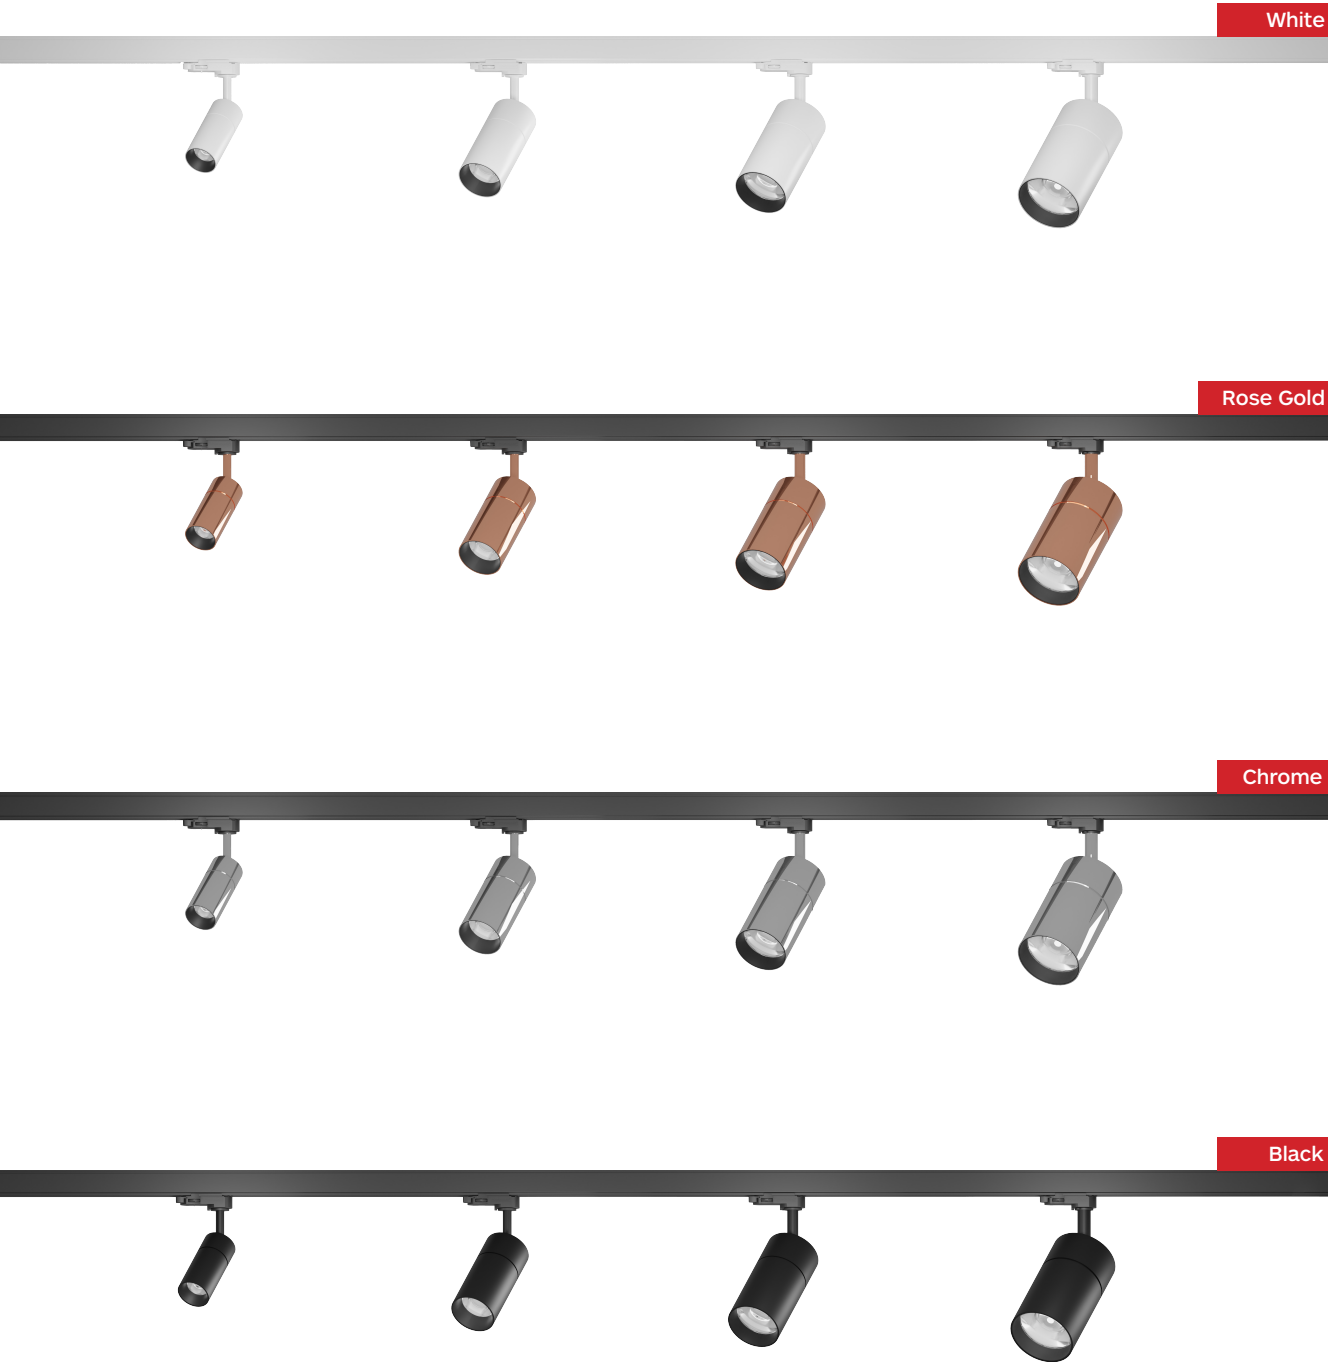


# EMMA Track Lighting

Track 45 | 62 | 73 | 90

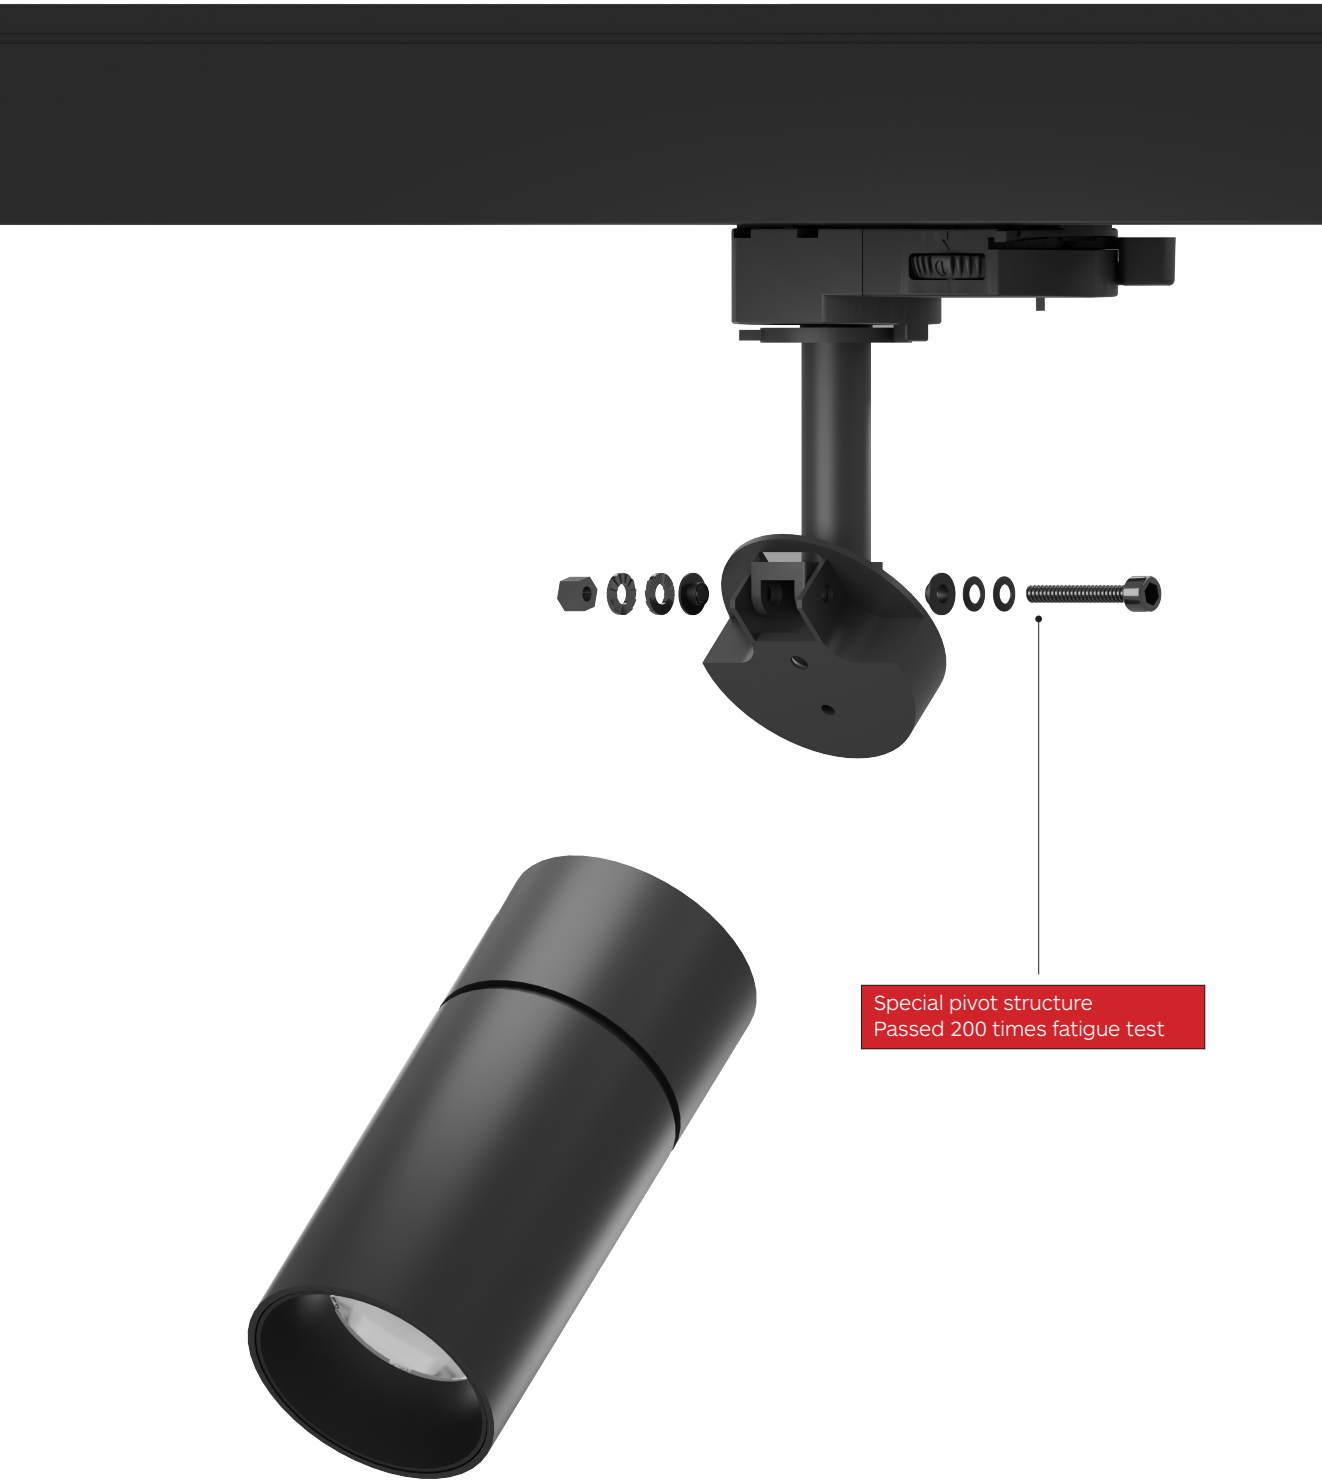

# EMMA Track Lighting

CE IP20   Rotate 350° Tilt 90°

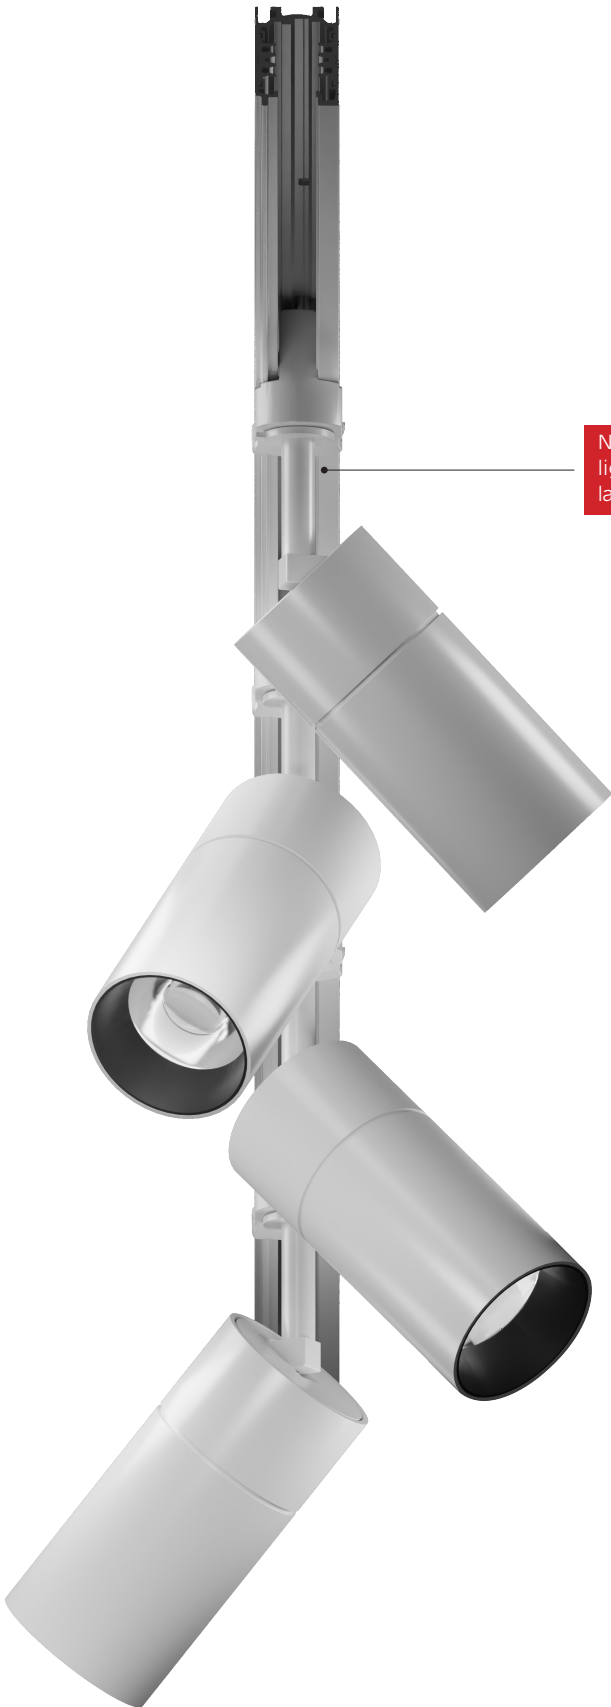


# EMMA Track Lighting


Track 45 | 62 | 73 | 90



## EMMA Track Lighting

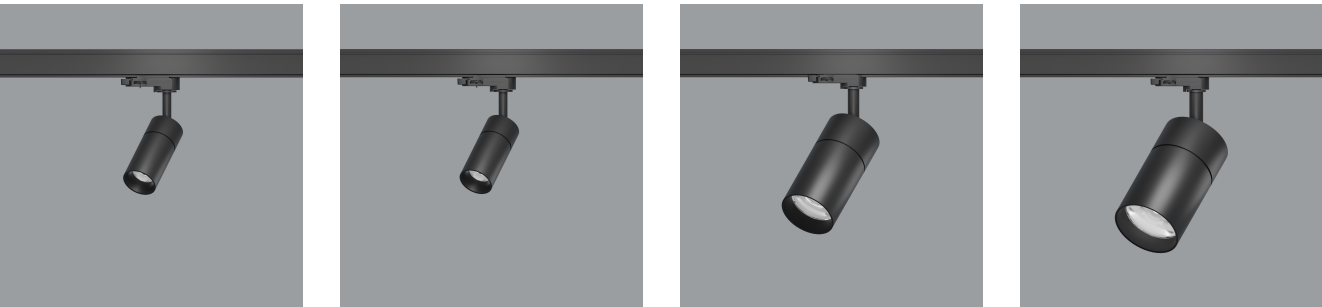

EMMA 45 32.04515 EMMA 62 32.06219 EMMA 73 32.07313 EMMA 90 32.09013

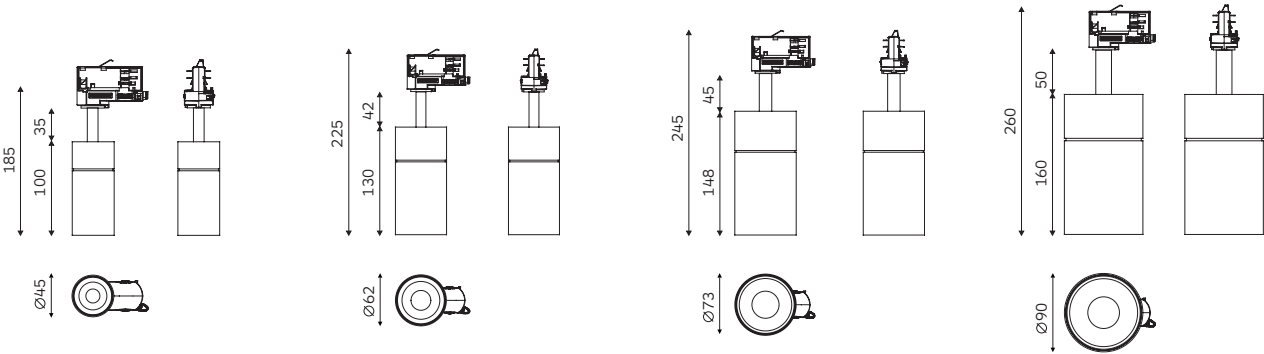

### Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

### Accessories

Honeycomb louvre, Linear Spread glass, Spread glass, glass.

### Finish

Black or white colour.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

### Optic

Lens.  
Narrow, medium and wide beam angle available.

### Driver


Supplied with Single circuit universal adapter, 3 circuit universal adapter or Dali Track adapter.

### Applications


A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

### Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 3 2 . 0 4 5 1 5 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Lighting	32.04515	CA	90	30	3000K	8W	749 lm	D0 No Dim	10 <input type="checkbox"/> WH
				40	4000k		786 lm		20 <input type="checkbox"/> BK
EMMA 62 Track Lighting	32.06219	CA	90	30	3000K	15W	1305 lm		
				40	4000k		1370 lm		
EMMA 73 Track Lighting	32.07313	CA	90	30	3000K	25W	2221 lm		
				40	4000k		2332 lm		
EMMA 90 Track Lighting	32.09013	CA	90	30	3000K	35W	3295 lm		
				40	4000k		3460 lm		

# EMMA Track Lighting-Intrack


Track 45 | 62 | 73 | 90



## EMMA Track Lighting-Intrack



EMMA 45 Intrack 32.04516 EMMA 62 Intrack 32.06220 EMMA 73 Intrack 32.07315 EMMA 90 Intrack 32.09015

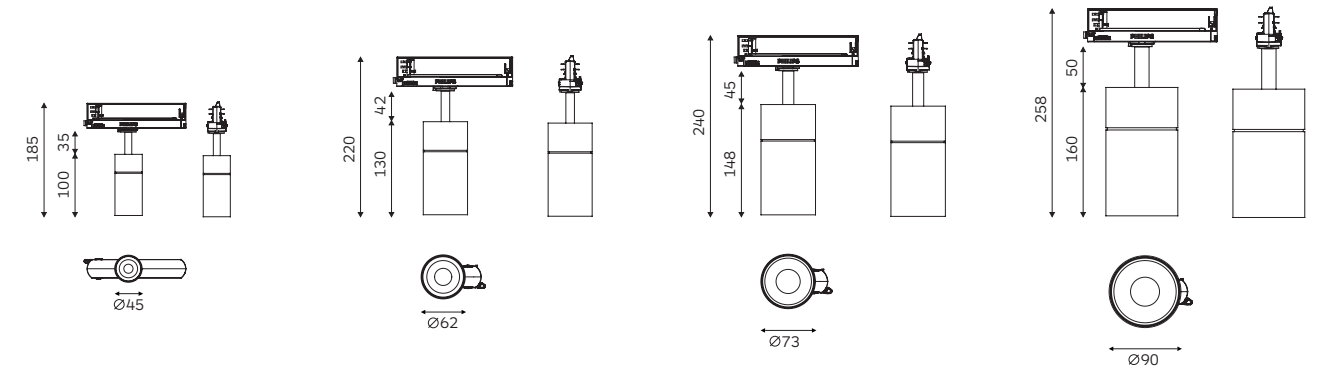

### Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

### Accessories

Honeycomb louvre, Linear Spread glass, glass.

### Finish

Black or white colour.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

### Optic

Lens.  
Narrow, medium and wide beam angle available.

### Driver


Supplied with Single circuit universal adapter, 3 circuit universal adapter or Dali Track adapter.

### Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


### Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 3 2 . 0 4 5 1 6 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Lighting Intrack	32.04516	CA	90	30	3000K	8W	749 lm	D0 No Dim	10 <input type="checkbox"/> WH
				40	4000k		786 lm		20 <input checked="" type="checkbox"/> BK
EMMA 62 Track Lighting Intrack	32.06220	CA	90	30	3000K	15W	1305 lm		
				40	4000k		1370 lm		
EMMA 73 Track Lighting Intrack	32.07315	CA	90	30	3000K	25W	2221 lm		
				40	4000k		2332 lm		
EMMA 90 Track Lighting Intrack	32.09015	CA	90	30	3000K	35W	3295 lm		
				40	4000k		3460 lm		



# EMMA Recessed Downlight

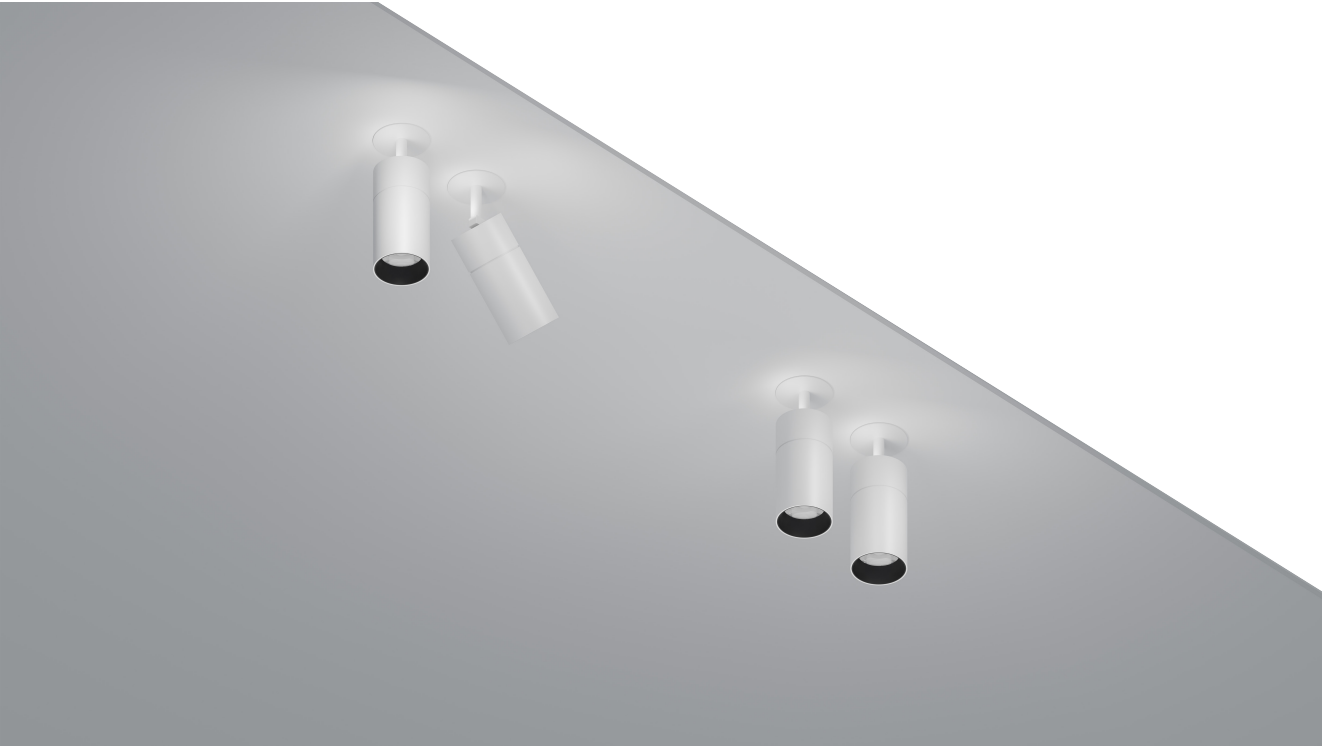

## Body

The body are available in four different diameters with different Powers.

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, recessed, surface mounted and pendant light meet different requirements.

## Accessories

Honeycomb louvre, Linear Spread glass, glass.

## Finish

Black or white colour.

## LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

## Optic

Lens.  
Narrow, medium and wide beam angle available.


## Driver

Supplied with No-dimable remote driver.  
Diming Options: Triac Dim, 0-10V Dim, Dali Dim.


## Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.  
Application areas: retail, museums, hospitality, residential, offices and other high-end place.


### Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

# EMMA Recessed Downlight

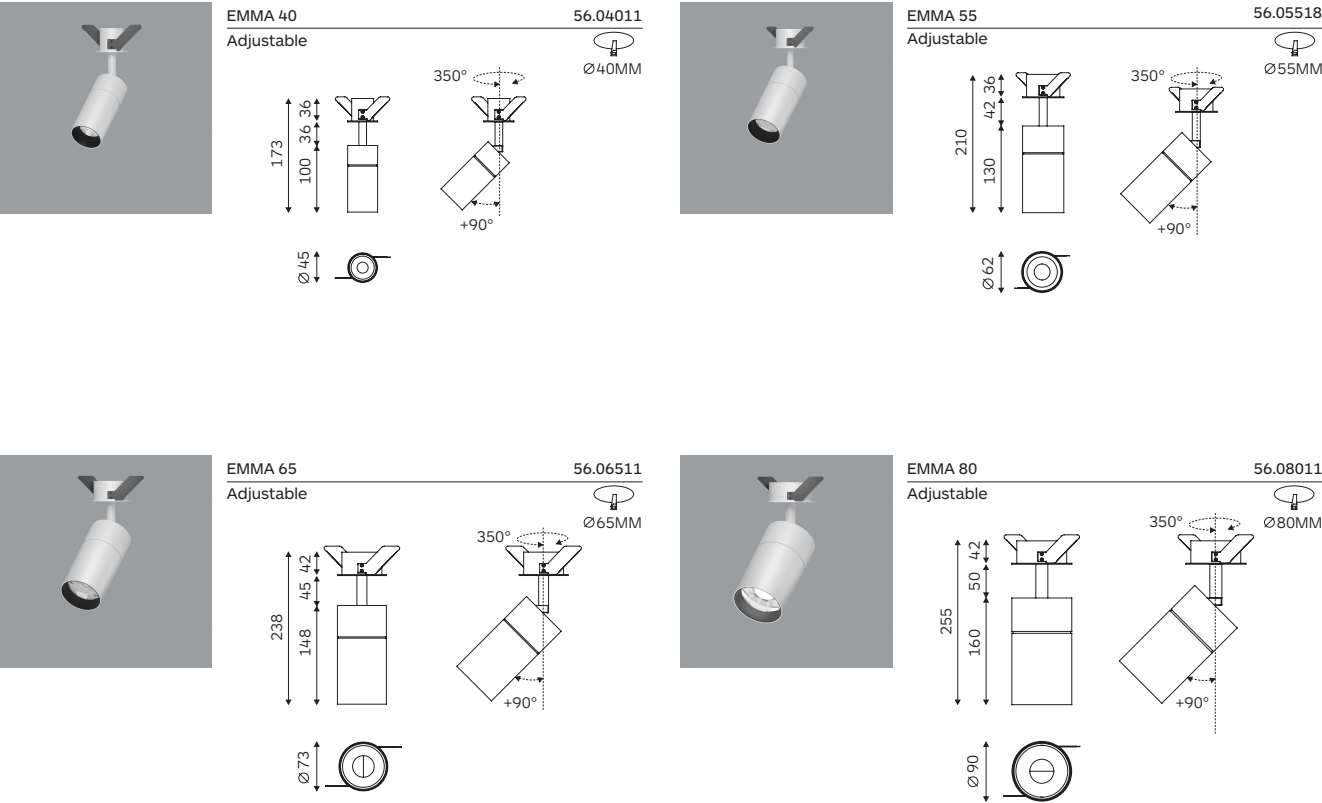

Code Ordering Example: 5 6 . 0 4 0 1 1 - 9 0 3 0 1 6 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 40 Downlight Adjustable	56.04011	CA	90	30	3000K	10W	749lm	D0 No Dim	10 □ WH
				40	4000k			DA Dali Dim	20 ■ BK
EMMA 55 Downlight Adjustable	56.05518	CA	90	30	3000K	15W	1305 lm	DC 0-10V Dim	
				40	4000k		1370 lm		
EMMA 65 Downlight Adjustable	56.06511	CA	90	30	3000K	25W	2221 lm		
				40	4000k		2332 lm		
EMMA 80 Downlight Adjustable	56.08011	CA	90	30	3000K	35W	3295 lm		
				40	4000k		3460 lm		

# EMMA Surface Mounted Lighting


Surface Mounted 45 | 62 | 73 | 90



## EMMA Surface Mounted Lighting

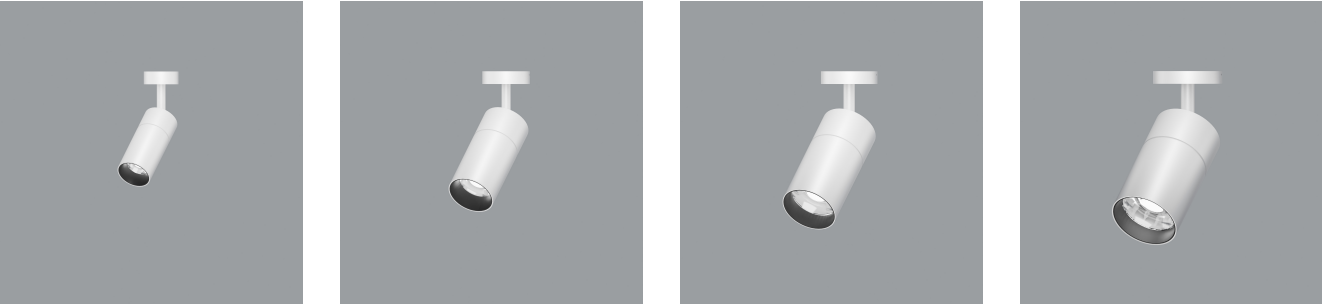

EMMA 45 93.04513 EMMA 62 93.06213 EMMA 73 93.07311 EMMA 90 93.09011

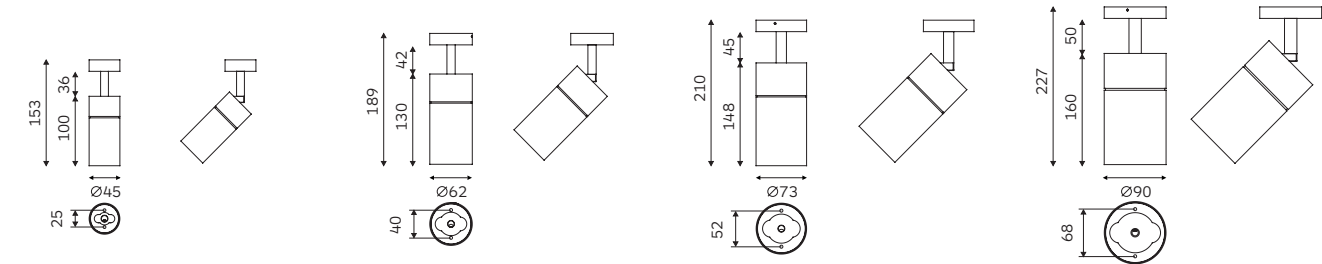

### Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

### Accessories

Honeycomb louvre, Linear Spread glass, glass.

### Finish

Black or white colour.

### LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

### Optic

Lens.  
Narrow, medium and wide beam angle available.

### Driver


Supplied with internal driver.

### Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

### Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 9 3 . 0 4 5 1 3 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
EMMA 45 Surface Mounted Adjustable	93.04513	CA	COB LED	90	30	3000K	8W	749 lm	16°/24°/37°	D0 No Dim	10 <input type="checkbox"/> WH
					40	4000k		786 lm			20 <input checked="" type="checkbox"/> BK
EMMA 62 Surface Mounted Adjustable	93.06213	CA	COB LED	90	30	3000K	15W	1305 lm	17°/25°/36°		
					40	4000k		1370 lm			
EMMA 73 Surface Mounted Adjustable	93.07311	CA	COB LED	90	30	3000K	25W	2221 lm	18°/26°/40°		
					40	4000k		2332 lm			
EMMA 90 Surface Mounted Adjustable	93.09011	CA	COB LED	90	30	3000K	35W	3295 lm	16°/20°/30°		
					40	4000k		3460 lm			

# EMMA Rod Suspension Lighting

Rod Suspension 45 | 62 | 73 | 90

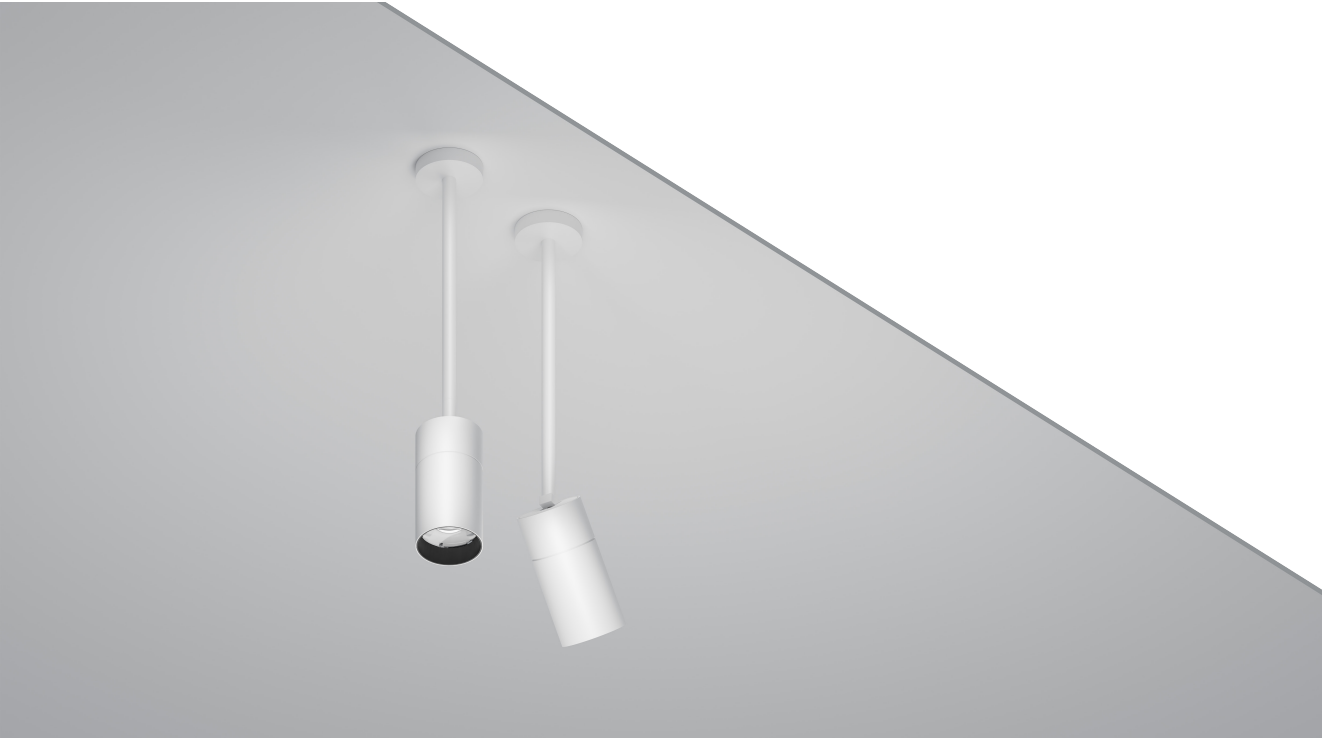

## Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

## Accessories

Honeycomb louvre, Linear Spread glass, glass.

## Finish

Black or white colour.

## LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

## Optic

Lens.  
Narrow, medium and wide beam angle available.

## Driver


Supplied with internal driver.

## Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

### Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

# EMMA Rod Suspension Lighting



EMMA 45

93.04515



EMMA 62

93.06215







EMMA 73

93.07312



EMMA 90

93.09012



Code Ordering Example: 9 3 . 0 4 5 1 5 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Rod Suspension Adjustable	93.04515	CA	90	30	3000K	8W	749 lm	D0 No Dim	10 □ WH
				40	4000k		786 lm		
EMMA 62 Rod Suspension Adjustable	93.06215	CA	90	30	3000K	15W	1305 lm		
				40	4000k		1370 lm		
EMMA 73 Rod Suspension Adjustable	93.07312	CA	90	30	3000K	25W	2221 lm		
				40	4000k		2332 lm		
EMMA 90 Rod Suspension Adjustable	93.09012	CA	90	30	3000K	35W	3295 lm		
				40	4000k		3460 lm		

# EMMA Pendant Lighting

Pendant Lighting 45 | 62 | 73 | 90



## Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

## Accessories

Honeycomb louvre, Linear Spread glass, glass.

## Finish

Black or white colour.

## LED sources

Light source: COB LED  
CRI: 90 | CCT: 3000K, 4000K  
Other CRI and CCT options available on request.

## Optic

Lens.  
Narrow, medium and wide beam angle available.

## Driver


Supplied with internal driver.

## Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

### Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

# EMMA Pendant Lighting



EMMA 45 91.04511







EMMA 62 91.06213



EMMA 73 91.07311



EMMA 90 91.09012



Code Ordering Example: 9 1 . 0 4 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Pendant Lighting	91.04511	CA	COB LED	90	30	3000K	8W	749 lm	17°/23°/36°
				40	4000k		786 lm		
EMMA 62 Pendant Lighting	91.06213	CA	COB LED	90	30	3000K	15W	1305 lm	17°/23°/36°
				40	4000k		1370 lm		
EMMA 73 Pendant Lighting	91.07311	CA	COB LED	90	30	3000K	25W	2221 lm	17°/23°/36°
				40	4000k		2332 lm		
EMMA 90 Pendant Lighting	91.09012	CA	COB LED	90	30	3000K	35W	3295 lm	16°/20°/30°
				40	4000k		3460 lm		