

Report No.:

Test Time: 2025-09-15 08:31

Luminaire Property

Luminaire Category:

Luminaire Description: EX030MINI PRO无边可Length (mm): -26).15

Width (mm): -26

Voltage: 227.9 V

Current: 0.055 A

Power: 7.70 W

Power Factor: 0.610

Photometric Results

CIE Class: Direct

Measurement Flux: 492.2 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H49.7

Vertical Diffuse Angle(50%): V49.7

Luminaire Efficacy Rating (LER): 64

Max. Intensity: 681.35 cd

Total Rated Lamp Lumens: 492.2 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 681.2 cd

Pos of Max. Intensity: H180 V1

Picture Of Luminaire



Luminous Intensity Distribution Curve

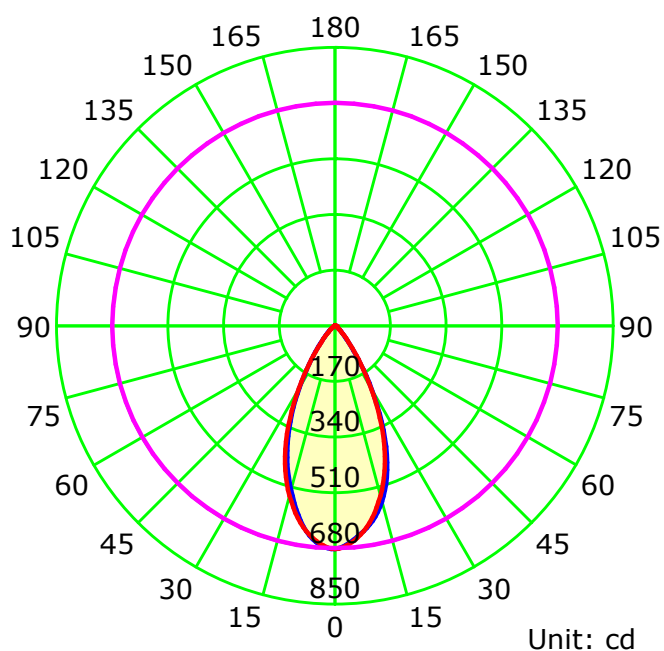

— C0-C180 — C90-C270 — G1

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

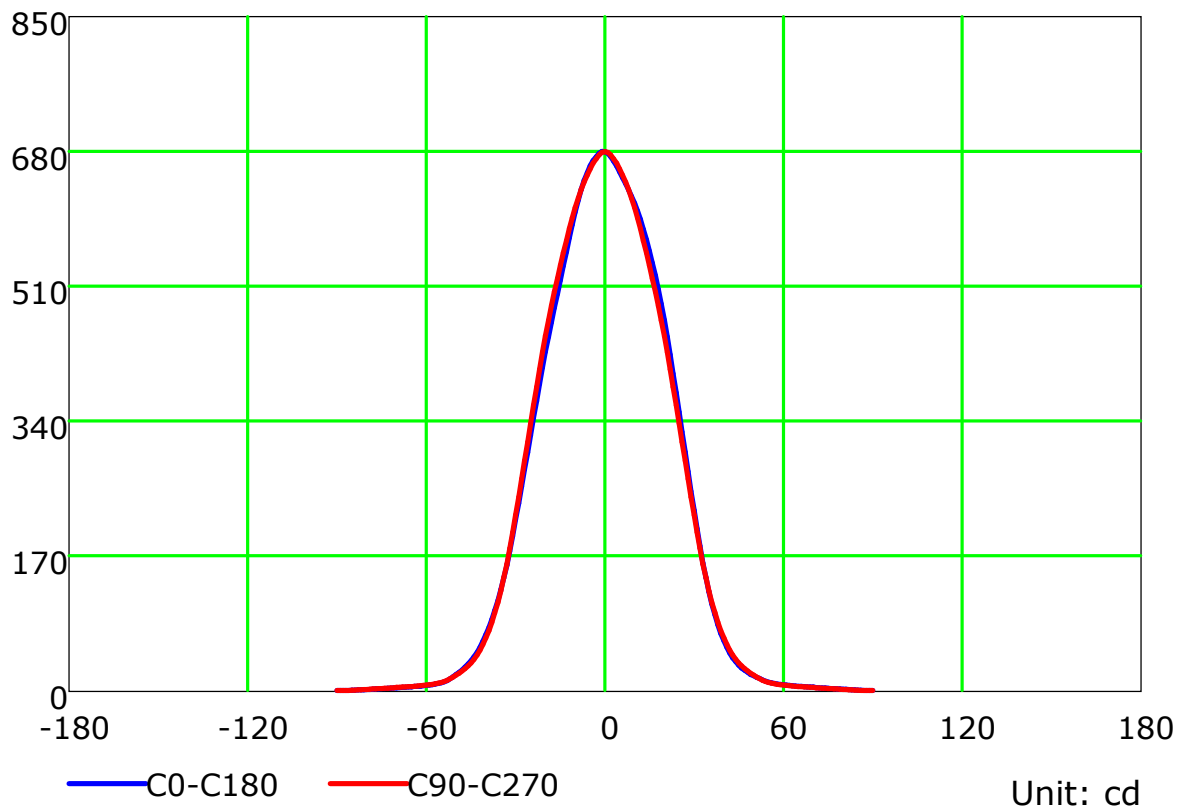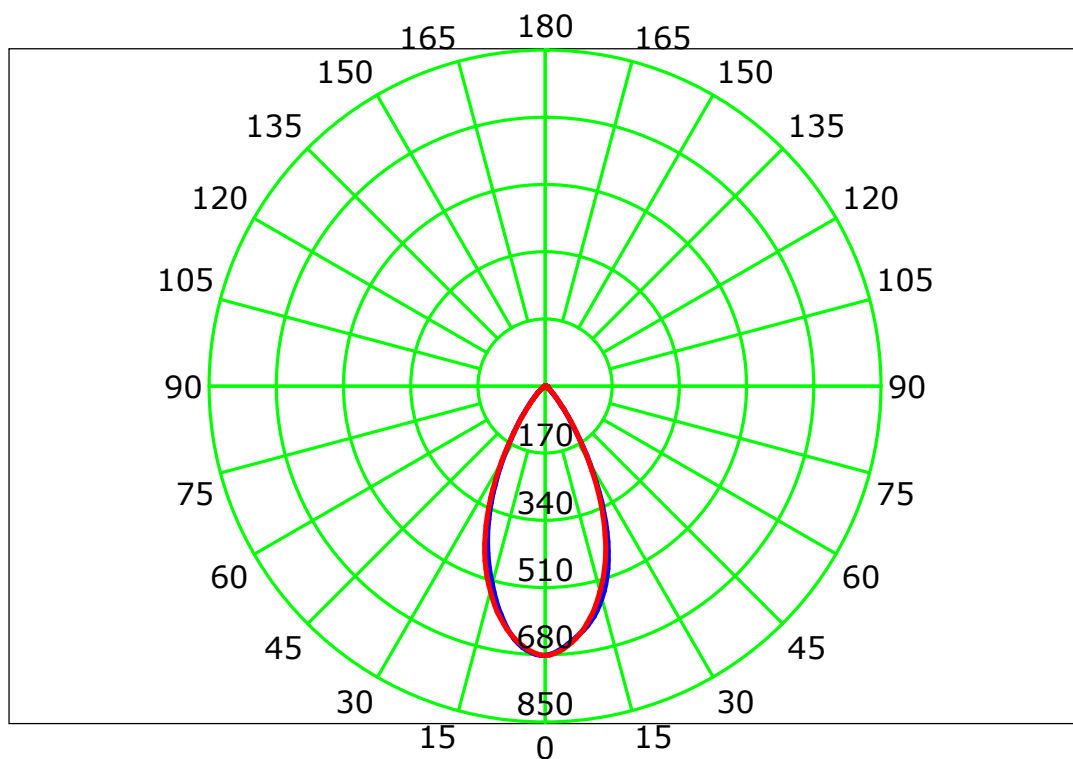

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

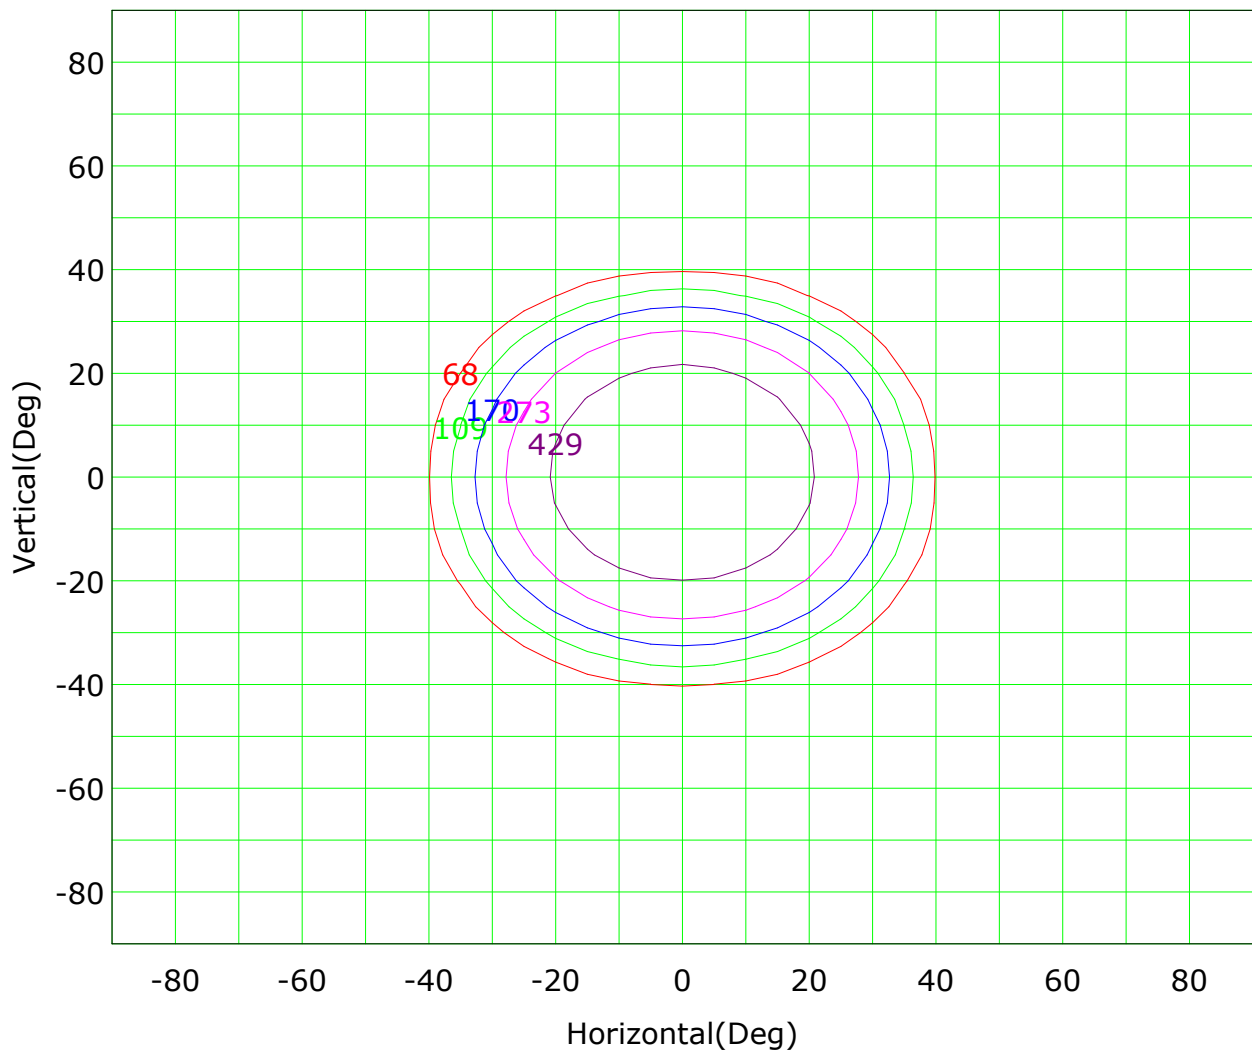

Imax (100%): 681 cd

(10%): 68 cd	(16%): 109 cd
(25%): 170 cd	(40%): 273 cd
(63%): 429 cd	(100%): 681 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

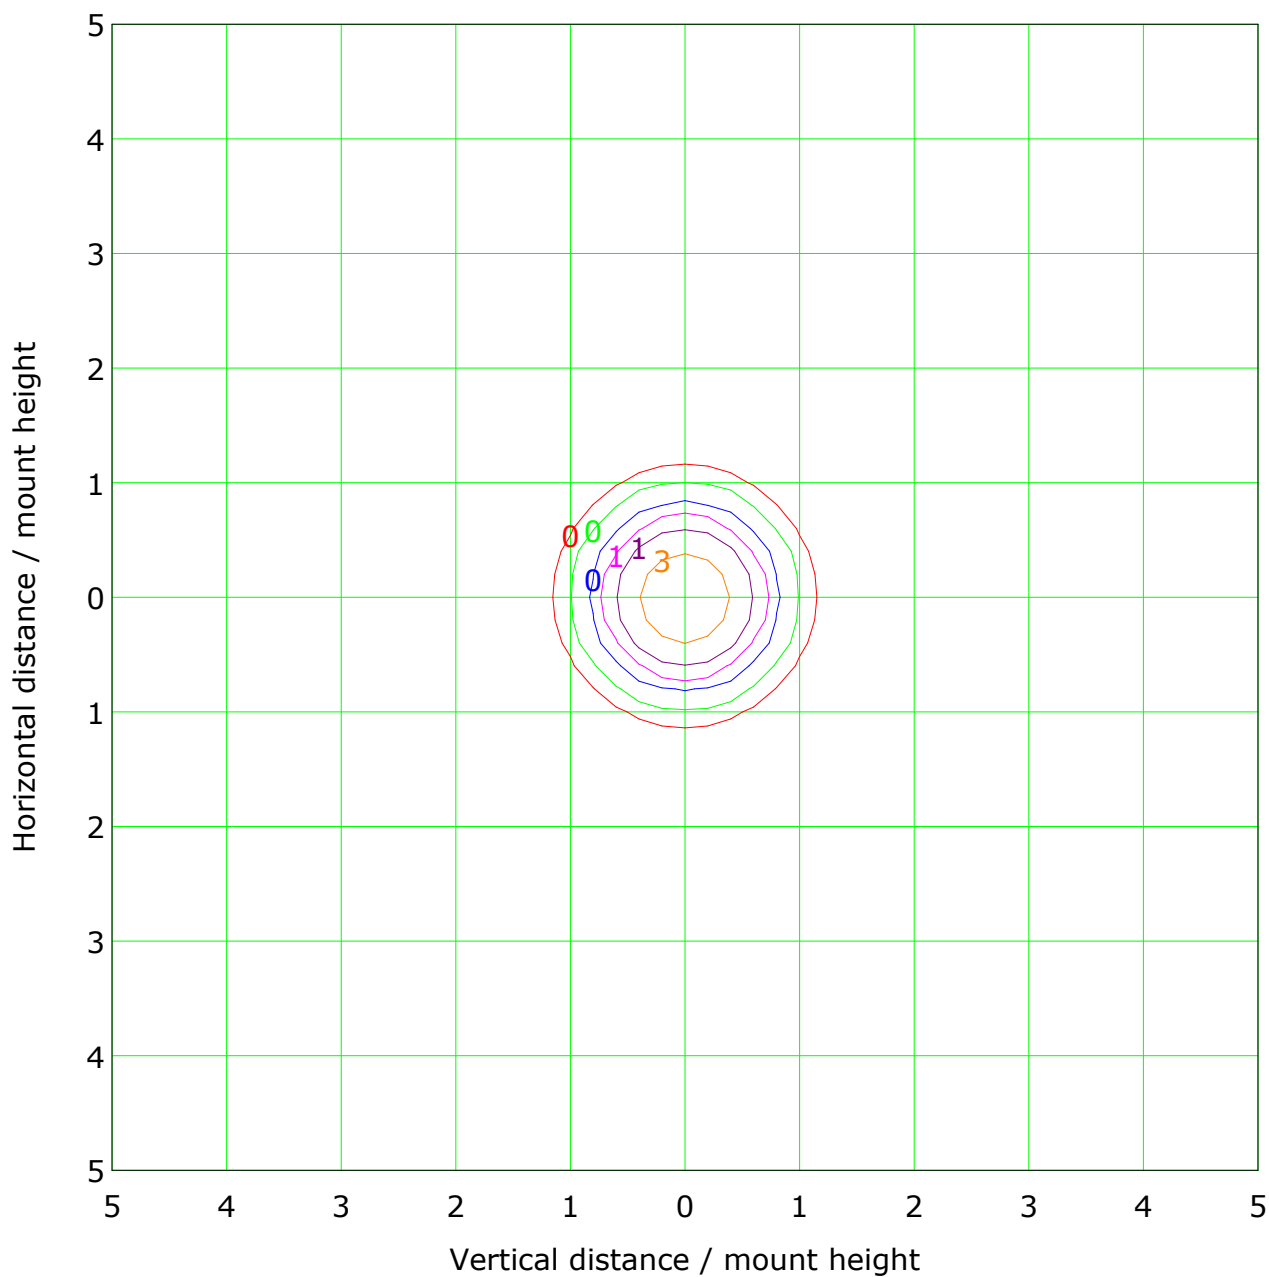


Mounting Height: 10m Max Lux(100%): 7 lx

(1%):	0 lx	(2%):	0 lx
(5%):	0 lx	(10%):	1 lx
(20%):	1 lx	(50%):	3 lx
(100%):	7 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Illuminance at a Distance

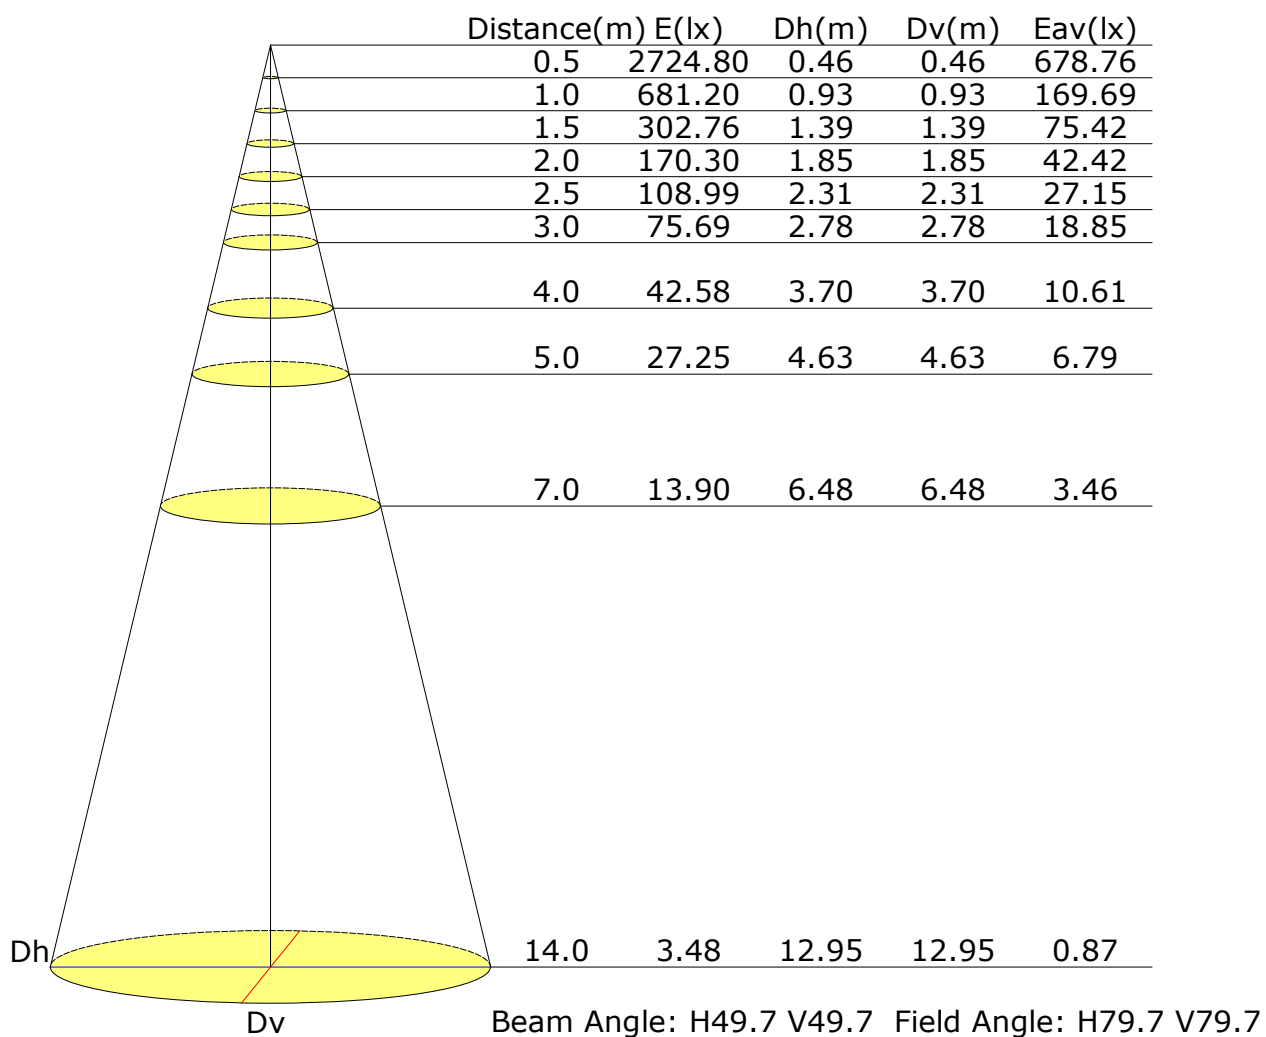

Vertical IsoLux Plot

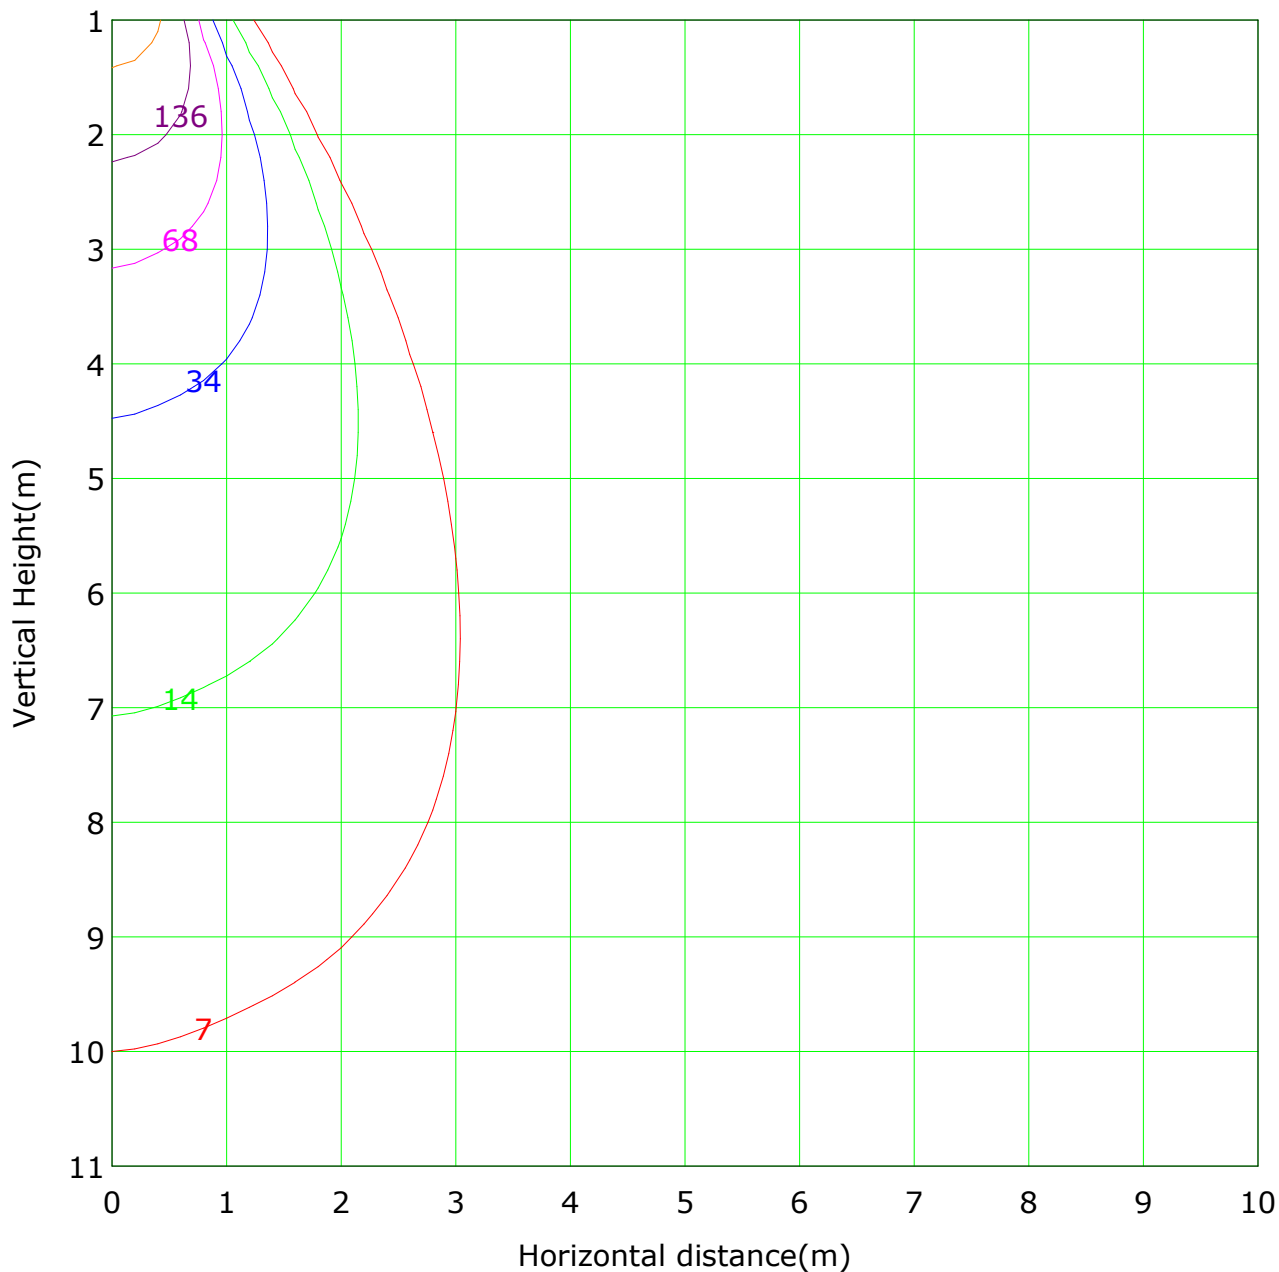


Lowest(m): 1m Highest(m): 11 Max Lux: 681	
(1%): 7 lx	(2%): 14 lx
(5%): 34 lx	(10%): 68 lx
(20%): 136 lx	(50%): 341 lx
(100%): 681 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The average illuminance effective figure

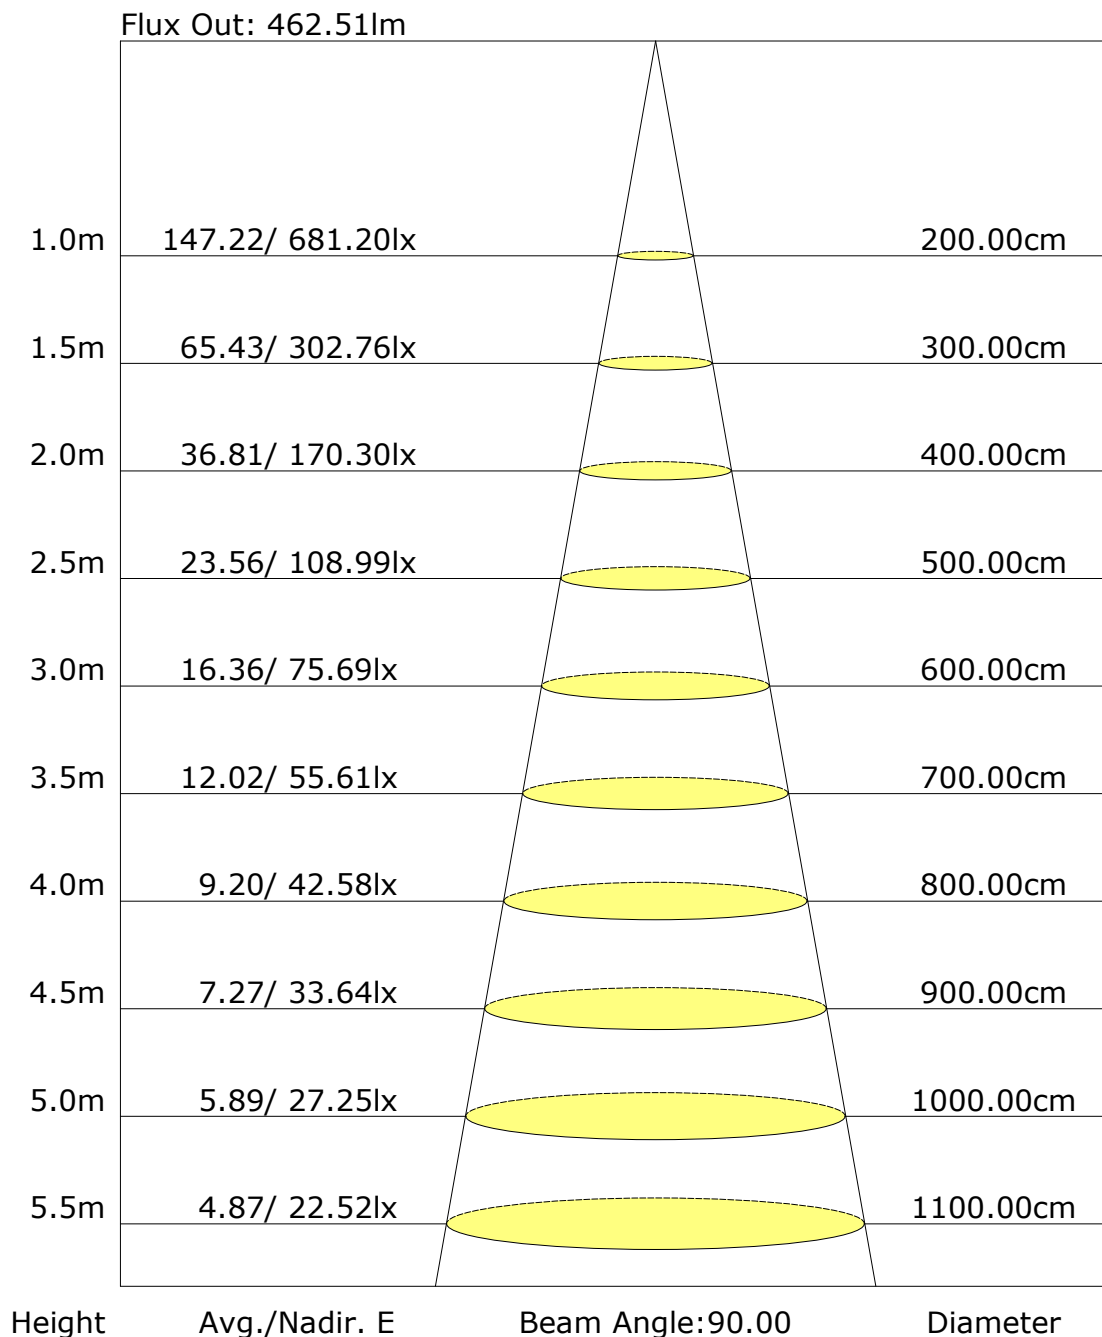

UGR table

Reflectance:										
Ceiling cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	viewed crosswise					viewed endwise				
x = 2H y = 2H	22.2	20.0	22.6	20.4	20.7	22.0	19.8	22.3	20.1	20.4
3H	23.7	21.2	24.2	21.6	22.0	23.4	20.9	23.9	21.2	21.6
4H	24.4	21.7	24.9	22.0	22.5	24.1	21.3	24.6	21.7	22.1
6H	24.8	22.0	25.3	22.4	22.8	24.4	21.5	24.9	22.0	22.4
8H	25.0	22.0	25.5	22.4	22.9	24.5	21.6	25.1	22.0	22.4
12H	24.7	22.0	25.3	22.4	22.8	24.3	21.5	24.8	21.9	22.4
x = 4H y = 2H	22.9	20.1	23.4	20.5	20.9	22.6	19.8	23.1	20.2	20.6
3H	24.7	21.5	25.3	22.0	22.4	24.4	21.2	25.0	21.7	22.1
4H	25.7	22.1	26.3	22.6	23.1	25.3	21.7	25.9	22.2	22.7
6H	26.4	22.5	27.3	23.0	23.6	26.0	22.1	26.9	22.6	23.2
8H	26.5	22.6	27.4	23.1	23.7	26.1	22.2	27.0	22.7	23.2
12H	26.5	22.6	27.3	23.1	23.7	26.0	22.1	26.8	22.7	23.2
x = 8H y = 4H	26.0	22.1	26.9	22.6	23.2	25.7	21.8	26.6	22.3	22.8
6H	28.0	22.7	28.6	23.3	23.9	27.6	22.3	28.2	22.9	23.5
8H	28.1	23.0	29.9	23.6	24.2	27.6	22.5	29.5	23.2	23.8
12H	28.7	23.1	30.3	23.7	24.4	28.3	22.6	29.9	23.2	24.0
x = 12H y = 4H	25.9	22.0	26.7	22.5	23.1	25.5	21.6	26.3	22.2	22.7
6H	27.5	22.6	28.8	23.2	23.9	27.1	22.2	28.3	22.8	23.4
8H	28.7	23.0	30.3	23.6	24.4	28.2	22.6	29.8	23.1	23.9

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	680.7	0.7	0.7	0.13	0.13
1.0-2.0	678.6	1.9	2.6	0.40	0.53
2.0-3.0	674.6	3.2	5.8	0.66	1.18
3.0-4.0	669.2	4.5	10.3	0.91	2.09
4.0-5.0	662.9	5.7	16.0	1.16	3.25
5.0-6.0	655.4	6.9	22.9	1.40	4.65
6.0-7.0	647.1	8.0	30.9	1.63	6.28
7.0-8.0	638.0	9.1	40.1	1.86	8.14
8.0-9.0	627.9	10.2	50.2	2.07	10.21
9.0-10.0	616.4	11.2	61.4	2.27	12.47
10.0-11.0	603.9	12.1	73.5	2.45	14.93
11.0-12.0	590.8	12.9	86.4	2.62	17.55
12.0-13.0	576.5	13.7	100.1	2.78	20.33
13.0-14.0	561.0	14.4	114.4	2.92	23.25
14.0-15.0	545.3	15.0	129.4	3.04	26.29
15.0-16.0	529.3	15.5	144.9	3.15	29.44
16.0-17.0	512.6	16.0	160.9	3.24	32.68
17.0-18.0	495.2	16.3	177.2	3.32	36.00
18.0-19.0	477.2	16.6	193.8	3.37	39.37
19.0-20.0	458.1	16.8	210.6	3.41	42.78
20.0-21.0	437.9	16.8	227.4	3.42	46.20
21.0-22.0	416.9	16.8	244.2	3.40	49.60
22.0-23.0	394.9	16.6	260.7	3.37	52.97
23.0-24.0	372.2	16.3	277.0	3.31	56.27
24.0-25.0	349.2	15.9	292.9	3.23	59.50
25.0-26.0	325.8	15.4	308.3	3.13	62.63
26.0-27.0	302.5	14.8	323.1	3.01	65.63
27.0-28.0	279.2	14.1	337.2	2.87	68.50
28.0-29.0	256.0	13.4	350.6	2.72	71.22
29.0-30.0	233.2	12.6	363.2	2.56	73.78
30.0-31.0	211.1	11.7	374.9	2.39	76.17
31.0-32.0	190.0	10.9	385.8	2.21	78.38
32.0-33.0	169.9	10.0	395.8	2.03	80.41
33.0-34.0	151.2	9.2	405.0	1.86	82.27
34.0-35.0	134.3	8.3	413.3	1.69	83.97
35.0-36.0	118.9	7.6	420.9	1.54	85.51

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	105.0	6.8	427.7	1.39	86.90
37.0-38.0	92.5	6.2	433.9	1.25	88.15
38.0-39.0	81.3	5.5	439.5	1.13	89.28
39.0-40.0	71.3	5.0	444.4	1.01	90.29
40.0-41.0	62.6	4.5	448.9	0.91	91.20
41.0-42.0	54.9	4.0	452.9	0.81	92.01
42.0-43.0	48.1	3.6	456.4	0.72	92.73
43.0-44.0	42.3	3.2	459.6	0.65	93.38
44.0-45.0	37.3	2.9	462.5	0.58	93.96
45.0-46.0	33.1	2.6	465.1	0.53	94.49
46.0-47.0	29.5	2.3	467.4	0.48	94.97
47.0-48.0	26.3	2.1	469.6	0.43	95.40
48.0-49.0	23.4	1.9	471.5	0.39	95.79
49.0-50.0	20.8	1.7	473.2	0.35	96.14
50.0-51.0	18.4	1.6	474.8	0.32	96.46
51.0-52.0	16.3	1.4	476.2	0.28	96.74
52.0-53.0	14.2	1.2	477.4	0.25	96.99
53.0-54.0	12.3	1.1	478.5	0.22	97.21
54.0-55.0	10.9	1.0	479.5	0.20	97.41
55.0-56.0	9.9	0.9	480.4	0.18	97.59
56.0-57.0	9.1	0.8	481.2	0.17	97.76
57.0-58.0	8.3	0.8	482.0	0.16	97.91
58.0-59.0	7.7	0.7	482.7	0.15	98.06
59.0-60.0	7.3	0.7	483.4	0.14	98.20
60.0-61.0	6.8	0.7	484.0	0.13	98.33
61.0-62.0	6.4	0.6	484.6	0.12	98.46
62.0-63.0	6.0	0.6	485.2	0.12	98.58
63.0-64.0	5.8	0.6	485.8	0.11	98.69
64.0-65.0	5.4	0.5	486.3	0.11	98.80
65.0-66.0	5.2	0.5	486.8	0.10	98.91
66.0-67.0	4.9	0.5	487.3	0.10	99.01
67.0-68.0	4.6	0.5	487.8	0.09	99.10
68.0-69.0	4.3	0.4	488.2	0.09	99.19
69.0-70.0	4.1	0.4	488.7	0.09	99.28
70.0-71.0	3.9	0.4	489.1	0.08	99.36
71.0-72.0	3.5	0.4	489.4	0.07	99.43

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	681.2	681.2								
G1.0	679.0	681.3								
G2.0	675.0	679.0								
G3.0	669.5	674.8								
G4.0	663.0	669.7								
G5.0	655.8	663.2								
G6.0	648.2	654.6								
G7.0	640.6	644.8								
G8.0	633.1	633.4								
G9.0	624.8	620.2								
G10.0	615.9	604.6								
G11.0	606.4	588.8								
G12.0	595.8	572.4								
G13.0	583.2	554.5								
G14.0	569.9	536.6								
G15.0	555.9	519.0								
G16.0	540.7	501.5								
G17.0	524.6	483.6								
G18.0	507.1	465.7								
G19.0	488.8	447.2								
G20.0	468.2	428.1								
G21.0	447.1	408.4								
G22.0	424.6	387.7								
G23.0	400.8	366.4								
G24.0	376.6	344.9								
G25.0	352.3	322.9								
G26.0	327.0	301.2								
G27.0	301.8	279.8								
G28.0	276.8	258.3								
G29.0	251.9	236.9								
G30.0	227.9	216.1								
G31.0	204.9	195.5								
G32.0	182.9	176.5								
G33.0	161.5	158.6								
G34.0	142.6	142.2								
G35.0	124.9	127.5								
G36.0	109.4	113.8								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	95.5	101.3								
G38.0	83.1	90.1								
G39.0	72.2	79.7								
G40.0	62.8	70.5								
G41.0	54.8	62.4								
G42.0	47.5	55.0								
G43.0	41.7	48.4								
G44.0	36.5	42.8								
G45.0	32.3	37.8								
G46.0	28.7	33.7								
G47.0	25.7	29.8								
G48.0	23.2	26.3								
G49.0	20.6	23.4								
G50.0	18.7	20.4								
G51.0	16.9	17.6								
G52.0	15.4	15.1								
G53.0	13.4	12.9								
G54.0	11.9	11.1								
G55.0	10.8	9.8								
G56.0	9.9	8.9								
G57.0	9.1	8.3								
G58.0	8.4	7.6								
G59.0	8.0	7.0								
G60.0	7.6	6.7								
G61.0	7.0	6.2								
G62.0	6.7	5.6								
G63.0	6.4	5.4								
G64.0	5.9	5.3								
G65.0	5.6	4.8								
G66.0	5.6	4.8								
G67.0	5.0	4.3								
G68.0	4.8	4.2								
G69.0	4.5	3.9								
G70.0	4.5	3.6								
G71.0	3.9	3.4								
G72.0	3.6	3.2								
G73.0	3.4	3.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

[illegible]

Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector: