

Report No.:

Test Time: 2026-04-03 15:51

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 中号

Luminous Width (mm): -50

Current: 0.074 A

Power Factor: 0.959

Luminous Length (mm): -50

Voltage: 234.4 V

Power: 16.70 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1293 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H18.2

Vertical Diffuse Angle(50%): V18.2

Luminaire Efficacy Rating (LER): 77.48

Max. Intensity: 7111.61 cd

S/MH(C0/C180): 0.31

Total Rated Lamp Lumens: 1293.0 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 7111.6 cd


Pos of Max. Intensity: H0 V0

S/MH(C90/C270): 0.31

Picture Of Luminaire



Luminous Intensity Distribution Curve

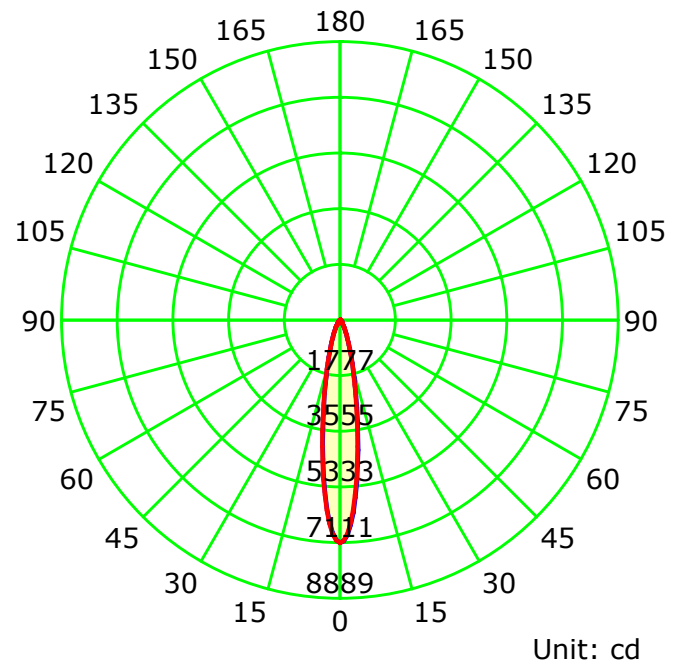

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

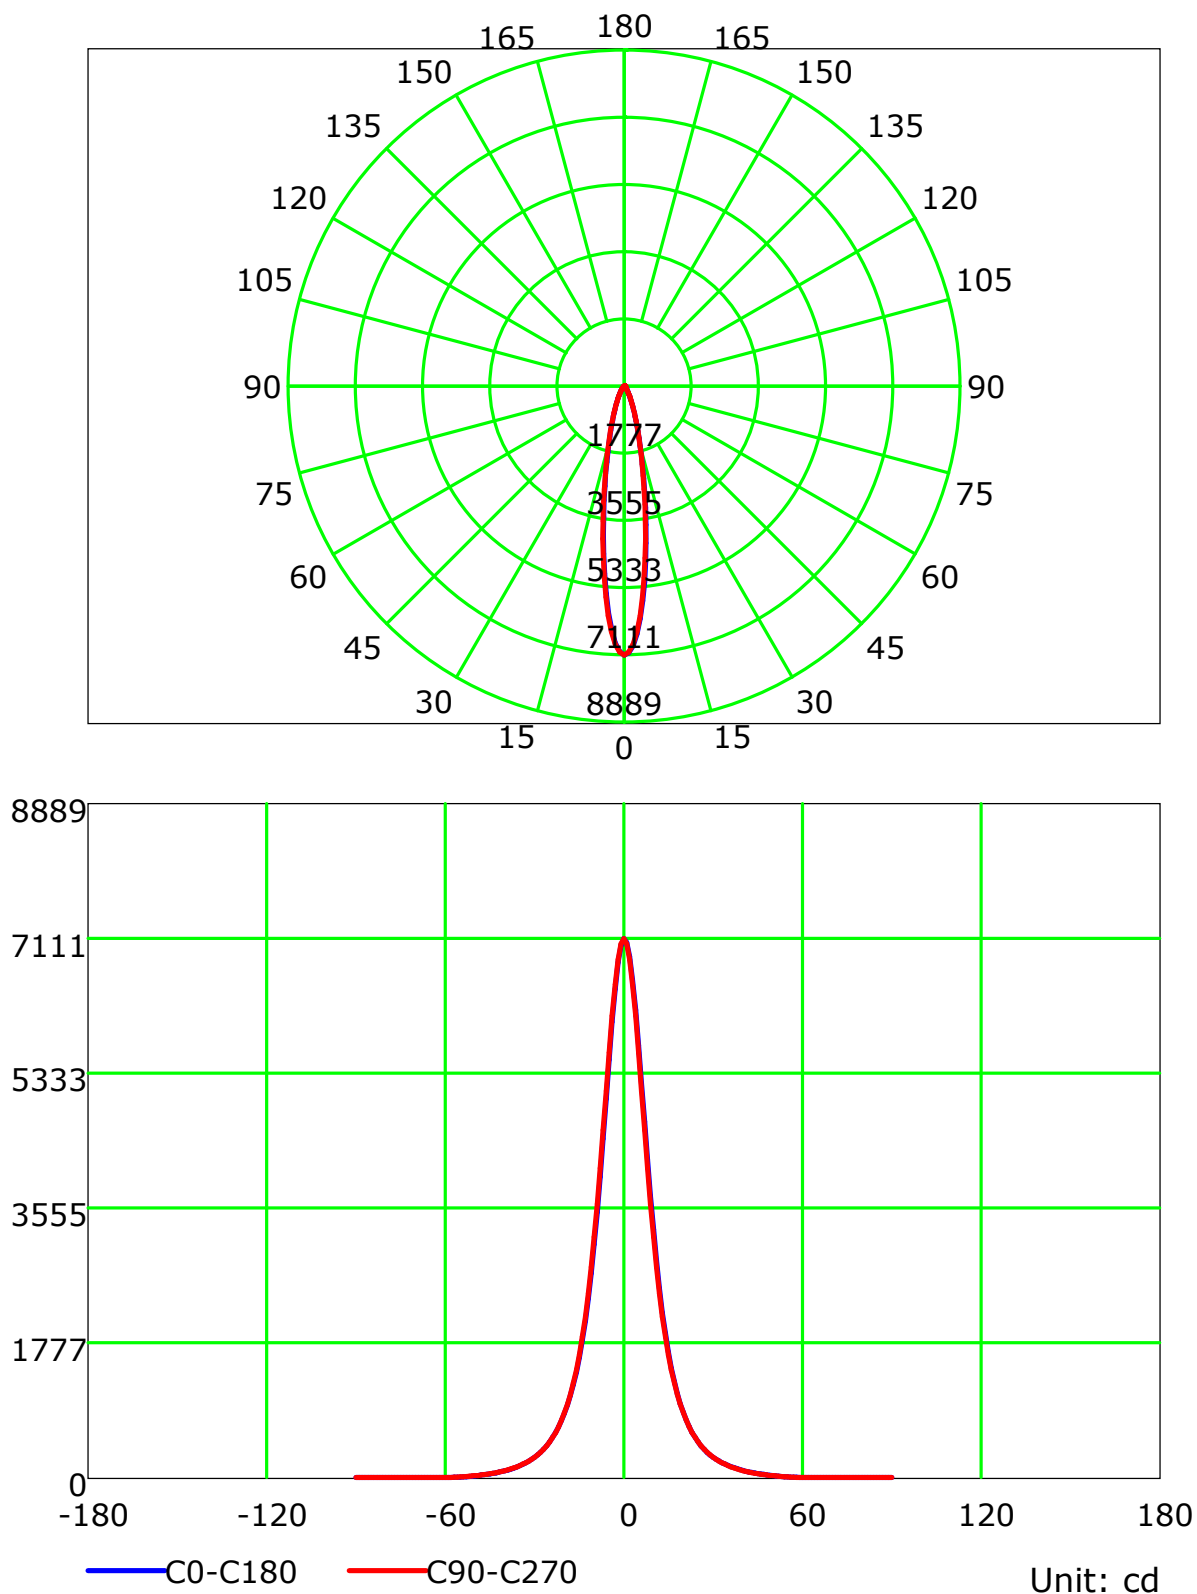

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

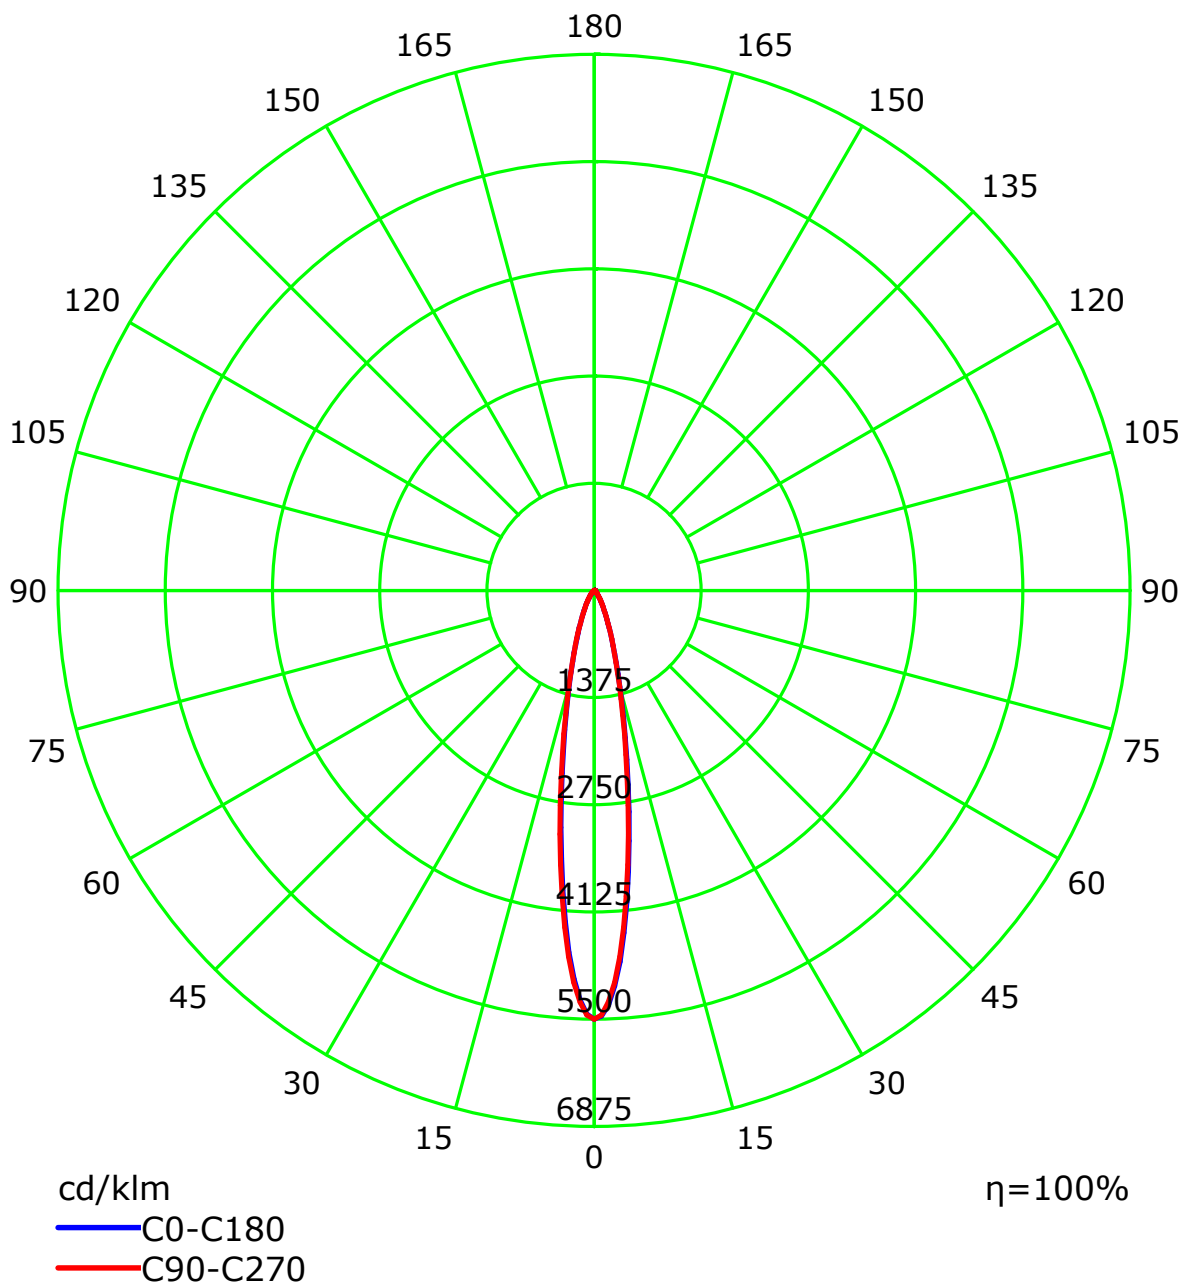

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

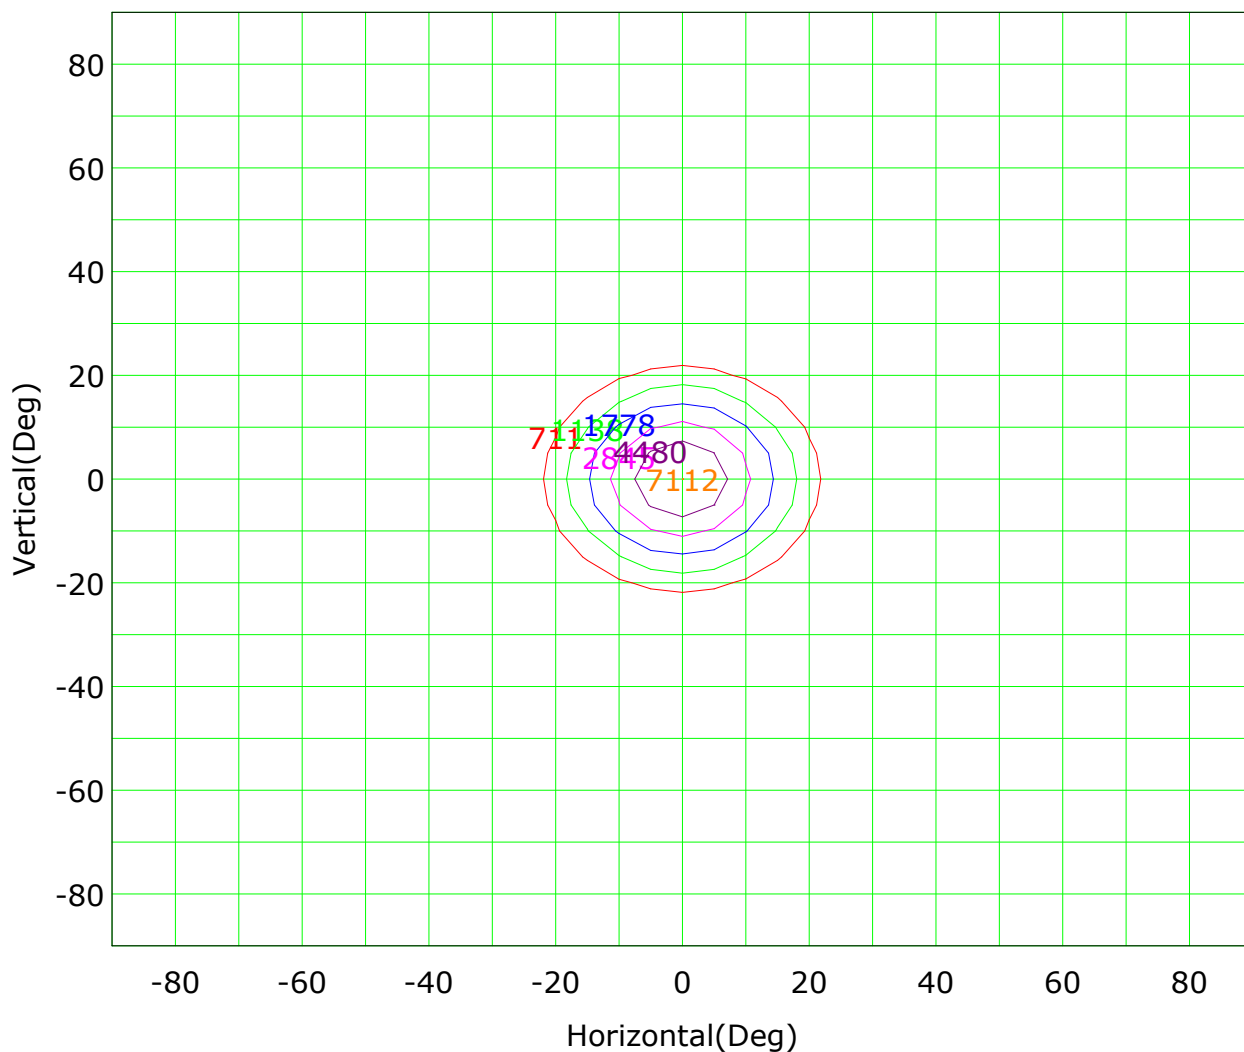

Imax (100%): 7112 cd

(10%): 711 cd	(16%): 1138 cd
(25%): 1778 cd	(40%): 2845 cd
(63%): 4480 cd	(100%): 7112 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

IsoLux Plot

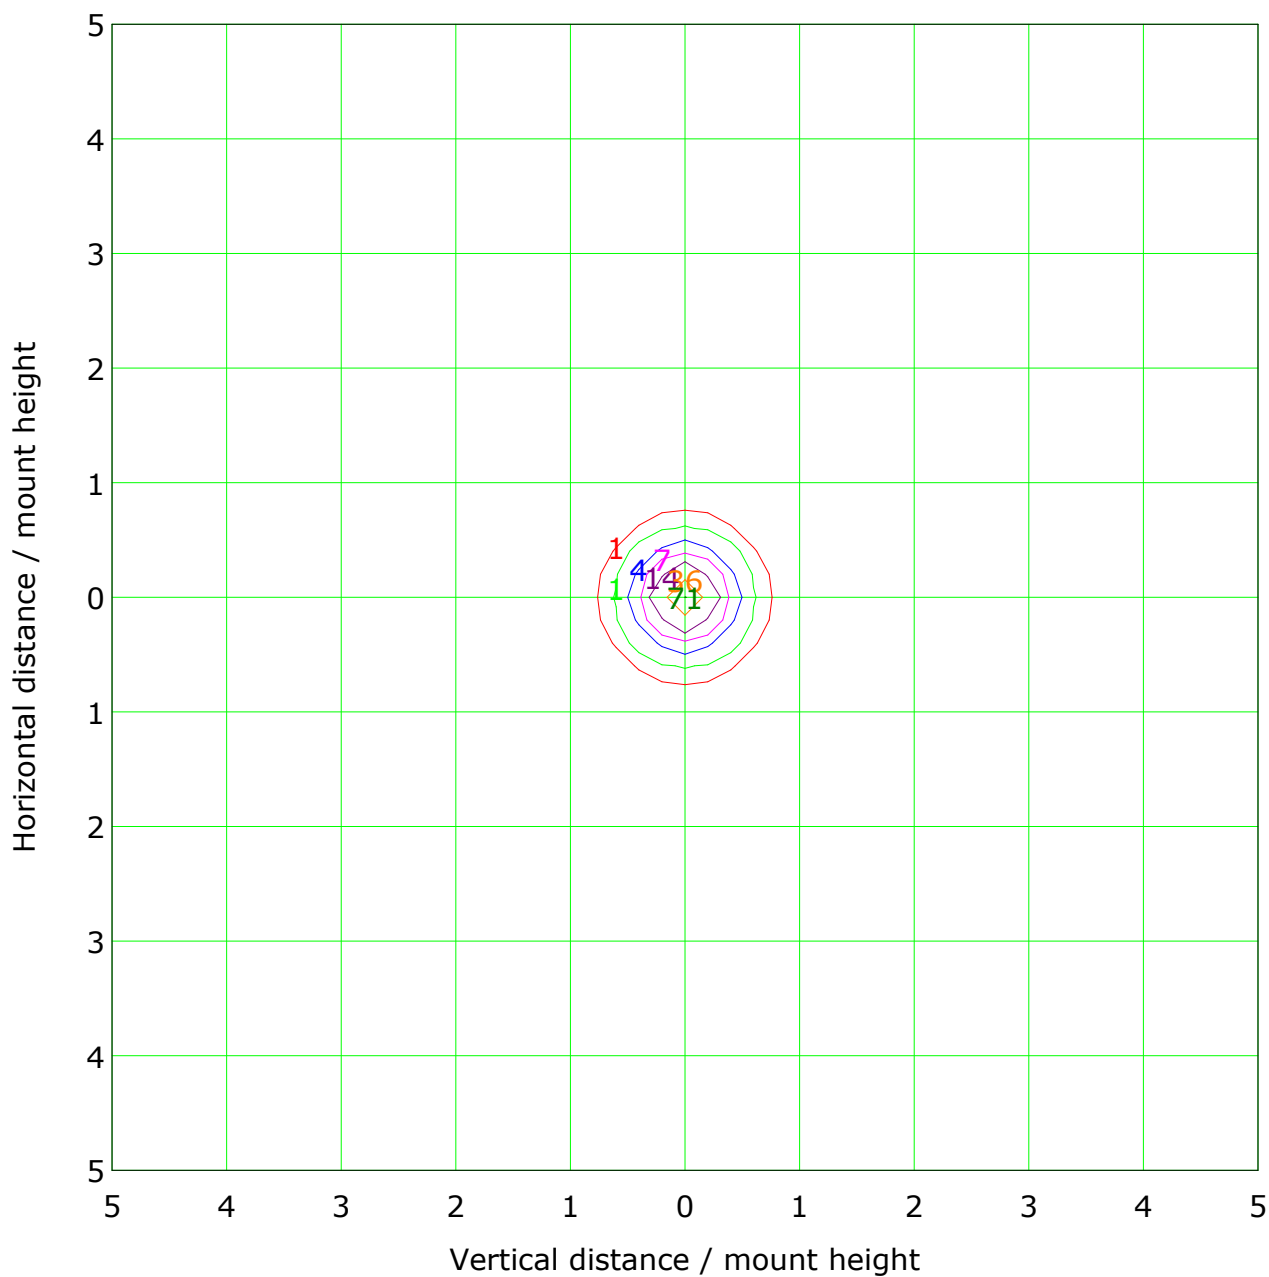


Mounting Height: 10.0m Max Lux(100%): 71.1 lx

(1%): 0.7 lx	(2%): 1.4 lx
(5%): 3.6 lx	(10%): 7.1 lx
(20%): 14.2 lx	(50%): 35.6 lx
(100%): 71.1 lx	


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Illuminance at a Distance

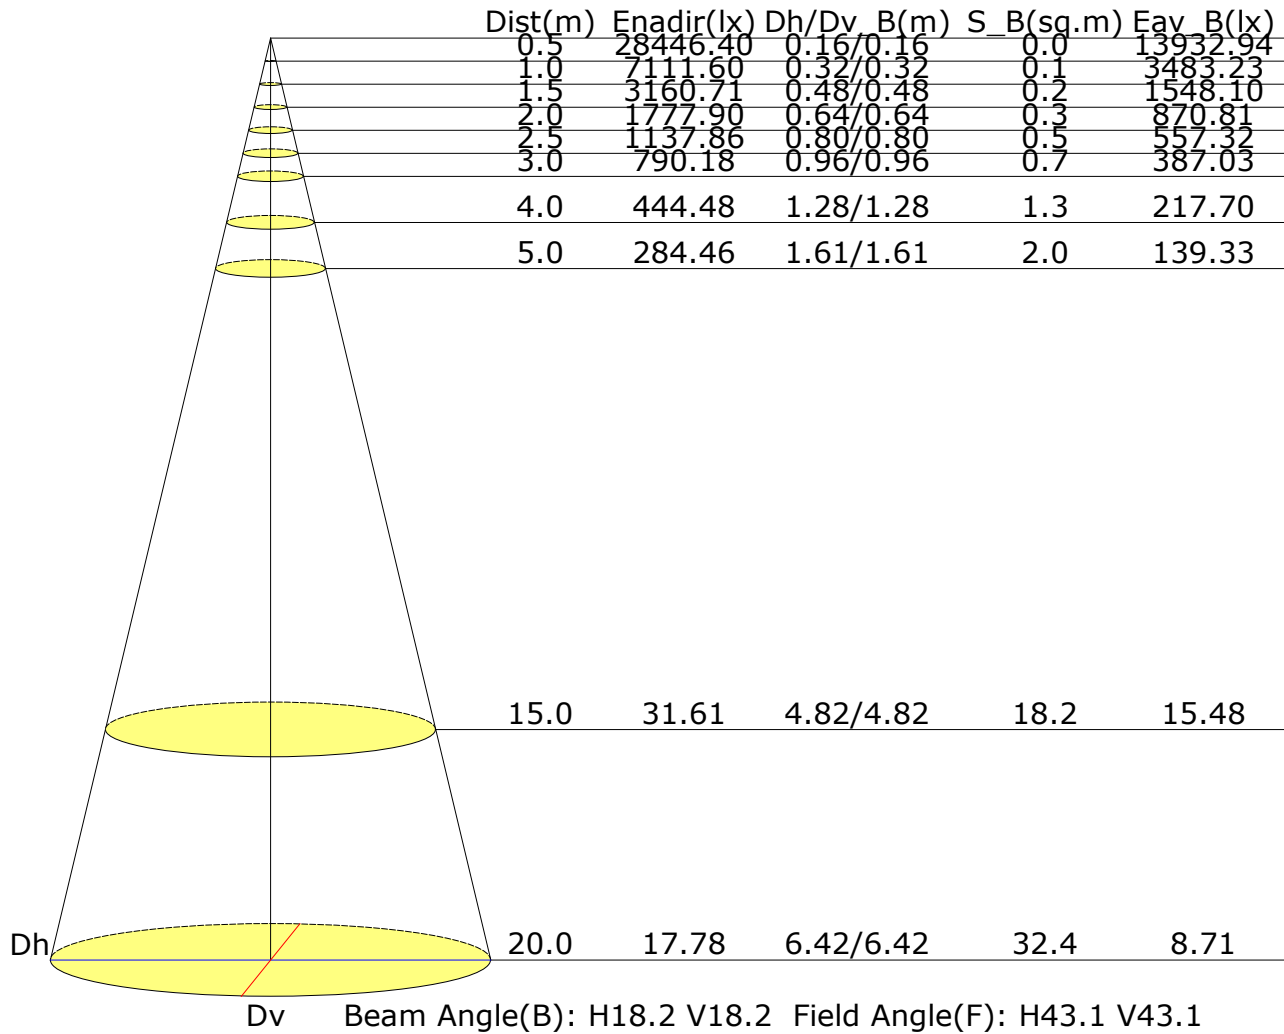

Vertical IsoLux Plot

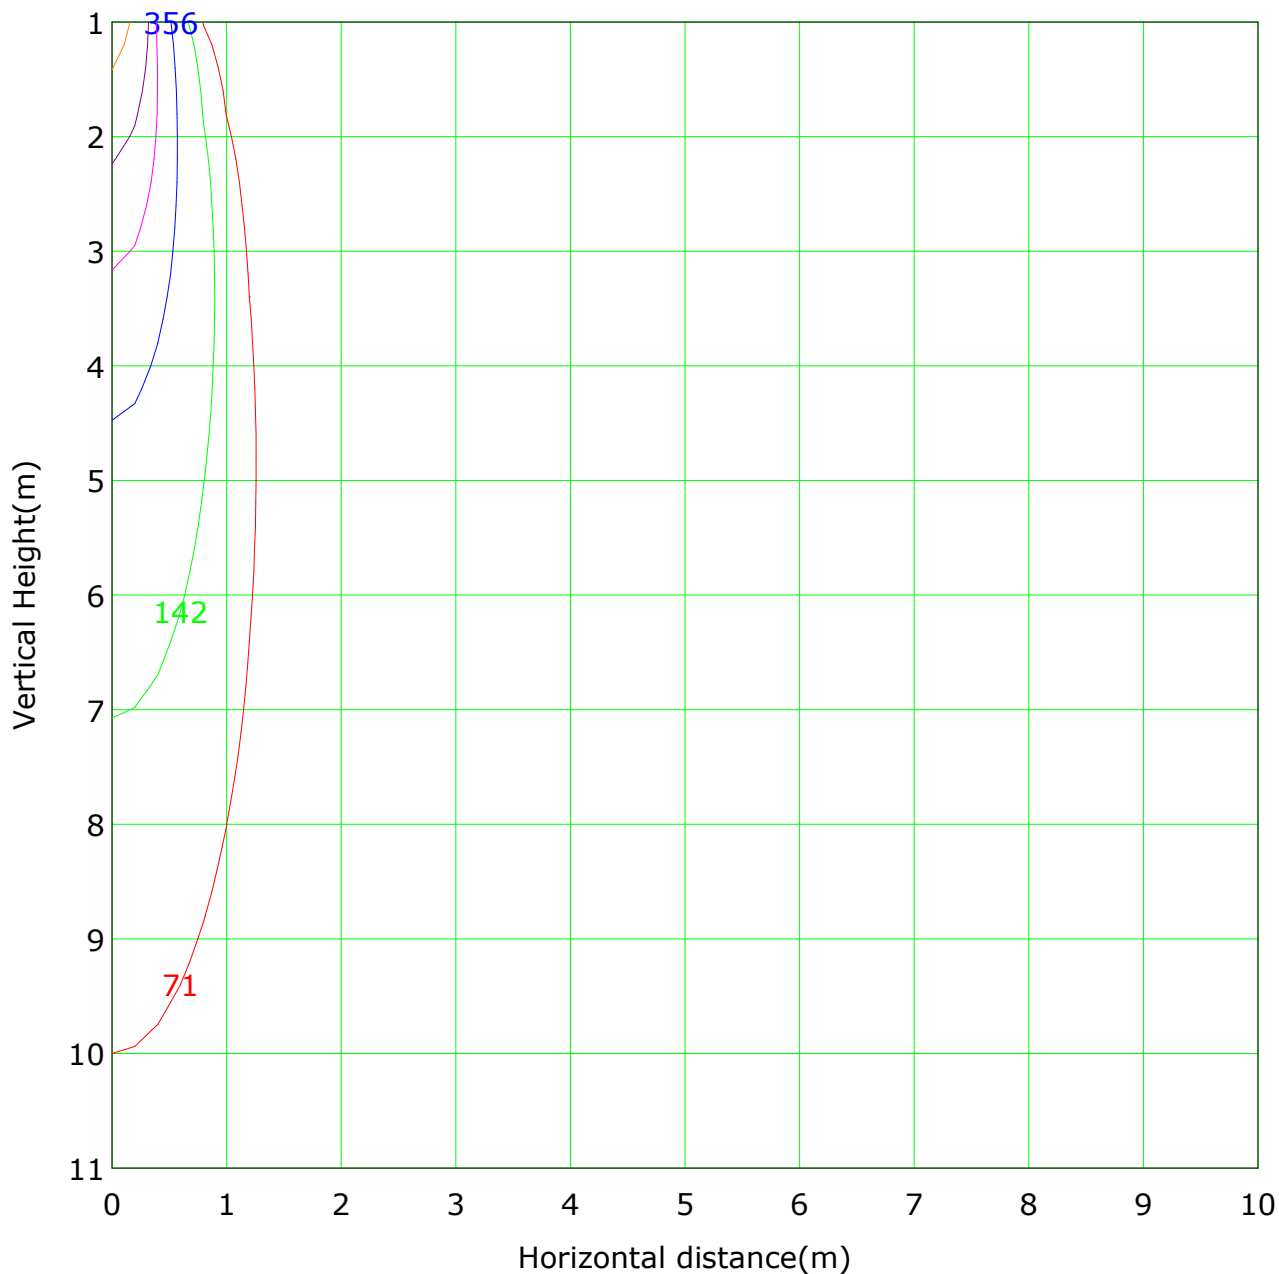

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 7111.6 lx


(1%): 71.1 lx	(2%): 142.2 lx
(5%): 355.6 lx	(10%): 711.2 lx
(20%): 1422.3 lx	(50%): 3555.8 lx
(100%): 7111.6 lx	

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

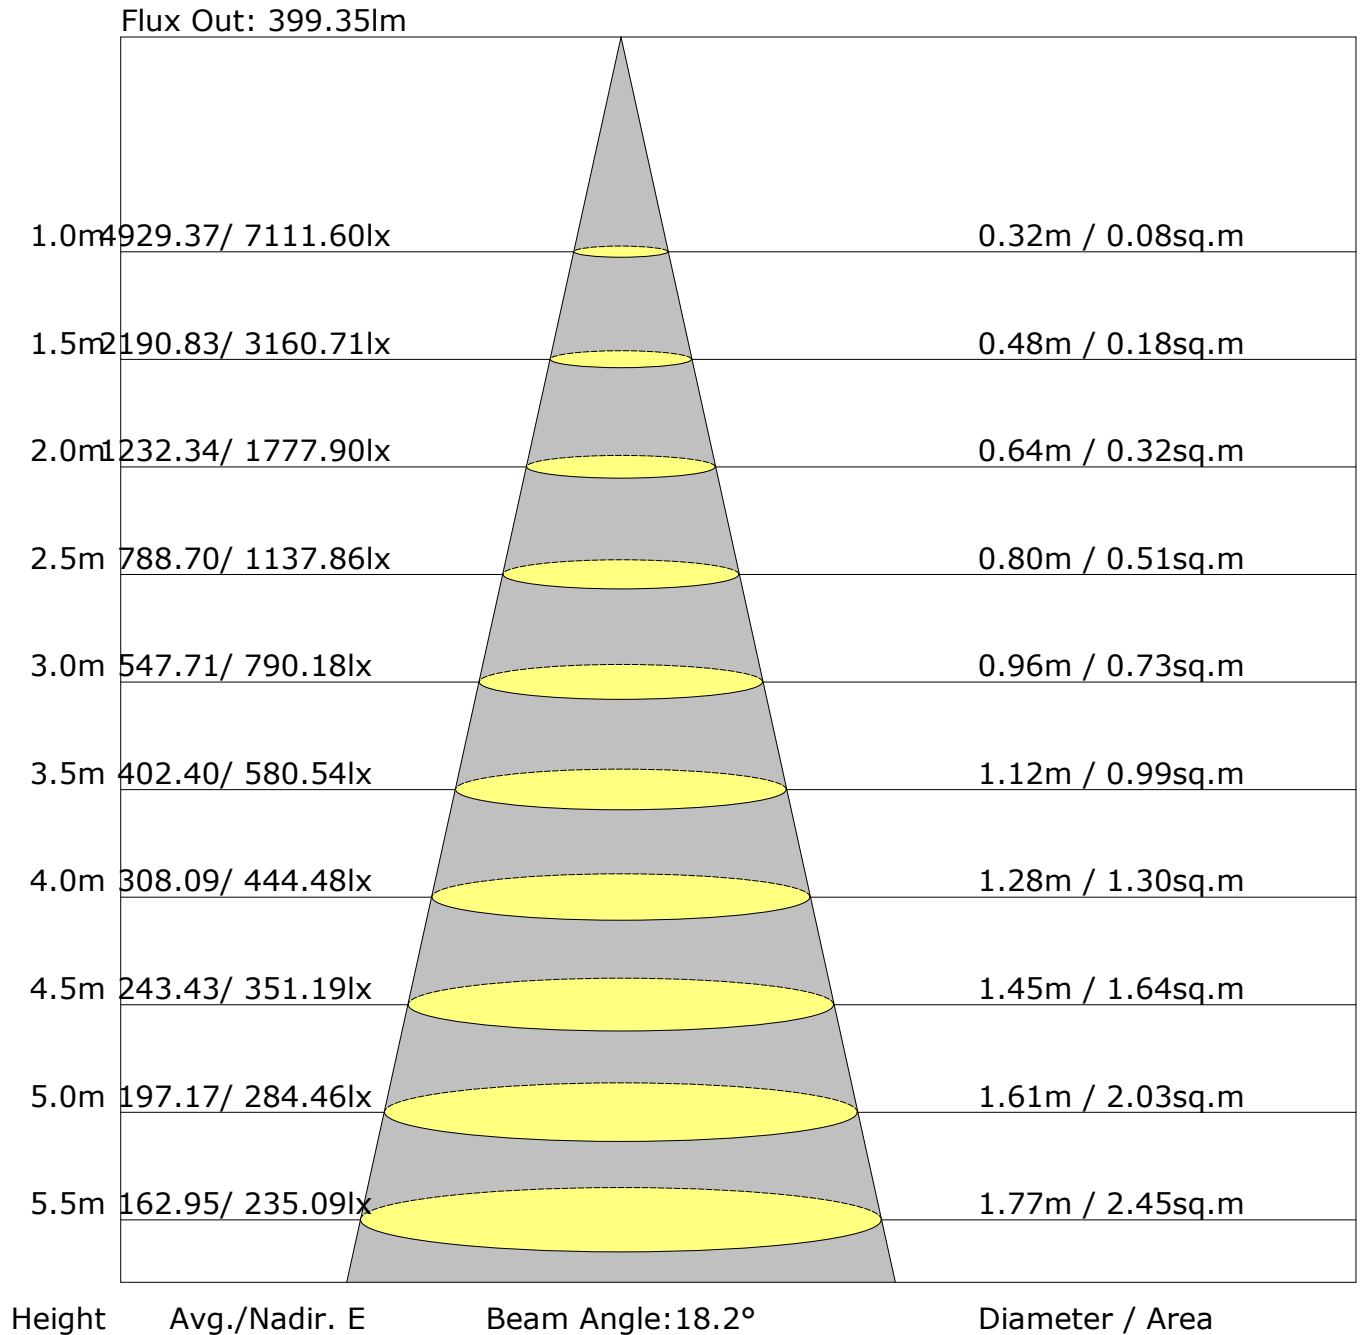

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	17.2	17.8	17.4	18.0	18.2	17.1	17.8	17.4	17.9	18.1
3H	17.1	17.7	17.3	17.9	18.1	17.0	17.6	17.3	17.8	18.0
4H	17.0	17.5	17.3	17.8	18.1	16.9	17.5	17.2	17.7	18.0
6H	16.9	17.4	17.2	17.7	18.0	16.8	17.3	17.1	17.6	17.9
8H	16.9	17.4	17.2	17.7	18.0	16.8	17.3	17.1	17.6	17.9
12H	16.8	17.3	17.2	17.6	17.9	16.7	17.2	17.1	17.5	17.8
X=4H Y=2H	17.0	17.6	17.3	17.8	18.1	16.9	17.5	17.2	17.7	18.0
3H	16.9	17.3	17.2	17.6	17.9	16.8	17.2	17.1	17.5	17.9
4H	16.8	17.2	17.1	17.5	17.9	16.7	17.1	17.0	17.4	17.8
6H	16.7	17.1	17.1	17.4	17.8	16.6	17.0	17.0	17.3	17.7
8H	16.6	17.0	17.0	17.4	17.8	16.5	16.9	17.0	17.3	17.7
12H	16.6	16.9	17.0	17.3	17.7	16.5	16.8	16.9	17.2	17.6
X=8H Y=4H	16.6	17.0	17.0	17.4	17.8	16.5	16.9	17.0	17.3	17.7
6H	16.5	16.8	17.0	17.2	17.7	16.4	16.7	16.9	17.1	17.6
8H	16.5	16.7	17.0	17.2	17.6	16.4	16.6	16.9	17.1	17.6
12H	16.4	16.6	16.9	17.1	17.6	16.3	16.6	16.8	17.0	17.5
X=12H Y=4H	16.6	16.9	17.0	17.3	17.7	16.5	16.8	16.9	17.2	17.6
6H	16.5	16.7	17.0	17.2	17.6	16.4	16.6	16.9	17.1	17.6
8H	16.4	16.6	16.9	17.1	17.6	16.3	16.6	16.8	17.0	17.5
Variations with the observer position at spacings:										
S=1.0H	+3.8/-9.2					+3.8/-10.0				
S=1.5H	+6.4/-1.\$					+6.5/-1.\$				
S=2.0H	+8.4/-1.\$					+8.5/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 1293lm ($8\log(F/F_0) = 0.9$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	652	50.4
	FL (0°-30°)	575	44.5
	FM (30°-60°)	78	6.0
	FH (60°-80°)	0	0.0
	FVH (80°-90°)	0	0.0
	BACK LIGHT	641	49.6
	BL (0°-30°)	565	43.7
	BM (30°-60°)	75	5.8
	BH (60°-80°)	0	0.0
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	7075.8	6.8	6.8	0.52	0.52
1.0-2.0	6936.7	19.9	26.7	1.54	2.06
2.0-3.0	6669.9	31.9	58.6	2.47	4.53
3.0-4.0	6298.2	42.2	100.8	3.26	7.79
4.0-5.0	5848.2	50.3	151.1	3.89	11.68
5.0-6.0	5352.5	56.3	207.3	4.35	16.03
6.0-7.0	4840.7	60.1	267.4	4.65	20.68
7.0-8.0	4331.5	62.0	329.4	4.79	25.48
8.0-9.0	3844.9	62.3	391.7	4.82	30.30
9.0-10.0	3391.5	61.4	453.1	4.75	35.04
10.0-11.0	2976.1	59.5	512.6	4.60	39.64
11.0-12.0	2604.8	56.9	569.5	4.40	44.05
12.0-13.0	2276.6	54.0	623.6	4.18	48.23
13.0-14.0	1989.0	50.9	674.5	3.94	52.16
14.0-15.0	1738.7	47.7	722.2	3.69	55.86
15.0-16.0	1520.8	44.6	766.8	3.45	59.30
16.0-17.0	1333.5	41.5	808.3	3.21	62.52
17.0-18.0	1172.2	38.7	847.0	2.99	65.51
18.0-19.0	1032.4	35.9	882.9	2.78	68.28
19.0-20.0	910.6	33.3	916.3	2.58	70.86
20.0-21.0	805.1	30.9	947.2	2.39	73.25
21.0-22.0	713.5	28.7	975.8	2.22	75.47
22.0-23.0	632.8	26.6	1002.4	2.05	77.52
23.0-24.0	562.0	24.6	1027.0	1.90	79.43
24.0-25.0	499.8	22.7	1049.7	1.76	81.18
25.0-26.0	444.8	21.0	1070.7	1.62	82.81
26.0-27.0	396.5	19.4	1090.1	1.50	84.31
27.0-28.0	354.3	17.9	1108.0	1.39	85.69
28.0-29.0	317.4	16.6	1124.7	1.28	86.98
29.0-30.0	284.6	15.4	1140.0	1.19	88.17
30.0-31.0	255.2	14.2	1154.2	1.10	89.27
31.0-32.0	229.9	13.2	1167.4	1.02	90.28
32.0-33.0	207.3	12.2	1179.6	0.94	91.23
33.0-34.0	187.0	11.3	1190.9	0.88	92.10
34.0-35.0	168.9	10.5	1201.4	0.81	92.92
35.0-36.0	151.5	9.6	1211.1	0.75	93.66

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	136.1	8.9	1219.9	0.69	94.35
37.0-38.0	122.5	8.2	1228.1	0.63	94.98
38.0-39.0	110.1	7.5	1235.6	0.58	95.56
39.0-40.0	98.0	6.8	1242.5	0.53	96.09
40.0-41.0	87.8	6.3	1248.7	0.48	96.57
41.0-42.0	78.8	5.7	1254.4	0.44	97.02
42.0-43.0	70.1	5.2	1259.6	0.40	97.42
43.0-44.0	62.6	4.7	1264.4	0.37	97.78
44.0-45.0	55.0	4.2	1268.6	0.33	98.11
45.0-46.0	48.6	3.8	1272.4	0.29	98.40
46.0-47.0	44.1	3.5	1275.9	0.27	98.68
47.0-48.0	39.2	3.2	1279.1	0.25	98.92
48.0-49.0	32.8	2.7	1281.8	0.21	99.13
49.0-50.0	27.9	2.3	1284.1	0.18	99.31
50.0-51.0	24.1	2.0	1286.1	0.16	99.47
51.0-52.0	20.0	1.7	1287.8	0.13	99.60
52.0-53.0	16.2	1.4	1289.2	0.11	99.71
53.0-54.0	12.4	1.1	1290.3	0.08	99.79
54.0-55.0	9.8	0.9	1291.2	0.07	99.86
55.0-56.0	7.9	0.7	1291.9	0.06	99.92
56.0-57.0	5.7	0.5	1292.5	0.04	99.96
57.0-58.0	3.8	0.3	1292.8	0.03	99.98
58.0-59.0	1.9	0.2	1293.0	0.01	100.00
59.0-60.0	0.4	0.0	1293.0	0.00	100.00
60.0-61.0	0.0	0.0	1293.0	0.00	100.00
61.0-62.0	0.0	0.0	1293.0	0.00	100.00
62.0-63.0	0.0	0.0	1293.0	0.00	100.00
63.0-64.0	0.0	0.0	1293.0	0.00	100.00
64.0-65.0	0.0	0.0	1293.0	0.00	100.00
65.0-66.0	0.0	0.0	1293.0	0.00	100.00
66.0-67.0	0.0	0.0	1293.0	0.00	100.00
67.0-68.0	0.0	0.0	1293.0	0.00	100.00
68.0-69.0	0.0	0.0	1293.0	0.00	100.00
69.0-70.0	0.0	0.0	1293.0	0.00	100.00
70.0-71.0	0.0	0.0	1293.0	0.00	100.00
71.0-72.0	0.0	0.0	1293.0	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	7111.6	7111.6								
G1.0	7057.3	7022.6								
G2.0	6871.9	6795.0								
G3.0	6565.8	6446.7								
G4.0	6167.8	6012.5								
G5.0	5697.4	5515.0								
G6.0	5201.4	4996.4								
G7.0	4693.3	4471.7								
G8.0	4191.3	3969.6								
G9.0	3714.9	3503.8								
G10.0	3270.1	3077.1								
G11.0	2860.0	2697.2								
G12.0	2499.7	2362.5								
G13.0	2178.6	2065.5								
G14.0	1902.7	1809.2								
G15.0	1656.9	1586.1								
G16.0	1447.3	1393.1								
G17.0	1264.9	1228.7								
G18.0	1109.6	1085.5								
G19.0	975.5	958.9								
G20.0	859.4	848.8								
G21.0	758.3	753.8								
G22.0	672.4	669.4								
G23.0	594.0	595.5								
G24.0	529.2	529.2								
G25.0	468.9	471.9								
G26.0	417.6	420.6								
G27.0	372.4	375.4								
G28.0	333.2	336.2								
G29.0	298.5	301.5								
G30.0	269.9	268.4								
G31.0	241.2	241.2								
G32.0	220.1	217.1								
G33.0	197.5	194.5								
G34.0	180.9	174.9								
G35.0	162.8	156.8								
G36.0	146.2	140.2								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	131.2	126.6								
G38.0	119.1	113.1								
G39.0	107.0	101.0								
G40.0	93.5	90.5								
G41.0	84.4	82.9								
G42.0	75.4	72.4								
G43.0	69.3	63.3								
G44.0	61.8	55.8								
G45.0	54.3	48.2								
G46.0	48.2	43.7								
G47.0	45.2	39.2								
G48.0	37.7	34.7								
G49.0	31.7	27.1								
G50.0	28.6	24.1								
G51.0	24.1	19.6								
G52.0	19.6	16.6								
G53.0	16.6	12.1								
G54.0	12.1	9.1								
G55.0	10.6	7.5								
G56.0	7.5	6.0								
G57.0	4.5	4.5								
G58.0	4.5	1.5								
G59.0	1.5	0.0								
G60.0	0.0	0.0								
G61.0	0.0	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

Unit: cd

Inspector: