

Report No.:

Test Time: 2025-12-10 17:54

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 50D

Luminous Width (mm): -80

Current: 0.114 A

Power Factor: 0.531

Luminous Length (mm): -80

Voltage: 234.1 V

Power: 14.20 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1350 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H48.6

Vertical Diffuse Angle(50%): V48.6

Luminaire Efficacy Rating (LER): 95.12

Max. Intensity: 2162.39 cd

S/MH(C0/C180): 0.80

Total Rated Lamp Lumens: 1350.0 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 2101.23 cd


Pos of Max. Intensity: H0 V7

S/MH(C90/C270): 0.80

Picture Of Luminaire



Luminous Intensity Distribution Curve

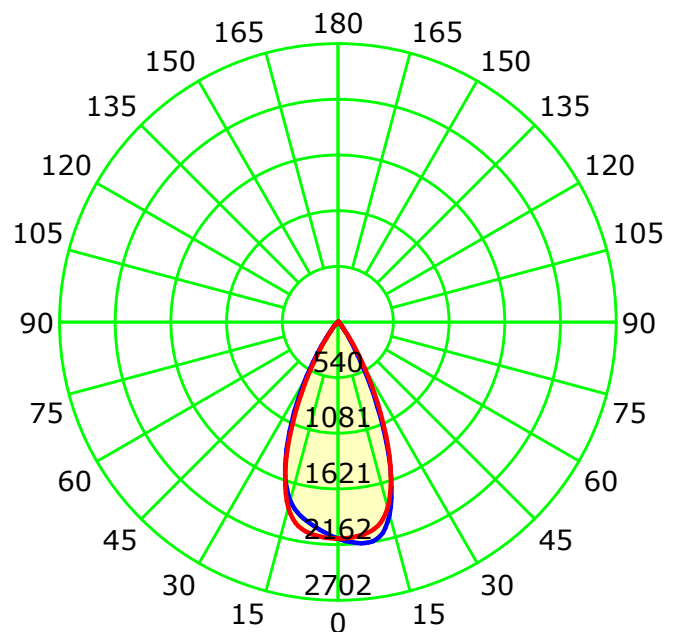

Unit: cd

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.030 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

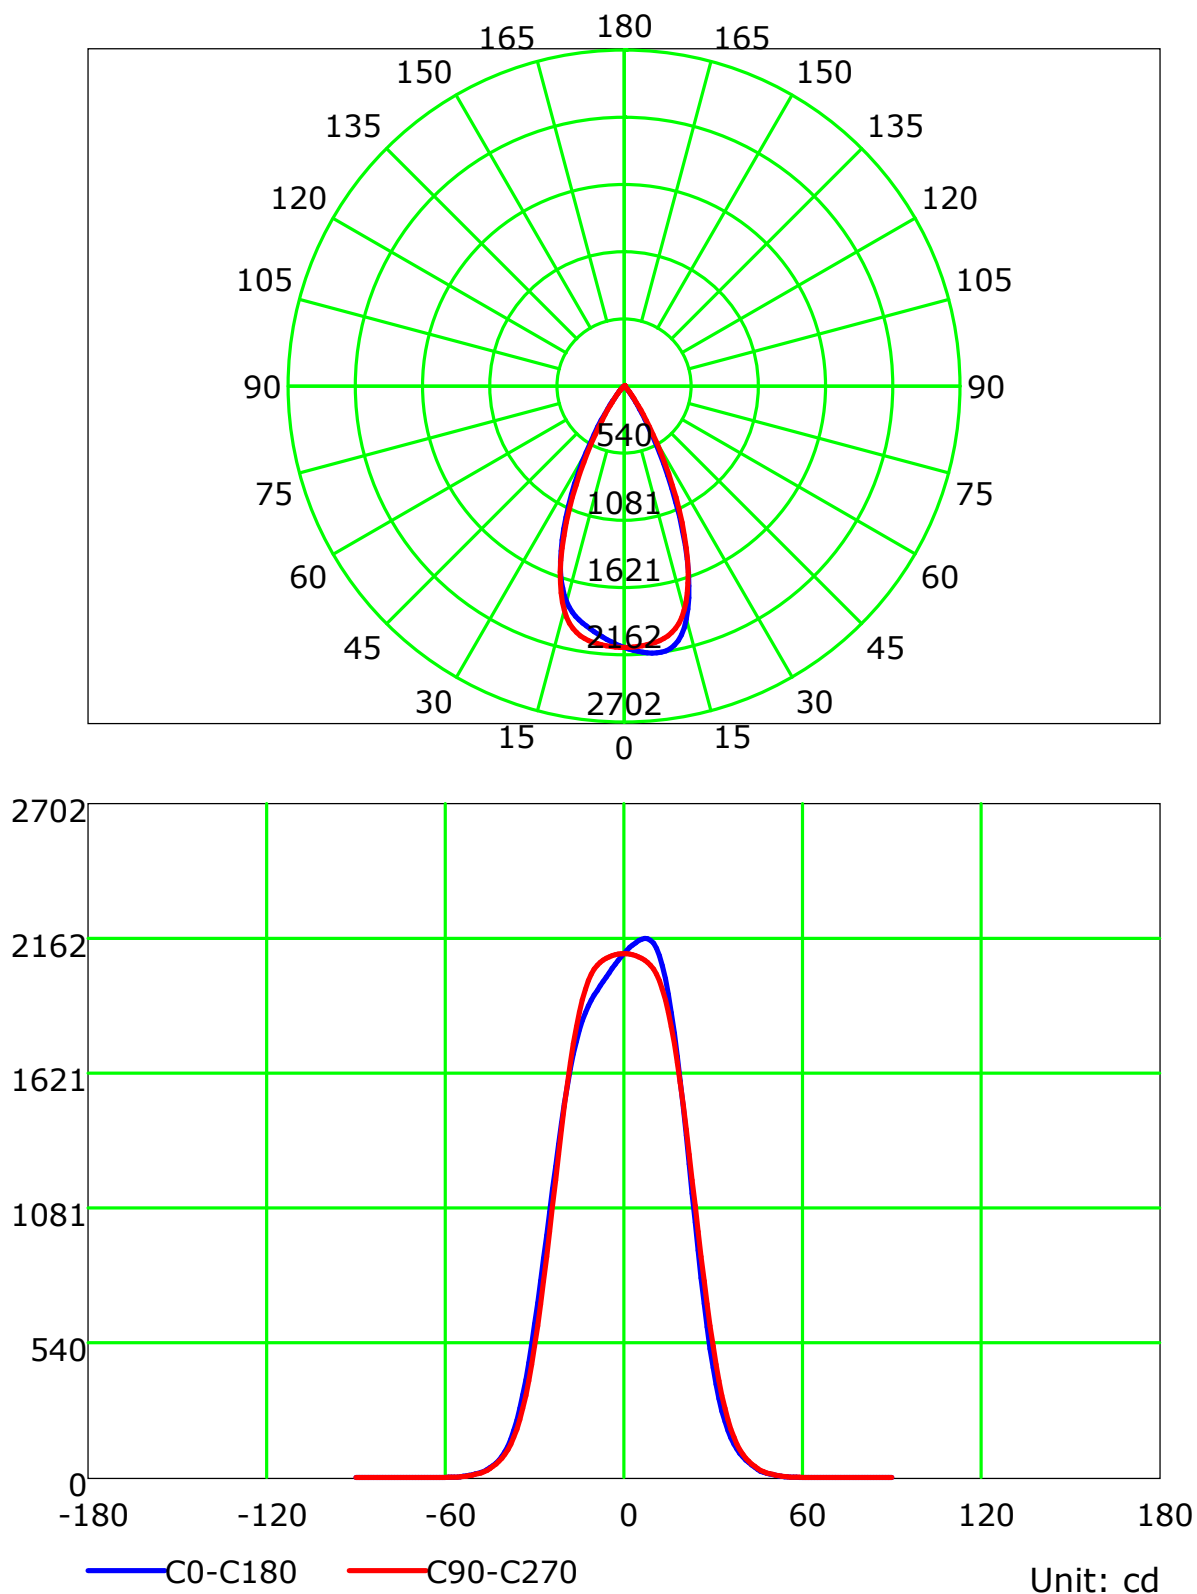

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

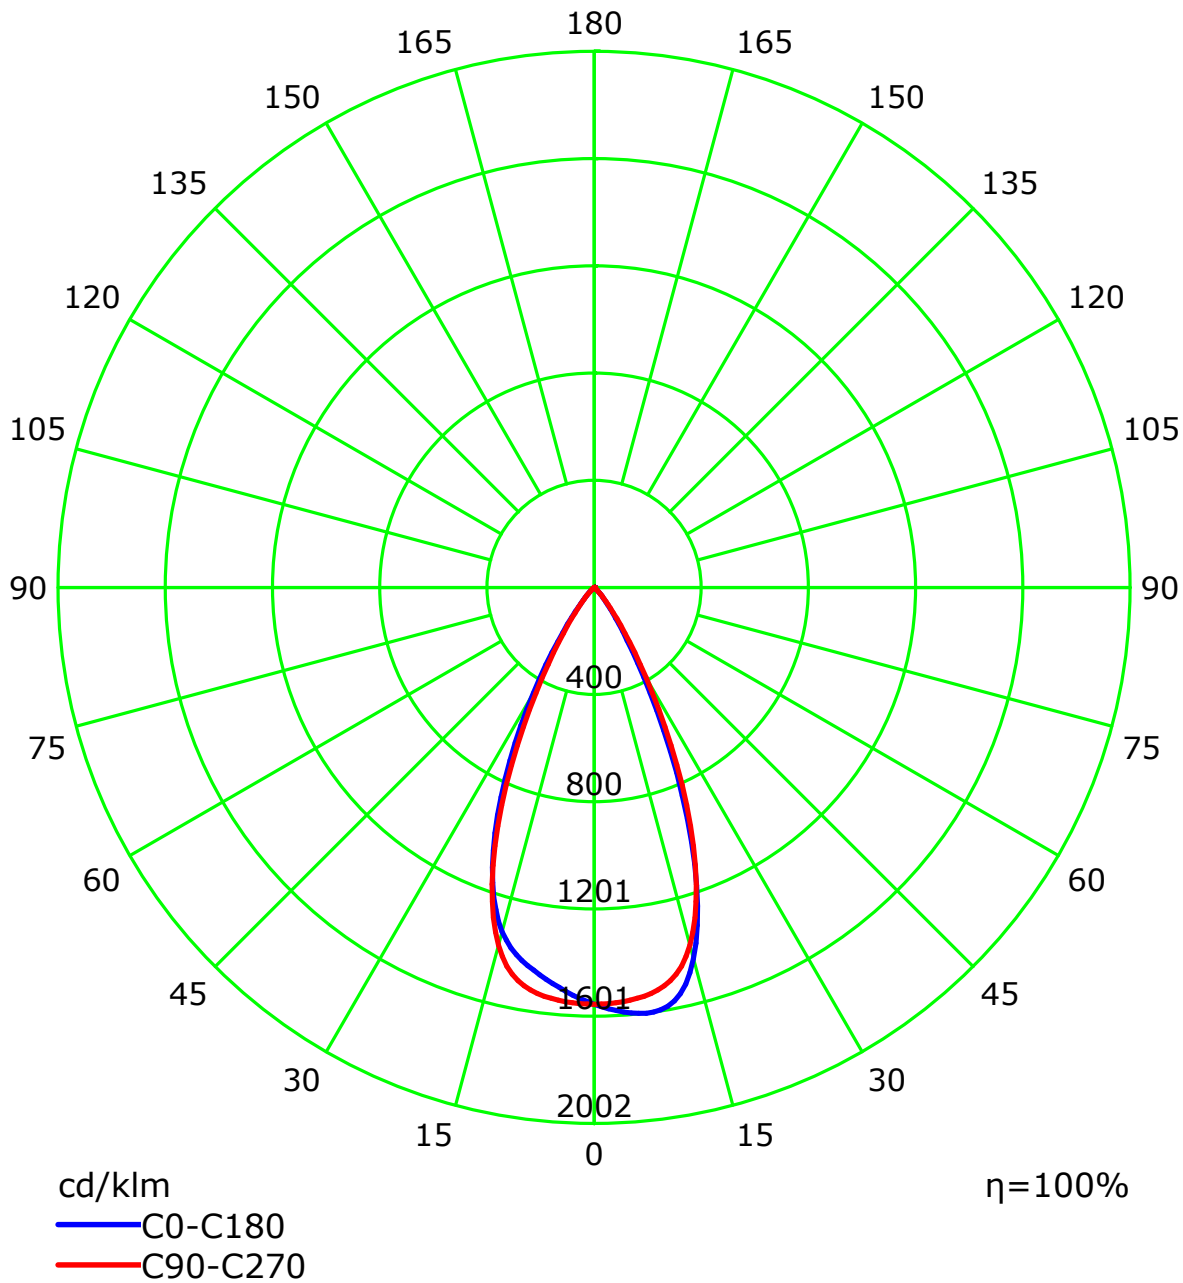

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Isocandela (rectangle)

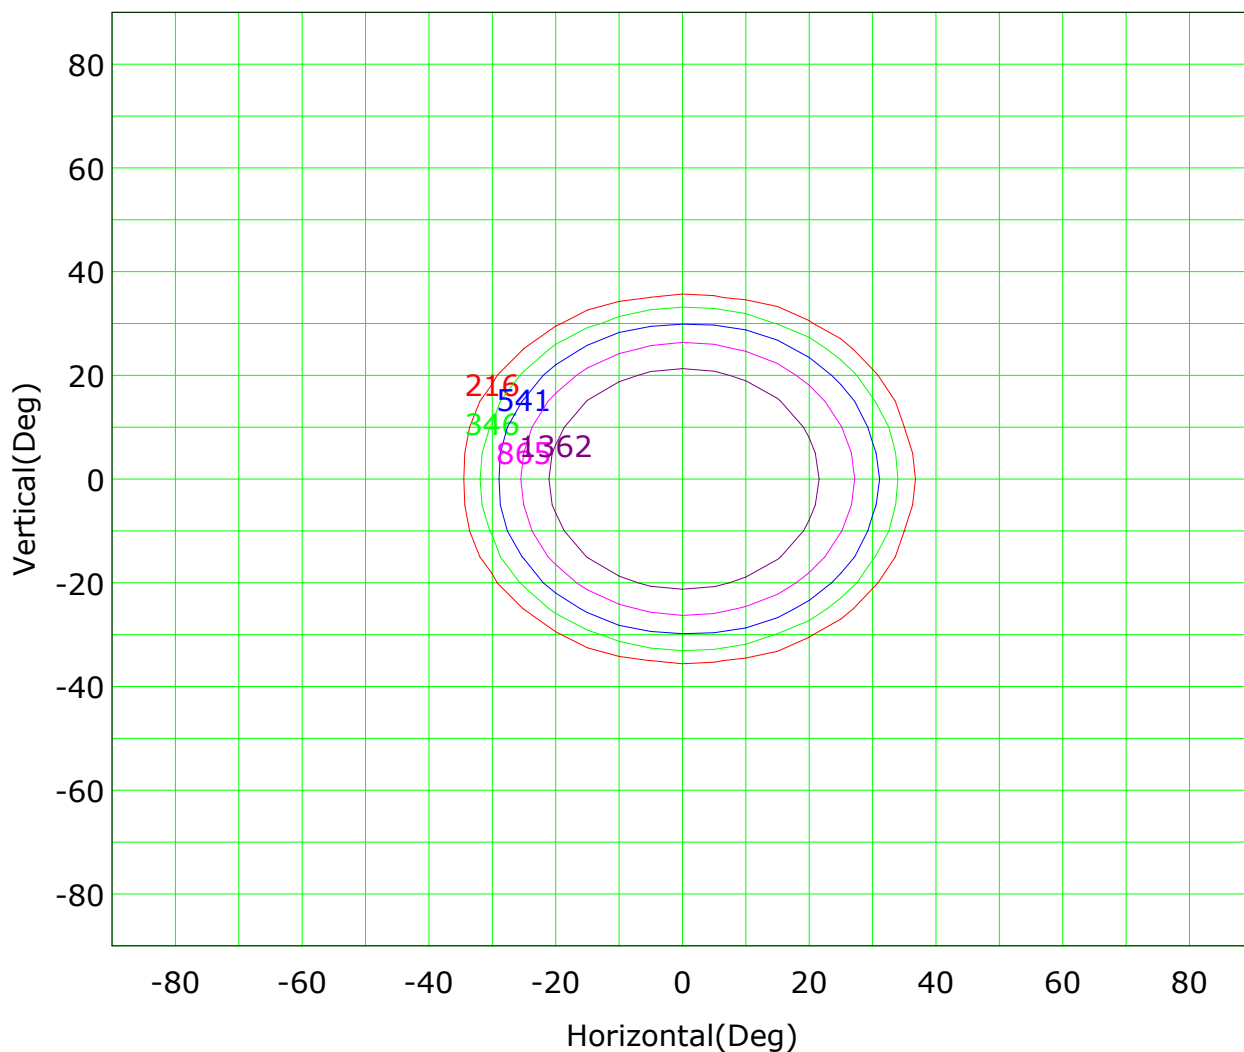

Imax (100%): 2162 cd

(10%): 216 cd	(16%): 346 cd
(25%): 541 cd	(40%): 865 cd
(63%): 1362 cd	(100%): 2162 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.030 m

Humidity:

Inspector:

IsoLux Plot

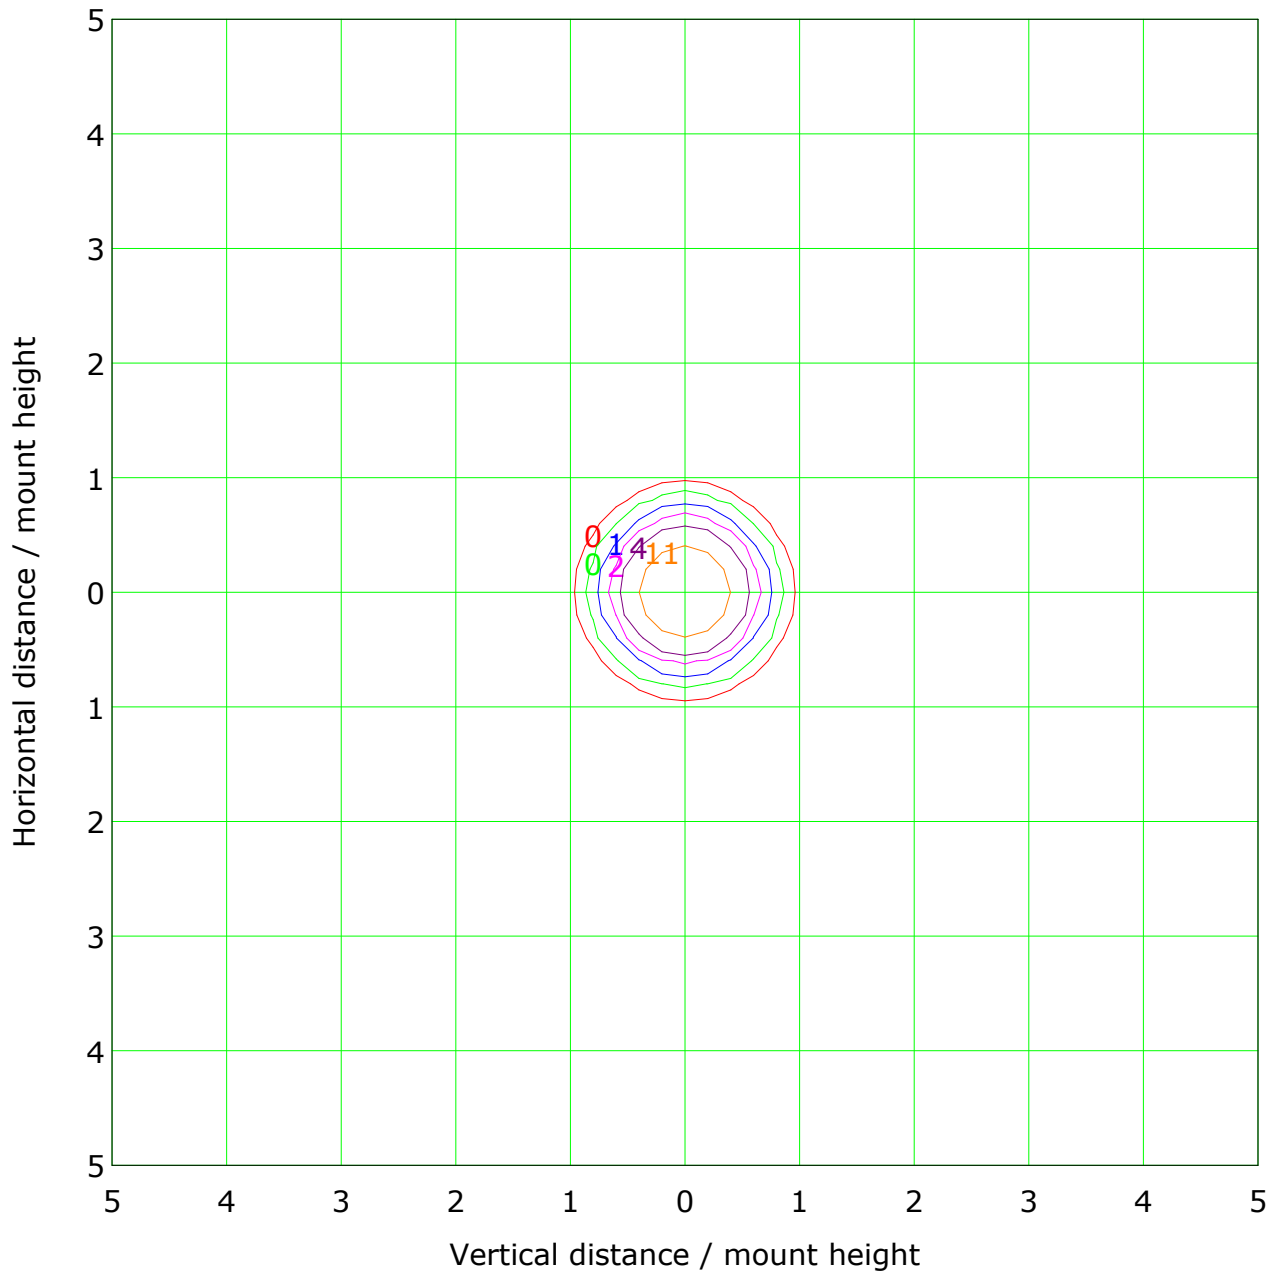

Mounting Height: 10.0m Max Lux(100%): 21.3 lx

(1%): 0.2 lx	(2%): 0.4 lx
(5%): 1.1 lx	(10%): 2.1 lx
(20%): 4.3 lx	(50%): 10.6 lx
(100%): 21.3 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.030 m


Humidity:

Inspector:

Illuminance at a Distance

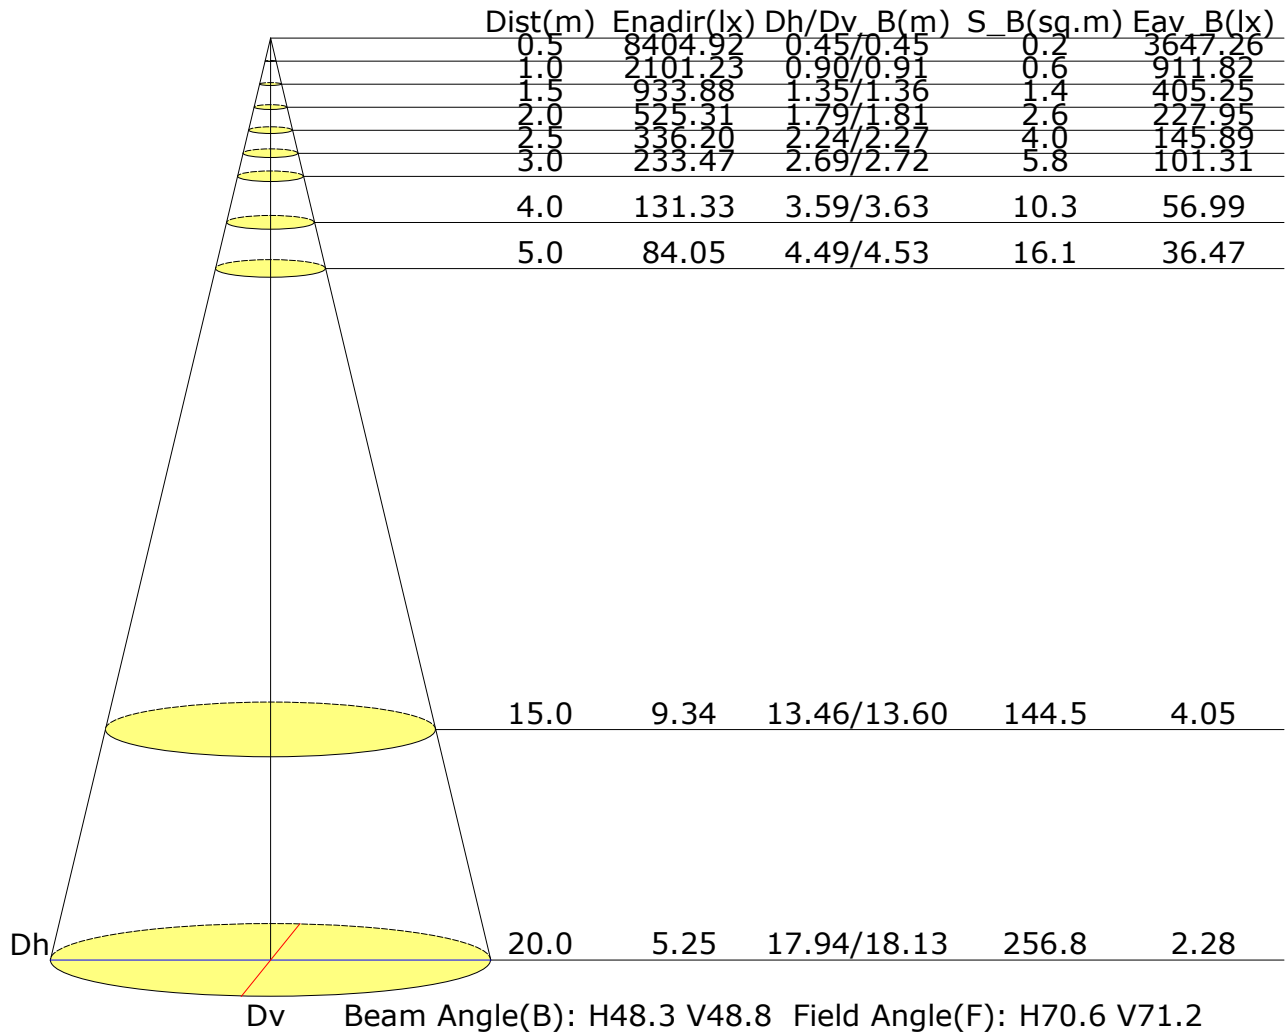

Vertical IsoLux Plot

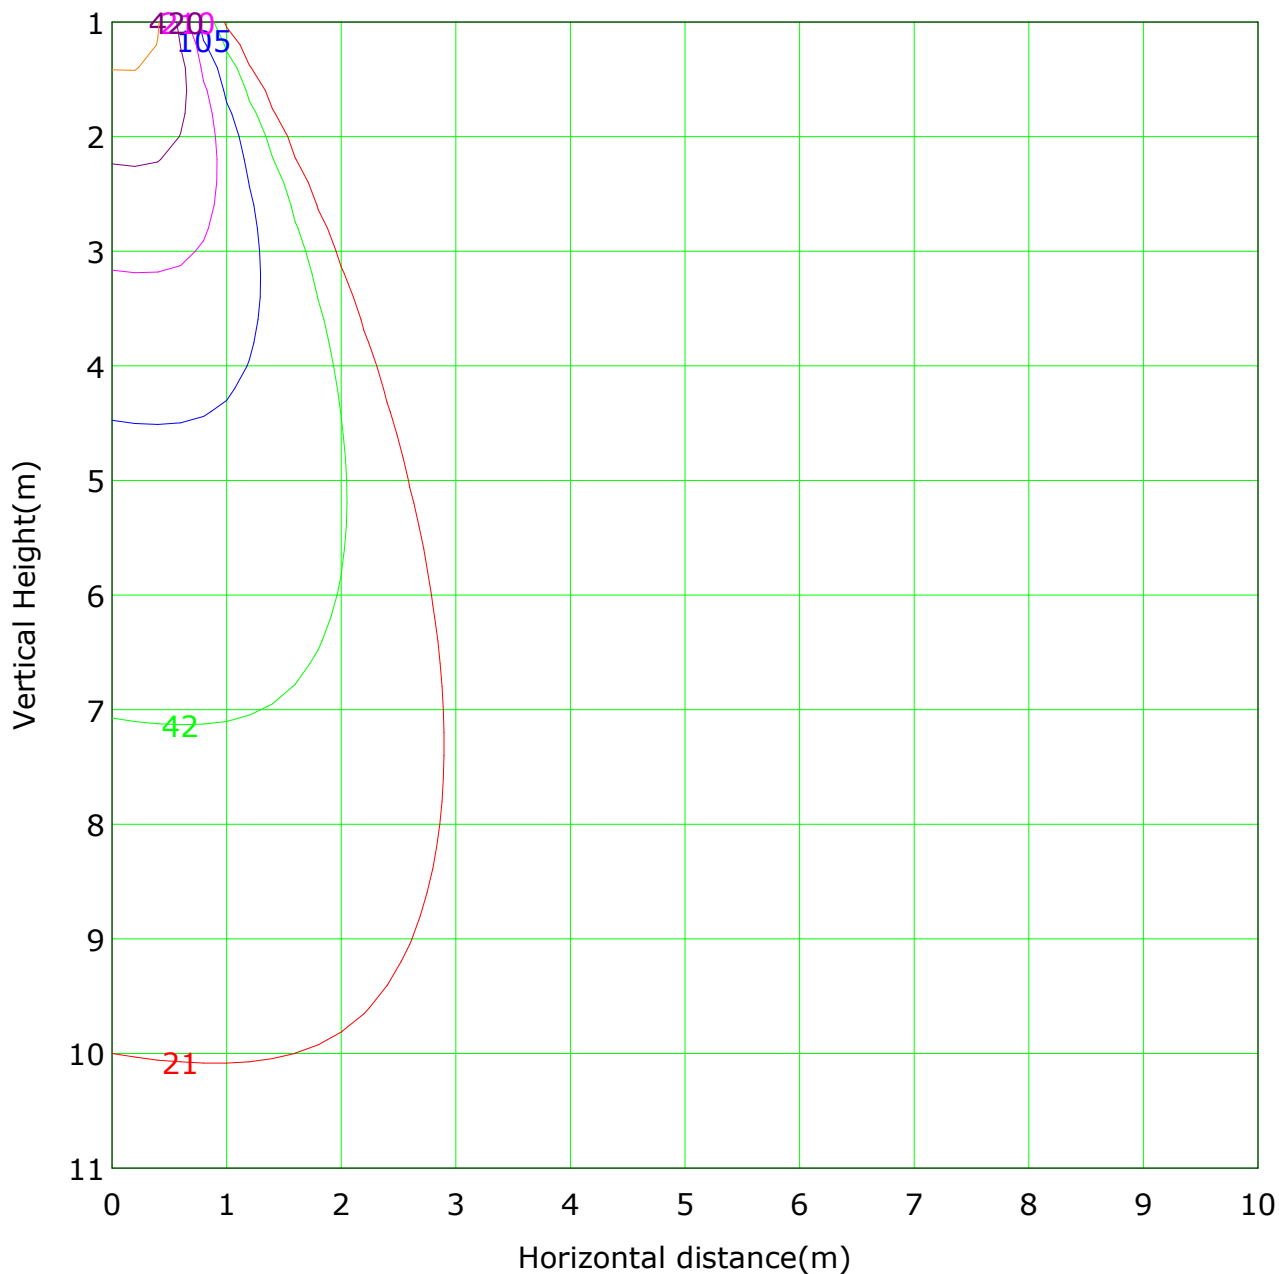


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 2101.2 lx
— (1%): 21.0 lx — (2%): 42.0 lx
— (5%): 105.1 lx — (10%): 210.1 lx
— (20%): 420.2 lx — (50%): 1050.6 lx
— (100%): 2101.2 lx

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

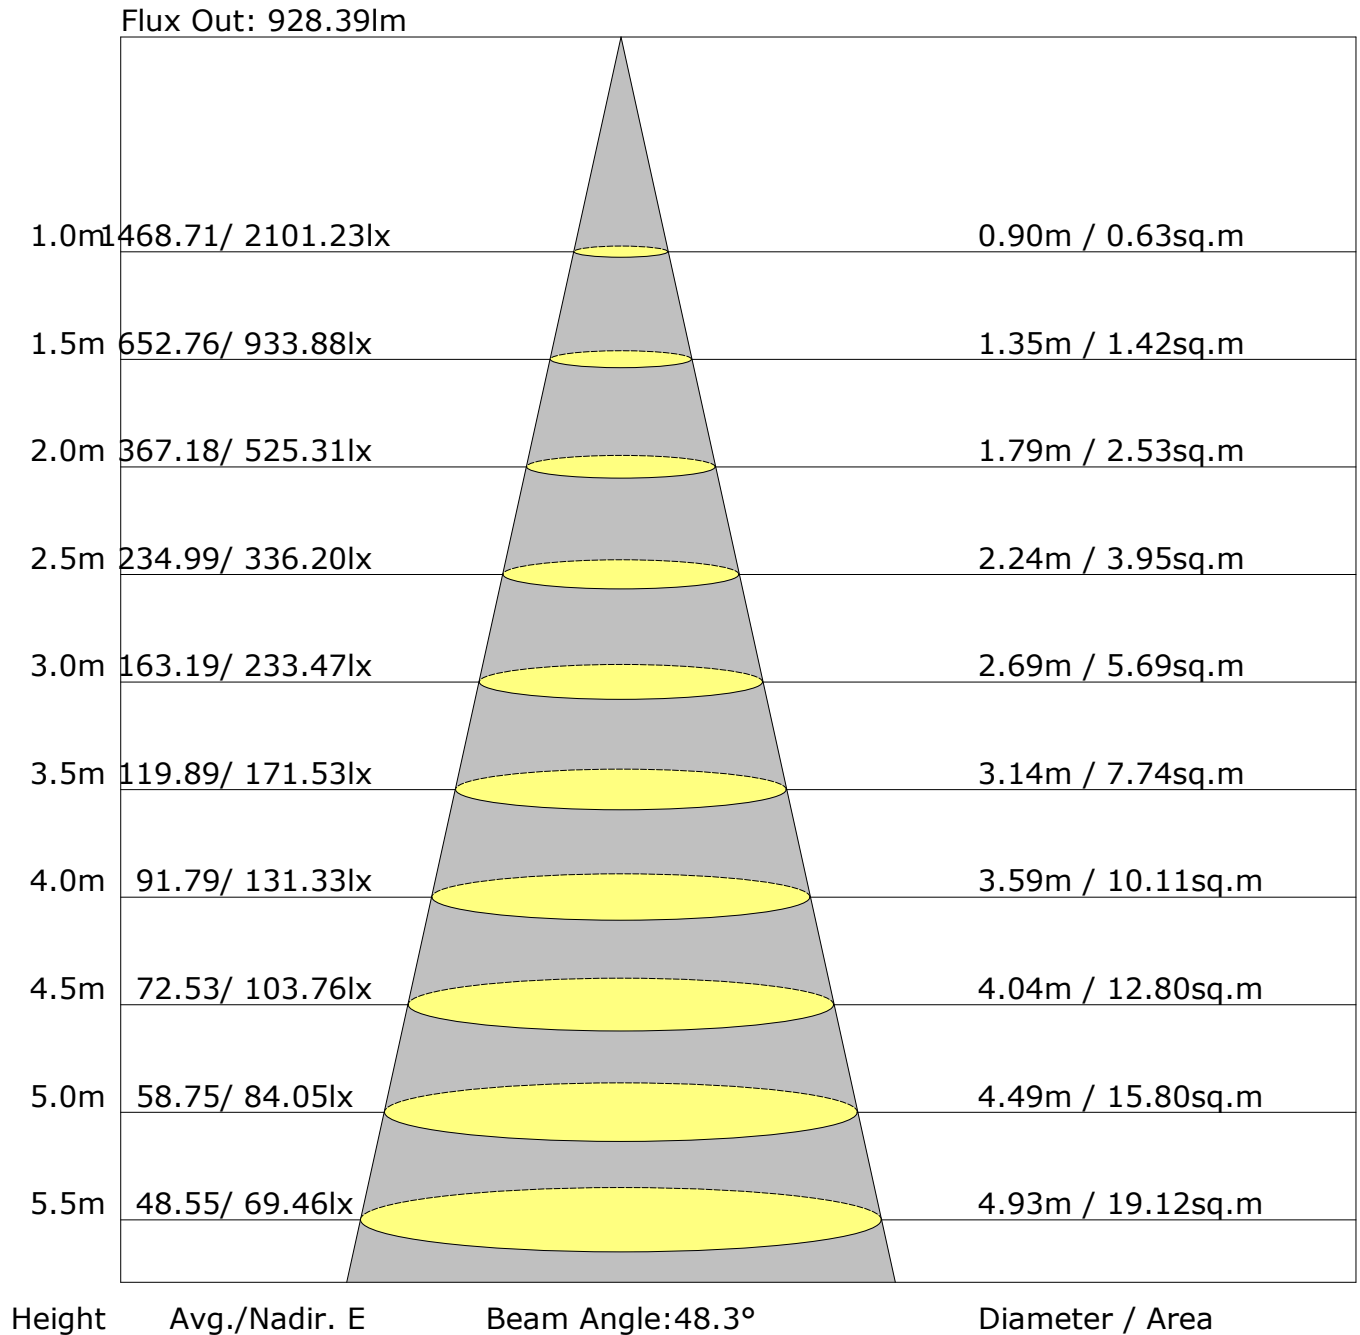

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.4	15.2	14.7	15.4	15.6	15.2	16.0	15.5	16.2	16.4
3H	14.3	15.0	14.6	15.2	15.4	15.1	15.8	15.4	16.0	16.3
4H	14.2	14.8	14.5	15.1	15.4	15.0	15.7	15.3	15.9	16.2
6H	14.1	14.7	14.4	15.0	15.3	14.9	15.5	15.3	15.8	16.1
8H	14.1	14.7	14.4	15.0	15.3	14.9	15.5	15.2	15.8	16.1
12H	14.0	14.6	14.4	14.9	15.2	14.9	15.4	15.2	15.7	16.0
X=4H Y=2H	14.2	14.8	14.5	15.1	15.4	15.0	15.7	15.3	15.9	16.2
3H	14.0	14.6	14.4	14.9	15.2	14.9	15.4	15.2	15.7	16.0
4H	14.0	14.5	14.3	14.8	15.1	14.8	15.3	15.2	15.6	16.0
6H	13.9	14.3	14.3	14.7	15.1	14.7	15.1	15.1	15.5	15.9
8H	13.8	14.2	14.3	14.6	15.0	14.7	15.0	15.1	15.4	15.8
12H	13.8	14.1	14.2	14.6	15.0	14.6	15.0	15.0	15.4	15.8
X=8H Y=4H	13.8	14.2	14.3	14.6	15.0	14.7	15.0	15.1	15.4	15.8
6H	13.7	14.1	14.2	14.5	14.9	14.6	14.9	15.0	15.3	15.8
8H	13.7	14.0	14.2	14.4	14.9	14.5	14.8	15.0	15.2	15.7
12H	13.7	13.9	14.1	14.4	14.9	14.5	14.7	15.0	15.2	15.7
X=12H Y=4H	13.8	14.1	14.2	14.6	15.0	14.6	15.0	15.0	15.4	15.8
6H	13.7	14.0	14.2	14.4	14.9	14.5	14.8	15.0	15.2	15.7
8H	13.7	13.9	14.1	14.4	14.9	14.5	14.7	15.0	15.2	15.7
Variations with the observer position at spacings:										
S=1.0H	+5.5/-16.4					+5.7/-17.3				
S=1.5H	+8.3/-19.7					+8.5/-22.3				
S=2.0H	+10.3/-20.9					+10.5/-22.1				

Calculate in accordance with CIE Pub.117. The table is revised with 1350lm ($8\log(F/F_0) = 1.0$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	665	49.3
	FL (0°-30°)	576	42.6
	FM (30°-60°)	89	6.6
	FH (60°-80°)	1	0.0
	FVH (80°-90°)	0	0.0
	BACK LIGHT	685	50.7
	BL (0°-30°)	580	43.0
	BM (30°-60°)	105	7.7
	BH (60°-80°)	0	0.0
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2101.2	2.0	2.0	0.15	0.15
1.0-2.0	2100.7	6.0	8.0	0.45	0.60
2.0-3.0	2098.8	10.0	18.1	0.74	1.34
3.0-4.0	2095.6	14.0	32.1	1.04	2.38
4.0-5.0	2091.6	18.0	50.1	1.33	3.71
5.0-6.0	2086.2	21.9	72.0	1.62	5.34
6.0-7.0	2079.8	25.8	97.9	1.91	7.25
7.0-8.0	2071.7	29.7	127.5	2.20	9.44
8.0-9.0	2060.8	33.4	160.9	2.47	11.92
9.0-10.0	2047.1	37.1	198.0	2.74	14.66
10.0-11.0	2029.3	40.6	238.5	3.00	17.67
11.0-12.0	2006.1	43.9	282.4	3.25	20.92
12.0-13.0	1976.2	46.9	329.3	3.47	24.39
13.0-14.0	1938.2	49.6	378.9	3.68	28.07
14.0-15.0	1892.0	51.9	430.8	3.85	31.91
15.0-16.0	1837.7	53.9	484.7	3.99	35.90
16.0-17.0	1774.3	55.3	540.0	4.09	40.00
17.0-18.0	1702.7	56.1	596.1	4.16	44.16
18.0-19.0	1623.7	56.5	652.6	4.19	48.34
19.0-20.0	1537.1	56.3	708.9	4.17	52.51
20.0-21.0	1444.3	55.5	764.3	4.11	56.62
21.0-22.0	1346.6	54.1	818.5	4.01	60.63
22.0-23.0	1245.2	52.3	870.7	3.87	64.50
23.0-24.0	1142.4	50.0	920.7	3.70	68.20
24.0-25.0	1039.0	47.2	967.9	3.50	71.70
25.0-26.0	936.5	44.2	1012.1	3.27	74.97
26.0-27.0	837.5	41.0	1053.1	3.04	78.01
27.0-28.0	742.7	37.6	1090.7	2.79	80.79
28.0-29.0	652.7	34.2	1124.9	2.53	83.32
29.0-30.0	568.7	30.7	1155.6	2.27	85.60
30.0-31.0	491.3	27.3	1182.9	2.03	87.62
31.0-32.0	421.2	24.1	1207.1	1.79	89.41
32.0-33.0	358.9	21.1	1228.2	1.57	90.98
33.0-34.0	304.0	18.4	1246.6	1.36	92.34
34.0-35.0	256.1	15.9	1262.5	1.18	93.52
35.0-36.0	214.4	13.7	1276.2	1.01	94.53

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	178.6	11.6	1287.8	0.86	95.39
37.0-38.0	148.4	9.9	1297.7	0.73	96.13
38.0-39.0	123.3	8.4	1306.1	0.62	96.75
39.0-40.0	102.7	7.2	1313.3	0.53	97.28
40.0-41.0	85.7	6.1	1319.4	0.45	97.73
41.0-42.0	71.7	5.2	1324.6	0.39	98.12
42.0-43.0	60.1	4.5	1329.1	0.33	98.45
43.0-44.0	50.1	3.8	1332.8	0.28	98.73
44.0-45.0	41.1	3.2	1336.0	0.23	98.96
45.0-46.0	33.0	2.6	1338.6	0.19	99.15
46.0-47.0	26.2	2.1	1340.7	0.15	99.31
47.0-48.0	21.3	1.7	1342.4	0.13	99.43
48.0-49.0	17.5	1.4	1343.8	0.11	99.54
49.0-50.0	14.4	1.2	1345.0	0.09	99.63
50.0-51.0	11.6	1.0	1346.0	0.07	99.70
51.0-52.0	9.2	0.8	1346.8	0.06	99.76
52.0-53.0	7.1	0.6	1347.4	0.05	99.81
53.0-54.0	5.2	0.5	1347.9	0.03	99.84
54.0-55.0	3.8	0.3	1348.2	0.02	99.87
55.0-56.0	2.7	0.2	1348.5	0.02	99.89
56.0-57.0	2.1	0.2	1348.7	0.01	99.90
57.0-58.0	1.7	0.2	1348.8	0.01	99.91
58.0-59.0	1.4	0.1	1349.0	0.01	99.92
59.0-60.0	1.1	0.1	1349.1	0.01	99.93
60.0-61.0	0.8	0.1	1349.1	0.01	99.93
61.0-62.0	0.6	0.1	1349.2	0.00	99.94
62.0-63.0	0.6	0.1	1349.3	0.00	99.94
63.0-64.0	0.8	0.1	1349.3	0.01	99.95
64.0-65.0	0.8	0.1	1349.4	0.01	99.95
65.0-66.0	0.8	0.1	1349.5	0.01	99.96
66.0-67.0	0.7	0.1	1349.6	0.01	99.97
67.0-68.0	0.7	0.1	1349.6	0.01	99.97
68.0-69.0	0.8	0.1	1349.7	0.01	99.98
69.0-70.0	0.8	0.1	1349.8	0.01	99.98
70.0-71.0	0.7	0.1	1349.9	0.01	99.99
71.0-72.0	0.6	0.1	1349.9	0.00	99.99

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.030 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	2101.2	2101.2								
G1.0	2114.0	2088.3								
G2.0	2126.5	2074.1								
G3.0	2135.6	2058.9								
G4.0	2145.2	2042.8								
G5.0	2153.9	2024.4								
G6.0	2159.4	2007.2								
G7.0	2162.4	1990.3								
G8.0	2161.6	1972.4								
G9.0	2155.9	1953.5								
G10.0	2143.5	1935.4								
G11.0	2123.0	1915.3								
G12.0	2093.8	1892.3								
G13.0	2053.5	1865.3								
G14.0	2001.1	1832.8								
G15.0	1937.8	1796.2								
G16.0	1865.4	1751.5								
G17.0	1781.4	1699.0								
G18.0	1689.1	1641.3								
G19.0	1589.7	1574.8								
G20.0	1482.9	1501.0								
G21.0	1372.8	1420.4								
G22.0	1257.3	1336.1								
G23.0	1139.8	1247.7								
G24.0	1024.2	1157.9								
G25.0	910.4	1063.3								
G26.0	801.2	971.0								
G27.0	698.5	879.5								
G28.0	603.5	789.2								
G29.0	517.0	701.1								
G30.0	440.6	616.0								
G31.0	373.8	534.6								
G32.0	316.5	459.9								
G33.0	266.7	392.4								
G34.0	225.5	331.5								
G35.0	189.4	278.0								
G36.0	159.3	230.9								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.030 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	134.6	189.4								
G38.0	114.4	155.0								
G39.0	97.2	126.7								
G40.0	82.9	103.9								
G41.0	70.6	85.2								
G42.0	60.4	70.6								
G43.0	50.8	58.6								
G44.0	42.1	48.7								
G45.0	33.3	40.3								
G46.0	25.4	32.9								
G47.0	21.1	25.6								
G48.0	17.6	20.7								
G49.0	14.6	17.0								
G50.0	11.7	14.3								
G51.0	9.1	11.4								
G52.0	7.0	9.3								
G53.0	5.2	7.0								
G54.0	3.7	5.2								
G55.0	2.6	3.7								
G56.0	2.3	2.4								
G57.0	2.0	1.8								
G58.0	1.7	1.4								
G59.0	1.2	1.4								
G60.0	0.8	1.2								
G61.0	0.8	0.5								
G62.0	0.8	0.3								
G63.0	1.1	0.5								
G64.0	1.1	0.5								
G65.0	0.9	0.6								
G66.0	1.1	0.5								
G67.0	0.9	0.5								
G68.0	1.1	0.5								
G69.0	1.1	0.5								
G70.0	1.1	0.5								
G71.0	1.1	0.2								
G72.0	0.9	0.2								
G73.0	1.1	0.0								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.030 m

Humidity:

Inspector:

Unit: cd

[illegible]

Inspector: