

Report No.: 93.08411 ADJ Surface Mounted I Test Time: 2023-09-28 11:57

Luminaire Property

Luminaire Category: Bridgelux V8第八代 4000K CRI90

Voltage: 225.7 V

Current: 0.117 A

Power: 14.00 W

Power Factor: 0.527

Photometric Results

CIE Class: Direct

Measurement Flux: 1141.2 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H30.3

Vertical Diffuse Angle(50%): V30.3

Luminaire Efficacy Rating (LER): 82

Max. Intensity: 3948.75 cd

Total Rated Lamp Lumens: 1141.2 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3948.75 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

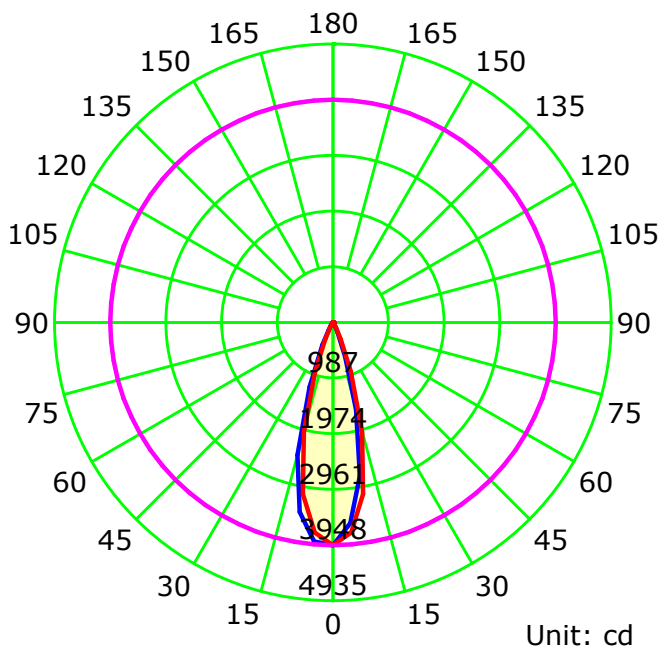

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

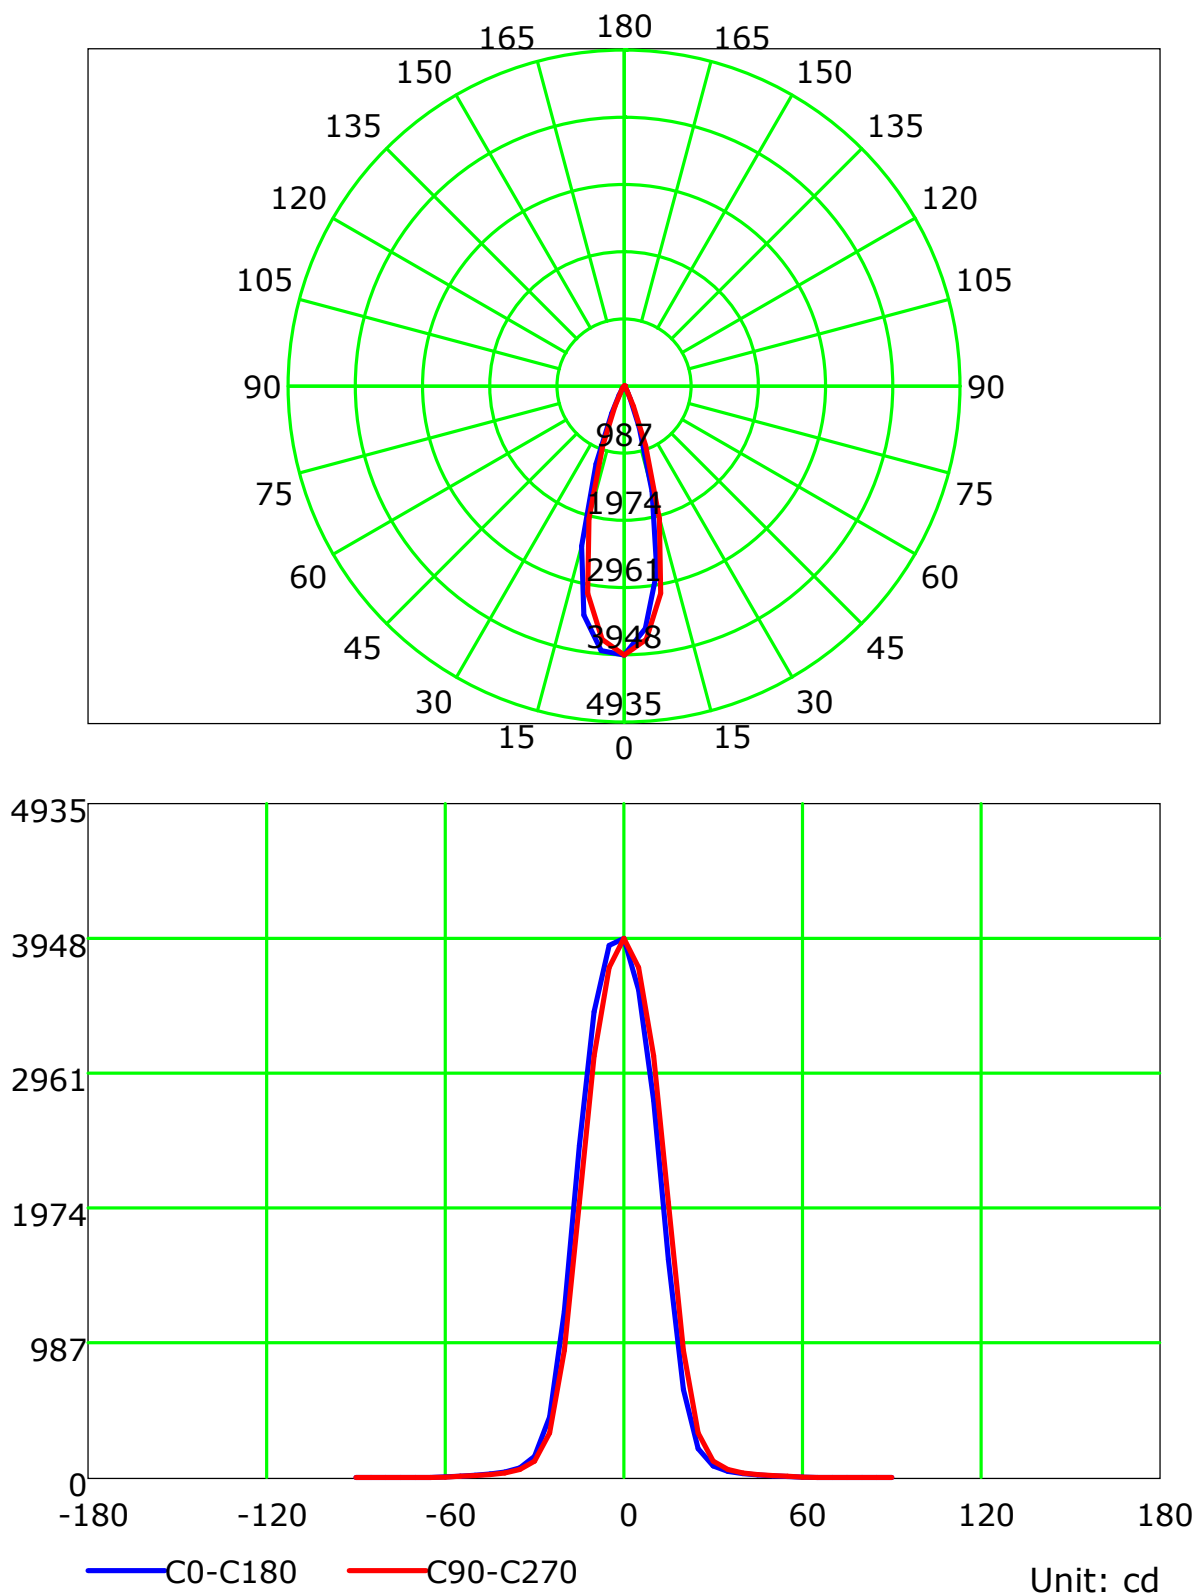

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

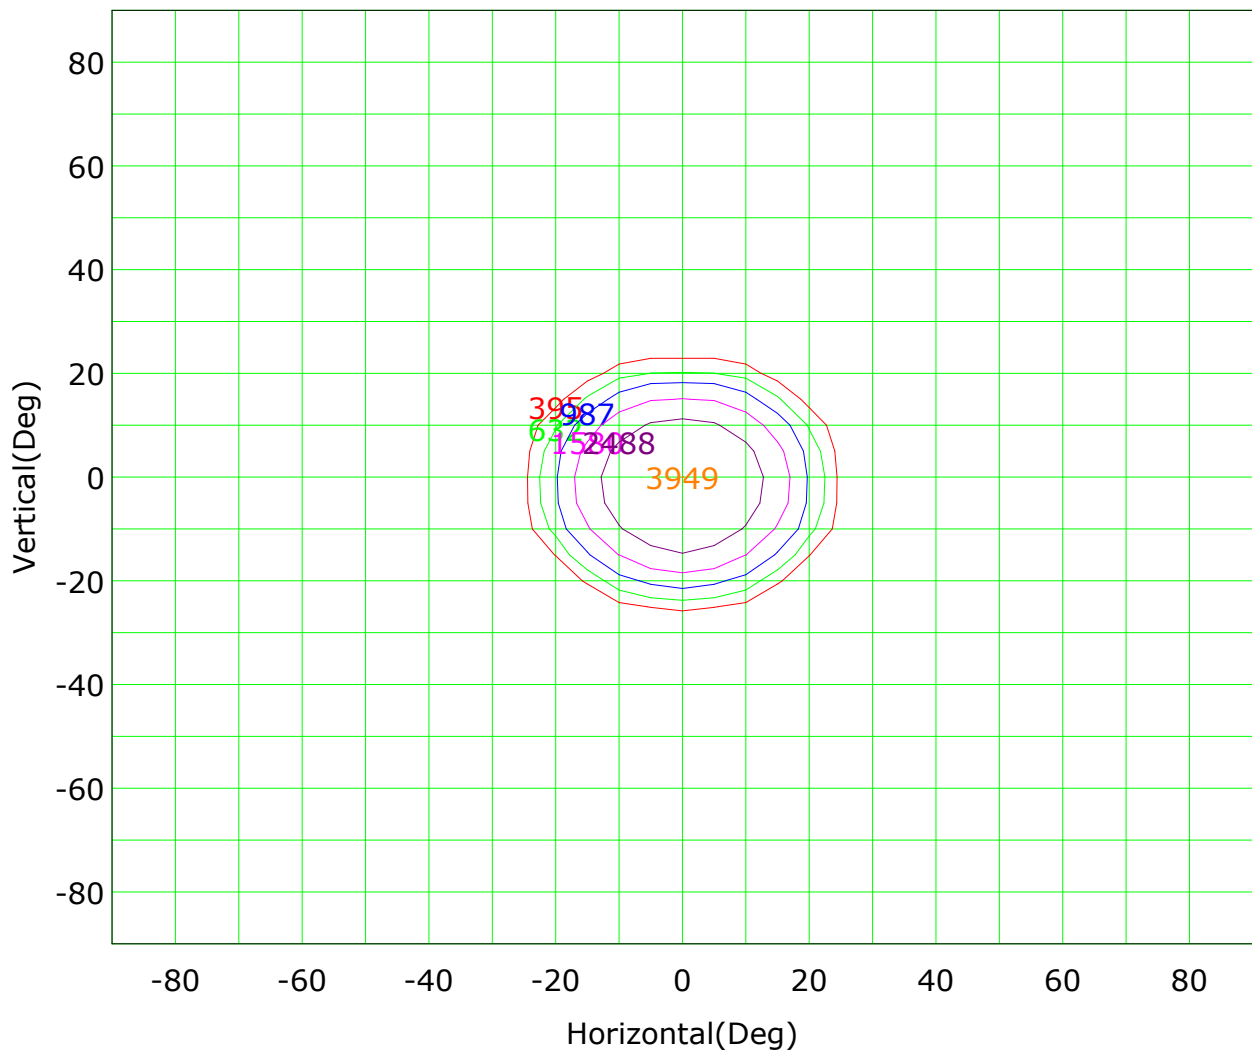

Imax (100%): 3949 cd

(10%): 395 cd	(16%): 632 cd
(25%): 987 cd	(40%): 1580 cd
(63%): 2488 cd	(100%): 3949 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

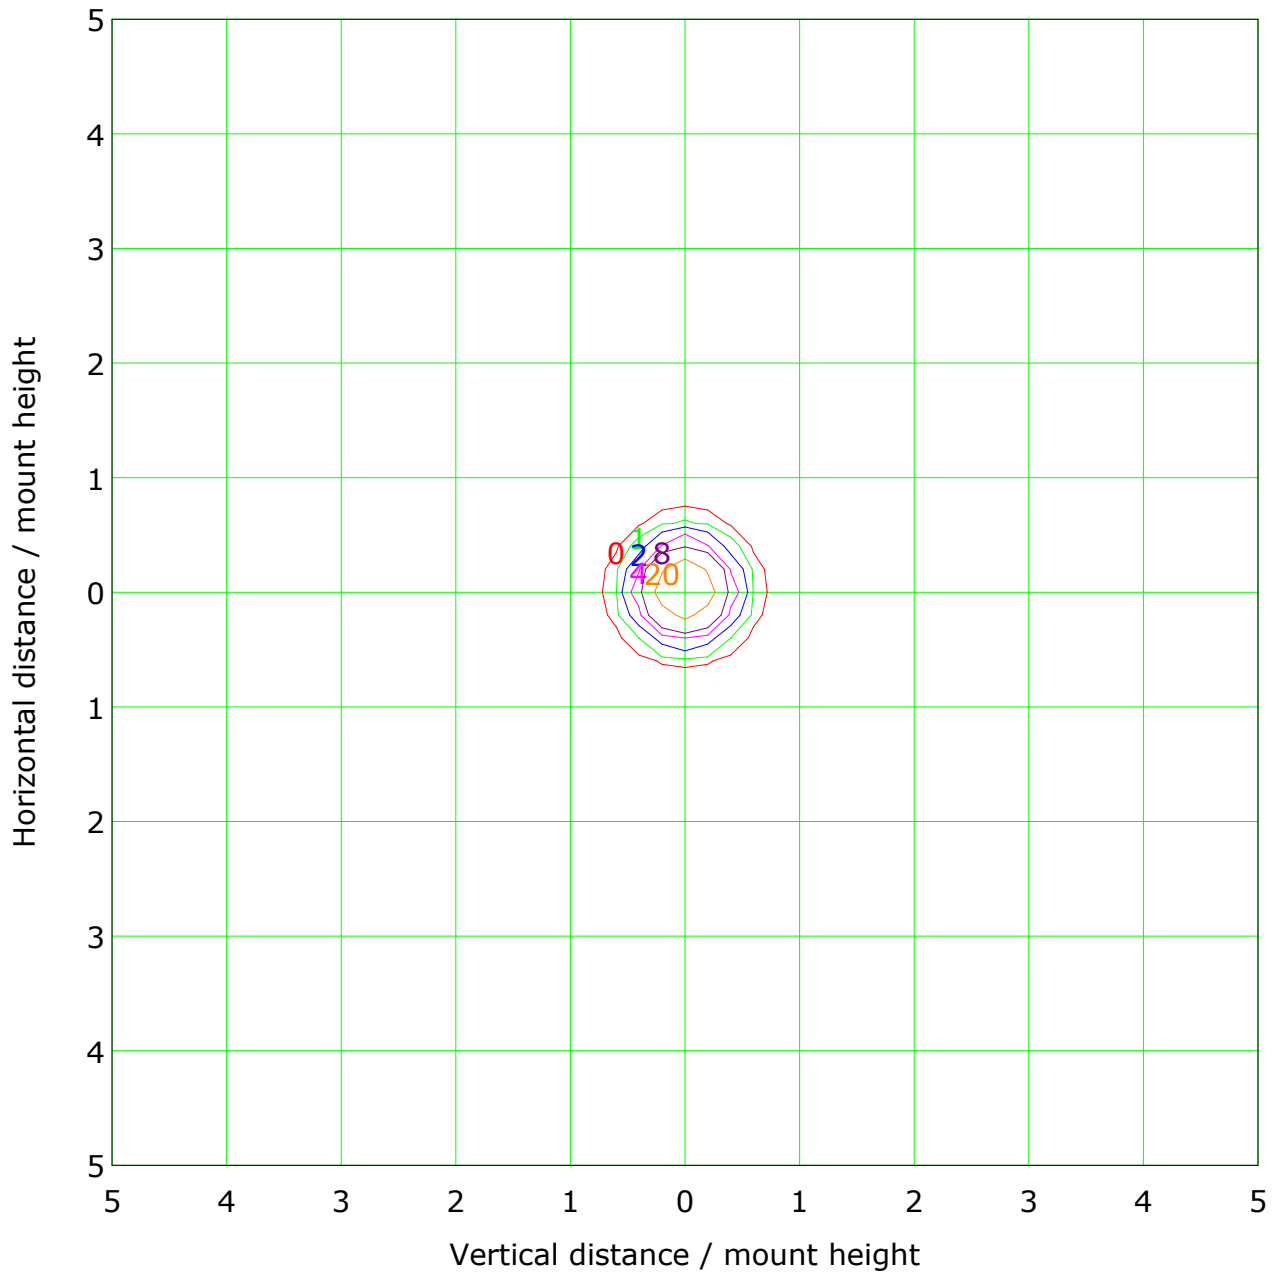

Mounting Height: 10m Max Lux(100%): 39 lx			
— (1%):	0 lx	— (2%):	1 lx
— (5%):	2 lx	— (10%):	4 lx
— (20%):	8 lx	— (50%):	20 lx
— (100%):	39 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

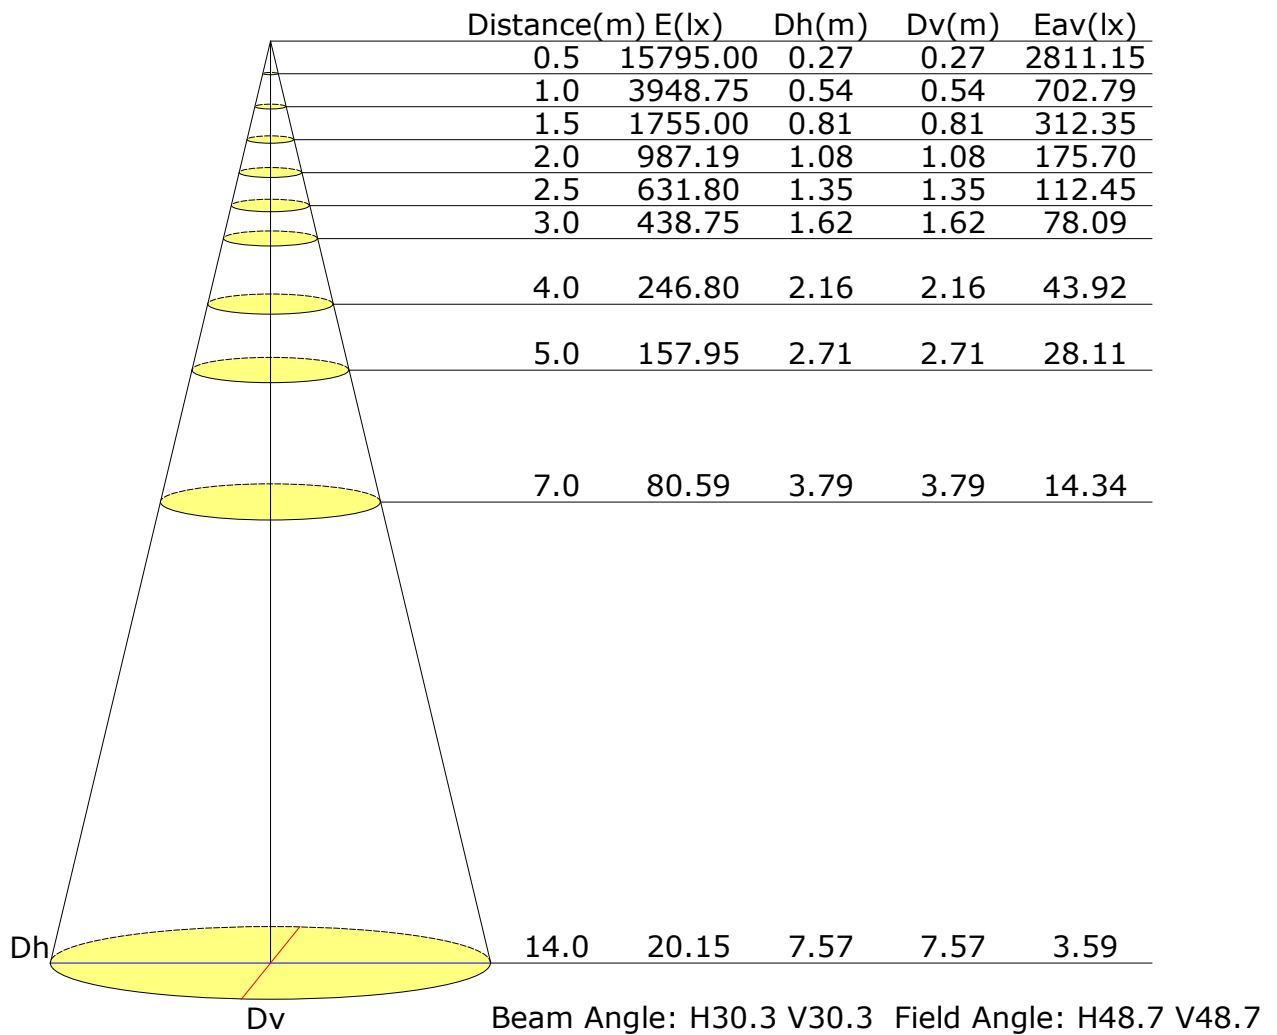

Vertical IsoLux Plot

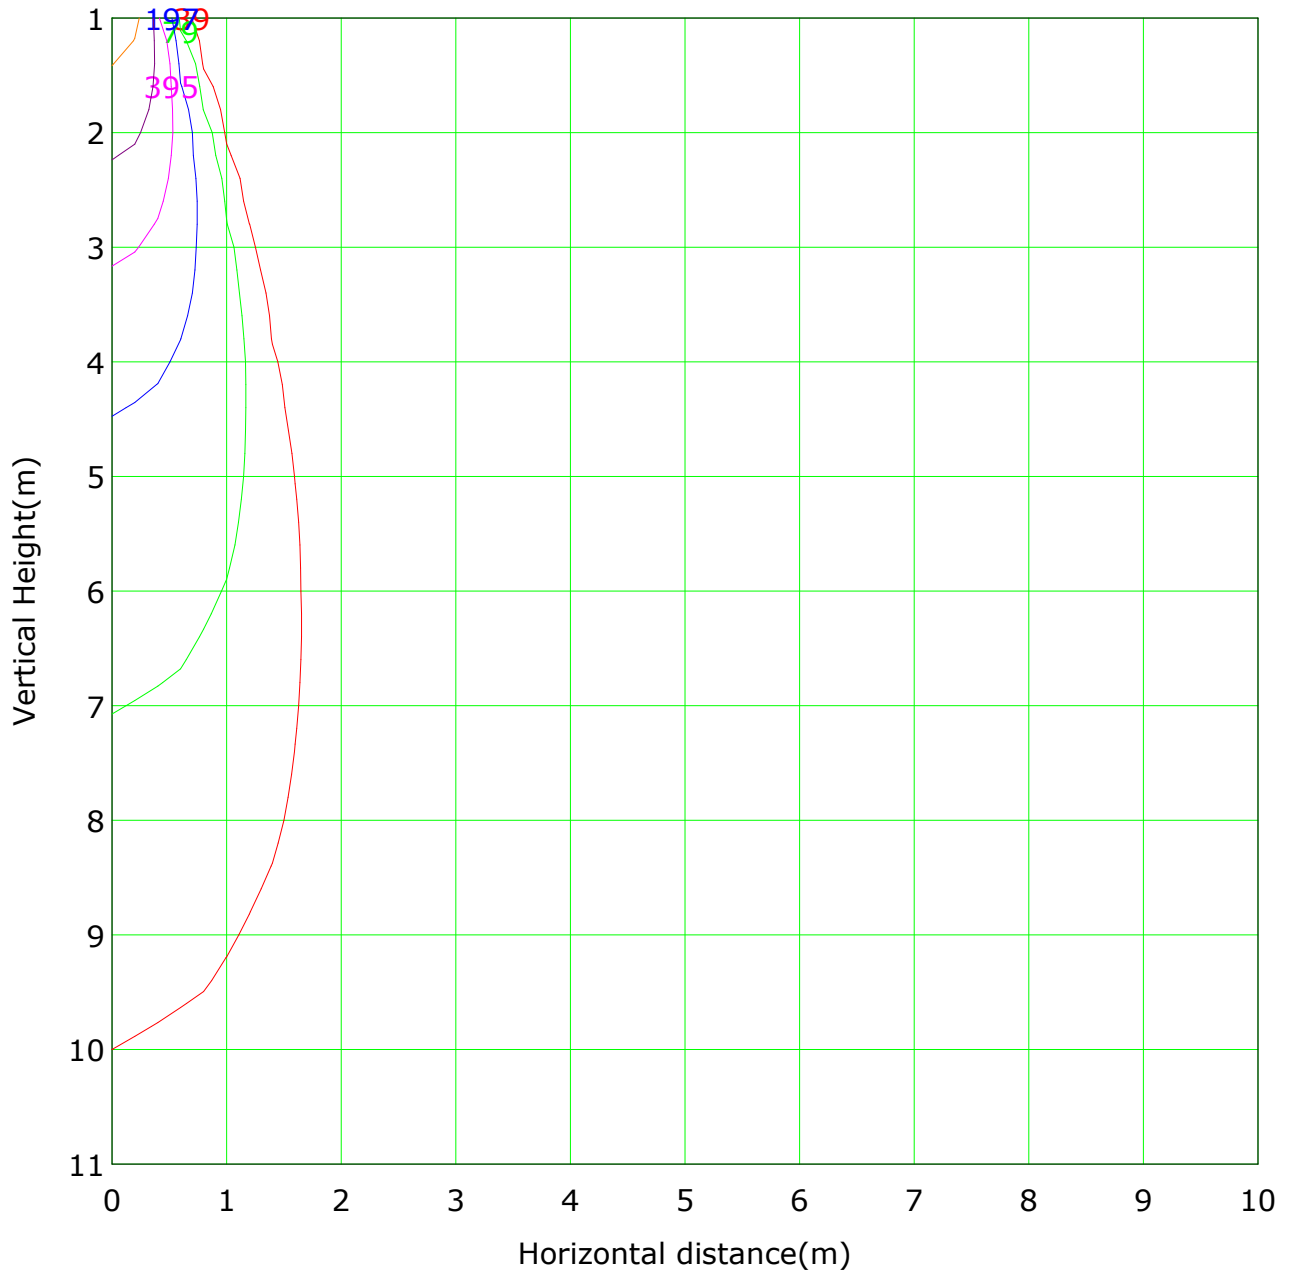

Lowest(m): 1m Highest(m): 11 Max Lux: 3949

(1%): 39 lx	(2%): 79 lx
(5%): 197 lx	(10%): 395 lx
(20%): 790 lx	(50%): 1974 lx
(100%): 3949 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

The average illuminance effective figure

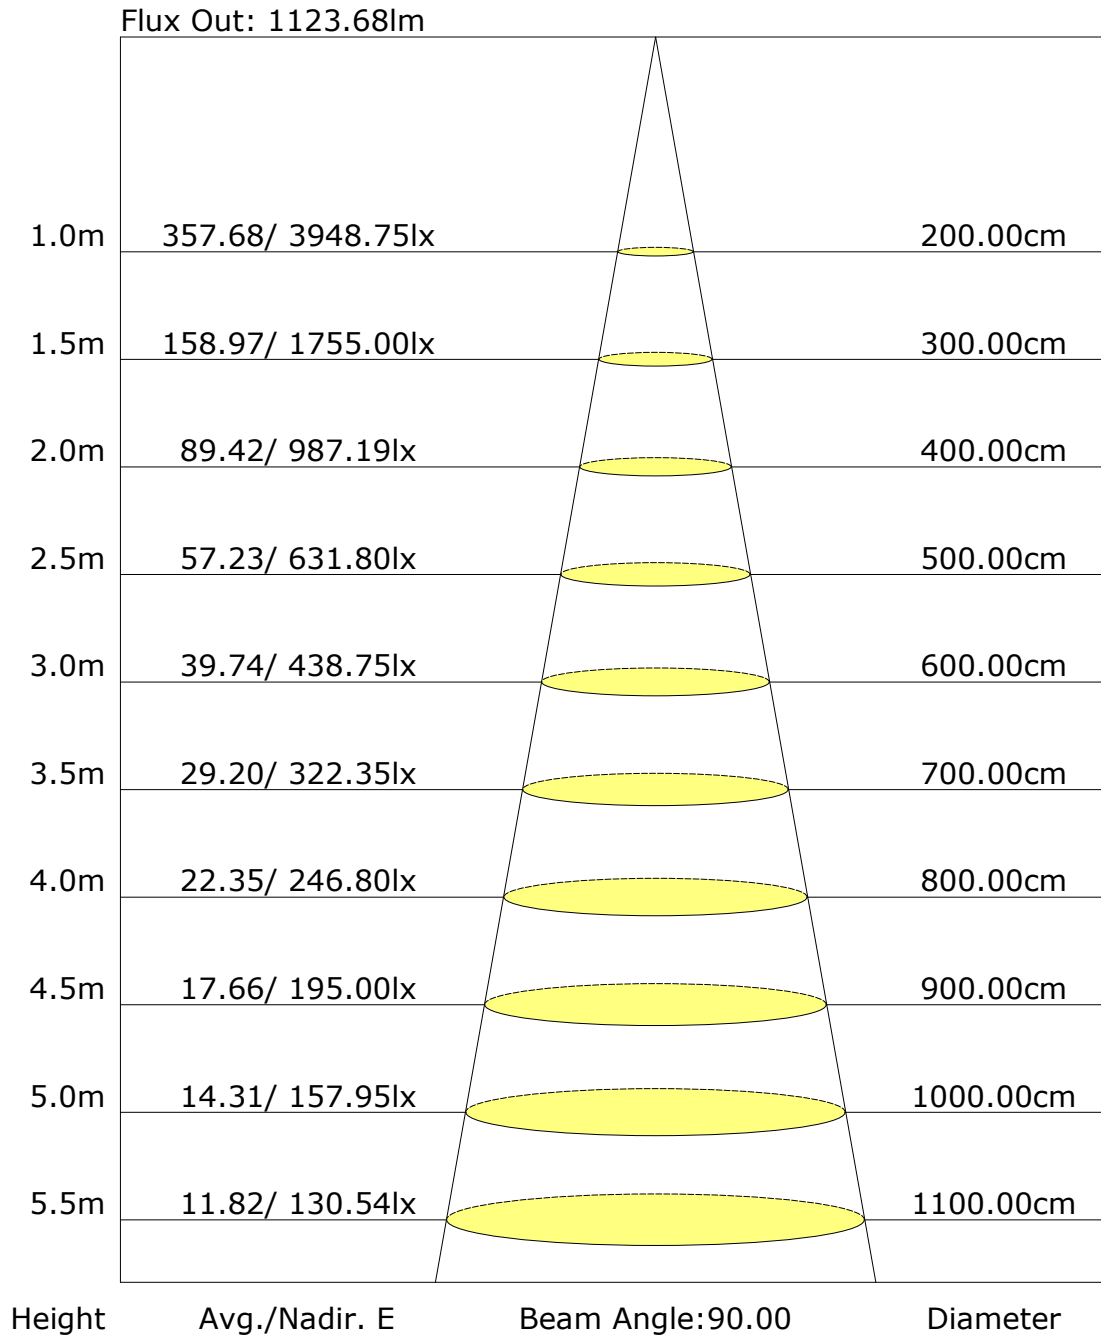

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: