




2023

Catalogue

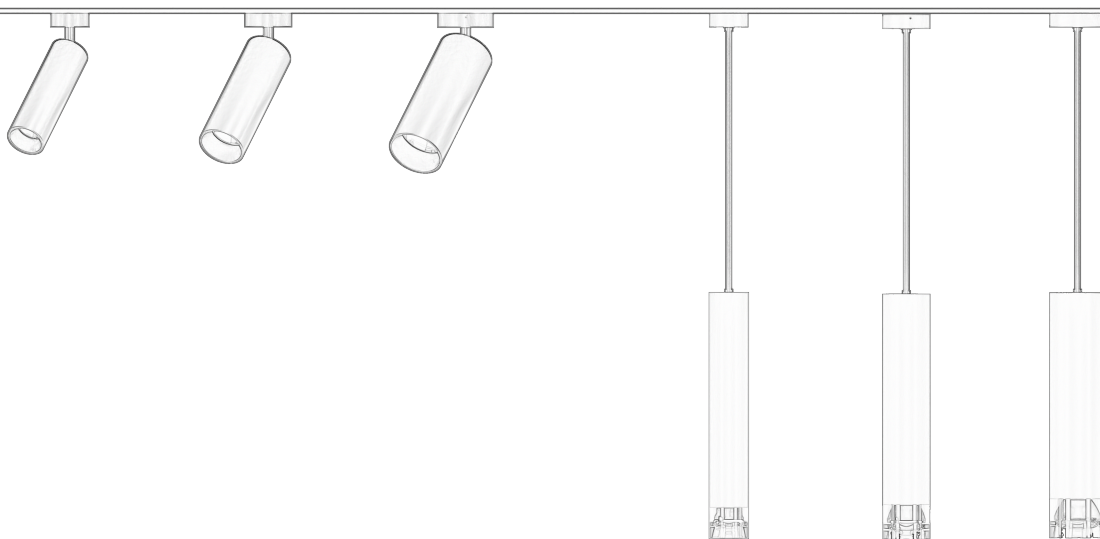

Index

ARTAX Series



ARTAX 10W



ARTAX 20W

Feel Zoom Series



FEEL 10W



FEEL 18W



FEEL 25W

ECO Series



ECO 15W



ECO 35W



ECO 15W



ECO 35W

EMMA Series



EMMA 8W



EMMA 15W



EMMA 25W



EMMA 35W

ACTION Series



EMMA 8W



EMMA 15W



EMMA 25W



EMMA 35W

ACTION Series



ACTION 35W



ACTION 35W



ACTION 35W



ACTION 25W



ACTION 25W



ACTION 25W

FOS Series



FOS 25W



FOS 18W



FOS 10W

Index

ECO Series



ECO 15W




ECO 35W

SLIM Series



SLIM 20W



SLIM 25W



SLIM 35W


UTH Series



UTH 6W



UTH 10W



UTH 15W

SILO Series



SILO 10W



SILO 15W



SILO 25W



SILO 10W



SILO 15W



SILO 25W

EMMA Series



EMMA 10W



EMMA 15W



EMMA 25W



EMMA 35W

FOS Series



FOS 25W




FOS 20W



FOS 15W

NOVAL Series




NOVAL 2X6W




NOVAL 6W




NOVAL 6W



NOVAL 2X3W




NOVAL 3W




NOVAL 3W


MINI Series




MINI 6W




MINI 6W




MINI 6W




MINI 6W



MINI 6W




MINI 6W




MINI 8W



MINI 8W



MINI 6W



MINI 6W



MINI 6W



MINI 4W




MINI 8W




MINI 4W

Index

NEK Series



NEK 3W




NEK 5W




NEK 8W

VARI Series



VARI 9W




VARI 9W



VARI 9W

Index

ADJ Series



ADJ 6W



ADJ 10W



ADJ 20W

SQF/SQA Series



SQF 6W



SQF 10W




SQA 10W




SQA 10W


UTH Series



UTH 6W



UTH 10W



UTH 15W

ECO Series



ECO 15W



ECO 35W

FOS Series



FOS 10W



FOS 18W



FOS 25W

EMMA Series



EMMA 35W



EMMA 25W



EMMA 15W




EMMA 8W




EMMA 35W



EMMA 25W



EMMA 15W



EMMA 8W



EMMA 35W



EMMA 25W



EMMA 15W




EMMA 8W


FOS Series



FOS 20W



FOS 15W



FOS 8W

Index

LENS Series



LENS 20W



LENS 20W

ADVANCED Series



ADVANCED 20W



ADVANCED 30W

ARTIST Series



ARTIST 40W



ARTIST 60W













G213 & G213A

QUALITAS
















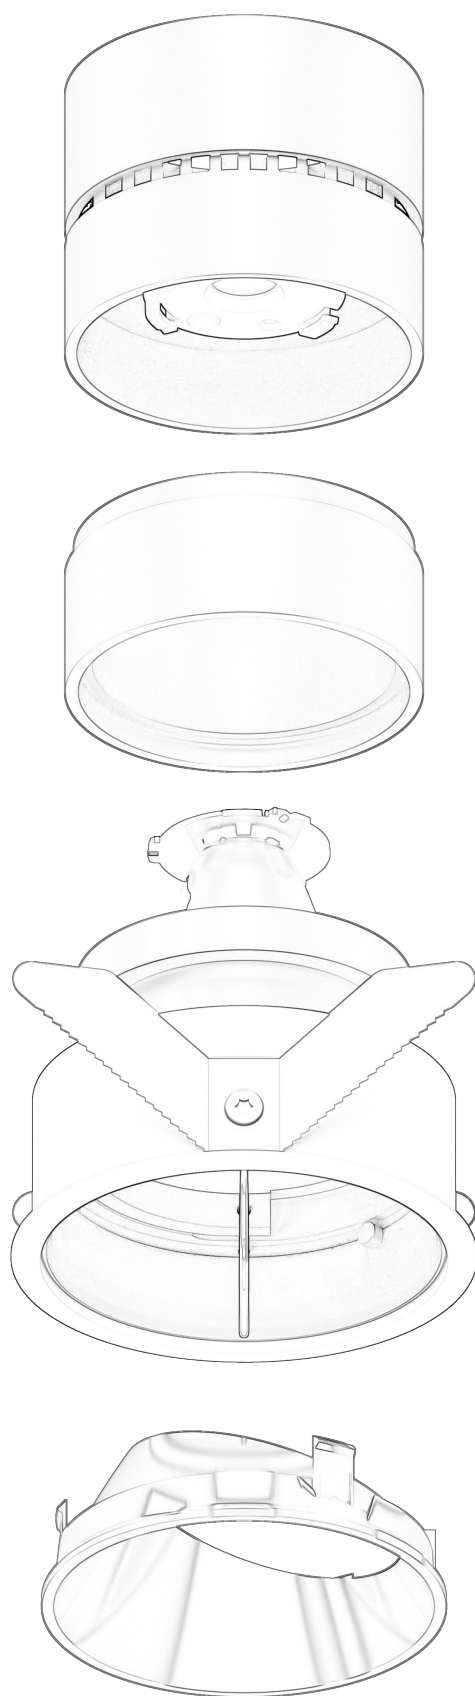

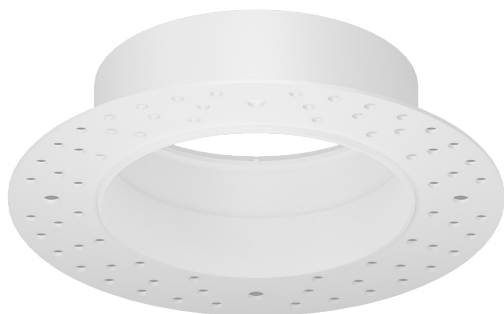



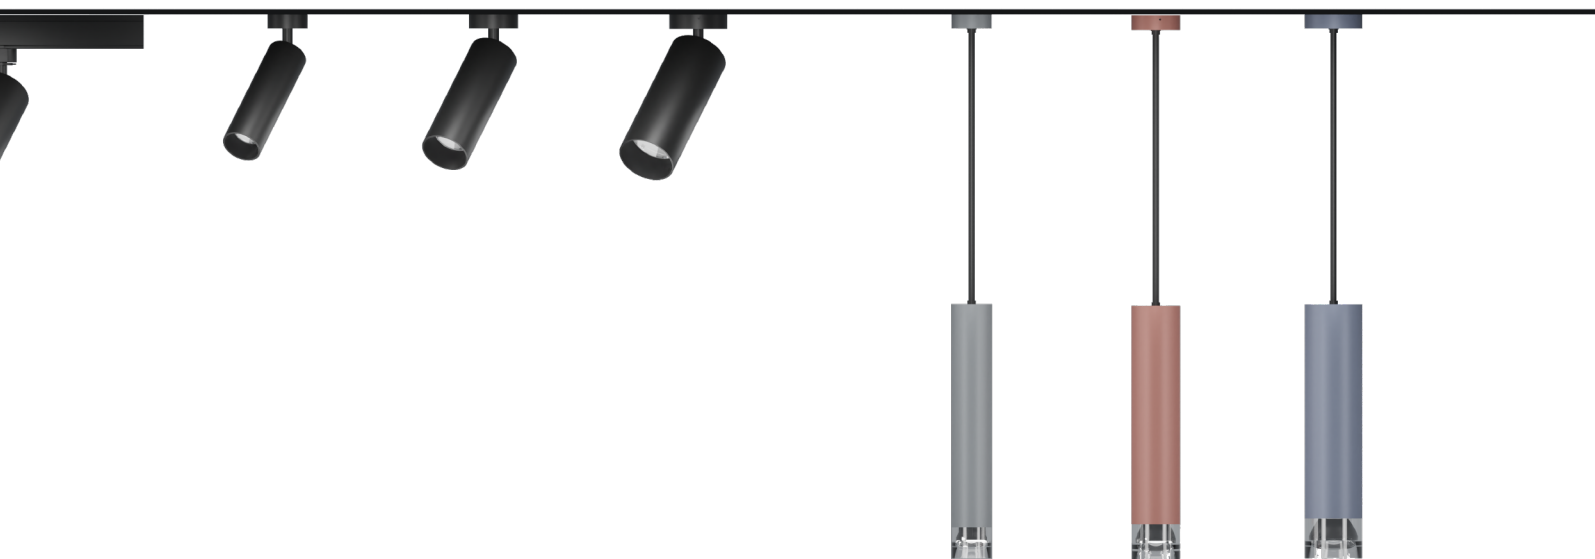





ARTAX Contour Track Lighting

Track 45 | 73




ARTAX Contour Track Lighting

CE IP20   Rotate 350° Tilt 90°




ARTAX Contour Track Lighting

Track 45 | 73

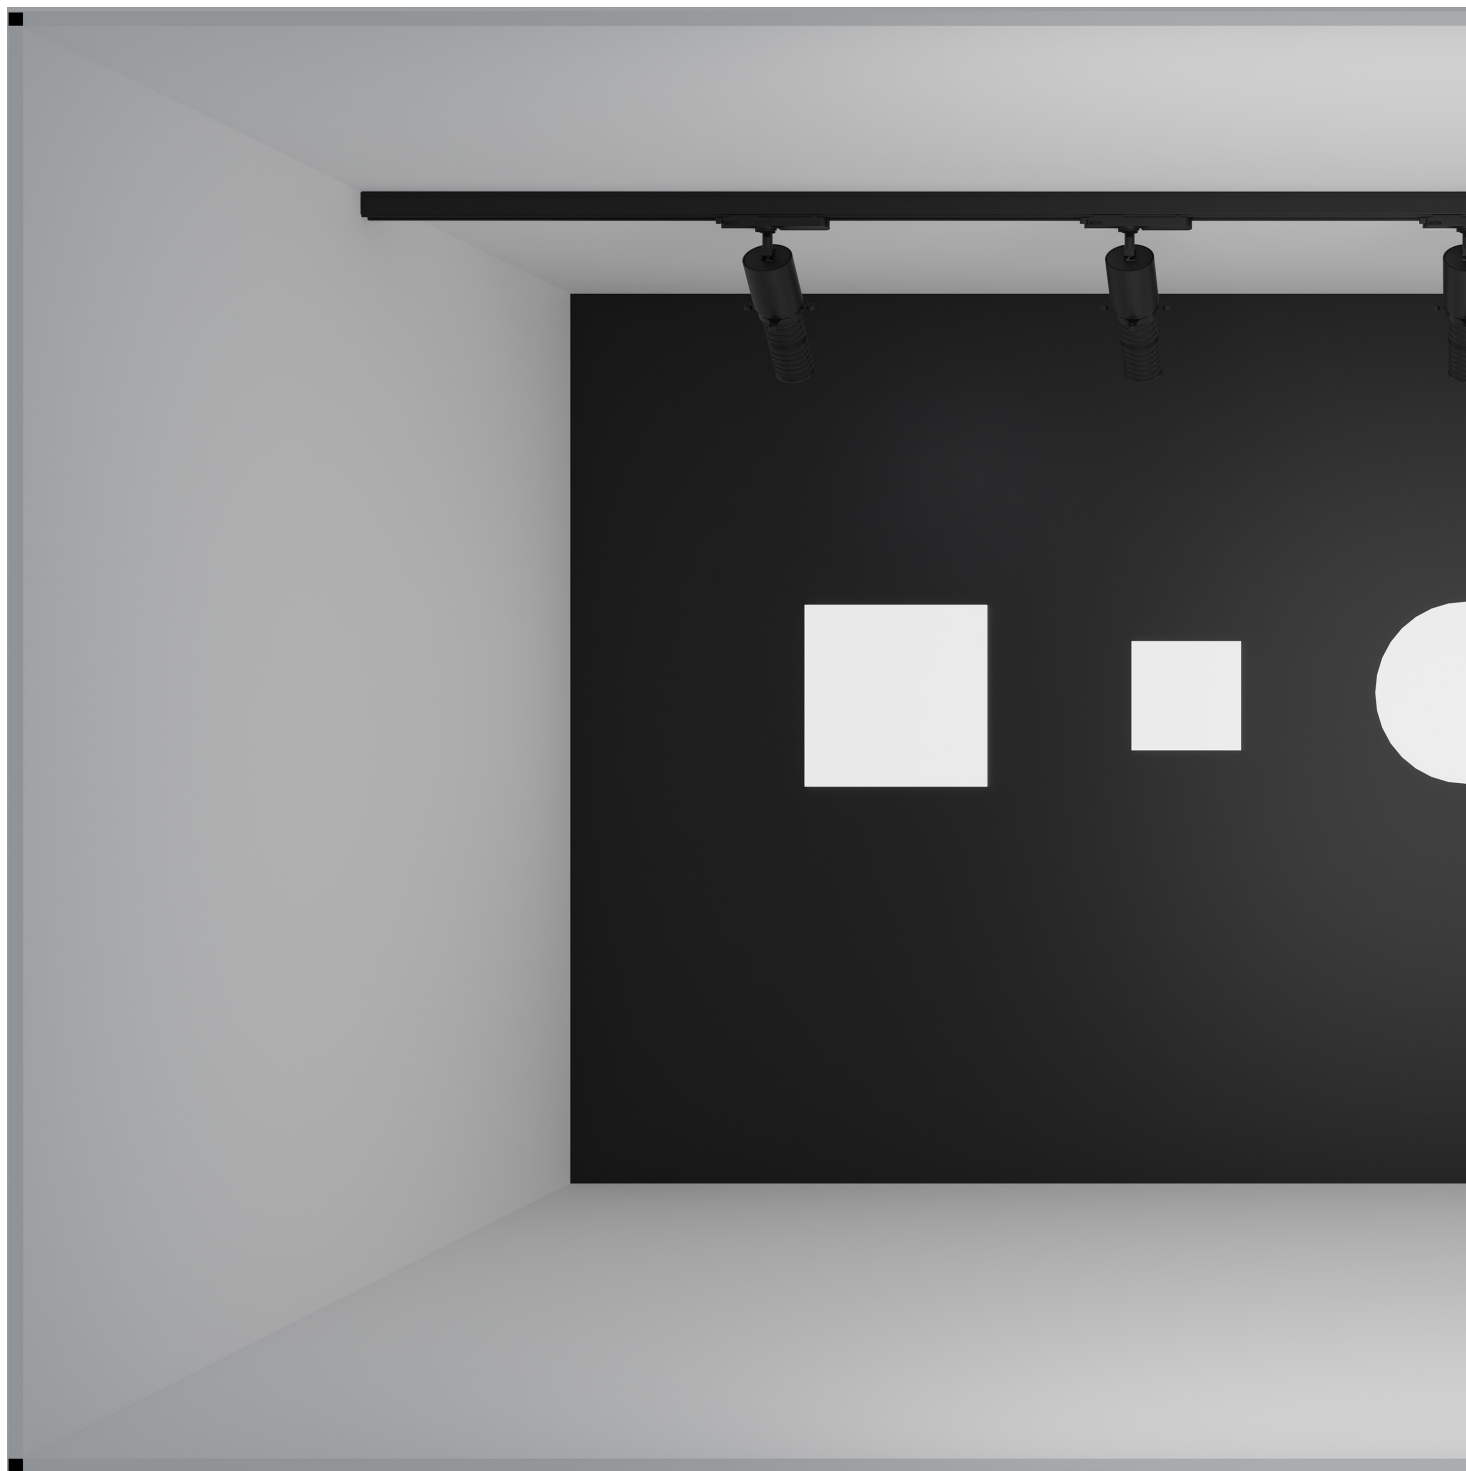

ARTAX Contour Track Lighting


CE IP20   Rotate 350° Tilt 90°

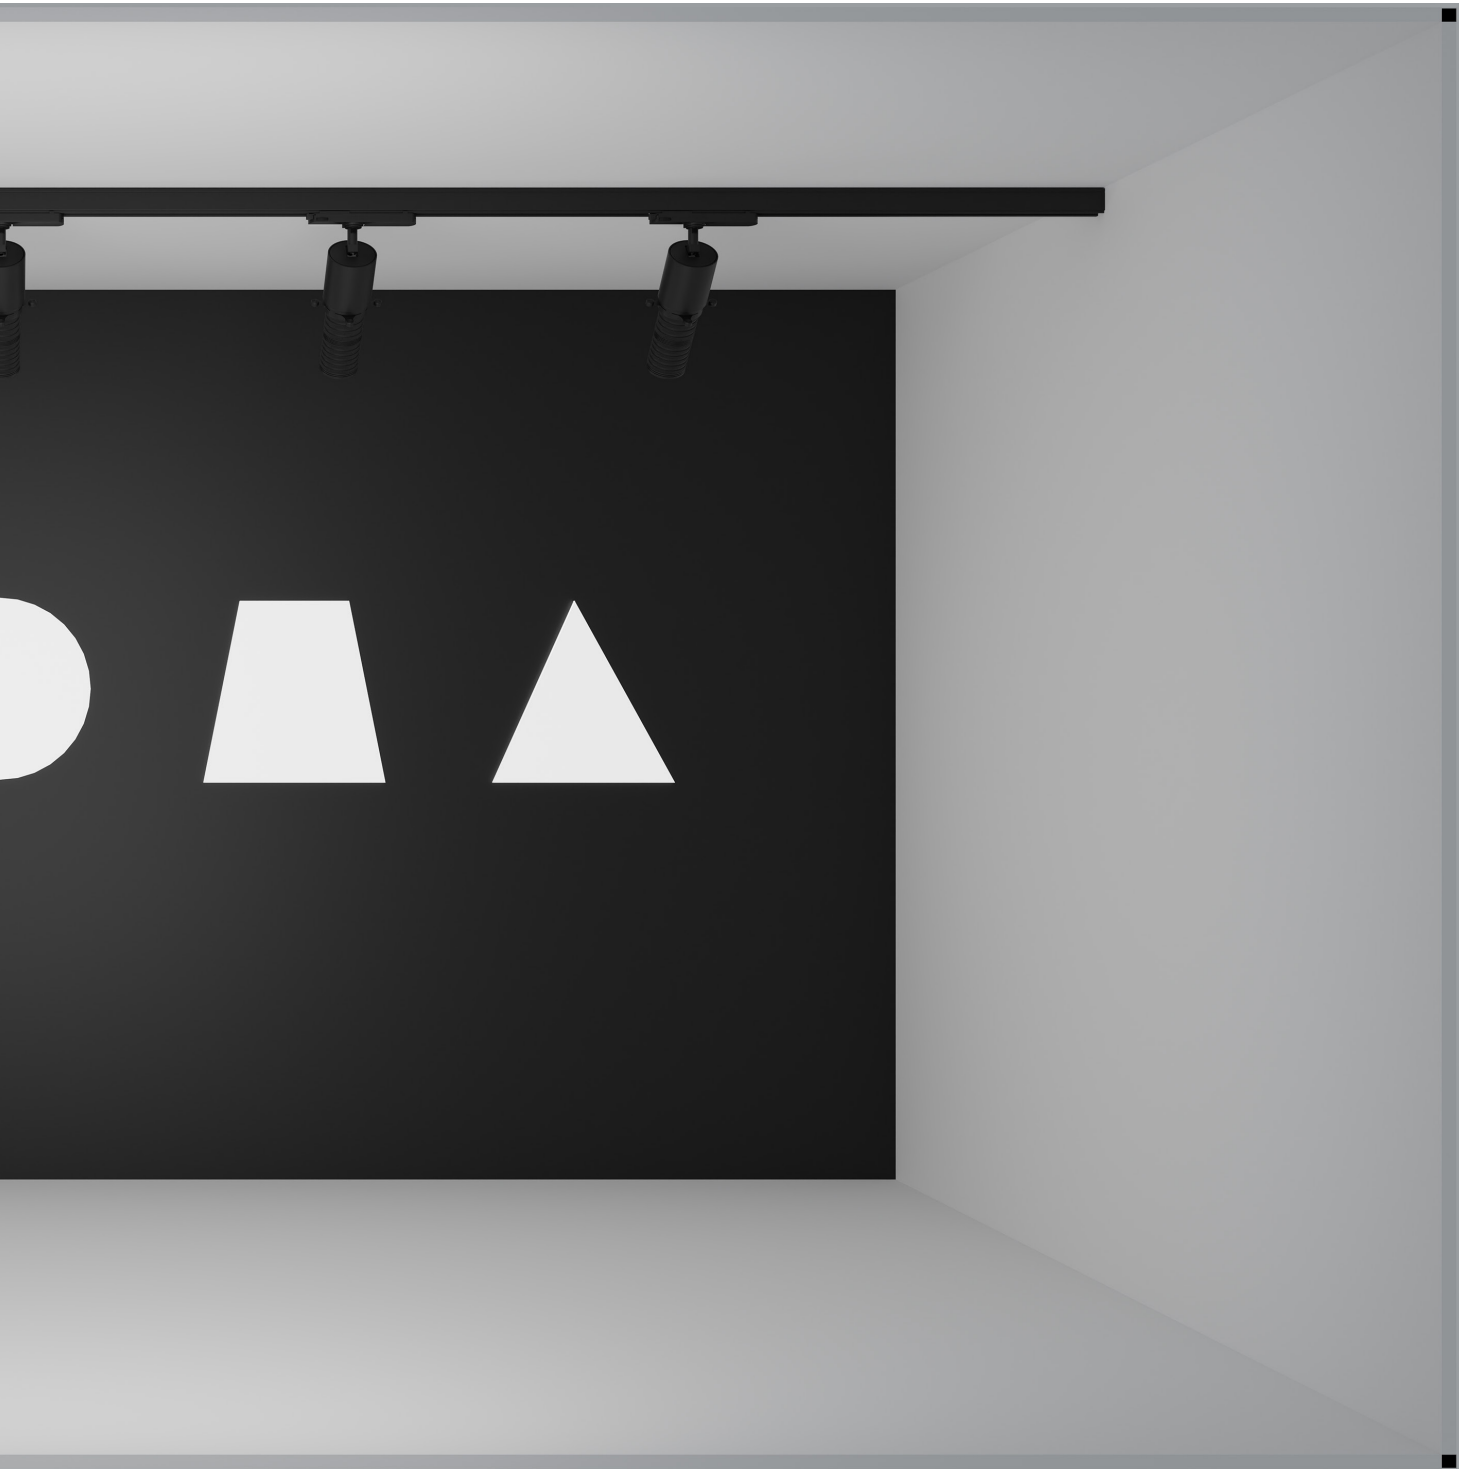

ARTAX Contour Track Lighting

Track 45 | 73

32.04520

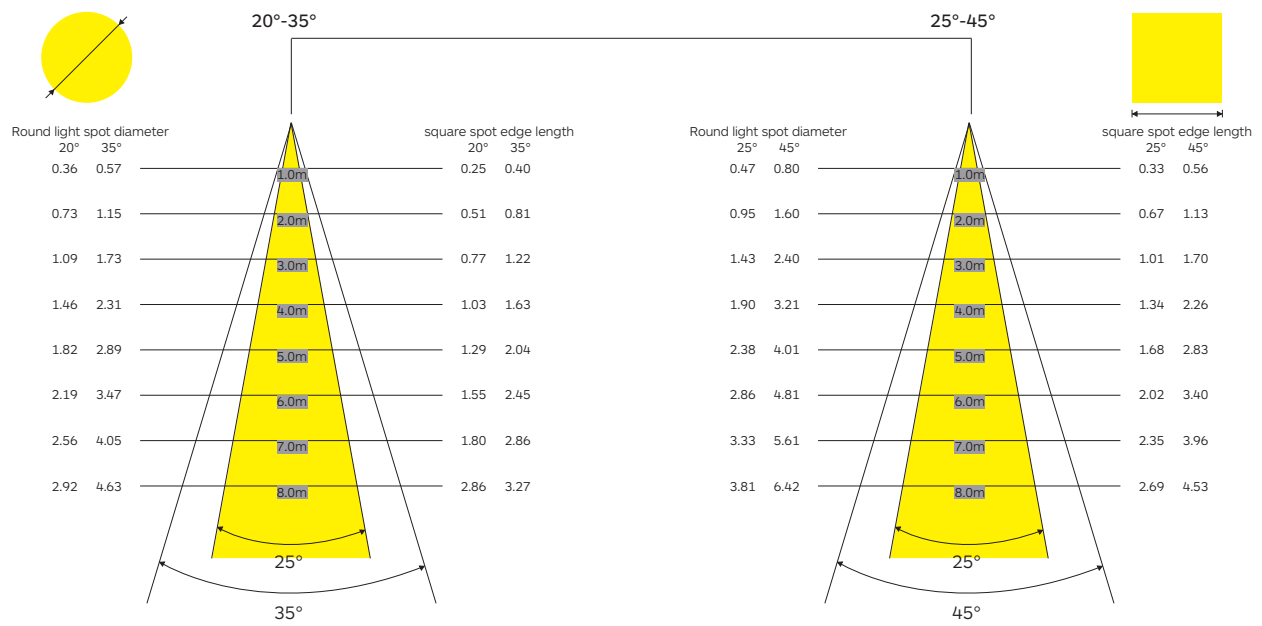


Unit: m

ARTAX Contour Track Lighting

CE IP20   Rotate 350°  Tilt 90°

32.07319

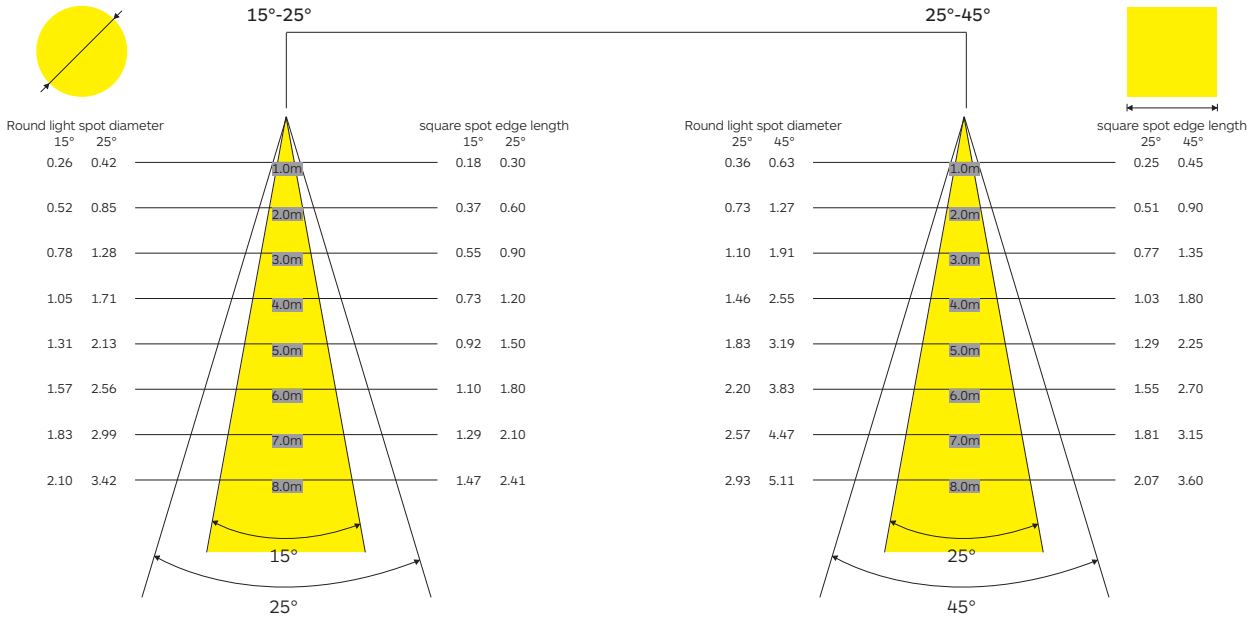

Unit: m

ARTAX Contour Track Lighting

Track 45 | 73



Body

A high quality track light, and the best choice to define your space.

Can free adjust the shape you requested by 4 pin at joints, can be zoom by rotate the Optics.

And the fixture is Museum style one, it has good heat dissipation effect by its solid aluminum housing

Accessories

Without.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT:3000K, 4000K

Other CRI and CCT options available on request.

Optic

Contour optics.

Driver

Supplied with Intrack driver.

Applications

Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.


ARTAX Contour Track Lighting



ARTAX Contour 45 32.04520



ARTAX Contour 73 32.07319

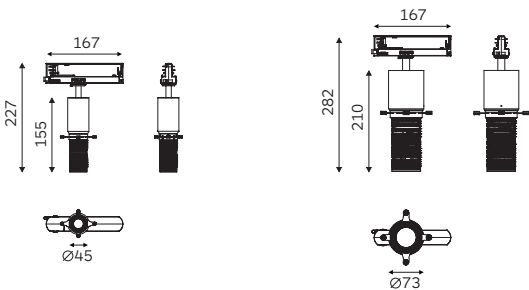


Code Ordering Example: 3 2 . 0 4 5 2 0 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ARTAX Contour 45 Track Lighting	32.04520 CA	COB LED	90	30 3000K	10W	600 lm	20°-35°	D0 No Dim	10 □ WH
				40 4000k		630 lm	25°-45°		20 ■ BK
ARTAX Contour 73 Track Lighting	32.07319 CA	COB LED	90	30 3000K	20W	1200 lm	15°-25°		
				40 4000k		1260 lm	25°-45°		

Feel Zoom

Track Lighting



32.04521 45x145 10w 13-45°
32.05517 55x155 18w 8-45°
32.06513 65x165 25w 13-51°



Min Angle



Max Angle

The zoom lens is adjusted by means of a three-part beveled groove (CNC machined) with a rotating ring. Min to maxi angle without changing the appearance of the luminaire.

FEEL Zoom Track Lighting

Track 45 | 55 | 65



Body

Adjustable lens allowing opening angle calibration from narrow to wide.

The zoom lens is adjusted by means of a three-part beveled groove (CNC machined) with a rotating ring. Min to maxi angle without changing the appearance of the luminaire.

Can be both track systems, 220V and 48V, semi-recessed and surface option.

Accessories

Without.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Zoom optics.

Driver

Supplied with No-dimable internal driver or Intrack driver.

Applications

An excellent and flexible accent lighting solution for restaurants, residential spaces, retail stores and galleries.

FEEL Zoom Track Lighting






FEEL Zoom 45 32.04521



FEEL Zoom 55 32.05517



FEEL Zoom 65 32.06513




Code Ordering Example: 3 2 . 0 4 5 2 1 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FEEL Zoom 45 Track Lighting	32.04521	CA	COB LED	90	30	3000K	13°-45°	D0 No Dim	10 □ WH
				40	4000k				20 ■ BK
FEEL Zoom 55 Track Lighting	32.05517	CA	COB LED	90	30	3000K	8°-45°		
				40	4000k				
FEEL Zoom 65 Track Lighting	32.06513	CA	COB LED	90	30	3000K	13°-51°		
				40	4000k				



ECO Track Lighting

Track 55 | 80

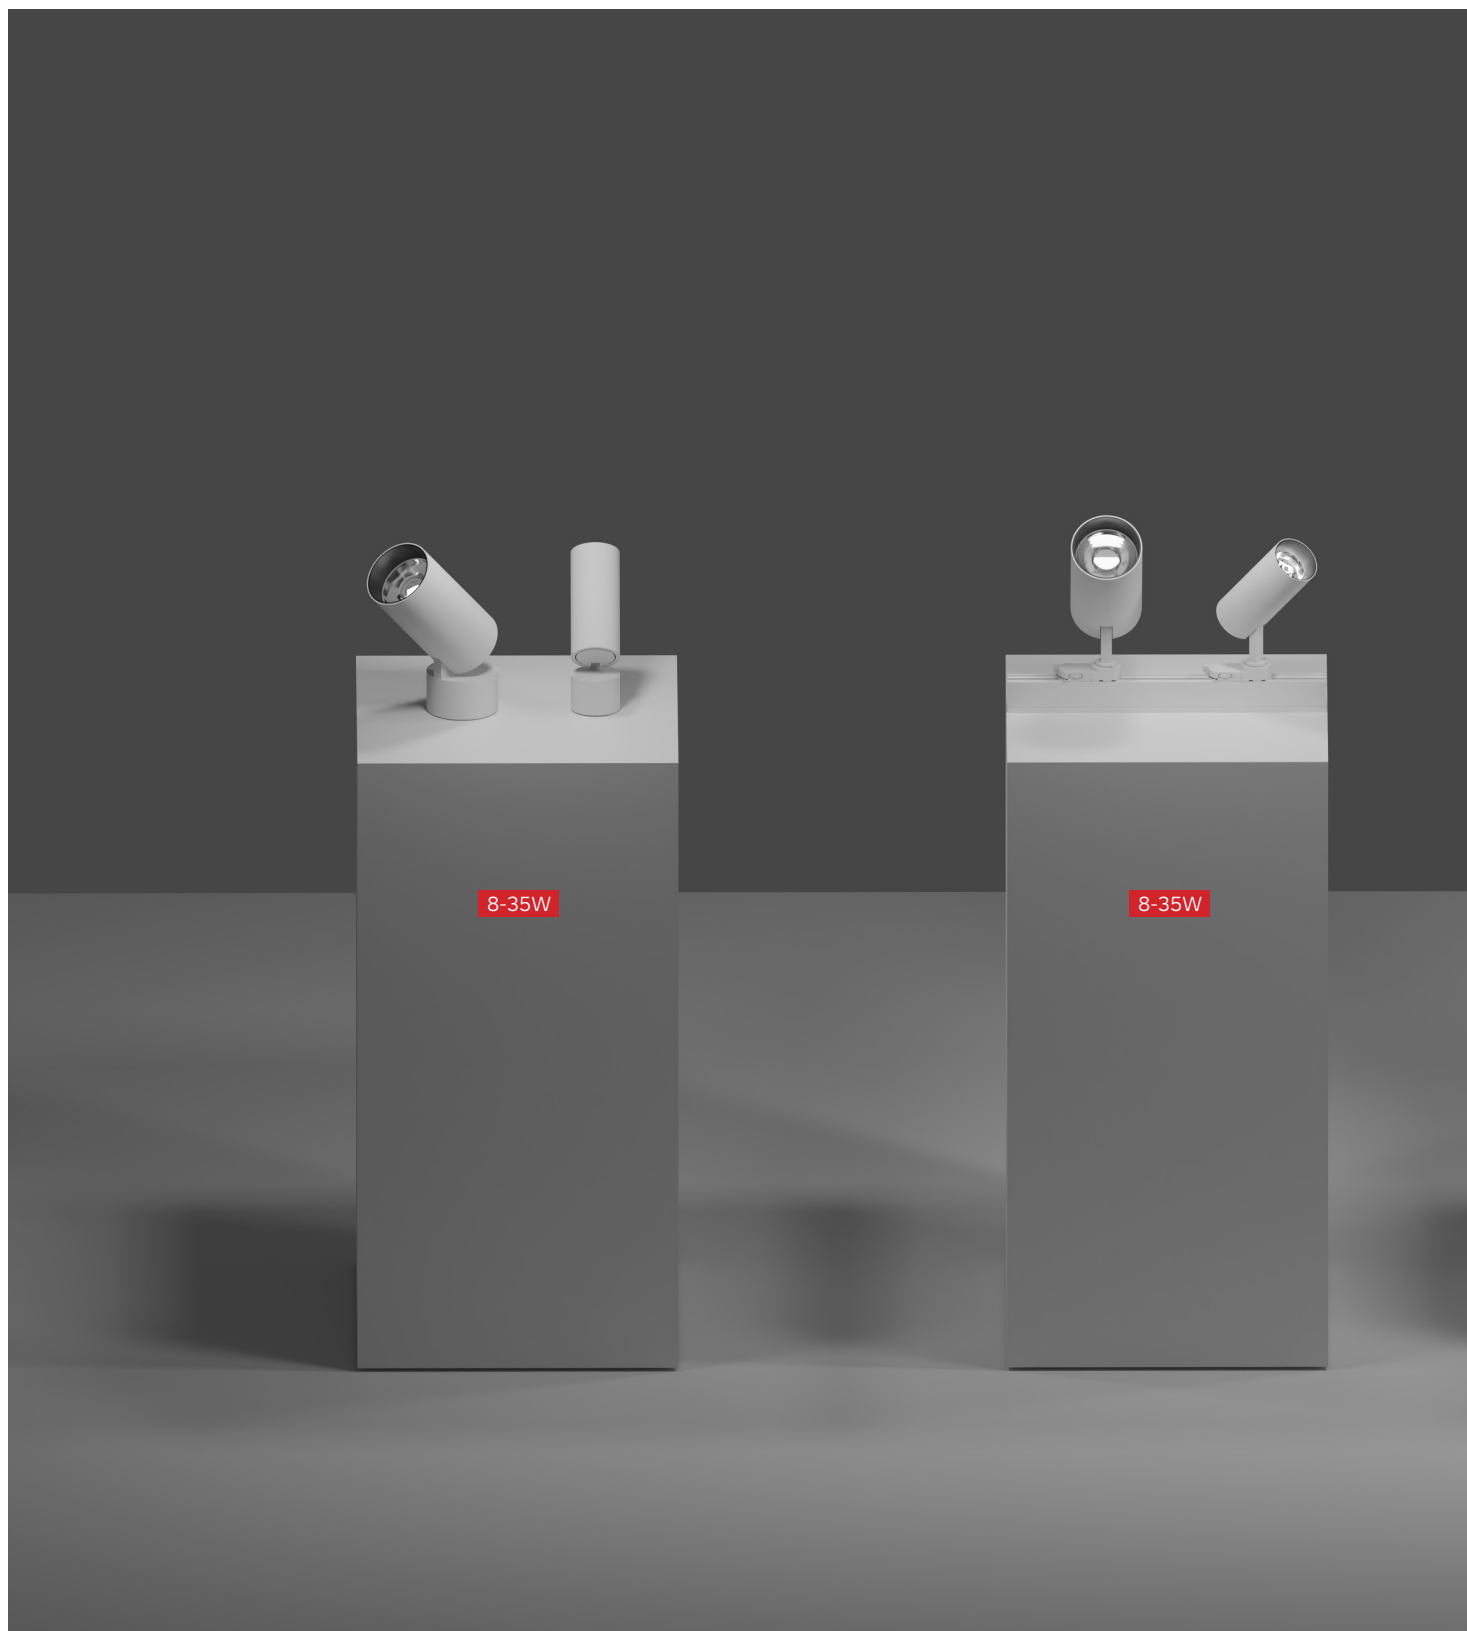

ECO Track Lighting

CE IP20   Rotate 350° Tilt 90°

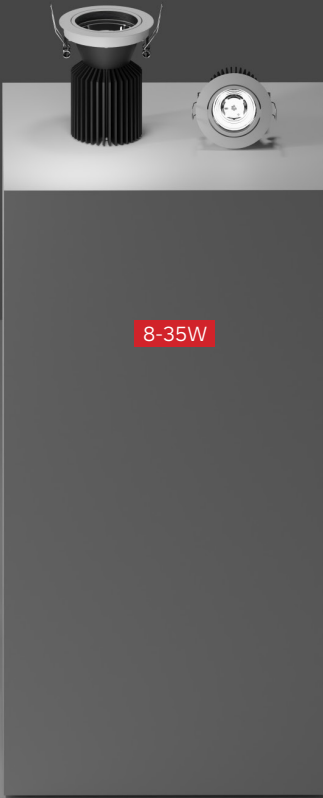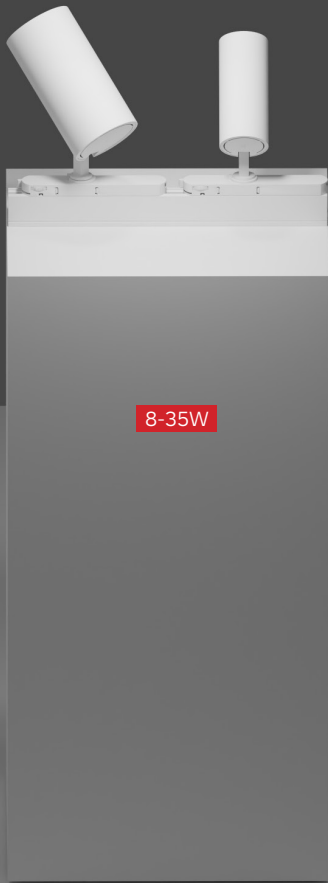

ECO Track Lighting

Track 55 | 80



Compact structure design, green manufacturing, reduce carbon emissions. 35W net weight of the main part is 40% lighter than normal fixtures (the main raw material part is about 605g)

ECO Track Lighting

CE IP20   Rotate 350° Tilt 90°



Integrated Track Light



Down Light



Surface Mounted Lighting

ECO Track Lighting

Track 55 | 80



Body

ECO Track light with 2 kinds of wattage, and there are also 2 kinds of common adaptor and integrated adaptor.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable interal driver or Intrack driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

ECO Track Lighting



ECO 55 32.05511







ECO 80 32.08011



ECO 55 Intrack 32.05512



ECO 80 Intrack 32.08012



Code Ordering Example: 3 2 . 0 5 5 1 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 55 Track Lighting	32.05511 CA	COB LED	90	30 3000K	15W	1000 lm	16°/24°/35°	D0 No Dim	10 □ WH
				40 4000k		1050 lm			20 ■ BK
ECO 80 Track Lighting	32.08011 CA	COB LED	90	30 3000K	35W	3246 lm	16°/22°/33°	D0 No Dim	10 □ WH
				40 4000k		3408 lm			20 ■ BK
ECO 55 Track Lighting Intrack	32.05512 CA	COB LED	90	30 3000K	15W	1000 lm	16°/24°/35°	D0 No Dim	10 □ WH
				40 4000k		1050 lm			20 ■ BK
ECO 80 Track Lighting Intrack	32.08012 CA	COB LED	90	30 3000K	35W	3246 lm	16°/22°/33°	D0 No Dim	10 □ WH
				40 4000k		3408 lm			20 ■ BK

EMMA Track Lighting

Track 45 | 62 | 73 | 90



EMMA Track Lighting

CE IP20   Rotate 350° Tilt 90°

White

Rose Gold

Chrome

Black


EMMA Track Lighting

Track 45 | 62 | 73 | 90



EMMA Track Lighting

CE IP20   Rotate 350° Tilt 90°

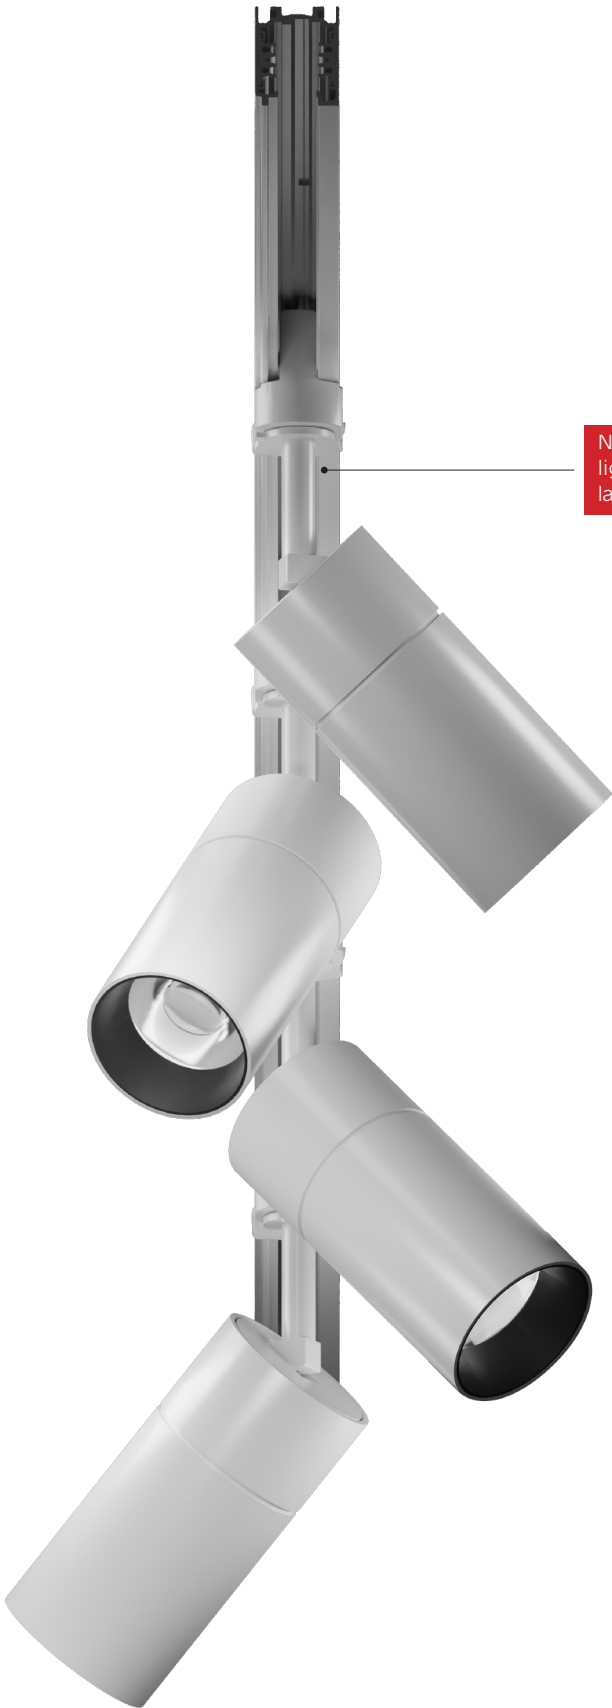

No matter how to adjust the lighting angle of the fixture and lanterns are always the same axis.

EMMA Track Lighting

Track 45 | 62 | 73 | 90



Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with Single circuit universal adapter, 3 circuit universal adapter or Dali Track adapter.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

EMMA Track Lighting



EMMA 45 32.04515







EMMA 62 32.06219



EMMA 73 32.07313



EMMA 90 32.09013

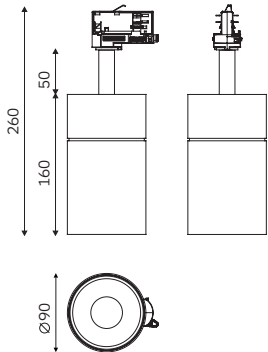

Code Ordering Example: 3 2 . 0 4 5 1 5 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Lighting	32.04515 CA	COB LED	90	30 3000K	8W	749 lm	16°/24°/37°	D0 No Dim	10 □ WH
				40 4000k		786 lm			20 ■ BK
EMMA 62 Track Lighting	32.06219 CA	COB LED	90	30 3000K	15W	1305 lm	17°/25°/36°		
				40 4000k		1370 lm			
EMMA 73 Track Lighting	32.07313 CA	COB LED	90	30 3000K	25W	2221 lm	18°/26°/40°		
				40 4000k		2332 lm			
EMMA 90 Track Lighting	32.09013 CA	COB LED	90	30 3000K	35W	3295 lm	16°/20°/30°		
				40 4000k		3460 lm			

EMMA Track Lighting-Intrack

Track 45 | 62 | 73 | 90



Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with Single circuit universal adapter, 3 circuit universal adapter or Dali Track adapter.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

EMMA Track Lighting-Intrack



EMMA 45
Intrack 32.04516







EMMA 62
Intrack 32.06220



EMMA 73
Intrack 32.07315



EMMA 90
Intrack 32.09015

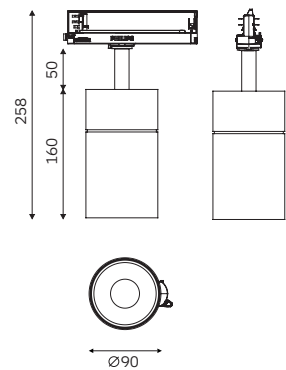


Code Ordering Example: 3 2 . 0 4 5 1 6 - 9 0 3 0 1 6 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Lighting Intrack	32.04516	CA COB LED	90	30 3000K	8W	749 lm	16°/24°/37°	D0 No Dim	10 □ WH
				40 4000k		786 lm			20 ■ BK
EMMA 62 Track Lighting Intrack	32.06220	CA COB LED	90	30 3000K	15W	1305 lm	17°/25°/36°		
				40 4000k		1370 lm			
EMMA 73 Track Lighting Intrack	32.07315	CA COB LED	90	30 3000K	25W	2221 lm	18°/26°/40°		
				40 4000k		2332 lm			
EMMA 90 Track Lighting Intrack	32.09015	CA COB LED	90	30 3000K	35W	3295 lm	16°/20°/30°		
				40 4000k		3460 lm			

ACTION Track Lighting

Track 62184

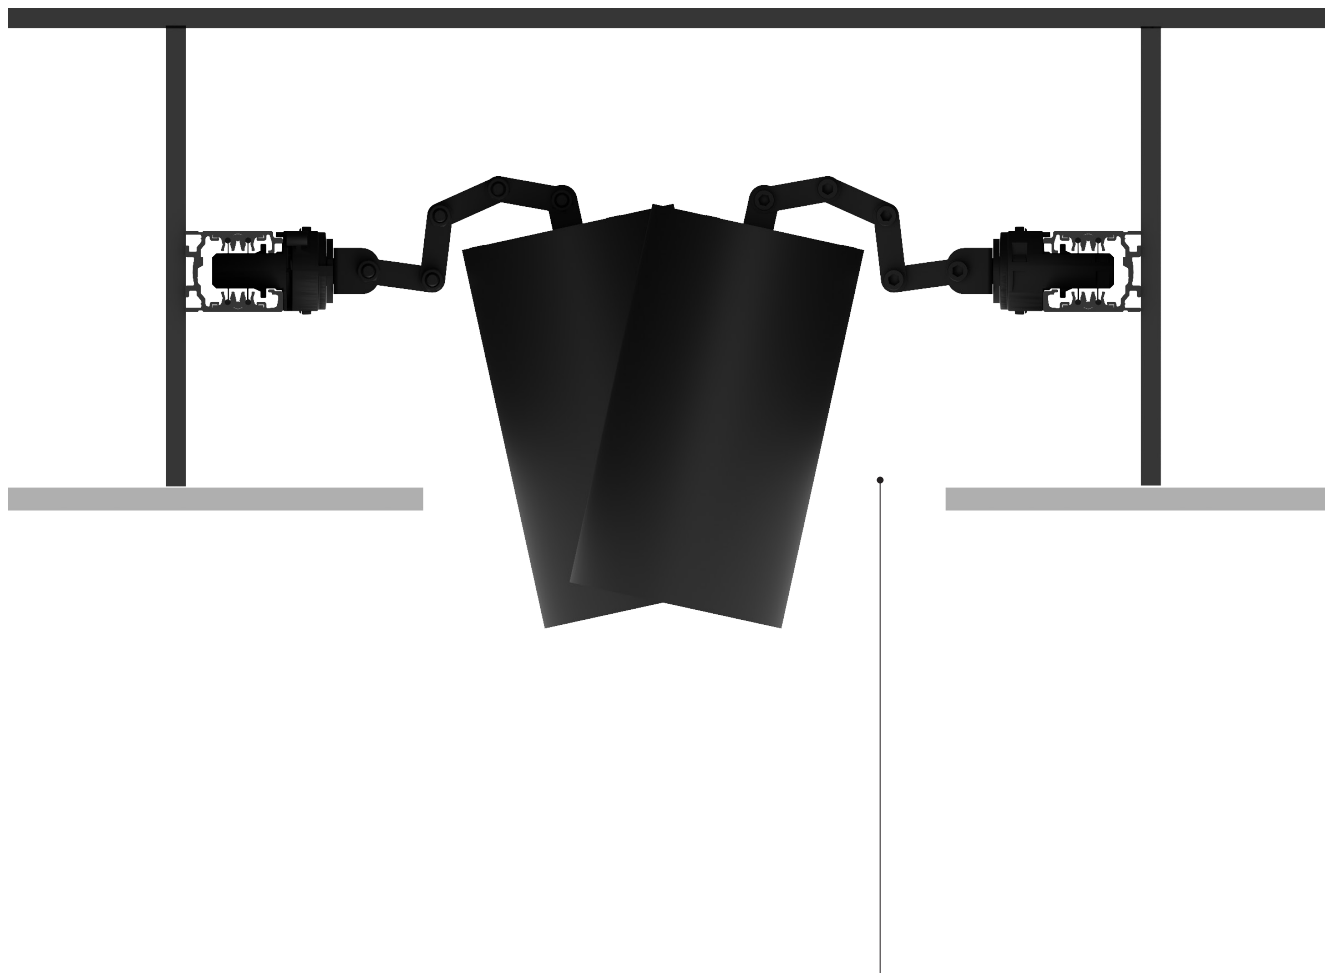

Concealed track light, can hide 90% of the volume of the lighting tool itself. Truly concealed design, and the fixture itself has an articulated angle adjustment function to meet complex angle adjustment. The fixture are suitable for museums, clothing stores, supermarkets and so on. This series of products can achieve 25-40W wattage options. And lumens up to 4000LM, can also meet the DALI access.

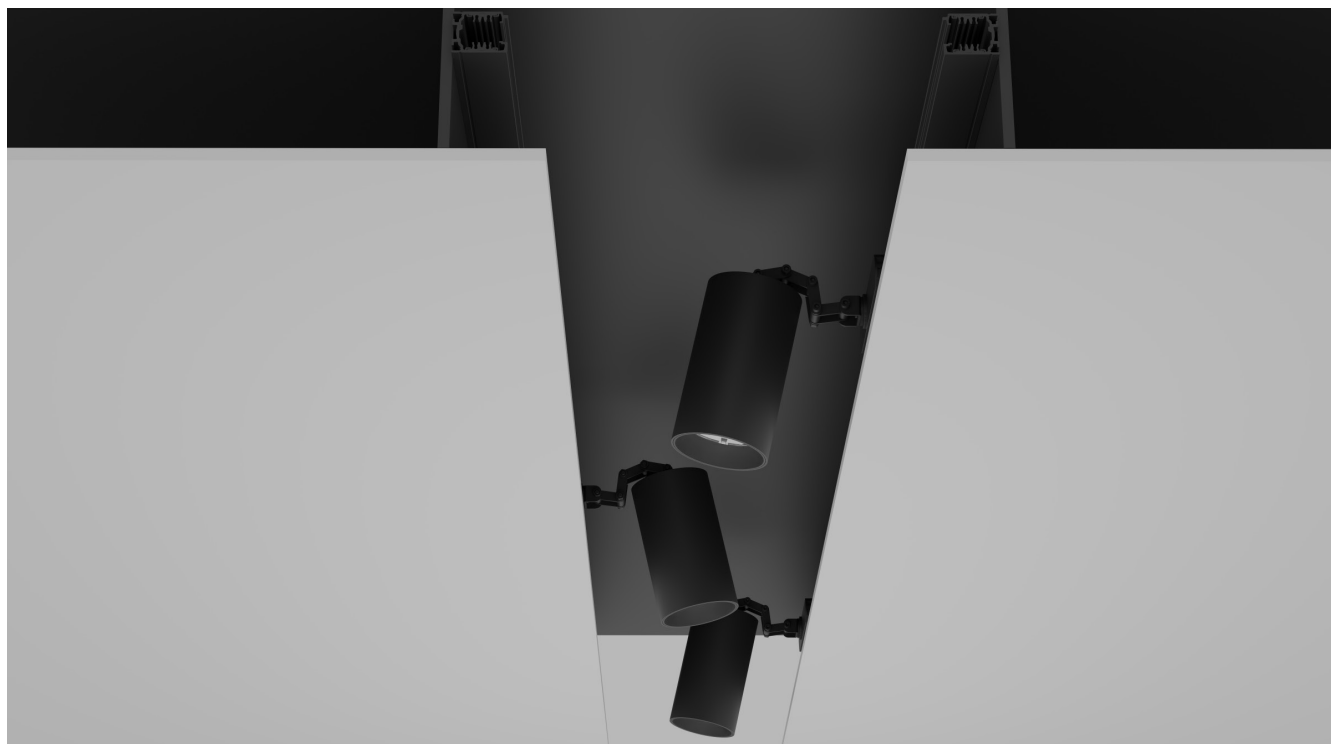

Flexible Chain leg track light, suitable for commercial space with high requirements for lighting adjustment, flexible use, can be adjusted to the angle required by the guests to meet a variety of needs.
Can just leak out the light body, so that the whole space more neat.

ACTION Track Lighting

Track 62184



Classic top and bottom structure style, die-casting aluminum box with our patented light body, small size and higher power, good heat dissipation effect of the whole fixture, fixture proportional coordination.

Can meet the Triac, 0-10V and Dali dimming.

ACTION Track Lighting

CE

IP20

Rotate 350°

Tilt 90°

Flexible
45-125



Intrack Simple Type



Flexible Chain Leg Type



With Driver Box Type

ACTION Track Lighting

Track 62



Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with Intrack driver or internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

ACTION Track Lighting



ACTION 62
Intrack

32.06211






ACTION 62
Flexible Chain Leg

32.06213



ACTION 62
With Driver Box

31.06211



Code Ordering Example: 3 2 . 0 6 2 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ACTION 62 Track Lighting Intrack	32.06211	CA	90	30 3000K	25W	2211 lm	19°/25°/38°	D0 No Dim	10 ☐ WH
				40 4000k		2321 lm			20 ☒ BK
ACTION 62 Track Lighting Flexible Chain Leg	32.06213	CA	90	30 3000K	25W	2211 lm	19°/25°/38°		
				40 4000k		2321 lm			
ACTION 62 Track Lighting With Driver Box	31.06211	CA	90	30 3000K	25W	2211 lm	19°/25°/38°		
				40 4000k		2321 lm			

ACTION Track Lighting

Track 84



Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with Intrack driver or internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

ACTION Track Lighting



ACTION 84
Intrack

32.08411






ACTION 84
Flexible Chain Leg

32.08415



ACTION 84
With Driver Box

31.08411





Code Ordering Example: 3 2 . 0 8 4 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ACTION 84 Track Lighting Intrack	32.08411	CA	COB LED	90	30	3000K	17°/24°/37°	D0 No Dim	10 ☐ WH
				40	4000k				20 ☒ BK
ACTION 84 Track Lighting Flexible Chain Leg	32.08415	CA	COB LED	90	30	3000K	17°/24°/37°		
				40	4000k				
ACTION 84 Track Lighting With Driver Box	31.08411	CA	COB LED	90	30	3000K	17°/24°/37°		
				40	4000k				

FOS

Series(Magnetic, AC 220V, Surface Mounted, Pendant Light)

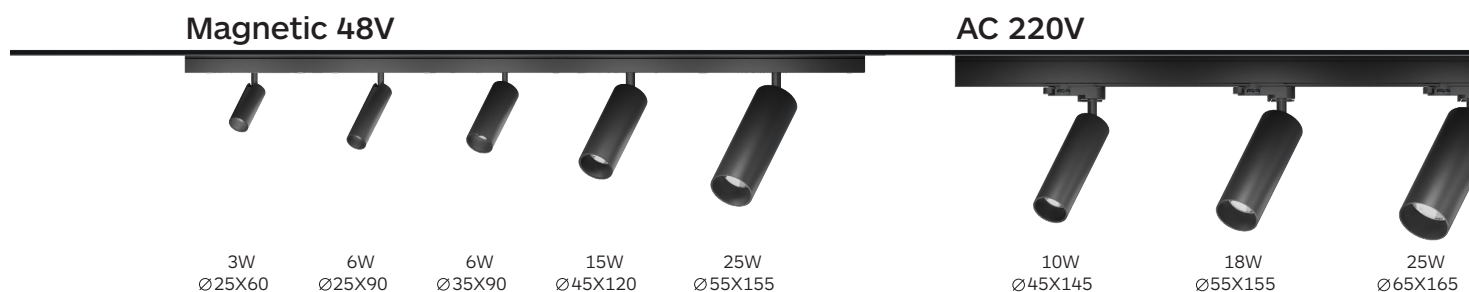

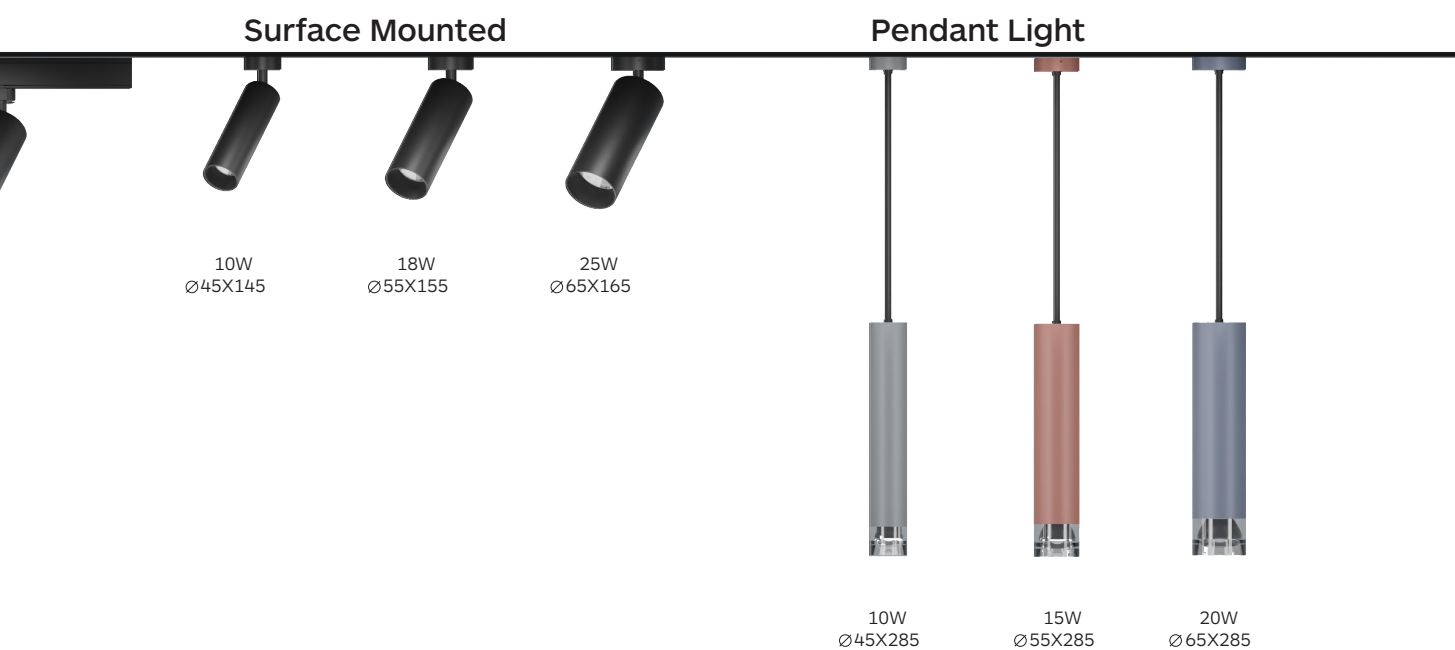

FOS Track Lighting

Track 45 | 55 | 65



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs.

Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

FOS Track Lighting






FOS 45 32.04519



FOS 55 32.05516




FOS 65 32.06512





Code Ordering Example: 3 2 . 0 4 5 1 9 - 9 0 3 0 1 7 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Track Lighting	32.04519 CA	COB LED	90	30 3000K	10W	720 lm	17°/24°/37°	D0 No Dim	10 □ WH
				40 4000k		756 lm			20 ■ BK
FOS 55 Track Lighting	32.05516 CA	COB LED	90	30 3000K	18W	1296 lm	17°/24°/37°		
				40 4000k		1360 lm			
FOS 65 Track Lighting	31.06512 CA	COB LED	90	30 3000K	25W	1800 lm	17°/24°/37°		
				40 4000k		1890 lm			

Recessed Downlight

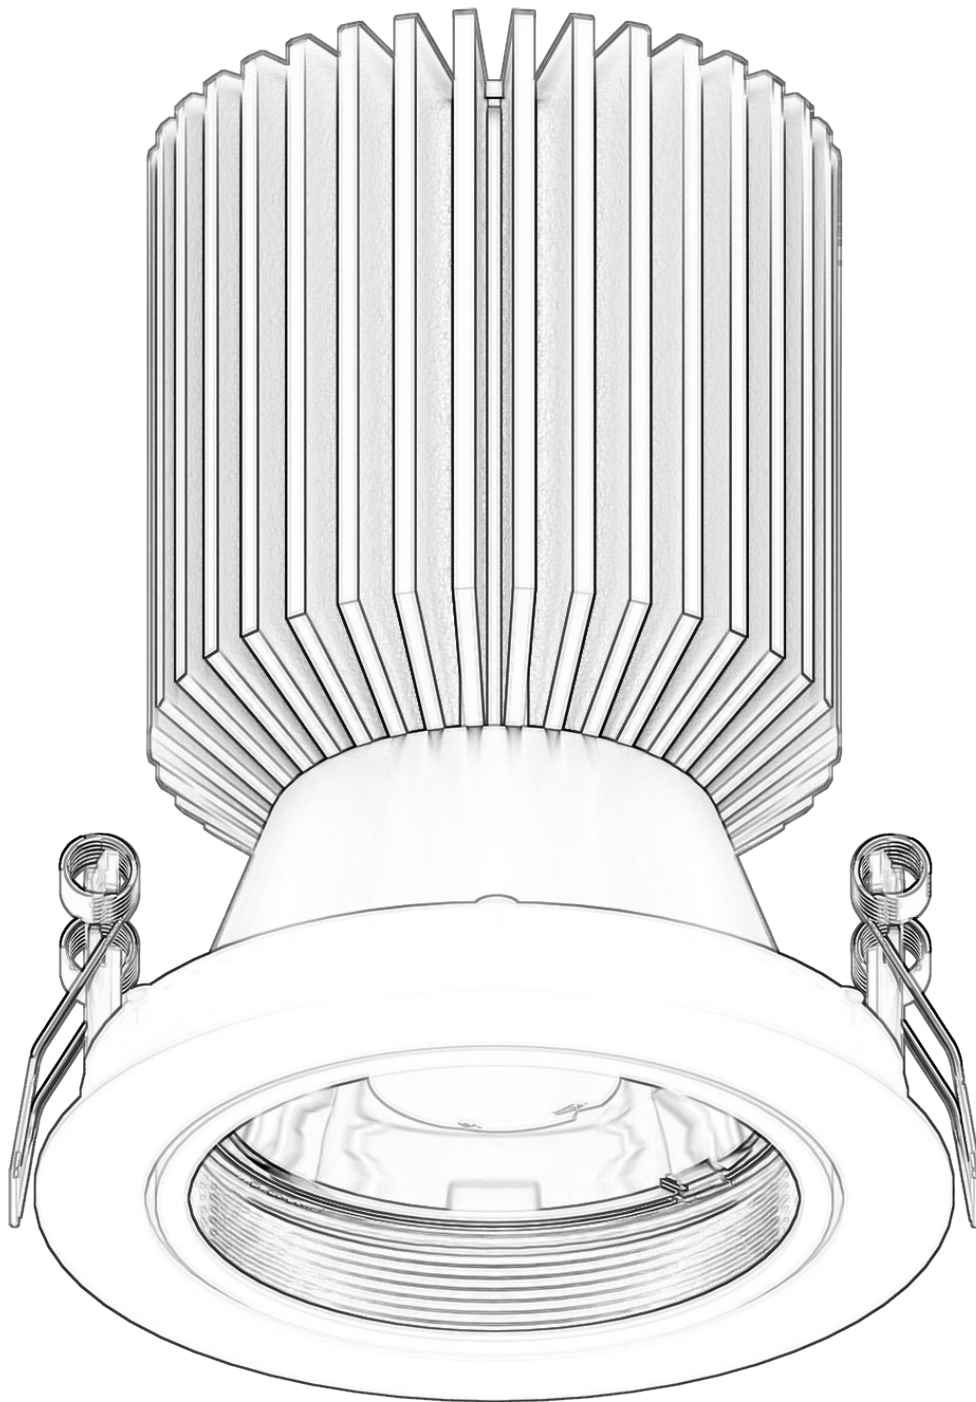

Recessed Downlight



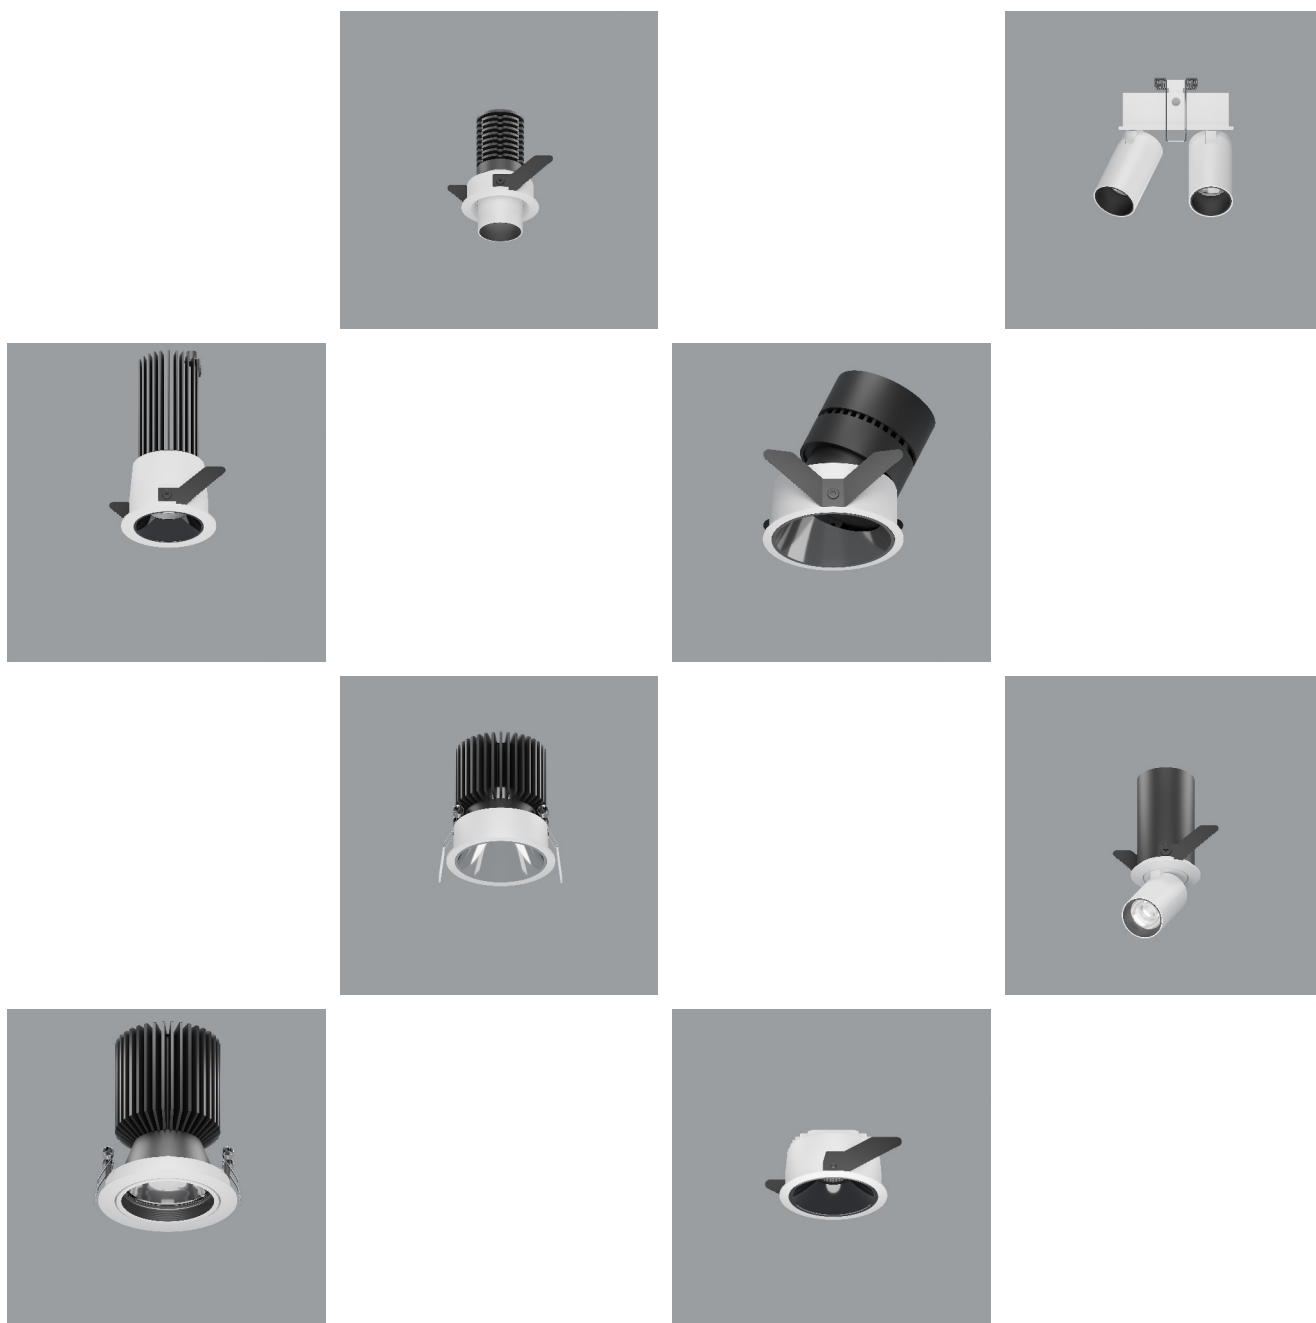

ECO Recessed Downlight



Body

ECO Track light with 2 kinds of wattage, and there are also 2 kinds of common adaptor and integrated adaptor.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: Triac Dim, 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

ECO Recessed Downlight




ECO 80
Adjustable

52.08011



ECO 100
Adjustable


52.10019



Code Ordering Example: 5 2 . 0 8 0 1 1 - 9 0 3 0 1 5 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 80 Downlight Adjustable	52.08011	CA COB LED	90	30 3000K	15W	1320 lm	15°/32°/42°	D0 No Dim	10 □ WH
				40 4000k		1386 lm		DA Dali Dim	20 ■ BK
ECO 100 Downlight Adjustable	52.10019	CA COB LED	90	30 3000K	30W	2640 lm	15°/32°/42°	DC 0-10V Dim	
				40 4000k		2772 lm			

SLIM Recessed Downlight

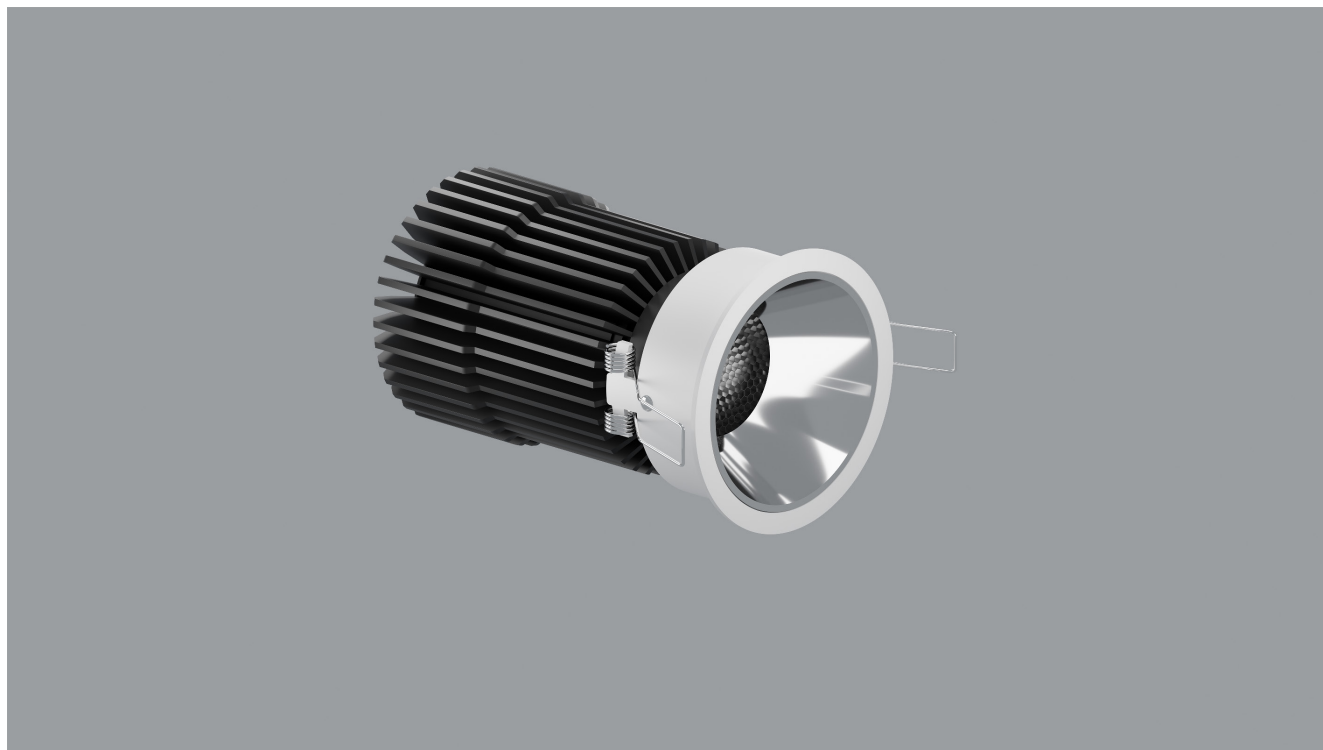

Body

Small body, high power. Blends well into the environment while meeting illumination requirements.

Very comfortable with anti-glare optics and different colour options for the bottom reflector.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre

SLIM Recessed Downlight

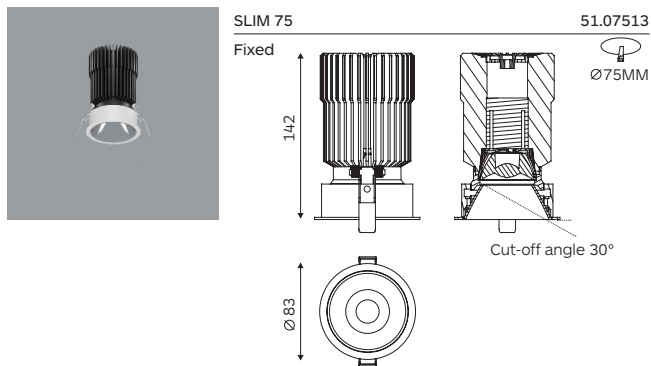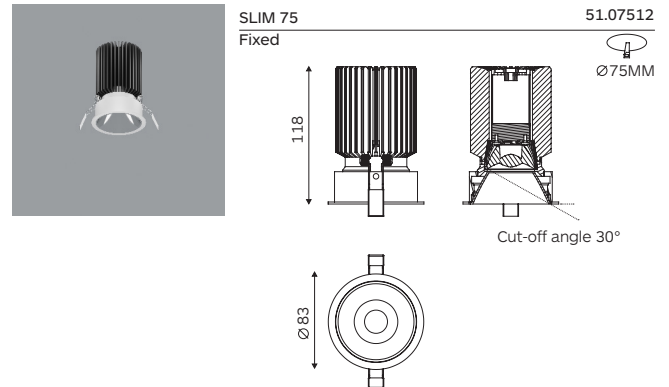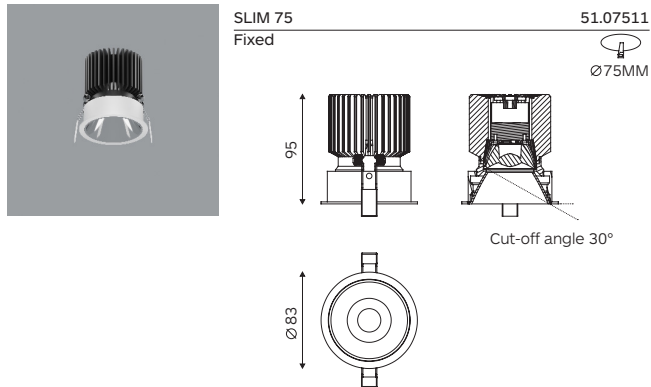

Code Ordering Example: 5 1 . 0 7 5 1 1 - 9 0 3 0 1 5 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SLIM 75 Downlight Fixed	51.07511	CA COB LED	90	30 3000K 40 4000k	20W	1729 lm 1815 lm	15°/32°/42°	D0 No Dim DA Dali Dim	10 □ WH 20 ■ BK
SLIM 75 Downlight Fixed	51.07512	CA COB LED	90	30 3000K 40 4000k	25W	1955 lm 2052 lm	15°/32°/42°	DC 0-10V Dim	
SLIM 75 Downlight Fixed	51.07513	CA COB LED	90	30 3000K 40 4000k	35W	2221 lm 2332 lm	19°/29°/38°		

UTH Recessed Downlight



Body

Ultra-thin Anti-glare downlight, CNC machining, luminaire surface can support electroplating treatment.

With Anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

UTH Recessed Downlight

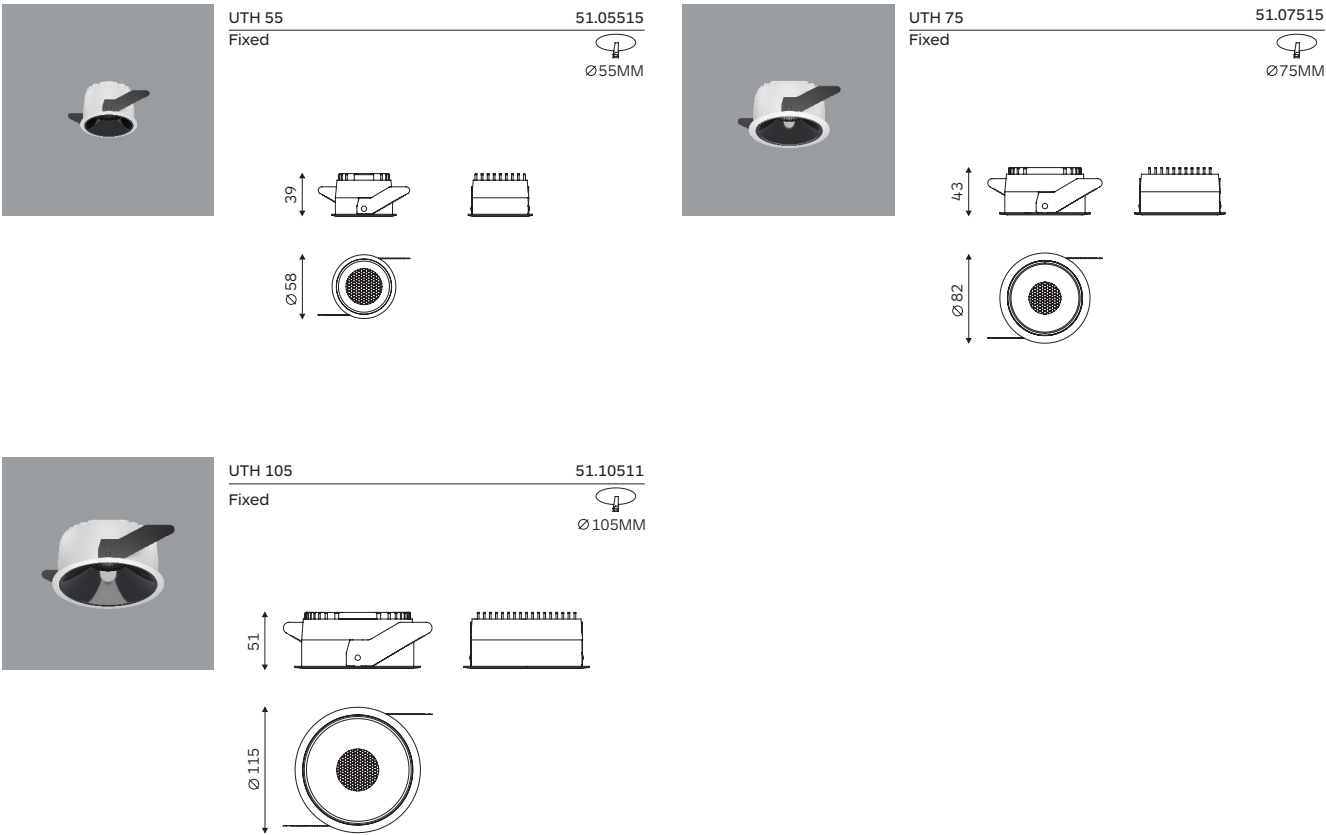

Code Ordering Example: 5 1 . 0 5 5 1 5 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
UTH 55 Downlight Fixed	51.05515 CA	COB LED	90	30 3000K	6W	480 lm	15°/32°/42°	D0 No Dim	10 □ WH
				40 4000k		504 lm		DA Dali Dim	20 ■ BK
UTH 75 Downlight Fixed	51.07515 CA	COB LED	90	30 3000K	10W	800 lm	15°/32°/42°	DC 0-10V Dim	
				40 4000k		840 lm			
UTH 105 Downlight Fixed	51.10511 CA	COB LED	90	30 3000K	15W	1200 lm	19°/29°/38°		
				40 4000k		1260 lm			

SILO

Recessed Downlight



Cut out : Ø75mm



10W



15W

Cut out : Ø95mm



20W



25W

SILO Recessed Downlight



Body

Designed from the user's point of view, the luminaire can be freely replaced with lenses and reflectors according to the customer's needs and is also available trim and trimless.

Add a pull-down ring allows the luminaire to be pulled down by hands, providing great convenience for the maintenance of the luminaire.

Not Only offer high efficiency and the comfortable low glare light, but also to achieve and even and soft high quality output of light.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens or reflector.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: Triac Dim, 0-10V Dim, Dali Dim.

Applications

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

SILO Recessed Downlight




SILO 55
Adjustable

52.05518
Ø55MM




SILO 75
Adjustable

52.07517
Ø75MM



SILO 95
Adjustable


52.09526
Ø95MM



Code Ordering Example: 5 2 . 0 5 5 1 8 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Downlight Adjustable Trim	52.05518 CA	COB LED	90	30 3000K	10W	1729 lm	15°/32°/42°	D0 No Dim	10 □ WH
			40	4000k		1815 lm		DA Dali Dim	20 ■ BK
SILO 75 Downlight Adjustable Trim	52.07517 CA	COB LED	90	30 3000K	15W	1955 lm	15°/32°/42°	DC 0-10V Dim	
			40	4000k		2052 lm			
SILO 95 Downlight Adjustable Trim	52.09526 CA	COB LED	90	30 3000K	25W	2221 lm	19°/29°/38°		
			40	4000k		2332 lm			

SILO Recessed Downlight



Body

Designed from the user's point of view, the luminaire can be freely replaced with lenses and reflectors according to the customer's needs and is also available trim and trimless.

Add a pull-down ring allows the luminaire to be pulled down by hands, providing great convenience for the maintenance of the luminaire.

Not Only offer high efficiency and the comfortable low glare right, but also to achieve and even and soft high quality output of light.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens or reflector.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)


Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre


SILO Recessed Downlight

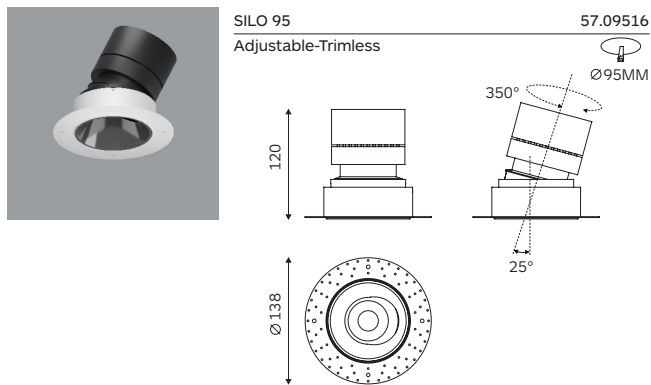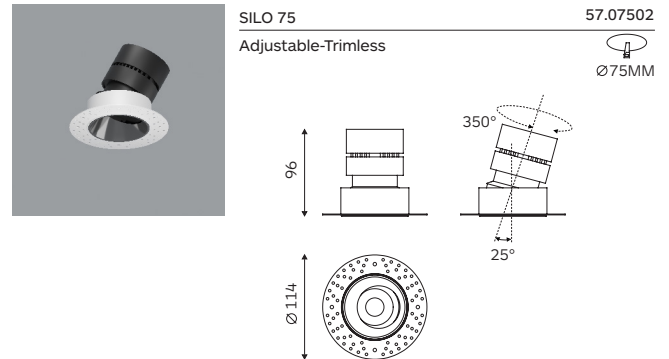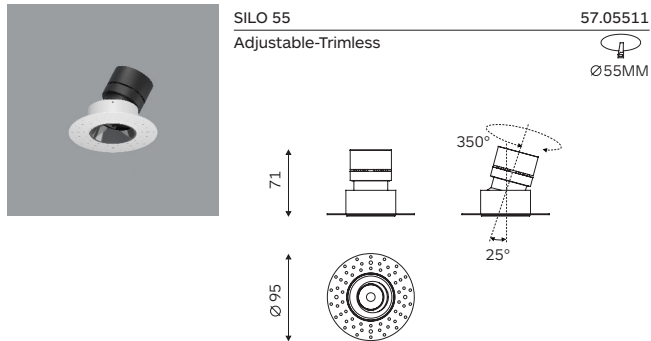

Code Ordering Example: 5 7 . 0 5 5 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Downlight Adjustable Trimless	57.05511	CA COB LED	90	30 3000K 40 4000k	10W	1729 lm 1815 lm	15°/32°/42°	D0 No Dim DA Dali Dim	10 □ WH 20 ■ BK
SILO 75 Downlight Adjustable Trimless	57.07502	CA COB LED	90	30 3000K 40 4000k	15W	1955 lm 2052 lm	15°/32°/42°	DC 0-10V Dim	
SILO 95 Downlight Adjustable Trimless	57.09516	CA COB LED	90	30 3000K 40 4000k	25W	2221 lm 2332 lm	19°/29°/38°		

EMMA Recessed Downlight

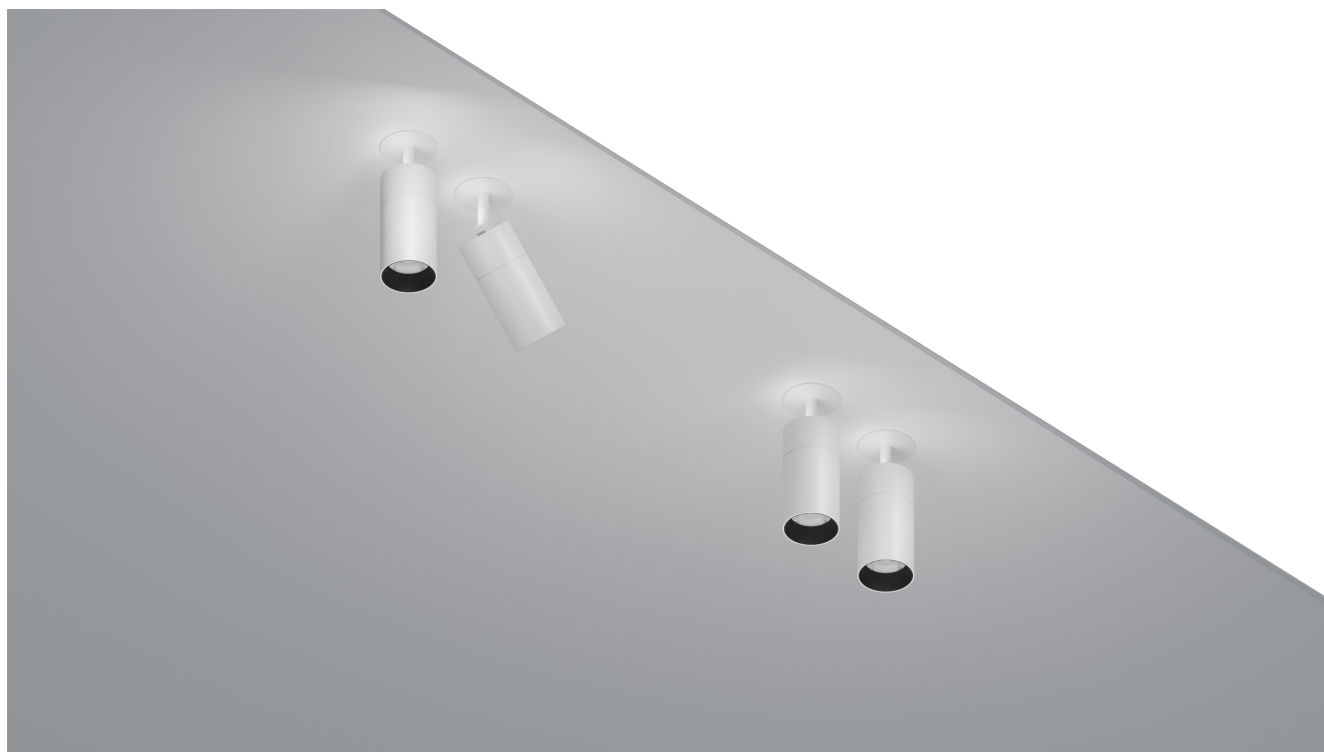

Body

The body are available in four different diameters with different Powers.

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, recessed, surface mounted and pendant light meet different requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable remote driver.
Diming Options: Triac Dim, 0-10V Dim, Dali Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre


EMMA Recessed Downlight



EMMA 40
Adjustable

56.04011


Ø40MM



EMMA 55
Adjustable

56.05518


Ø55MM



EMMA 65
Adjustable

56.06511


Ø65MM



EMMA 80
Adjustable

56.08011


Ø80MM



Code Ordering Example: 5 6 . 0 4 0 1 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 40 Downlight Adjustable	56.04011	CA COB LED	90	30 3000K	10W	749lm	16°/24°/37°	D0 No Dim	10 □ WH
			40	4000k		786 lm		DA Dali Dim	20 ■ BK
EMMA 55 Downlight Adjustable	56.05518	CA COB LED	90	30 3000K	15W	1305 lm	17°/25°/36°	DC 0-10V Dim	
			40	4000k		1370 lm			
EMMA 65 Downlight Adjustable	56.06511	CA COB LED	90	30 3000K	25W	2221 lm	18°/26°/40°		
			40	4000k		2332 lm			
EMMA 80 Downlight Adjustable	56.08011	CA COB LED	90	30 3000K	35W	3295 lm	16°/20°/30°		
			40	4000k		3460 lm			

FOS Recessed Downlight

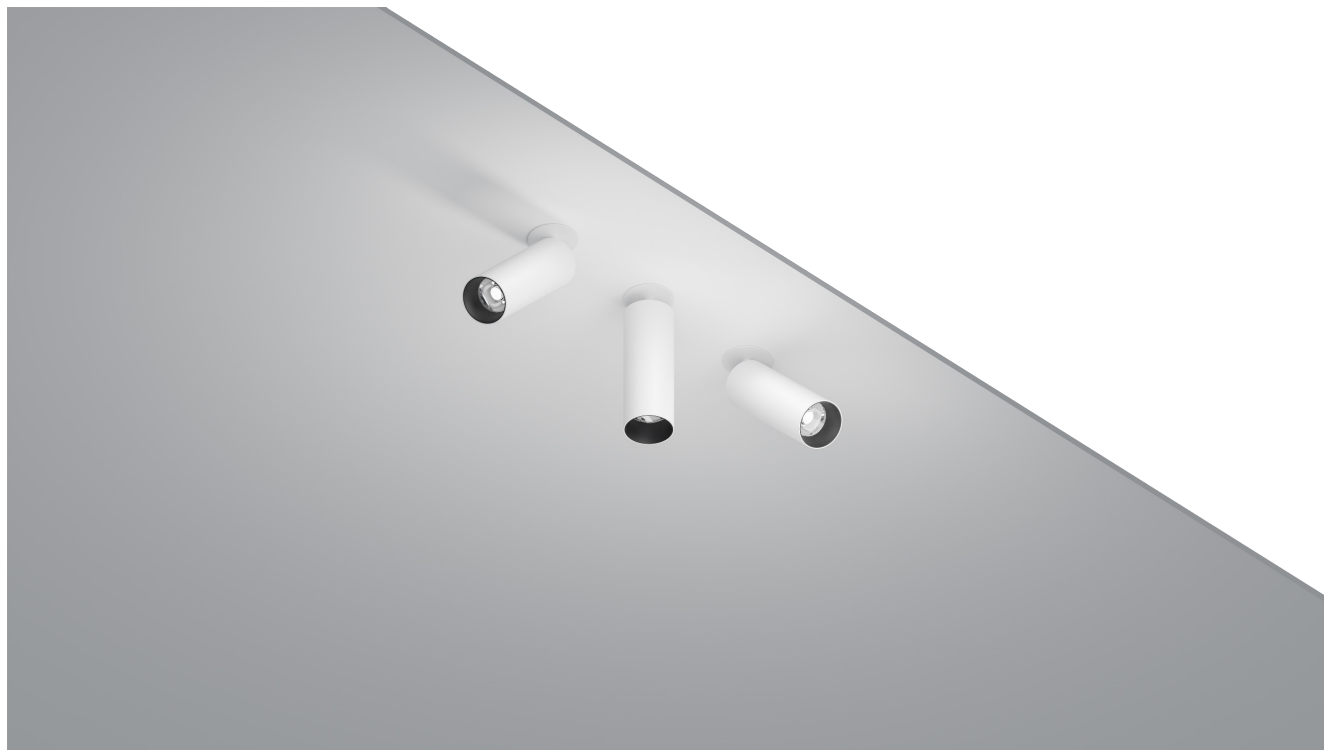

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs.

Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre

FOS Recessed Downlight

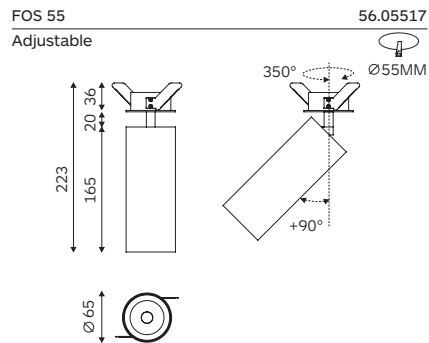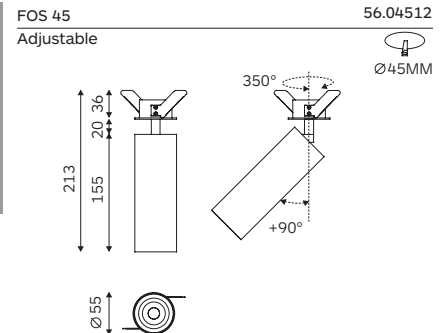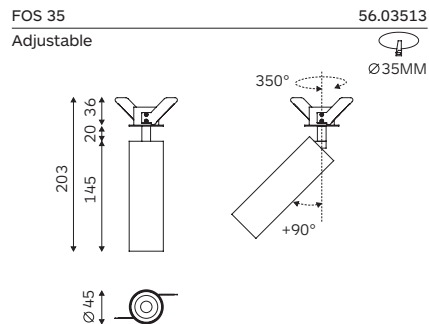


Code Ordering Example: 5 6 . 0 3 5 1 3 - 9 0 3 0 1 5 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 35 Downlight Adjustable	56.03513 CA	COB LED	90	30 3000K	15W	1729 lm	15°/32°/42°	D0 No Dim	10 □ WH
				40 4000k		1815 lm		DA Dali Dim	20 ■ BK
FOS 45 Downlight Adjustable	56.04512 CA	COB LED	90	30 3000K	20W	1955 lm	15°/32°/42°	DC 0-10V Dim	
				40 4000k		2052 lm			
FOS 55 Downlight Adjustable	56.05517 CA	COB LED	90	30 3000K	25W	2221 lm	19°/29°/38°		
				40 4000k		2332 lm			

NOVAL


Semi-recessed Downlight

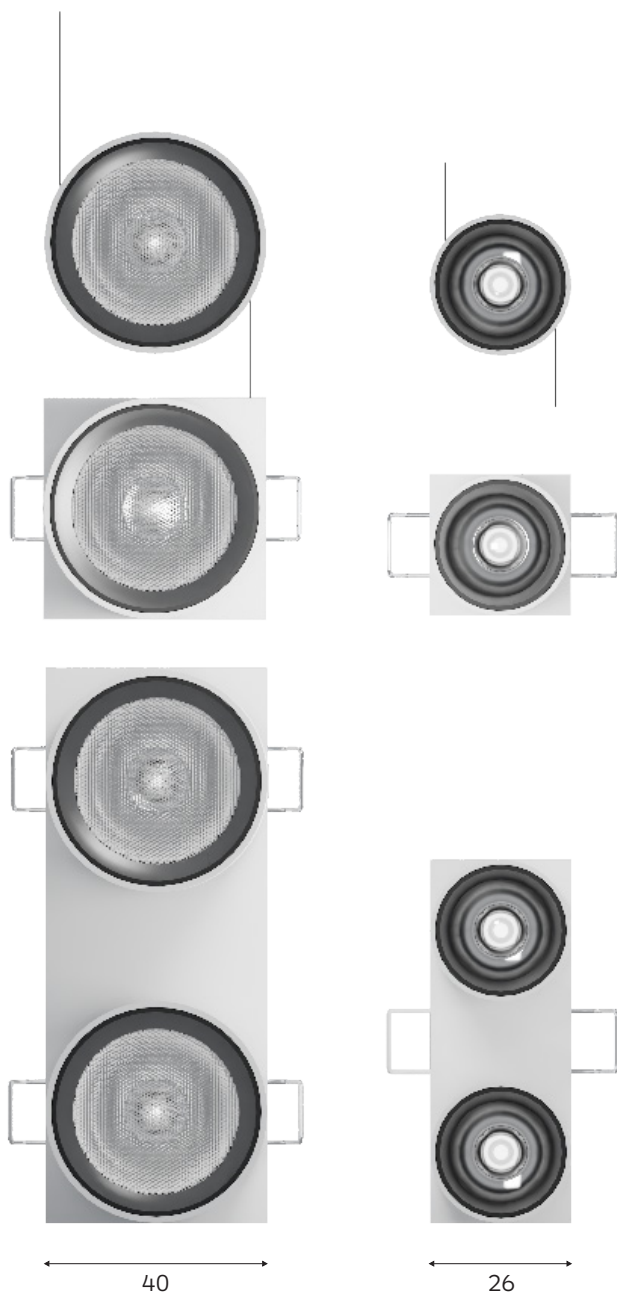

NOVAL Semi-recessed Downlight



NOVAL Semi-recessed Downlight

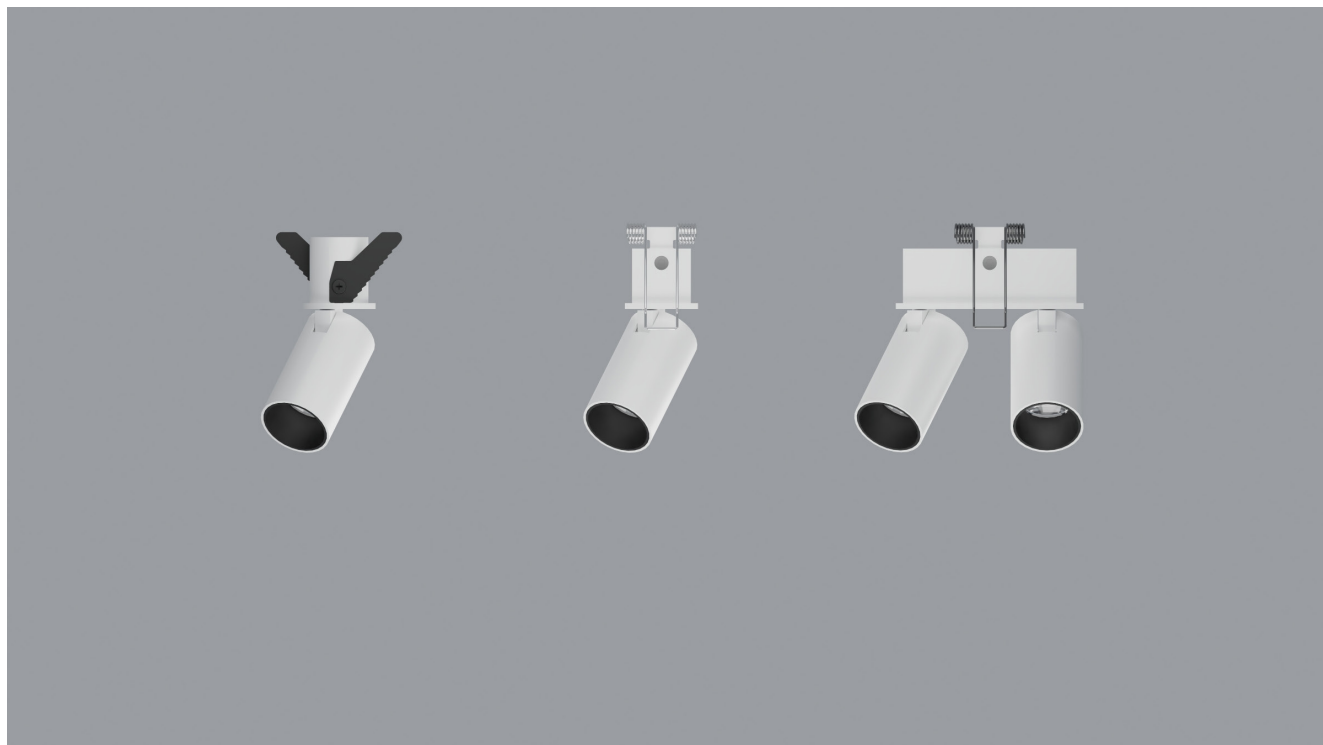

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED Or High Power
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre

NOVAL Semi-recessed Downlight





NOVAL 23
Round

56.02311
Ø23MM




NOVAL 23
Square 1H

56.02312
23X23MM



NOVAL 23
Square 2H


56.02313
62X23MM

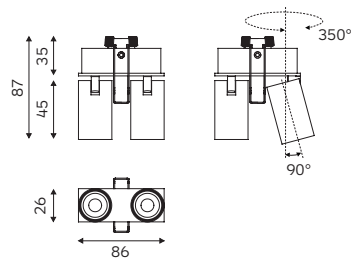

Code Ordering Example: 5 6 . 0 2 3 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NOVAL 23 Downlight Round	56.02311	CA COB LED	90	30 3000K 40 4000k	3W	535 lm 561 lm	22°/27°/40°	D0 No Dim DA Dali Dim	10 □ WH 20 ■ BK
NOVAL 23 Downlight Square 1H	52.02312	CA COB LED	90	30 3000K 40 4000k	3W	535 lm 561 lm	22°/27°/40°	DC 0-10V Dim	
NOVAL 23 Downlight Square 2H	52.02313	CA COB LED	90	30 3000K	2X3W	535 lm 561 lm	22°/27°/40°		

NOVAL Semi-recessed Downlight

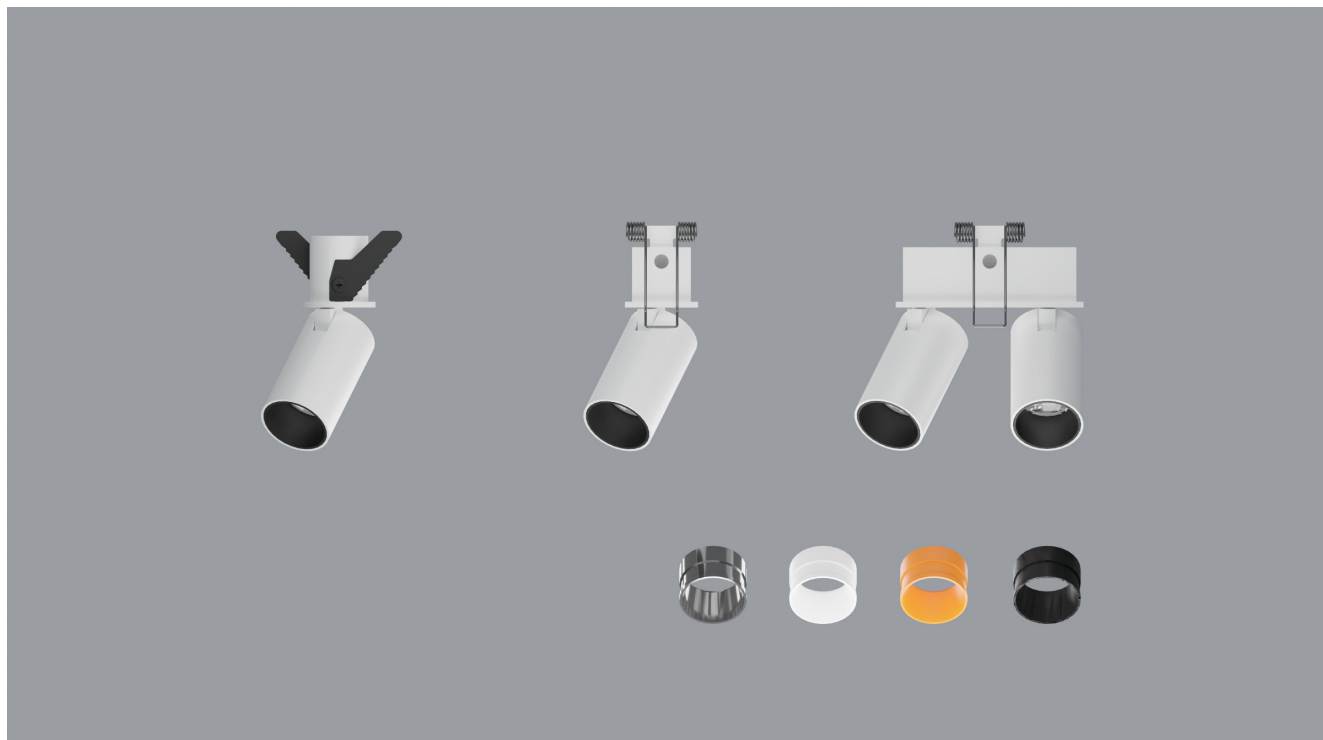

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED Or High Power
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre

NOVAL Semi-recessed Downlight

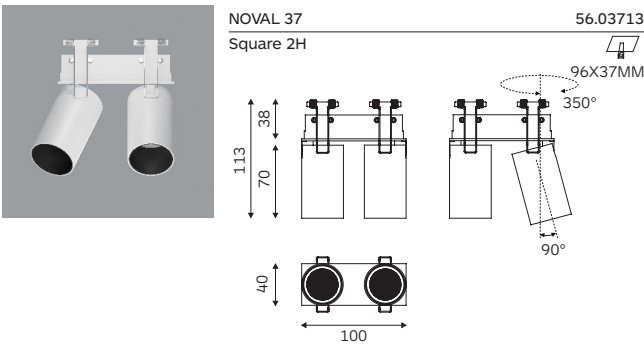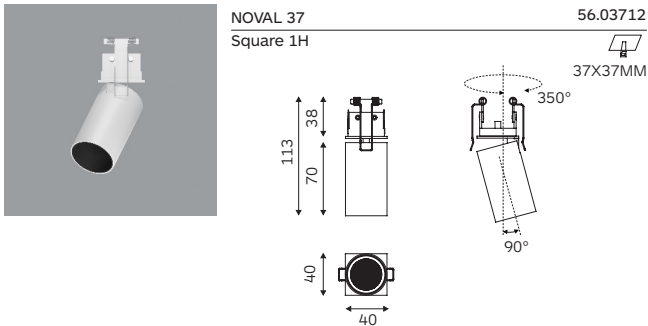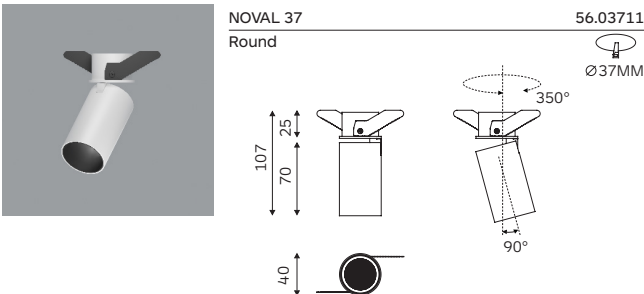


Code Ordering Example: 5 6 . 0 3 7 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NOVAL 37 Downlight Round	56.03711	CA	90	30	3000K	6W	535 lm	22°/27°/40°	D0 No Dim 10 □ WH
				40	4000k		561 lm	DA Dali Dim 20 ■ BK	
NOVAL 37 Downlight Square 1H	56.03712	CA	90	30	3000K	6W	535 lm	22°/27°/40°	DC 0-10V Dim
				40	4000k		561 lm		
NOVAL 37 Downlight Square 2H	56.03713	CA	90	30	3000K	2X6W	535 lm	22°/27°/40°	
							561 lm		

MINI

Recessed Downlight

MINI Recessed Downlight

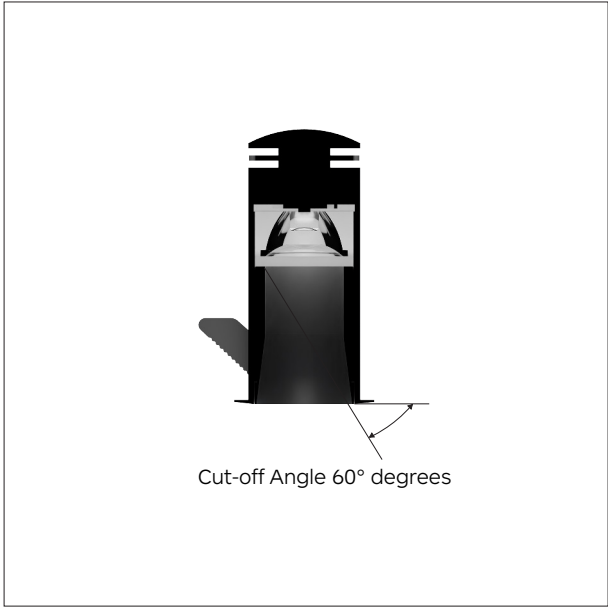

MINI Recessed Downlight



Fixed
Max 8W
Cut Out:35mm



Vertically Adjustable
Max 8W
Cut Out:35mm



Horizontal and Vertical Adjustable
Max 8W
Cut Out:35mm



Anti-glare
Max 8W
Cut Out:35mm



Large Angle Adjustable
Max 8W
Cut Out:45mm



Flared Anti-glare Adjustable
Max 8W
Cut Out:45mm



Semi-recessed Fixed
Max 8W
Cut Out:38mm



Semi-recessed Adjustable
Max 8W
Cut Out:38mm

MINI Recessed Downlight



glare
8W
Cut Out:30mm



Super Anti-glare
Max 4W
Cut Out:35mm




Flared Anti-glare Fixed
Max 8W
Cut Out:45mm



Drop-down
Max 4W
Cut Out:35mm



ed Adjustable
8W
Cut Out:40mm



IP65 Fixed
Max 10W
Cut Out:40mm



IP65 Adjustable
Max 10W
Cut Out:40mm



Drop-down
Max 8W
Cut Out:55mm


MINI Recessed Downlight





Unidirectional Vertical Adjustment: 15D
Horizontal Adjustment: 355D

MINI Recessed Downlight

CE | IP20 | □ | ■ | ◐

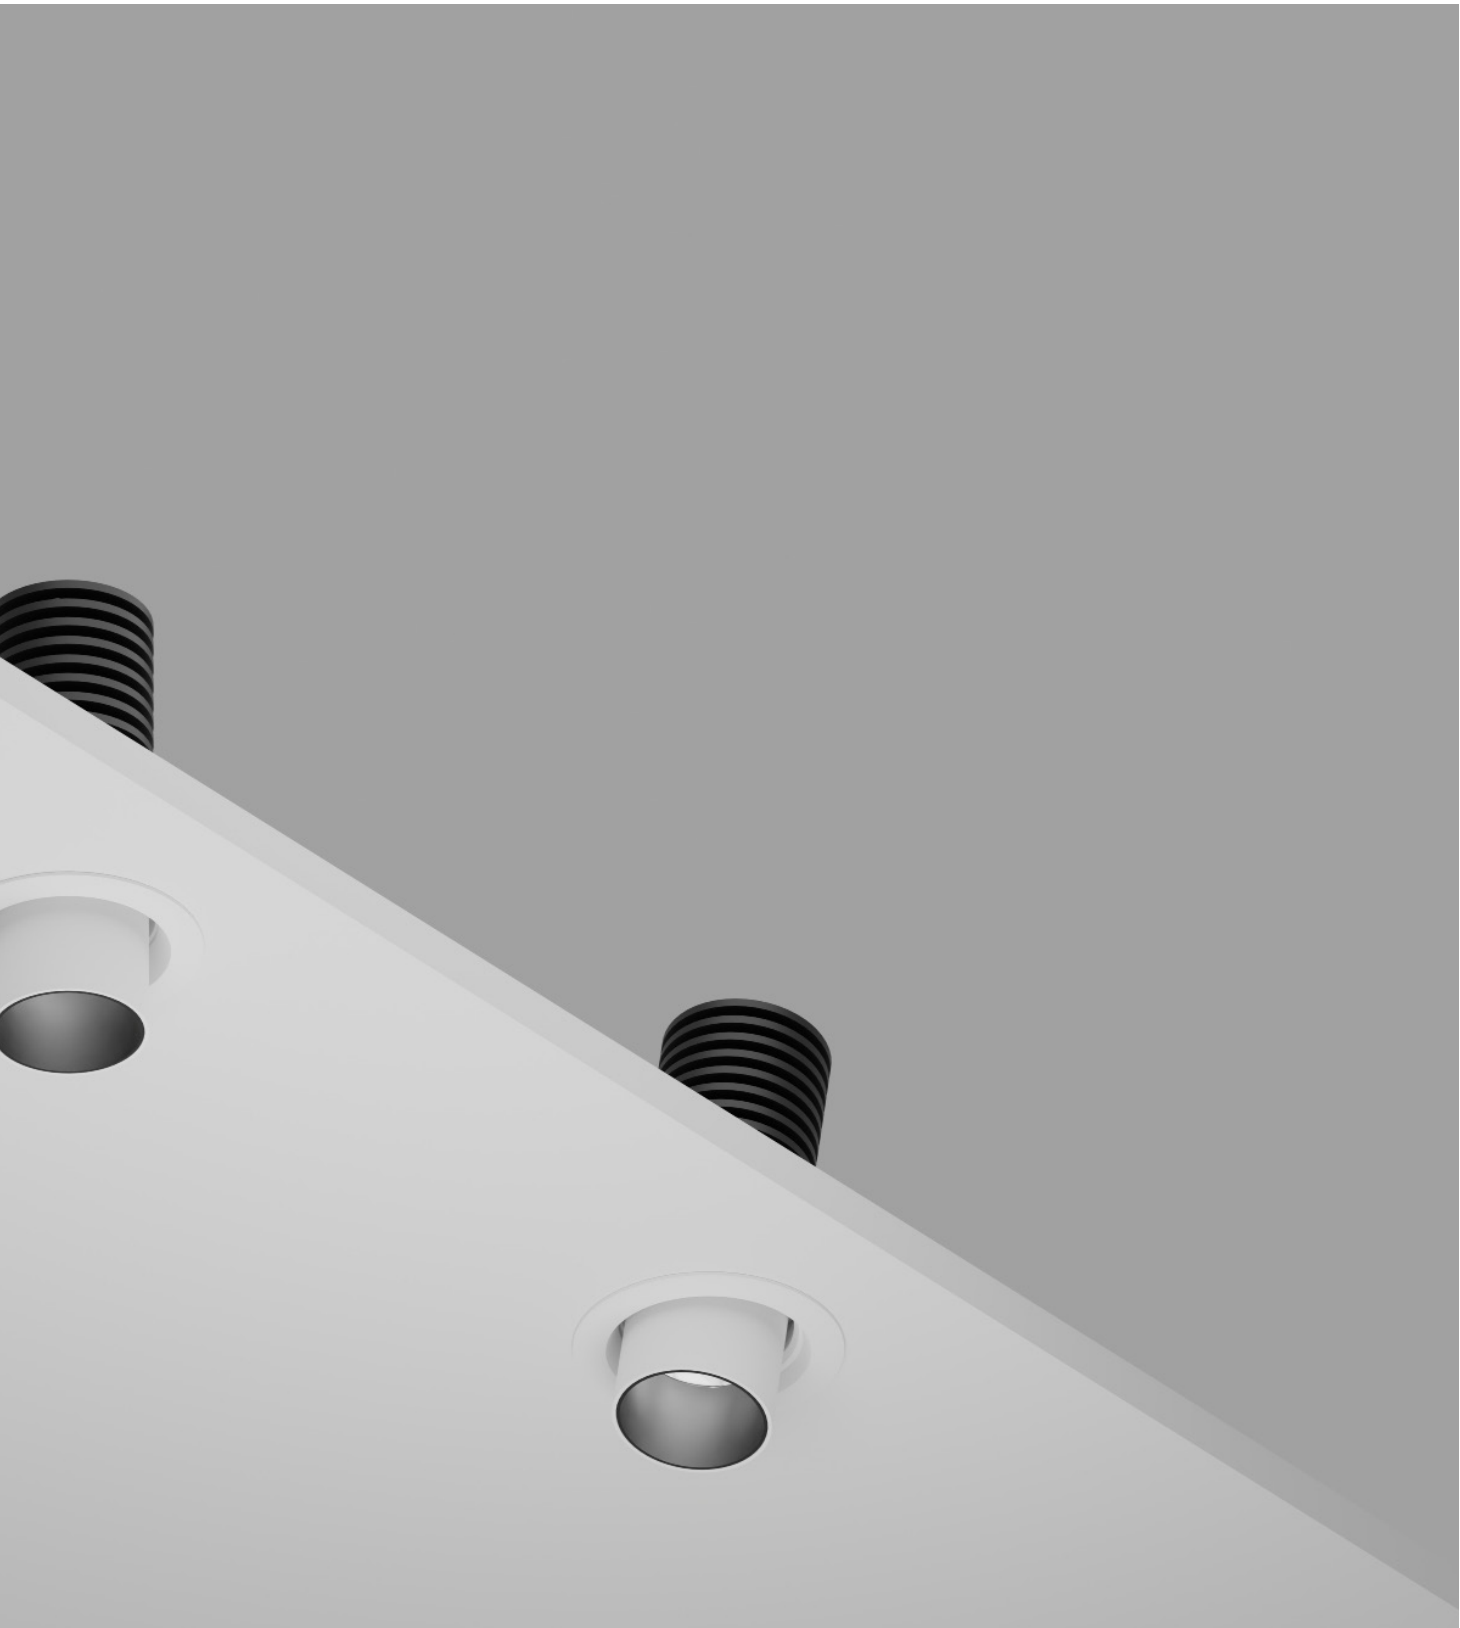

MINI Recessed Downlight



Body

Easier to adjust the angle of illumination, with both fixed and adjustable options, and with a 10d beam angle (Max 3.5W). A variety of decorative colors are available for the inner ring. Also can meet the use of 1-18mm thick ceiling.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

MINI Recessed Downlight

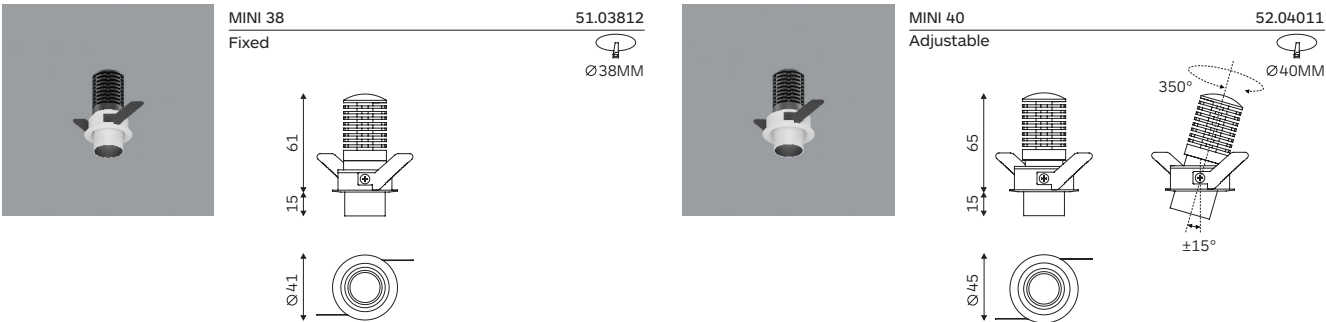

Code Ordering Example: 5 1 . 0 3 8 1 2 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 38 Downlight Fixed	51.03812 CA	SMD 5050	90	30 3000K	6W	485 lm	22°/24°/46°	D0 No Dim	10 □ WH
				40 4000k		509 lm		DA Dali Dim	20 ■ BK
MINI 40 Downlight Adjustable	52.04011 CA	SMD 5050	90	30 3000K	6W	485 lm	22°/24°/46°	DC 0-10V Dim	
				40 4000k		509 lm			

MINI Recessed Downlight



Body

Small size spotlight with cut out 35mm, Max 8W. Also have different control methods is available (SCR, 0-10V, Dali).

Choose high lumen 5050 LED, 6W Max lumen about 550LM

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



MINI Recessed Downlight

CE IP20





MINI 35
Fixed

51.03511




MINI 35
Adjustable

52.03513



MINI 35
Adjustable


52.03512



Code Ordering Example: 5 1 . 0 3 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 35 Downlight Fixed	51.03511	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°	D0 No Dim	10 □ WH
			40	4000k		509 lm		DA Dali Dim	20 ■ BK
MINI 35 Downlight Adjustable	52.03513	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°	DC 0-10V Dim	
			40	4000k		509 lm			
MINI 35 Downlight Adjustable	52.03512	CA SMD 5050	90	30 3000K	6W	485 lm	22°/27°/40°		
			40	4000k		509 lm			

MINI Recessed Downlight

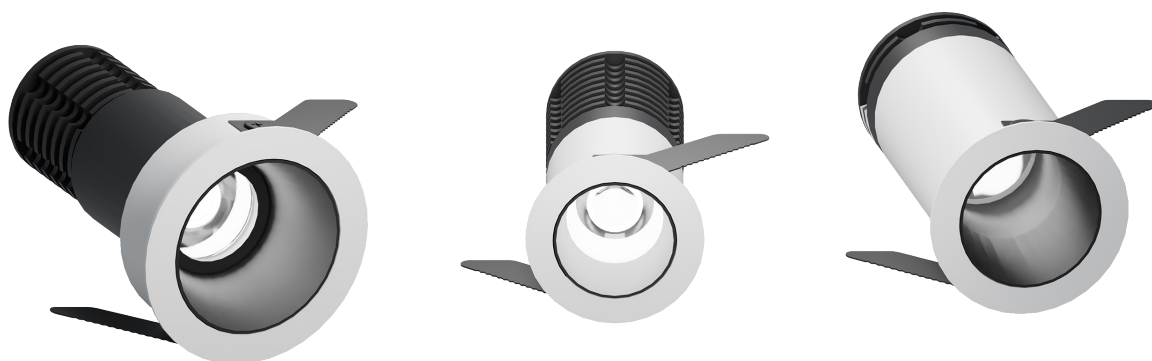

Body

Deeper cut-off angle, up to 40°. More comfortable light, better anti-glare design. And also high lumen output (6W about 500lm)

A wide selection of decorative colors for the inner ring, Also can meet the use of 1-18mm thick ceiling.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre

MINI Recessed Downlight


CE | IP20 |  | 



MINI 30
Fixed

51.03015


 Ø30MM



MINI 45
Fixed

51.04511


 Ø45MM



MINI 35
Fixed

51.03517


 Ø35MM



Code Ordering Example: 5 1 . 0 3 0 1 5 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 30 Downlight Fixed	51.03015	CA SMD 5050	90	30 3000K 40 4000k	6W	485 lm 509 lm	22°/28°/40°	D0 No Dim	10 ☐ WH 20 ☒ BK
MINI 45 Downlight Fixed	51.04511	CA SMD 5050	90	30 3000K 40 4000k	6W	485 lm 509 lm	22°/28°/40°		
MINI 35 Downlight Fixed	51.03517	CA SMD 5050	90	30 3000K 40 4000k	4W	221 lm 232 lm	15°/20°/27°		

MINI Recessed Downlight

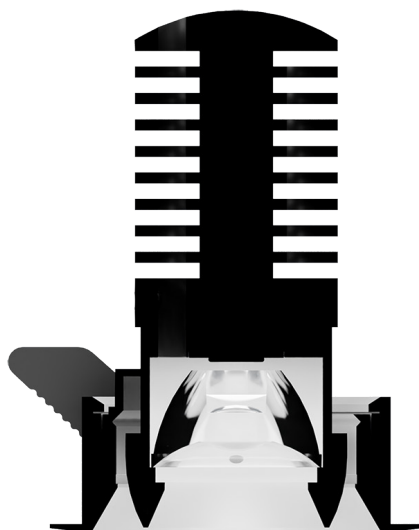

Body

Greater angle adjustment (up to 27° unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Selected high-quality LED, SDCM<3.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass






Glass



Honeycomb louvre

MINI Recessed Downlight

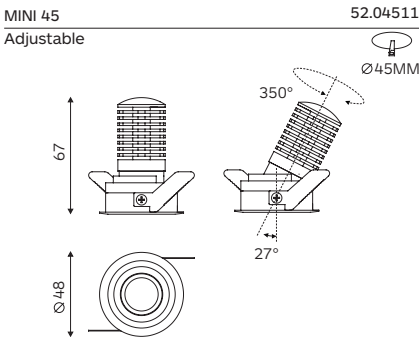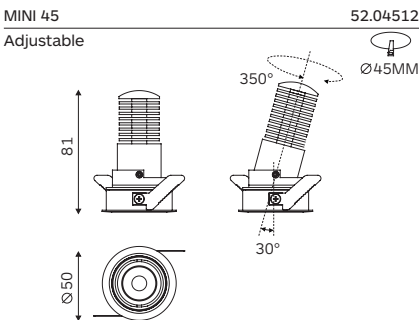

Code Ordering Example: 5 2 . 0 4 5 1 2 - 9 0 3 0 2 2 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI Downlight Adjustable	52.04512 CA	SMD 5050	90	30 3000K	6W	485 lm	22°/28°/40°	D0 No Dim	10 □ WH
				40 4000k		509 lm		DA Dali Dim	20 ■ BK
MINI Downlight Adjustable	52.04511 CA	SMD 5050	90	30 3000K	6W	485 lm	22°/28°/40°	DC 0-10V Dim	
				40 4000k		509 lm			

MINI Recessed Downlight





MINI Recessed Downlight

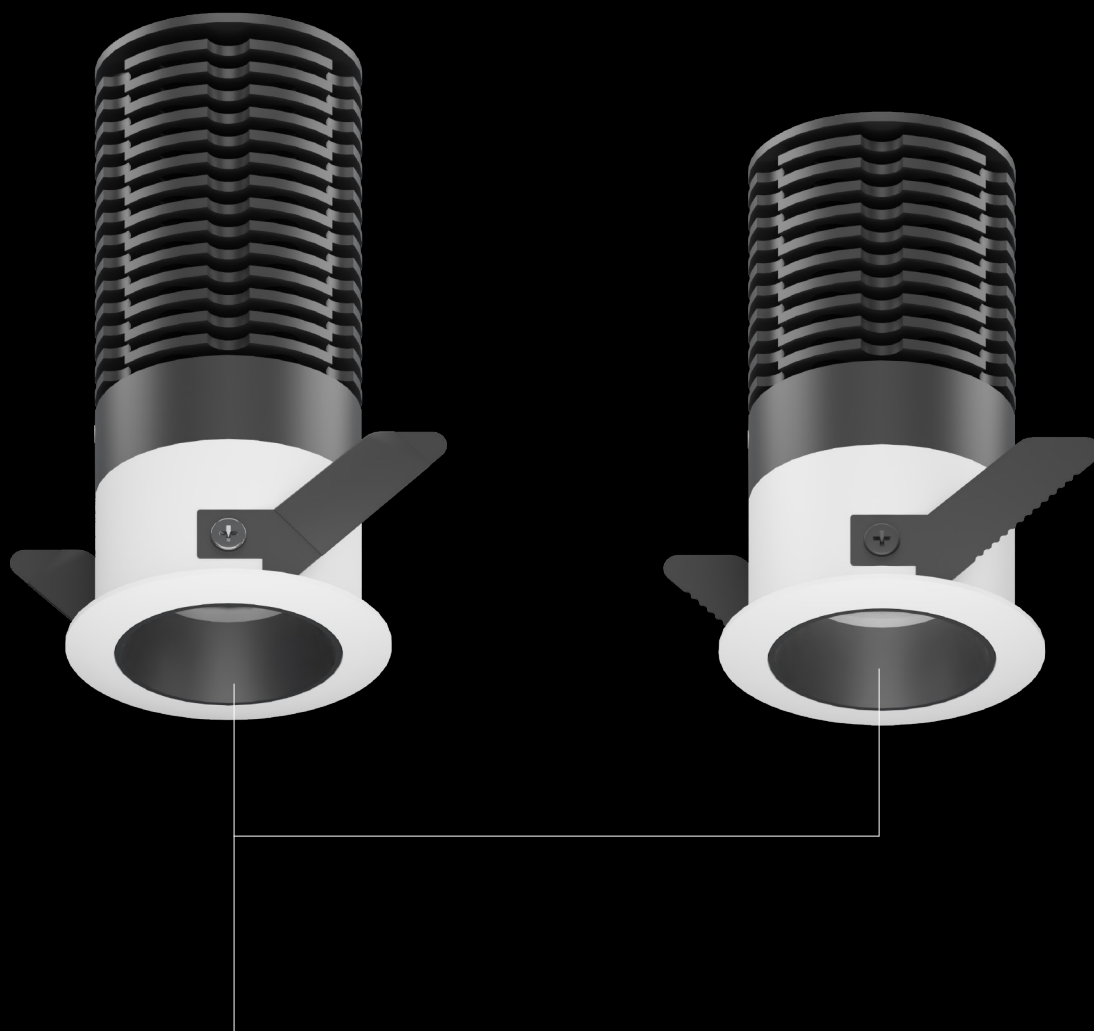

IP54 by adding protective glass.

MINI Recessed Downlight

One-piece carriage with integral heat dissipation and 6 internal circular holes for top and bottom convection. Reduce the number of layers or increase the number of layers of cooling teeth to meet different illumination requirements

New thermal design with convection around the perimeter for higher power in a very small size.



MINI Recessed Downlight



Body

Luminaire with IP44 for use in bathrooms and optionally also with honeycomb at the same time.

Up to 8W, lumen output up to approx. 700lm. Also have different control methods is available (SCR, 0-10V, Dali).

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre


MINI Recessed Downlight

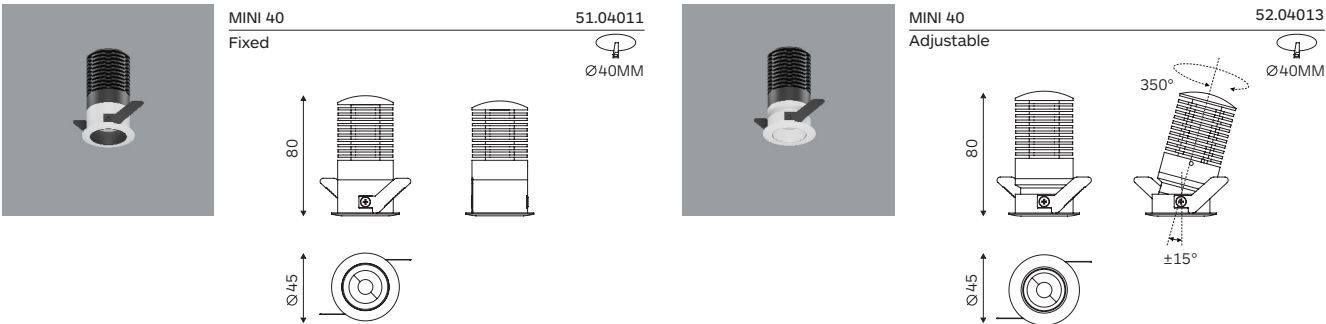

Code Ordering Example: 5 1 . 0 4 0 1 1 - 9 0 3 0 2 2 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI Downlight Fixed	51.04011 CA	SMD 5050	90	30 3000K	8W	479 lm	22°/28°/40°	D0 No Dim	10 □ WH
				40 4000k		503 lm		DA Dali Dim	20 ■ BK
MINI Downlight Adjustable	52.04013 CA	SMD 5050	90	30 3000K	8W	479 lm	22°/28°/40°	DC 0-10V Dim	
				40 4000k		503 lm			

MINI Recessed Downlight



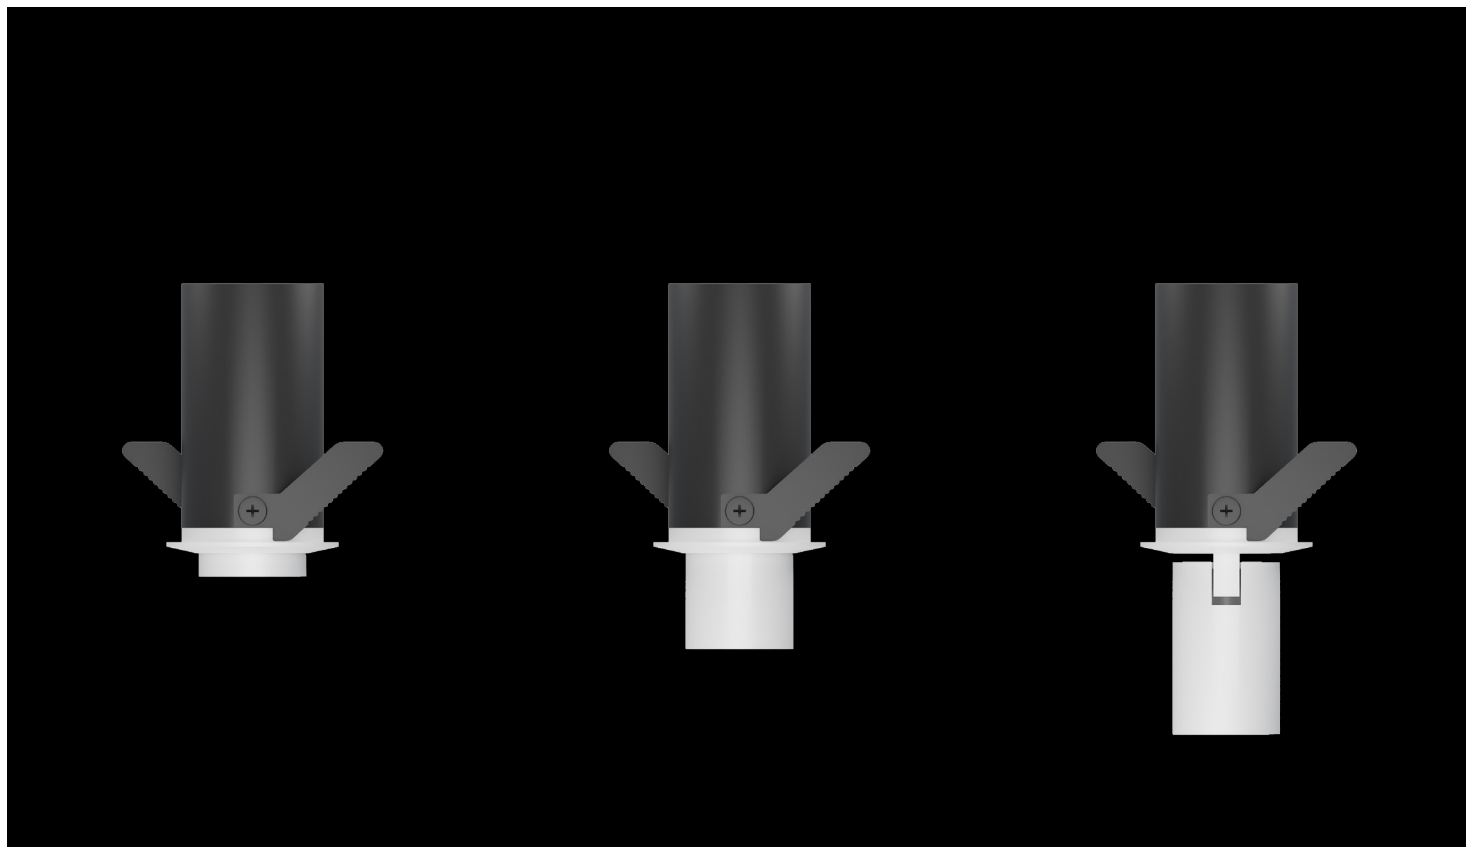


MINI Recessed Downlight

CE | IP20 |  |  | 

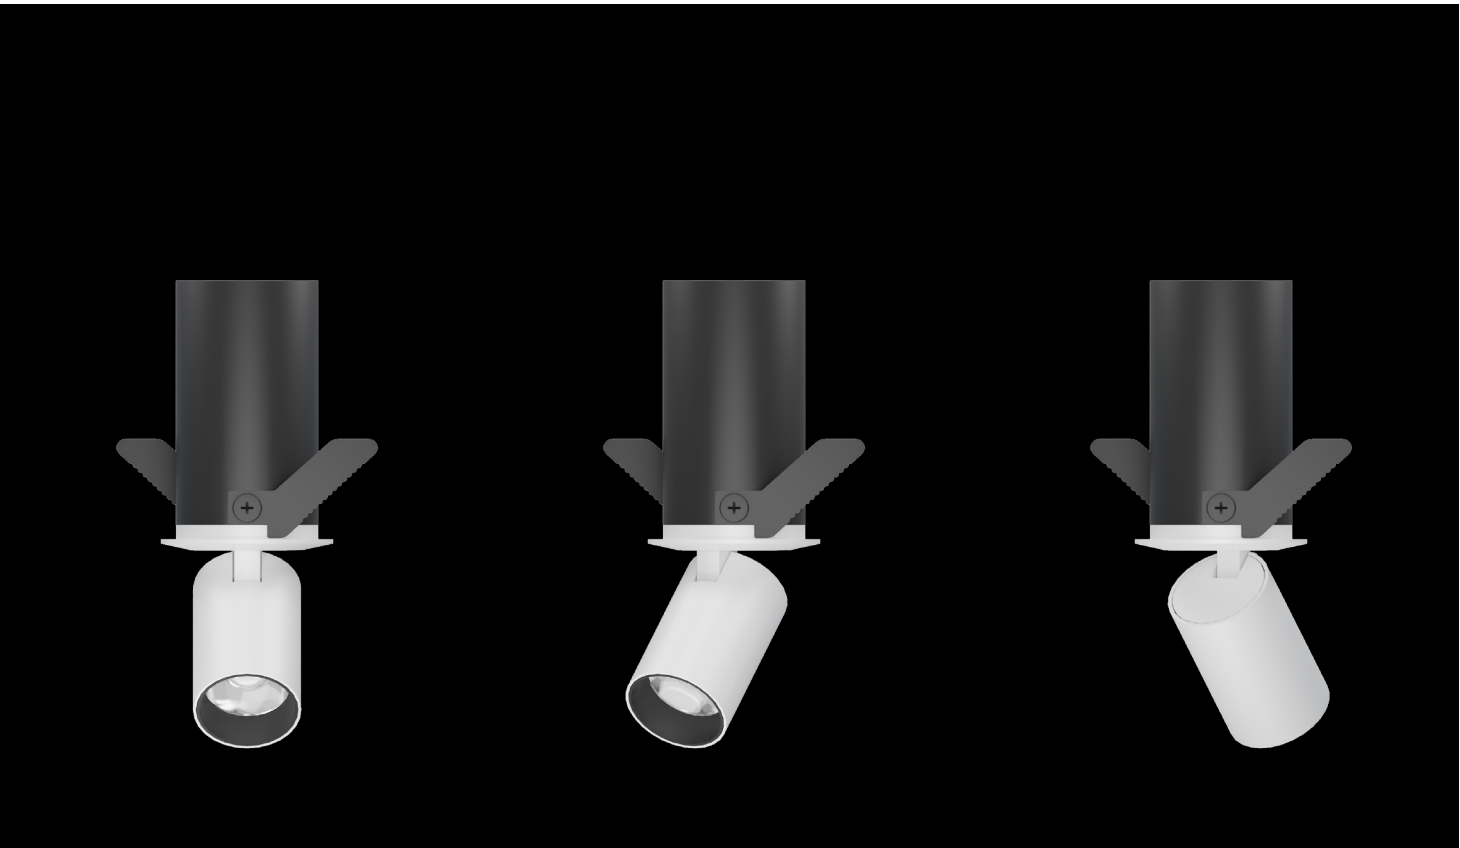

MINI Recessed Downlight

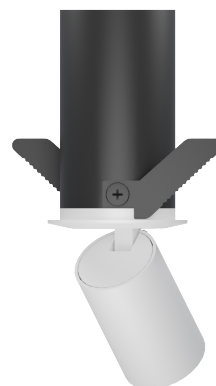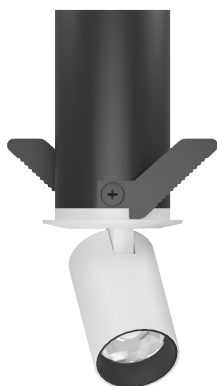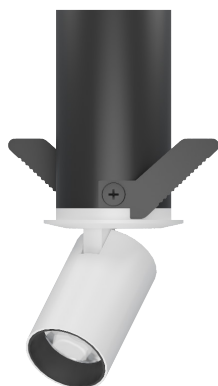

Body

The body head can be up and down and rotated by 350°.

Can be integrated into almost any room architecture.

The round light heads are available in two different diameters and can be inserted into a round recessed housing

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED Or High Power
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Offers a variable and professional lighting solution for illuminating accents in retail areas and exhibition rooms where goods have to be presented in a particularly realistic way.


Suitable Accessories



Linear Spread glass





Glass



Honeycomb louvre


MINI Recessed Downlight

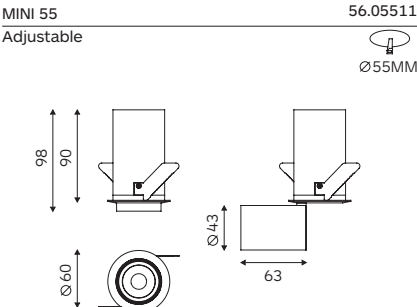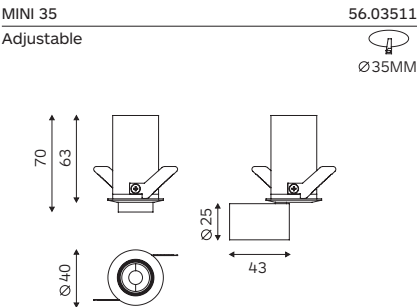

Code Ordering Example: 5 6 . 0 3 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 35 Downlight Adjustable	56.03511	CA	SMD 5050	90	30	3000K	22°/28°/40°	D0 No Dim	10 □ WH
				40	4000k			DA Dali Dim	20 ■ BK
MINI 55 Downlight Adjustable	56.05511	CA	COB LED	90	30	3000K	22°/28°/40°	DC 0-10V Dim	
				40	4000k				

NEK Recessed Downlight

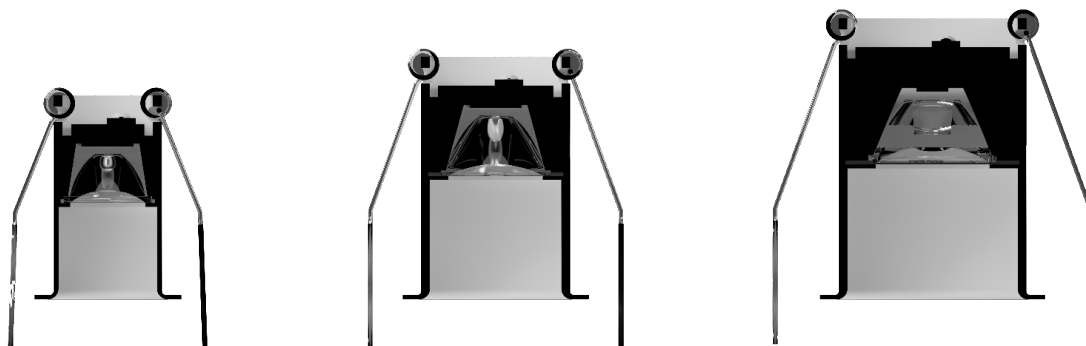

Body

Ultra-narrow trim design, can be restrained in all architectural environments and almost disappear as a technical detail.

Low-seated LED ensures a glare-free light with high visual comfort and sets special lighting accents in living rooms, hotel rooms, lobbies, foyers, restaurants or bars.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: High Power LED, COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass




Glass






Honeycomb louvre

NEK Recessed Downlight





NEK 35
Fixed

51.03515
Ø35MM





NEK 45
Fixed

51.04515
Ø45MM



NEK 55
Fixed

51.05511
Ø55MM



Code Ordering Example: 5 1 . 0 3 5 1 5 - 9 0 3 0 1 2 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NEK 35 Downlight Fixed	51.03515	CA High Power LED	90	30 3000K 40 4000k	3W	81 lm 85 lm	12°/20°/26°	D0 No Dim DA Dali Dim	10 □ WH 20 ■ BK
NEK 45 Downlight Fixed	51.04515	CA COB LED	90	30 3000K 40 4000k	5W	403 lm 423 lm	15°/22°/36°	DC 0-10V Dim	
NEK 55 Downlight Fixed	51.05511	CA COB LED	90	30 3000K 40 4000k	8W	555 lm 582 lm	17°/20°/31°		

VARI Recessed Downlight



Body

Unique design heat sink, special appearance with strong heat dissipation performance, can be small sizes for high power.

This MINI lighting systems combines a special optic lens producing a uniform lighting effect that provides high visual comfort.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable remote driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass






Glass






Honeycomb louvre

VARI Recessed Downlight

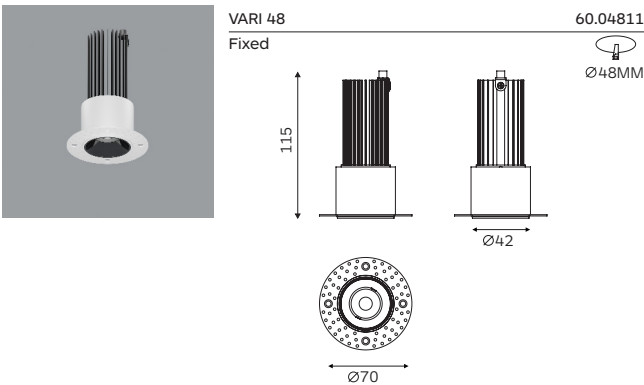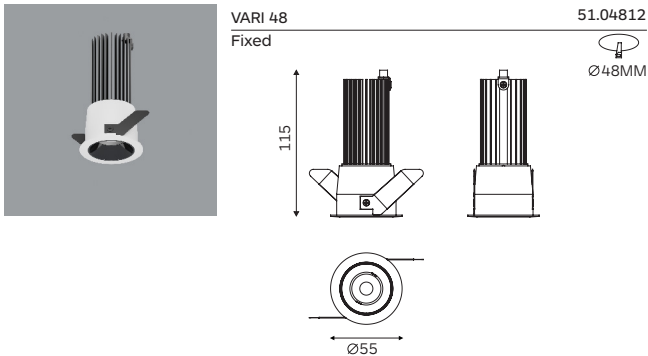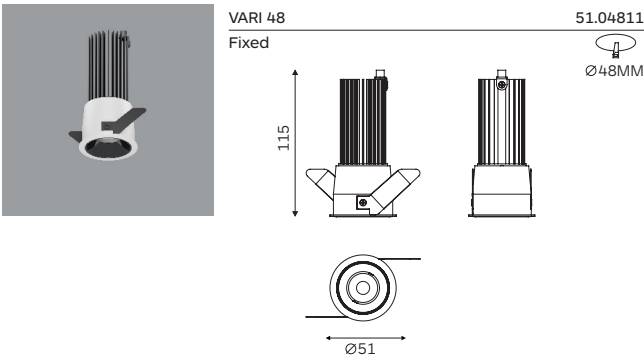

Code Ordering Example: 5 1 . 0 4 8 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
VARI 48 Downlight Fixed	51.04811	CA COB LED	90	30 3000K	9W	537 lm	17°/23°/36°	D0 No Dim	10 □ WH
				40 4000k		563 lm		DA Dali Dim	20 ■ BK
VARI 48 Downlight Fixed	51.04812	CA COB LED	90	30 3000K	9W	537 lm	17°/23°/36°	DC 0-10V Dim	
				40 4000k		563 lm			
VARI 48 Downlight Fixed	60.04811	CA COB LED	90	30 3000K	9W	537 lm	17°/23°/36°		
				40 4000k		563 lm			





ADJ Surface Mounted Lighting

Surface Mounted 62 | 84 | 116



Body

A wide optional range of appearance, the whole series is included small, medium and large sizes.

The vertically adjustable angle is 25 degrees and can be rotated 350 degrees to precise adjustment of the illuminated object.

IP54 by adding protective glass.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

ADJ Surface Mounted Lighting






ADJ 62 93.06211



ADJ 84 93.08411



ADJ 116 93.11611




Code Ordering Example: 9 3 . 0 6 2 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ADJ 62 Surface Mounted Adjustable	93.06211	CA COB LED	90	30 3000K 40 4000k	6W	400 lm 420 lm	17°/30°/50°	D0 No Dim	10 □ WH 20 ■ BK
ADJ 84 Surface Mounted Adjustable	93.08411	CA COB LED	90	30 3000K 40 4000k	10W	600 lm 630 lm	18°/27°/43°		
ADJ 116 Surface Mounted Adjustable	93.11611	CA COB LED	90	30 3000K 40 4000k	20W	1200 lm 1260 lm	20°/28°/42°		

SQF Surface Mounted Lighting

Surface Mounted 80 | 100

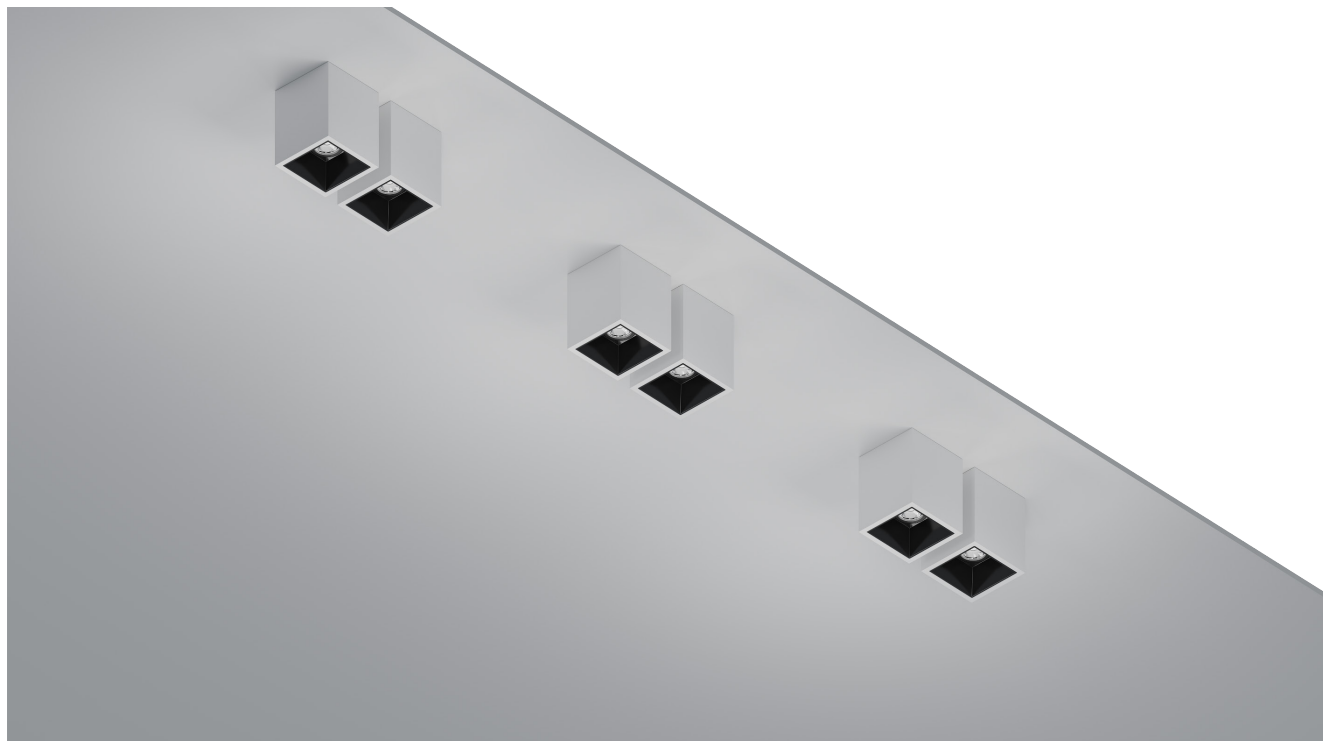

Body

Square surface mounted lighting, CNC machining, luminaire surface can support electroplating treatment.

With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre


SQF Surface Mounted Lighting



SQF 80 94.08011



SQF 100 94.10013

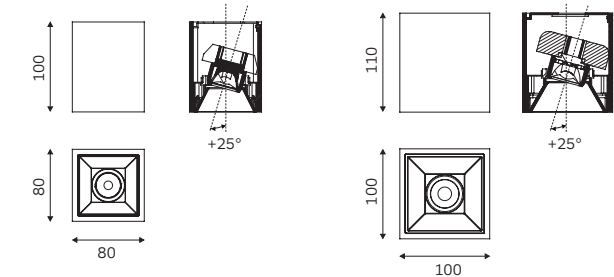


Code Ordering Example: 94.08011-903017D010

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SQF 80 Surface Mounted Adjustable	94.08011 CA	COB LED	90	30 3000K	6W	450 lm	17°/24°/37°	D0 No Dim	10 □ WH
				40 4000k		472 lm			20 ■ BK
SQF 100 Surface Mounted Adjustable	94.10013 CA	COB LED	90	30 3000K	10W	700 lm	17°/24°/37°		
				40 4000k		735 lm			

SQA Surface Mounted Lighting

Surface Mounted 80 | 100

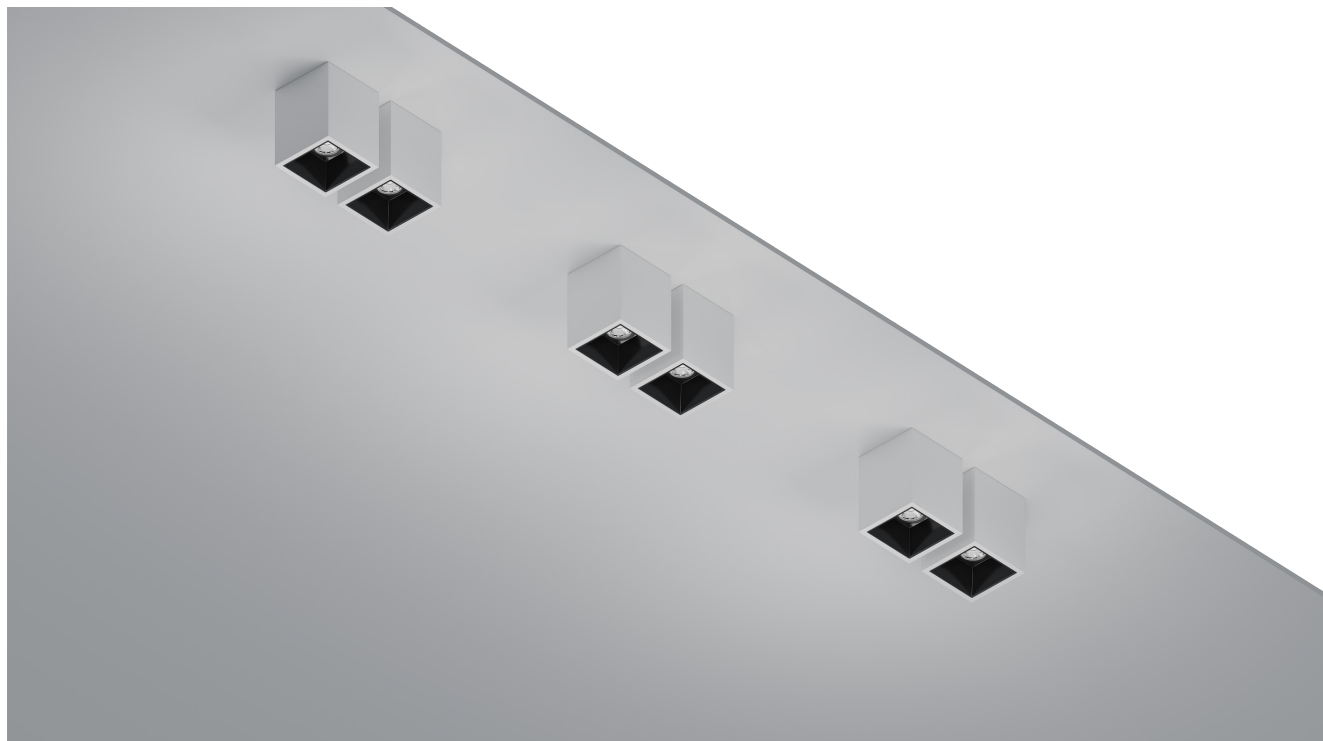

Body

Square surface mounted lighting, CNC machining, luminaire surface can support electroplating treatment.

With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



SQA Surface Mounted Lighting



SQA 80 92.08011



SQA 100 92.10013




Code Ordering Example: 9 2 . 0 8 0 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SQA 80 Surface Mounted Fixed	92.08011 CA	COB LED	90	30 3000K	10W	450 lm	17°/24°/37°	D0 No Dim	10 □ WH
				40 4000k					20 ■ BK
SQA 100 Surface Mounted Fixed	92.10013 CA	COB LED	90	30 3000K	15W	700 lm	17°/24°/37°		
				40 4000k					

UTH Surface Mounted Lighting

Surface Mounted 65 | 80 | 95

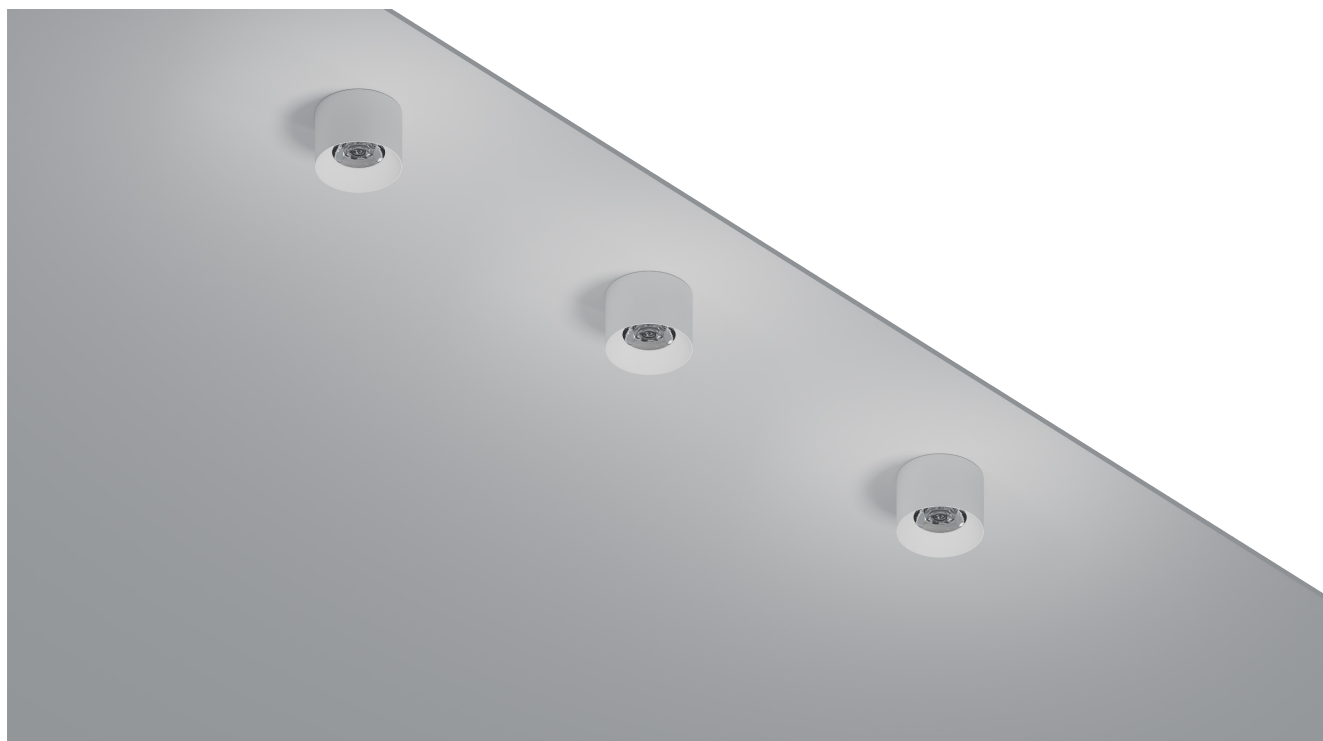

Body

Ultra-thin round surface mounted light, CNC machining, luminaire surface can support electroplating treatment.

With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre


UTH Surface Mounted Lighting






UTH 65 91.06511



UTH 80 91.08011



UTH 95 91.09511




Code Ordering Example: 9 1 . 0 6 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
UTH 65 Surface Mounted Fixed	91.06511	CA COB LED	90	30 3000K 40 4000k	6W	420 lm 435 lm	17°/24°/37°	D0 No Dim	10 □ WH 20 ■ BK
UTH 80 Surface Mounted Fixed	91.08011	CA COB LED	90	30 3000K 40 4000k	10W	750 lm 800 lm	17°/24°/37°		
UTH 95 Surface Mounted Fixed	91.09511	CA COB LED	90	30 3000K 40 4000k	15W	1150 lm 1230 lm	17°/24°/37°		

ECO Surface Mounted Lighting

Surface Mounted 55 | 80

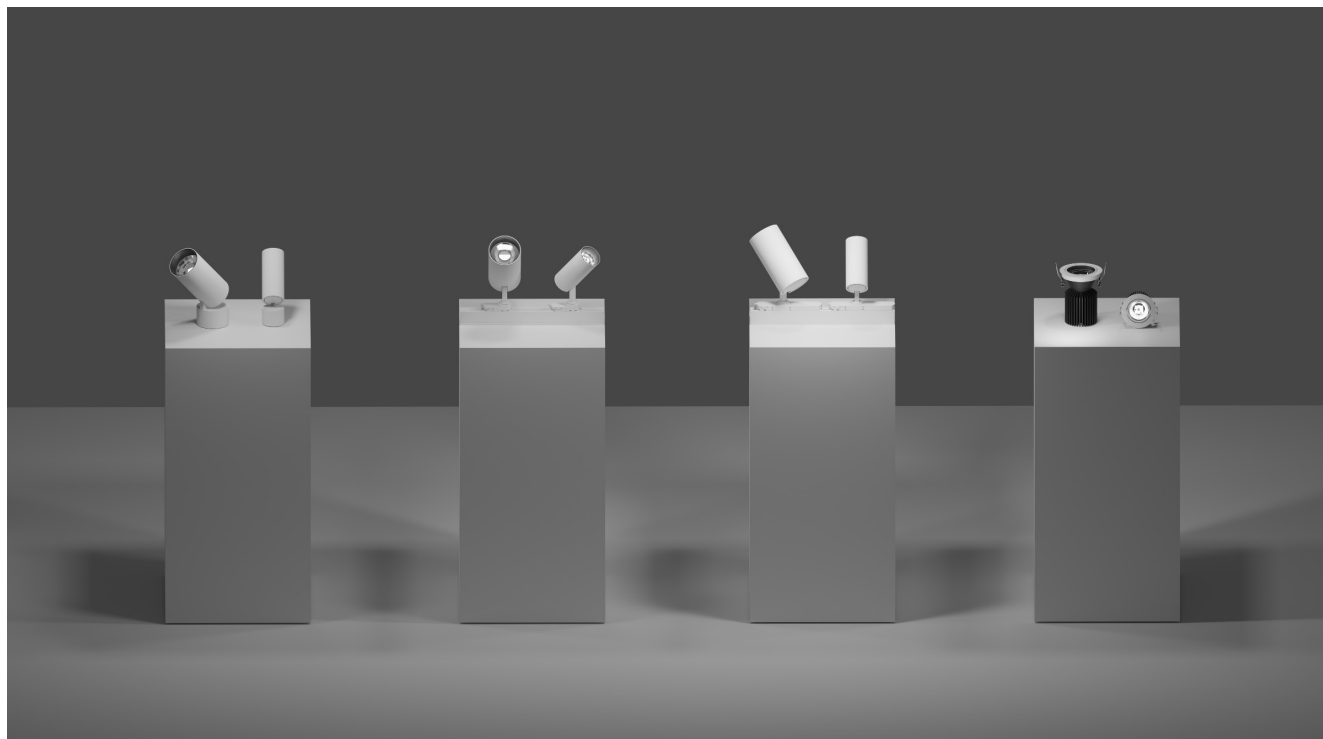

Body

ECO Surface mounted lighting with 2 kinds of wattage and sizes.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.

Driver


Supplied with internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre


ECO Surface Mounted Lighting



ECO Surface Mounted 55 93.05511



ECO Surface Mounted 80 93.08011

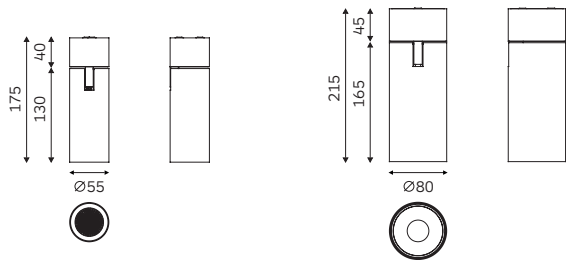


Code Ordering Example: 9 3 . 0 5 5 1 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 55 Surface Mounted Adjustable	93.05511 CA	COB LED	90	30	3000K	15W	1000 lm	16°/24°/35°	D0 No Dim
				40	4000k				
ECO 80 Surface Mounted Adjustable	93.08011 CA	COB LED	90	30	3000K	35W	3246 lm	16°/22°/33°	20
				40	4000k				
									10 □ WH
									20 ■ BK

FOS Surface Mounted Lighting

Surface Mounted 45 | 55 | 65

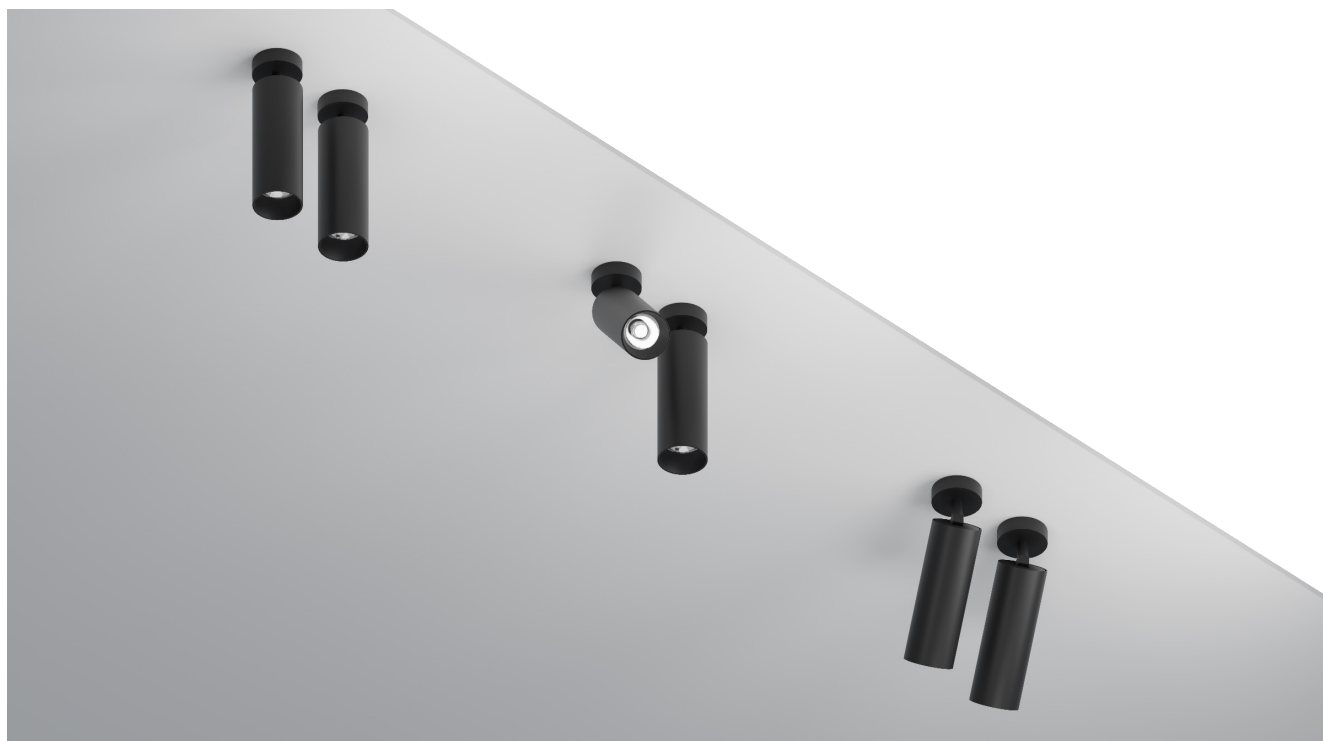

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions. Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

FOS Surface Mounted Lighting






FOS 45 93.04512



FOS 55 93.05512



FOS 65 93.06511



Code Ordering Example: 9 3 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Surface Mounted Adjustable	93.04512	CA COB LED	90	30 3000K 40 4000k	10W	749 lm 786 lm	17°/23°/36°	D0 No Dim	10 □ WH 20 ■ BK
FOS 55 Surface Mounted Adjustable	93.05512	CA COB LED	90	30 3000K 40 4000k	18W	1500 lm 1575 lm	17°/23°/36°		
FOS 65 Surface Mounted Adjustable	93.06511	CA COB LED	90	30 3000K 40 4000k	25W	2221 lm 2332 lm	17°/23°/36°		

EMMA Surface Mounted Lighting

Surface Mounted 45 | 62 | 73 | 90



Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

EMMA Surface Mounted Lighting



EMMA 45 93.04513











EMMA 62 93.06213



EMMA 73 93.07311



EMMA 90 93.09011




Code Ordering Example: 93.04513-903019D010

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Surface Mounted Adjustable	93.04513	CA COB LED	90	30 3000K 40 4000k	8W	749 lm 786 lm	16°/24°/37°	D0 No Dim	10 □ WH 20 ■ BK
EMMA 62 Surface Mounted Adjustable	93.06213	CA COB LED	90	30 3000K 40 4000k	15W	1305 lm 1370 lm	17°/25°/36°		
EMMA 73 Surface Mounted Adjustable	93.07311	CA COB LED	90	30 3000K 40 4000k	25W	2221 lm 2332 lm	18°/26°/40°		
EMMA 90 Surface Mounted Adjustable	93.09011	CA COB LED	90	30 3000K 40 4000k	35W	3295 lm 3460 lm	16°/20°/30°		

EMMA Rod Suspension Lighting

Rod Suspension 45 | 62 | 73 | 90

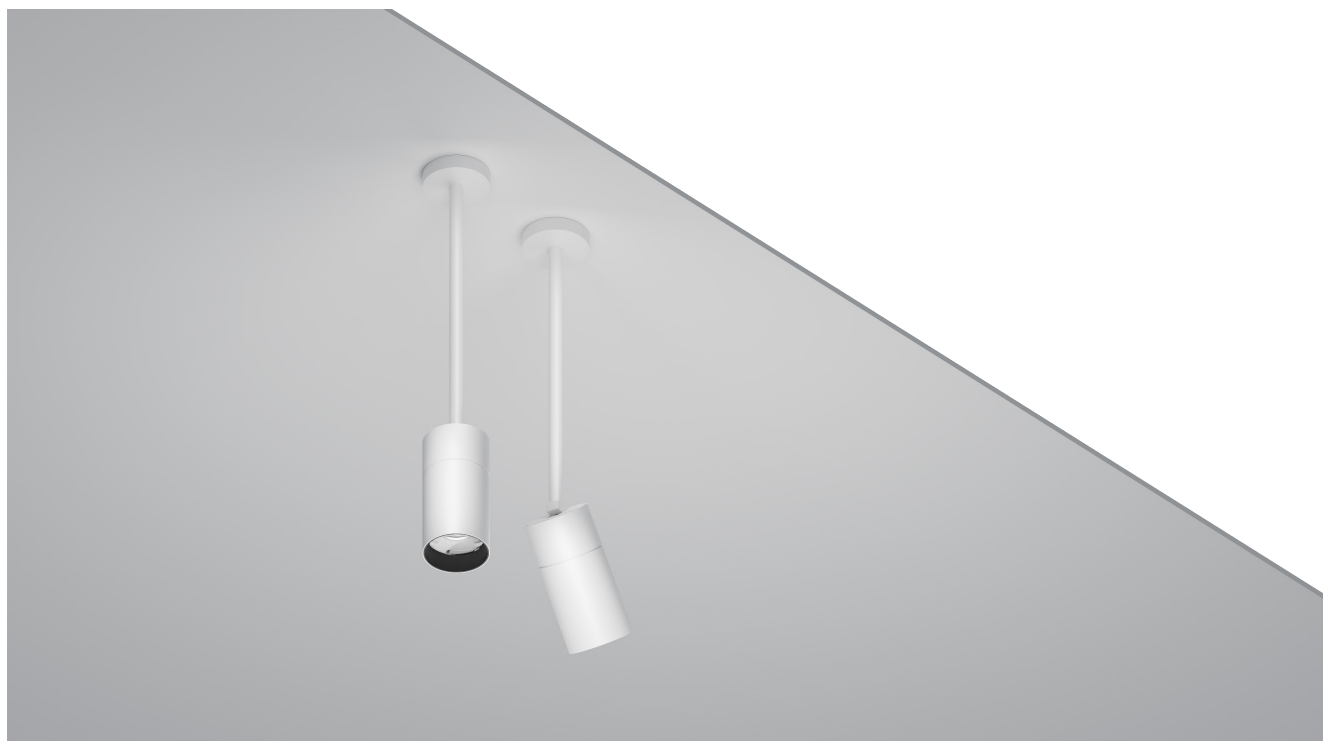

Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

EMMA Rod Suspension Lighting



EMMA 45 93.04515







EMMA 62 93.06215



EMMA 73 93.07312



EMMA 90 93.09012

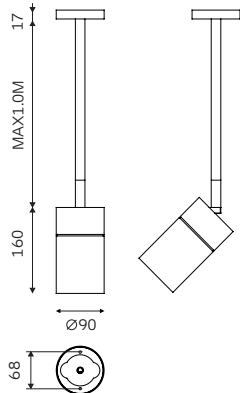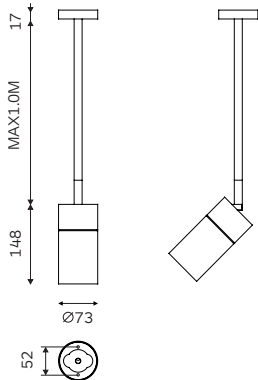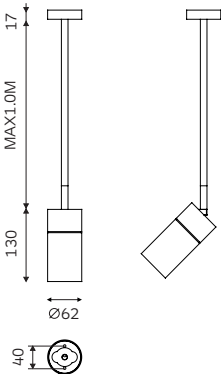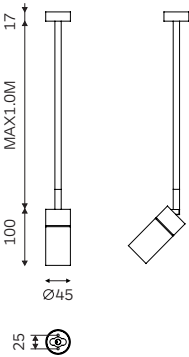

Code Ordering Example: 9 3 . 0 4 5 1 5 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Rod Suspension Adjustable	93.04515	CA COB LED	90	30 3000K 40 4000k	8W	749 lm 786 lm	16°/24°/37°	D0 No Dim	10 □ WH 20 ■ BK
EMMA 62 Rod Suspension Adjustable	93.06215	CA COB LED	90	30 3000K 40 4000k	15W	1305 lm 1370 lm	17°/25°/36°		
EMMA 73 Rod Suspension Adjustable	93.07312	CA COB LED	90	30 3000K 40 4000k	25W	2221 lm 2332 lm	18°/26°/40°		
EMMA 90 Rod Suspension Adjustable	93.09012	CA COB LED	90	30 3000K 40 4000k	35W	3295 lm 3460 lm	16°/20°/30°		

EMMA Pendant Lighting

Pendant Lighting 45 | 62 | 73 | 90



Body

The body are available in four different diameters with different Powers

Simple design can be integrated into almost any room architecture.

Available with 3phases track, 48V magnetic, surface mounted and pendant light meet different requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with internal driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and other high-end place.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

EMMA Pendant Lighting



EMMA 45 91.04511







EMMA 62 91.06213



EMMA 73 91.07311



EMMA 90 91.09012




Code Ordering Example: 9 1 . 0 4 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Pendant Lighting	91.04511 CA	COB LED	90	30 3000K	8W	749 lm	17°/23°/36°	D0 No Dim	10 □ WH
				40 4000k		786 lm			20 ■ BK
EMMA 62 Pendant Lighting	91.06213 CA	COB LED	90	30 3000K	15W	1305 lm	17°/23°/36°		
				40 4000k		1370 lm			
EMMA 73 Pendant Lighting	91.07311 CA	COB LED	90	30 3000K	25W	2221 lm	17°/23°/36°		
				40 4000k		2332 lm			
EMMA 90 Pendant Lighting	91.09012 CA	COB LED	90	30 3000K	35W	3295 lm	16°/20°/30°		
				40 4000k		3460 lm			

FOS Pendant Lighting


Pendant Lighting 45 | 55 | 65





FOS Pendant Lighting

Pendant Lighting 45 | 55 | 65

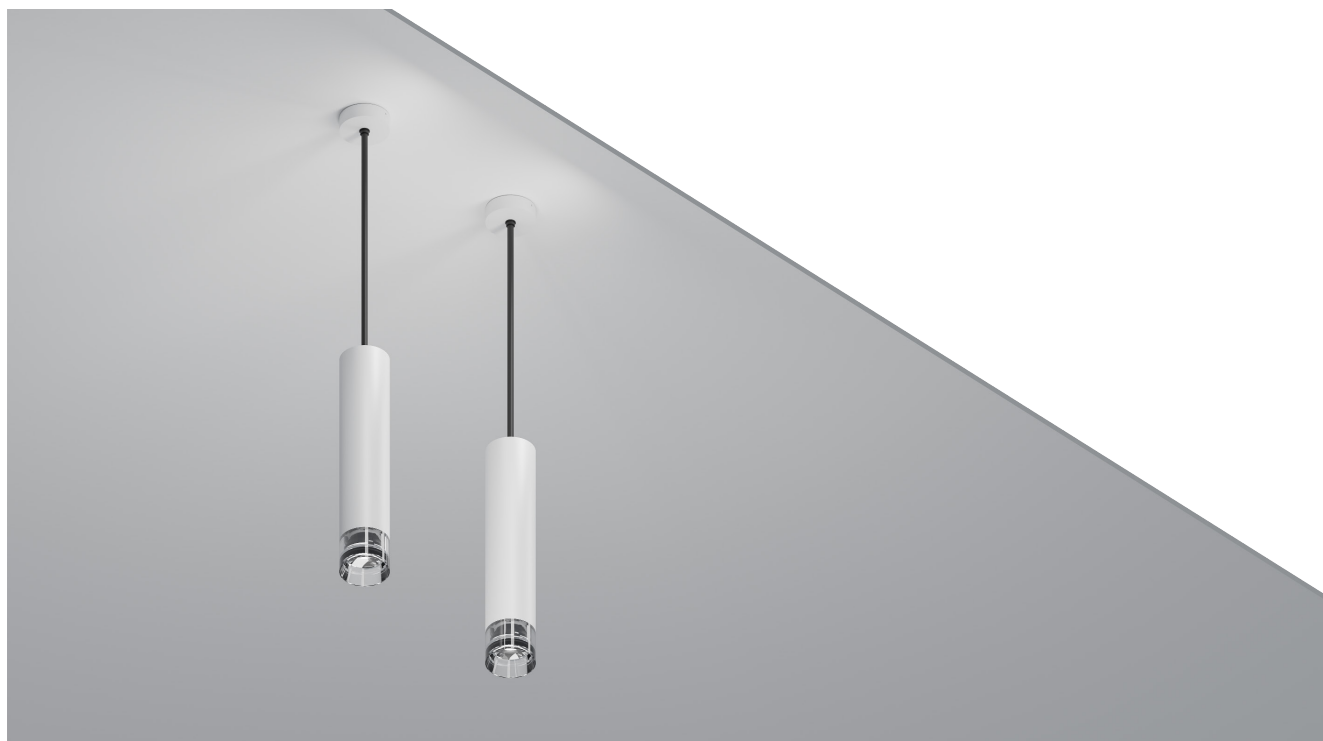

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Opti Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre

FOS Pendant Lighting






FOS 45 81.04511



FOS 55 81.05511



FOS 65 81.06511




Code Ordering Example: 8 1 . 0 4 5 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Pendant Lighting	81.04511 CA	COB LED	90	30 3000K	8W	537 lm	17°/23°/36°	D0 No Dim	10 □ WH
				40 4000k		563 lm		DA Dali Dim	20 ■ BK
FOS 55 Pendant Lighting	81.05511 CA	COB LED	90	30 3000K	15W	1100 lm	17°/23°/36°	DC 0-10V Dim	
				40 4000k		1155 lm			
FOS 65 Pendant Lighting	81.06511 CA	COB LED	90	30 3000K	20W	1400 lm	17°/23°/36°		
				40 4000k		1470 lm			

LENS Pendant Lighting

Pendant Lighting 105 | 116

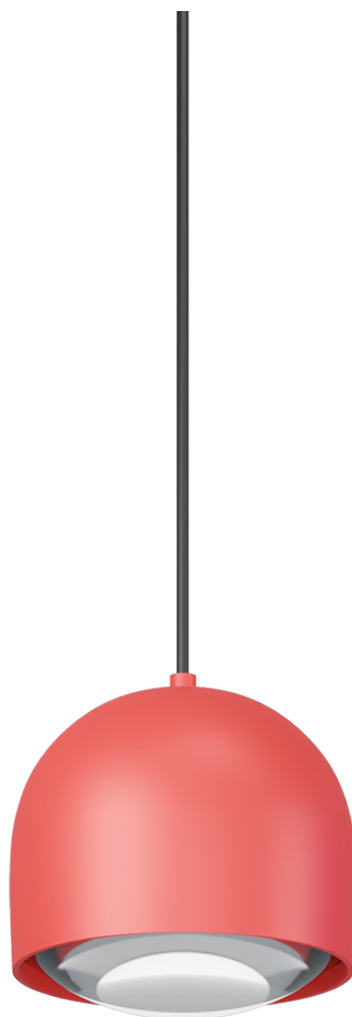



LENS Pendant Lighting

LENS Pendant Lighting 105 | 116



Body

The body is carved out of pure aluminum, special appearance with strong heat dissipation performance.

The design cover all installation methods, including track, surfaced mounted, wall and pendant, to meet the design requirements of different high end places.

Break the traditional optics, used special material glass lens, good anti-glare and average spot.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



LENS Pendant Lighting



LENS 105 81.10511



LENS 116 81.11611

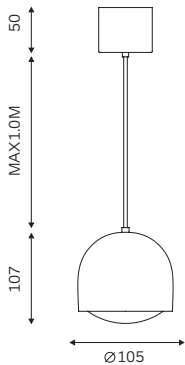

Code Ordering Example: 81.10511-903019D010

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LENS 105 Pendant Lighting	81.10511 CA	COB LED	90	30 3000K	20W	1700 lm	40°/80°	D0 No Dim	10 □ WH
				40 4000k		1900 lm		DA Dali Dim	20 ■ BK
LENS 116 Pendant Lighting	81.11611 CA	COB LED	90	30 3000K	20W	1700 lm	40°/80°	DC 0-10V Dim	
				40 4000k		1900 lm			

ADVANCED Pendant Lighting

Pendant Lighting 300 | 400





ADVANCED Pendant Lighting

Pendant Lighting 300 | 400



Body

Suspended luminaire for mounting on the ceiling with LED light source.

ADVANCED is a simplistic and elegant ceiling light that brings an inviting atmosphere to your home.

Can be individually or in a group using in any spaces.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Made of black powdered coating in outside, inside is gold, which reflects a warm glow into the space. The ADVANCED pendant decorates the dining table, living room, restaurant and other places. Can be individually or in a group.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



ADVANCED Pendant Lighting



ADVANCED 300 81.30011



ADVANCED 400 81.40012

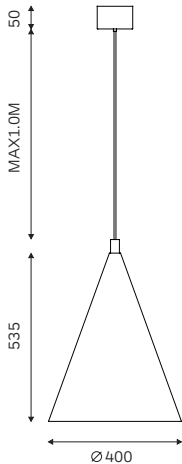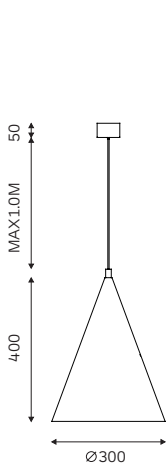

Code Ordering Example: 8 1 . 3 0 0 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ADVANCED 300 Pendant Lighting	81.30011 CA	COB LED	90	30 3000K	20W	1600 lm	100°	D0 No Dim	10 □ WH
				40 4000k		1680 lm		DA Dali Dim	20 ■ BK
ADVANCED 400 Pendant Lighting	81.40012 CA	COB LED	90	30 3000K	30W	2400 lm	100°	DC 0-10V Dim	
				40 4000k		2520 lm			

ARTIST Pendant Lighting

Pendant Lighting 400 | 600





ARTIST Pendant Lighting

Pendant Lighting 400 | 600



Body

Suspended luminaire for mounting on the ceiling with LED light source.

ARTIST is a simplistic and elegant ceiling light that brings an inviting atmosphere to your home.

Special structure, uniform light distribution, good anti-glare, can be used in different places.

Accessories

Without.

Finish

Black or white colour.

LED sources

Light source: SMD LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

PC.

Driver

Supplied with internal driver.

Applications

It is mainly used in office lighting, home, retail space and other places that need general lighting.



ARTIST Pendant Lighting



ARTIST 400 81.40011




ARTIST 600 81.60011



Code Ordering Example: 8 1 . 4 0 0 1 1 - 9 0 3 0 1 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ARTIST 400 Pendant Lighting	81.40011 CA	COB LED	90	30 3000K	40W	3800 lm	100°	D0 No Dim	10 □ WH
				40 4000k		3990 lm		DA Dali Dim	20 ■ BK
ARTIST 600 Pendant Lighting	81.60011 CA	COB LED	90	30 3000K	60W	5700 lm	100°	DC 0-10V Dim	
				40 4000k		5990 lm			

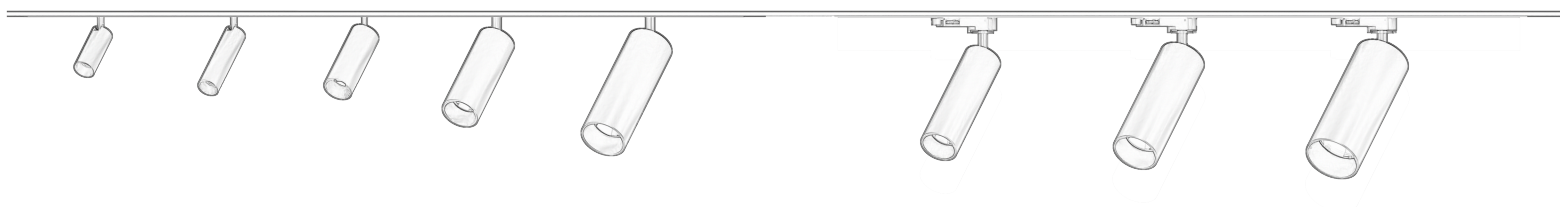

Artdon Lighting Limited

中山雅大光电有限公司

No.15 Zhihe 3rd street, Yumin,

Dongsheng town,Zhongshan City,

Guangdong, China

广东省中山市东升镇裕民志和三街15号

Tel:+86-760-2221 1886 Fax:+86-760-2221 1890

E-mail: Sales@artdon.cn www.artdon.cn

