



20

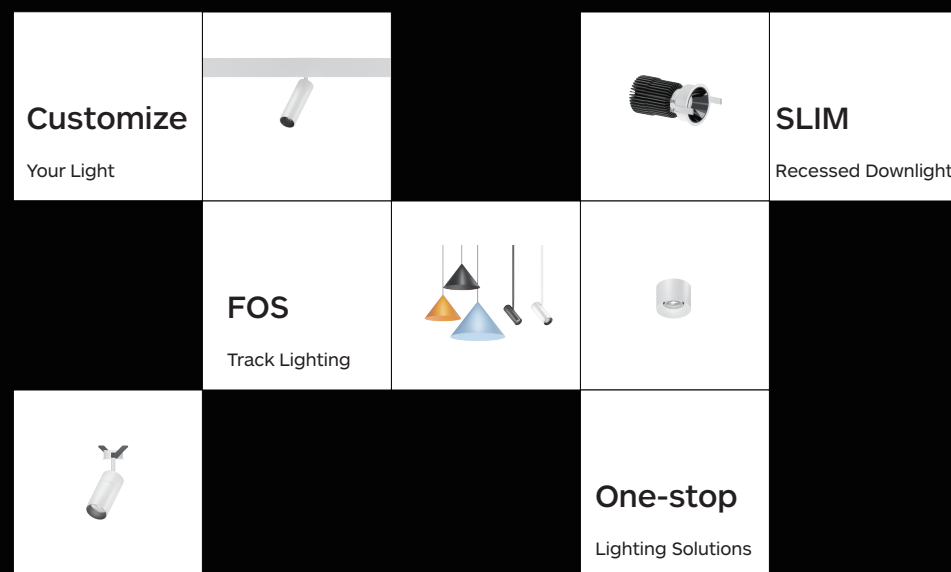

Artdon Lighting Limited
Tel: 86-760-22211886
Fax: 86-760-22211890
sales@artdon.cn
www.artdon.cn
No. 15, Zhihe 3rd Street,
Yumin Community, Xiaolan Town,
Zhongshan City, Guangdong Province, China



www.artdon.cn

24



2023-2024 catalogue



TRACK LIGHTING

SPECTRUM
Track Lighting



23



23



23



23

HIGH LUMEN
Track Lighting



27



27



27

ECO
Track Lighting



31



31



31

EMMA
Track Lighting



37



37



37



37

FEEL ZOOM
Track Lighting



41



41



41

FOS
Track Lighting



45



45



45

TRACK LIGHTING

ACTION
Track Lighting



49



49

ACTION
Track Lighting



51



51

ACTION
Track Lighting



53



53

ARTAX
Track Lighting



57



57

LOW VOLTAGE TRACK SYSTEM

SPECTRUM
Low Voltage Track Light



65



65




65



65

LOW VOLTAGE TRACK SYSTEM


FOS
Low Voltage Track Light

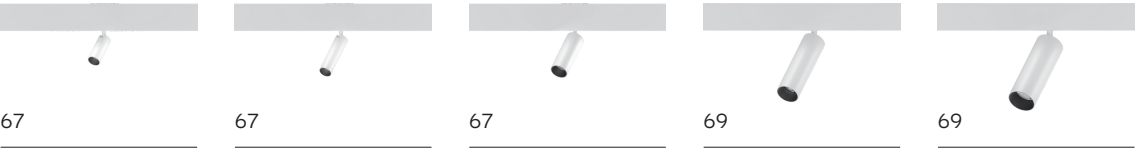

EMMA
Low Voltage Track Light



FEEL ZOOM
Low Voltage Track Light

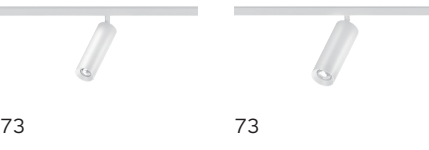


ARTAX
Low Voltage Track Light



LOW VOLTAGE TRACK SYSTEM

SPARK 20
Low Voltage Linear Light-Wall Washer

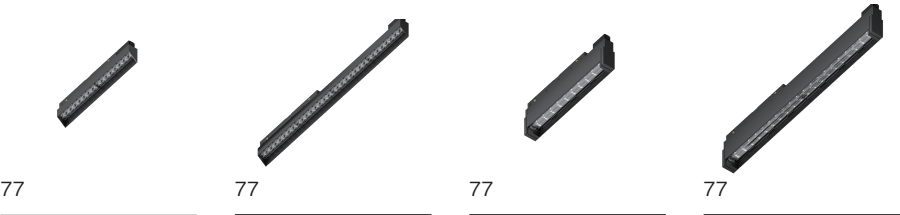

SPARK 20
Low Voltage Linear Light-General Lighting



LOW VOLTAGE TRACK SYSTEM

SPARK 20
Low Voltage Linear Light-Accent Lighting




SPARK 20
Low Voltage Linear Light-Accent Lighting



LOW VOLTAGE TRACK & ACCESSORIES


Low Voltage
Track

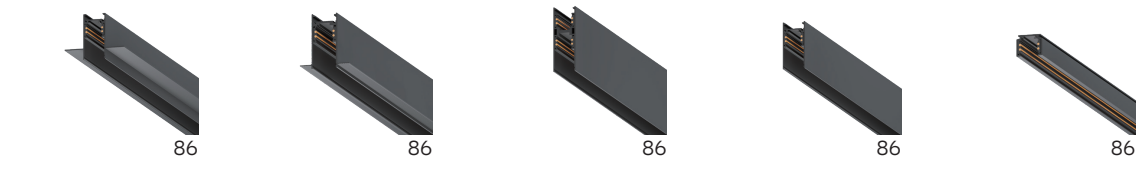

Low Voltage
Accessories



Low Voltage
Accessories

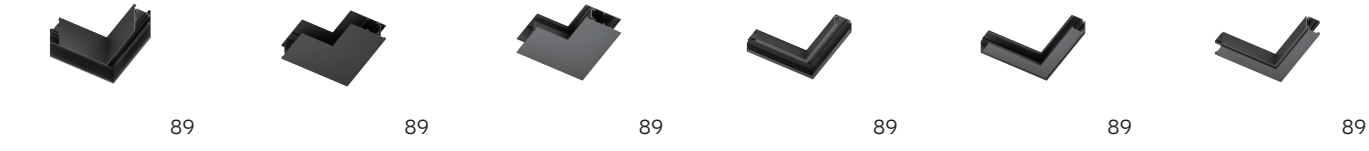


TRACK LIGHTING

Low Voltage
Accessories




TRACK & ACCESSORIES


3-Circuit Track & Accessories
Track

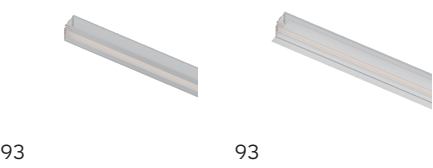

3-Circuit Track & Accessories
Accessories

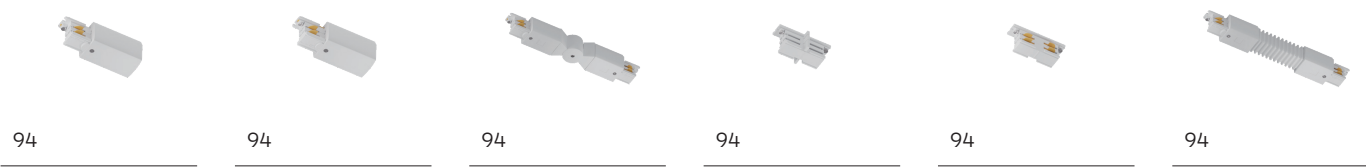


3-Circuit Track & Accessories
Accessories

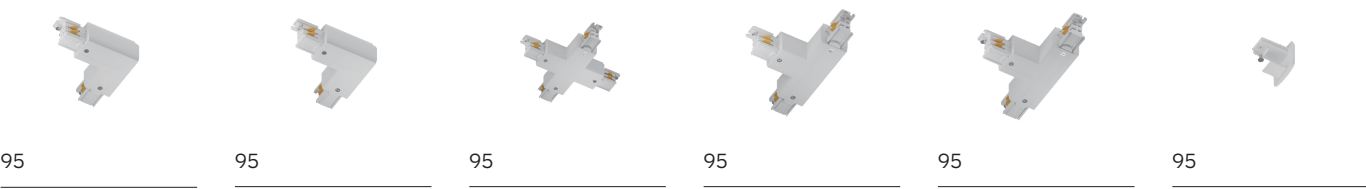


TRACK & ACCESSORIES


1-Circuit Track & Accessories
Track

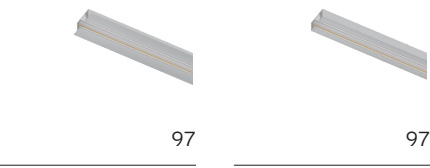

1-Circuit Track & Accessories
Accessories

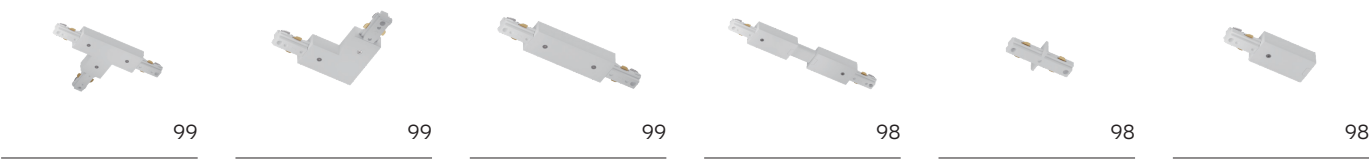

1-Circuit Track & Accessories
Accessories

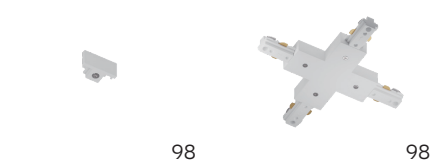

RECESSED DOWNLIGHT

SPECTRUM
Recessed Downlight-Trim




SPECTRUM
Recessed Downlight-Trimless



RECESSED DOWNLIGHT

UTH
Recessed Downlight

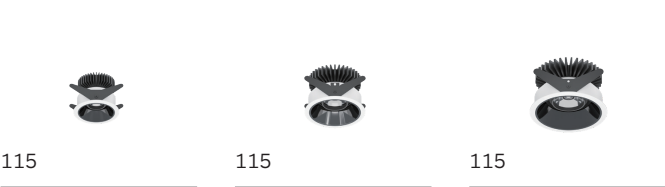

SILO
Recessed Downlight-Trim




SILO
Recessed Downlight-Trimless




LOTT
Recessed Downlight



SLIM
Recessed Downlight

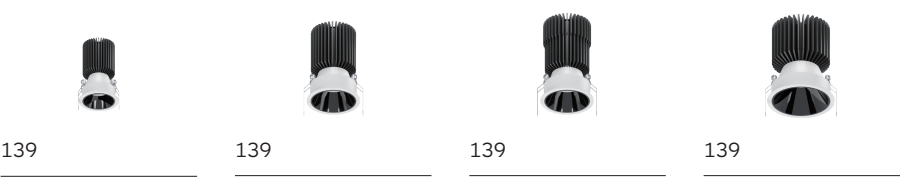

SLIM
Recessed Downlight

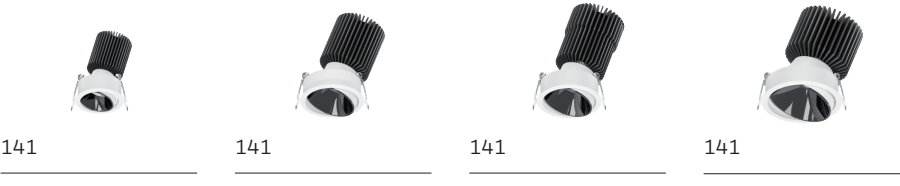

RECESSED DOWNLIGHT

ECO
Recessed Downlight




EMMA
Recessed Downlight



FOS
Recessed Downlight




NOVAL
Recessed Downlight

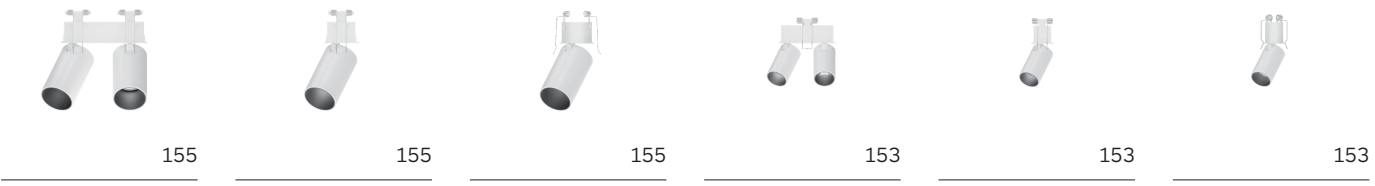

MINI
Recessed Downlight



MINI
Recessed Downlight

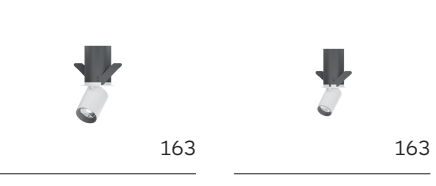

SURFACE MOUNTED LIGHT

ADJ
Surface Mounted Light



RECO
Surface Mounted Light




UTH
Surface Mounted Light




SRA
Surface Mounted Light



EMMA
Surface Mounted Light

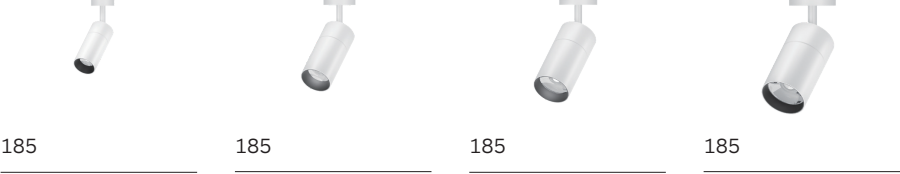


FOS
Surface Mounted Light

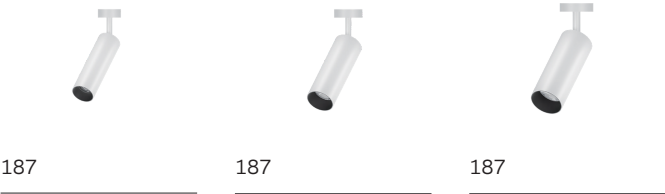

SURFACE MOUNTED LIGHT

ECO
Surface Mounted Light

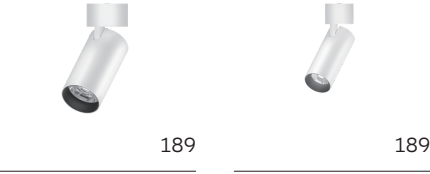


PENDANT LIGHTING

SPECTRUM
Rod Suspension Lighting





SWING
Pendant Lighting

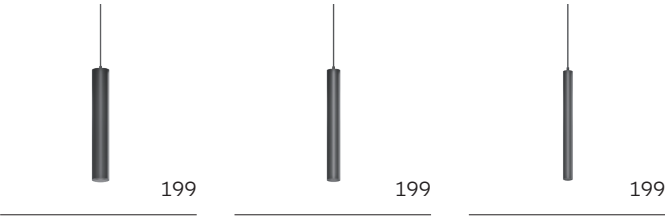

DELTA
Pendant Lighting



TRACK LIGHTING

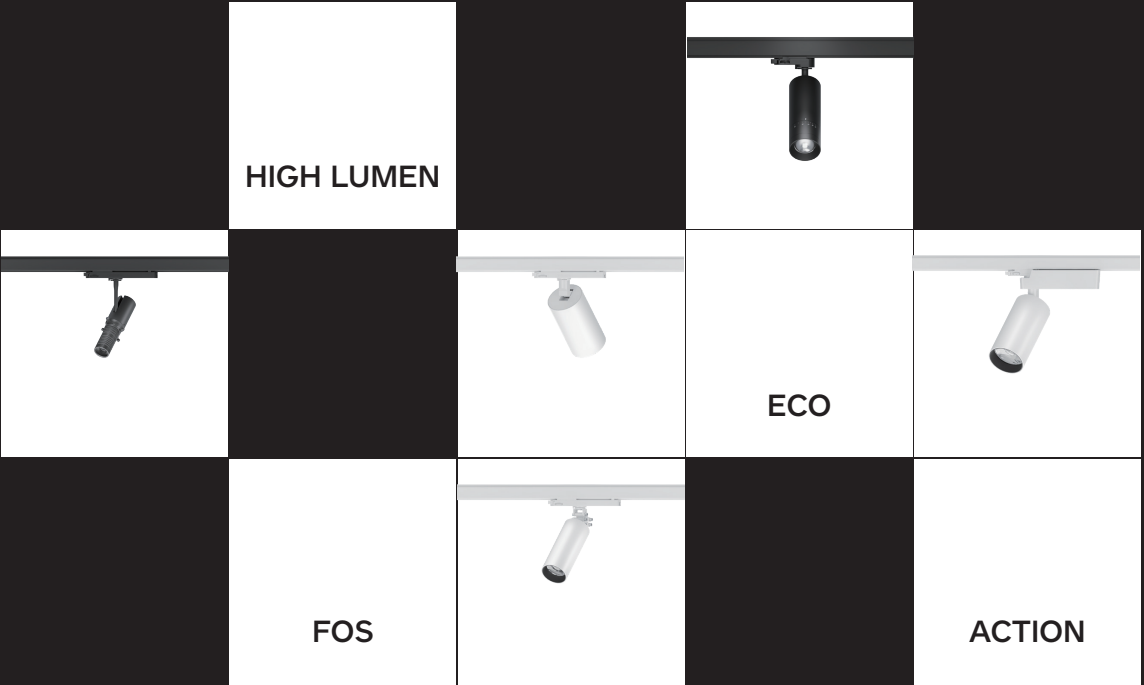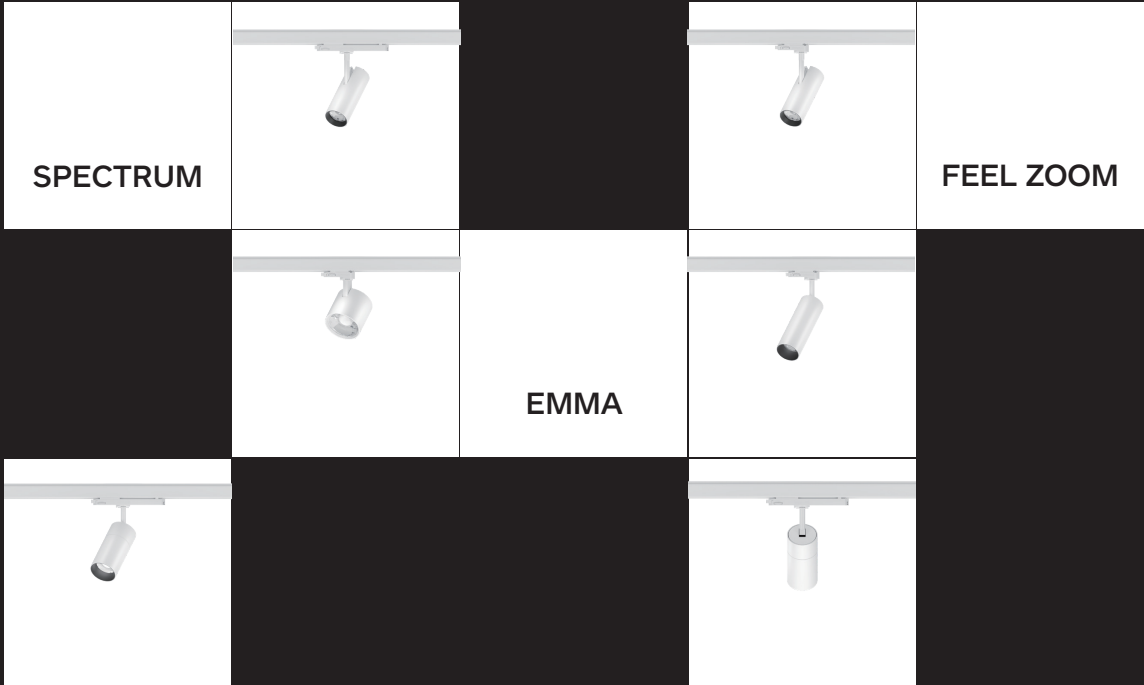

SPECTRUM TRACK LIGHTING




Wall Washer




Brandoor




Zoom



“+” Anti-glare




Deep Anti-glare
(Cutoff Angle 30D)




Ultra-narrow Angles Accessories


SPECTRUM TRACK LIGHTING





Wall Washer
Suitable for: Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC




Brandoor
Suitable for:
Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC




Zoom
Suitable for:
Ø35, Ø 45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

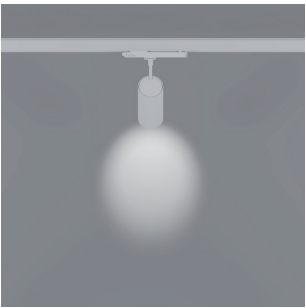

“ + ” Anti-glare
Suitable for:
Ø35, Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



Ultra-narrow Angle
Accessories
Suitable for:
Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

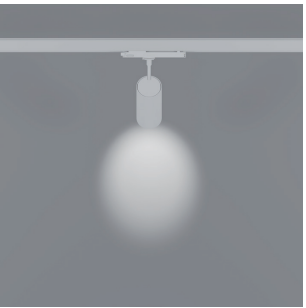


Deep Anti-glare (Cutoff Angle 30D)
Suitable for:
Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC


SPECTRUM TRACK LIGHTING



Ø35	Ø45	Ø55	Ø65	Ø90
9.4W	15.4W	21W	24W	38W
8-38°	13-44°	14-50°	16-46°	10-55°
505-2535cd	981-5967cd	1505-8444cd	3145-13030cd	1811-16722cd
Track	Track/Downlight	Track/Downlight	Track/Downlight	Track



Zoom
Suitable for:
Ø35, Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



Ø45	Ø55	Ø65	Ø90
7.4W	15W	21.6W	38W
5.4°	6.4°	5.4°	7.5°
7239cd	12732cd	30269cd	39400cd
Track/Downlight	Track/Downlight	Track/Downlight	Track






Ultra-narrow Angle
Accessories
Suitable for :
Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

SPECTRUM TRACK LIGHTING



One Main Body, the following accessories can be freely changeable.



SPECTRUM TRACK LIGHTING



Body

A range of sizes and wattage options to accommodate various environmental needs. Also can be 48V magnetic and AC220V.

A novel proportion design that provides even light distribution and optimal lighting effects.

Have different optical accessories to customize their lighting effects.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

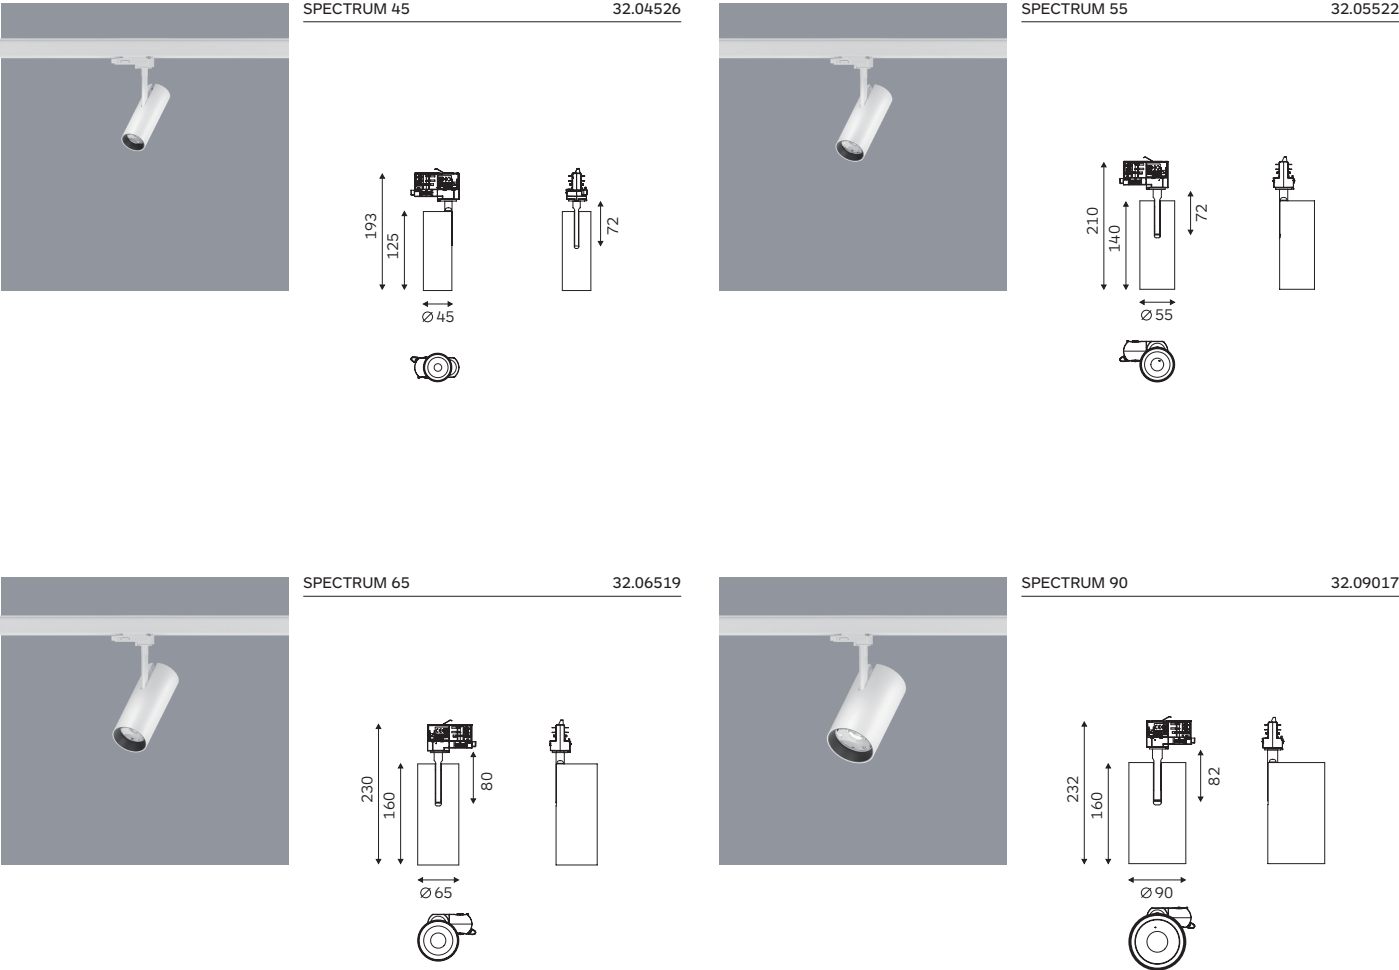

Code Ordering Example: 3 2 . 0 4 5 2 6 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 45 Track Light	32.04526	CA	COB LED	90	30	3000K	11.5W	16°/19°/28°/40°	D0 No Dim	10 □ WH 20 ■ BK
					40	4000k	848 lm			
SPECTRUM 55 Track Light	32.05522	CA	COB LED	90	30	3000K	14.3W	17°/28°/39°/49°		
					40	4000k	1306 lm			
SPECTRUM 65 Track Light	32.06519	CA	COB LED	90	30	3000K	19.7W	19°/24°/39°/51°		
					40	4000k	2507 lm			
SPECTRUM 90 Track Light	32.09017	CA	COB LED	90	30	3000K	36.5W	18°/25°/38°/51°		
					40	4000k	4802 lm			

HIGH LUMEN TRACK LIGHTING



HIGH LUMEN TRACK LIGHTING



Body

High lumen track lights use LED technology, which is more energy efficient than traditional lighting products.

Classic style rail fixtures often incorporate design elements of traditional fixtures for a classic and elegant look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

Ideal for places that need bright lighting, such as commercial spaces and exhibition halls.

Suitable Accessories

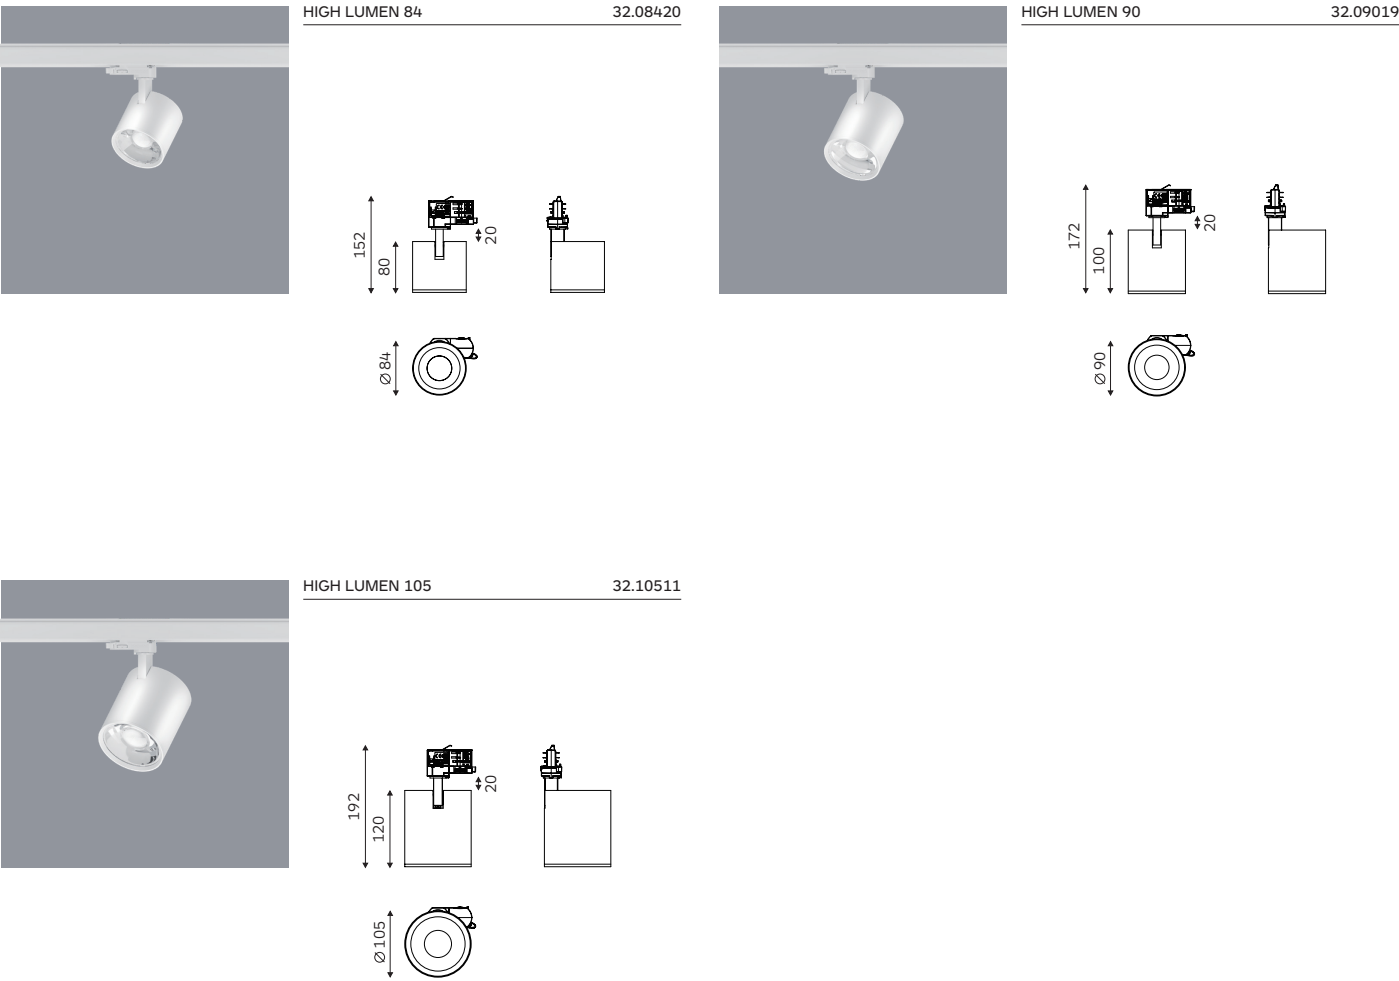

Code Ordering Example: 3 2 . 0 8 4 2 0 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
HIGH LUMEN 84 Track Light	32.08420	CA	COB LED	90	30	3000K	14.4W	1900 lm	D0 No Dim	10 □ WH
					40	4000k		1995 lm		20 ■ BK
HIGH LUMEN 90 Track Light	32.09019	CA	COB LED	90	30	3000K	23.4W	2929 lm	15°/23°/36°/60°	
					40	4000k		3075 lm		
HIGH LUMEN 105 Track Light	32.10511	CA	COB LED	90	30	3000K	31.8W	3835 lm	16°/24°/33°/63°	
					40	4000k		4026 lm		

ECO TRACK LIGHTING



ECO 55
Body Sizes: Ø55XH130mm
Watt: 14W

ECO 73
Body Sizes: Ø73XH150mm
Watt: 24W

ECO 80
Body Sizes: Ø80XH165mm
Watt: 31W



ECO

TRACK LIGHTING

IP20

Rotate 350°

Tilt 90°

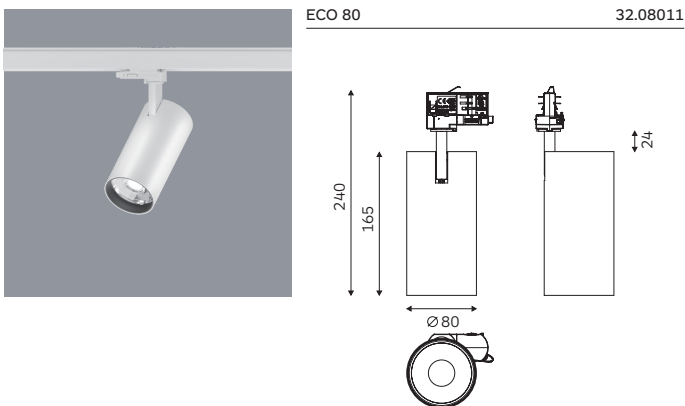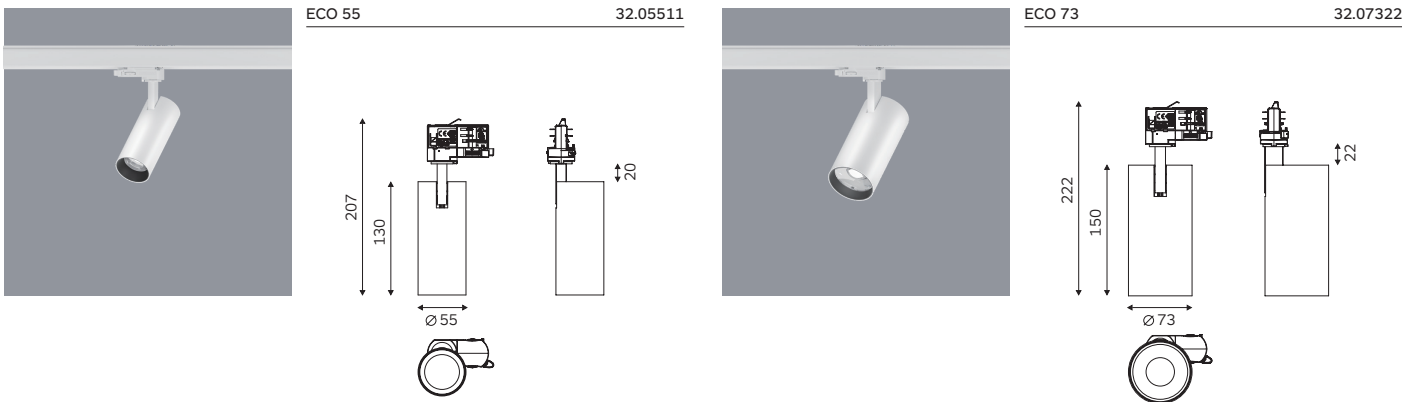

Code Ordering Example: 3 2 . 0 5 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT		LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 55 Track Light	32.05511	CA	COB LED	90	30	3000K	14W	1563 lm	22°/27°/38°/56°	D0 No Dim	10  WH
					40	4000k		1641 lm			20  BK
ECO 73 Track Light	32.07322	CA	COB LED	90	30	3000K	24W	2841 lm	14°/26°/36°/56°		
					40	4000k		2983 lm			
ECO 80 Track Light	32.08011	CA	COB LED	90	30	3000K	31W	3843 lm	18°/26°/33°/55°		
					40	4000k		4035 lm			

ECO Track light with 3 kinds of wattage, and there are also 3 kinds of common adaptor and integrated adaptor.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Honeycomb louvre, Linear Spread glass, glass.

Black or white colour.

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Narrow, medium and wide beam angles available.


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre




EMMA TRACK LIGHTING




EMMA 45
Body Sizes: Ø45XH100mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens



EMMA 62
Body Sizes: Ø62XH130mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens

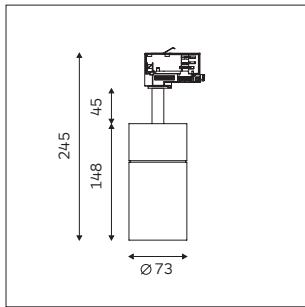


EMMA 73
Body Sizes: Ø73XH148mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens

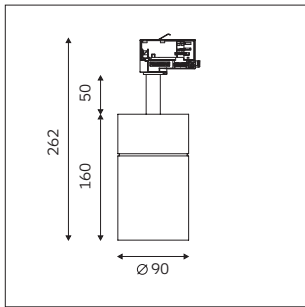

EMMA 90
Body Sizes: Ø90XH160mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens

EMMA TRACK LIGHTING

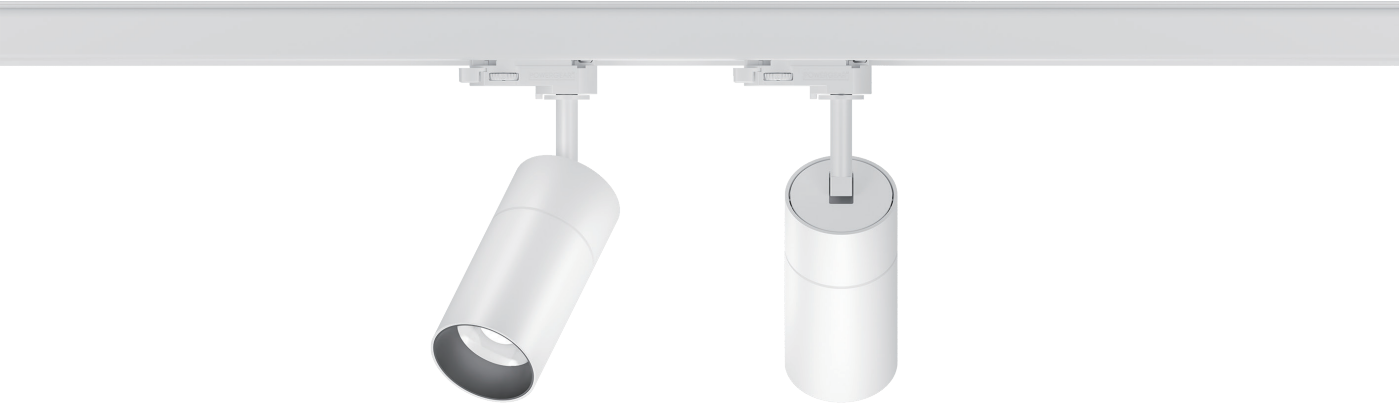

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Options1: Supplied with No-dimable built-in driver.


Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories





Linear Spread glass



Glass



Honeycomb louvre

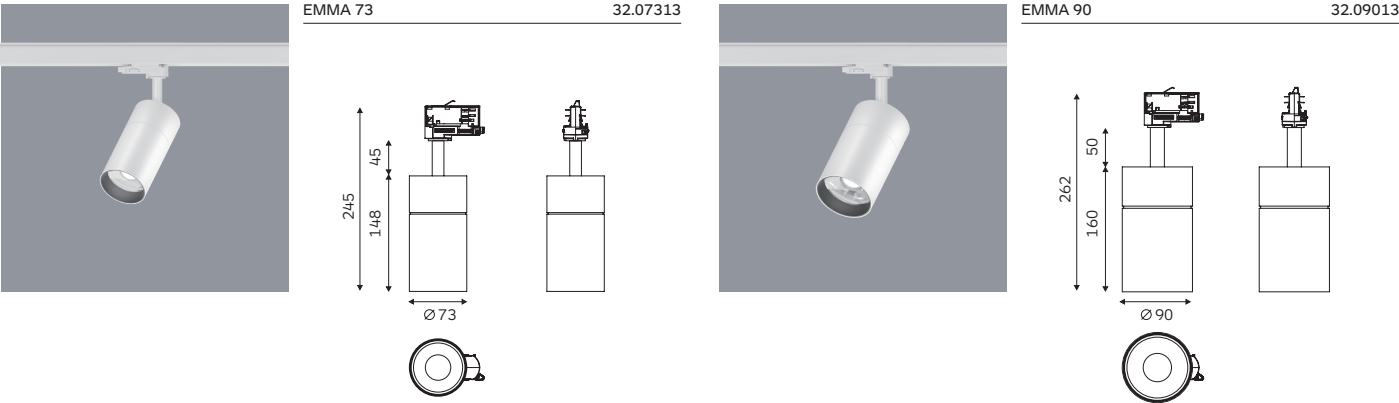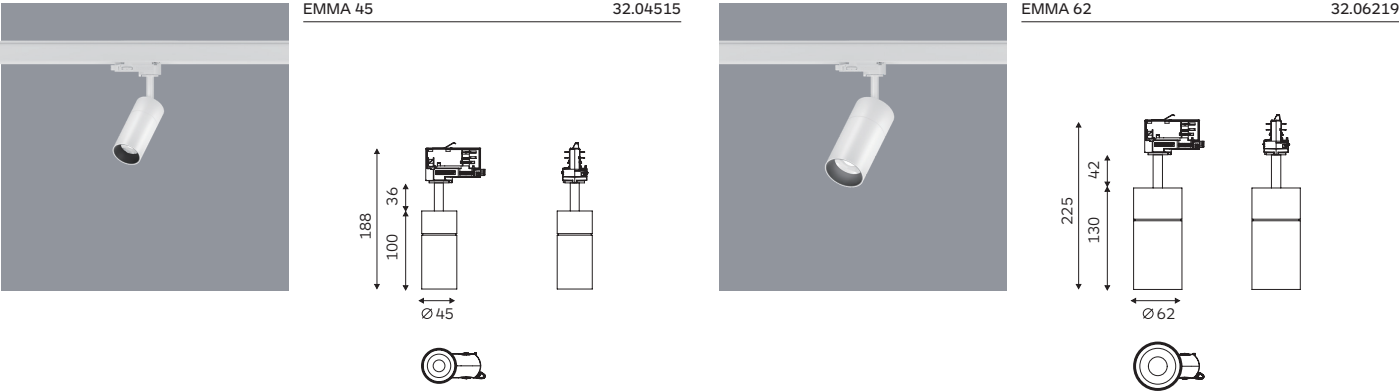

Code Ordering Example: 3 2 . 0 4 5 1 5 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Light	32.04515	CA	COB LED	90	30 3000K 40 4000k	11W	935 lm 981 lm	19°/29°/44°/56°	D0 No Dim	10 □ WH 20 ■ BK
EMMA 62 Track Light	32.06219	CA	COB LED	90	30 3000K 40 4000k	14W	1627 lm 1708 lm	18°/27°/38°/54°		
EMMA 73 Track Light	32.07313	CA	COB LED	90	30 3000K 40 4000k	24W	2963 lm 3111 lm	14°/28°/40°/50°		
EMMA 90 Track Light	32.09013	CA	COB LED	90	30 3000K 40 4000k	36W	4509 lm 4734 lm	16°/20°/30°/45°		

FEEL ZOOM TRACK LIGHTING



FEEL ZOOM TRACK LIGHTING



Body

Adjustable lens allowing opening angle calibration from narrow to wide.

The zoom lens is adjusted by means of a three-part beveled groove (CNC machined) with a rotating ring. Min to maxi angle without changing the appearance of the luminaire.

Can be both track systems, 220V and 48V, semi-recessed and surface option.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.


Driver

Supplied with No-dimable built-in driver.

Applications

An excellent and flexible accent lighting solution for restaurants, residential spaces, retail stores and galleries.

Suitable Accessories

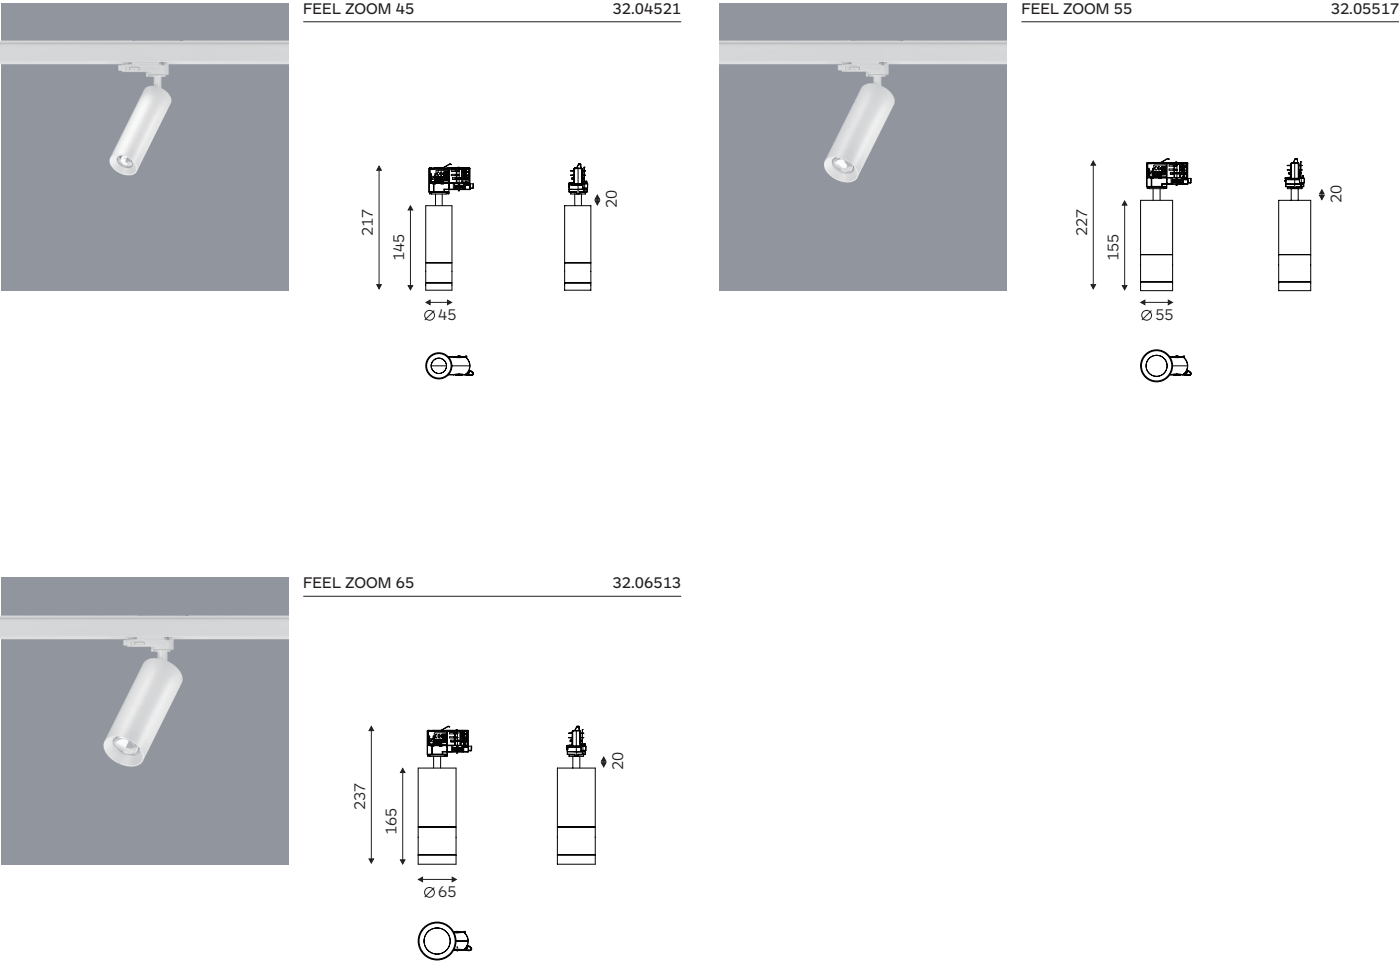


Code Ordering Example: 3 2 . 0 4 5 2 1 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FEEL ZOOM 45 Track Light	32.04521	CA	COB LED	90	30	3000K	9W	356 lm	D0 No Dim	10 □ WH 20 ■ BK
					40	4000k		373 lm		
FEEL ZOOM 55 Track Light	32.05517	CA	COB LED	90	30	3000K	17W	888 lm	7.5°-55°	
					40	4000k		932 lm		
FEEL ZOOM 65 Track Light	32.06513	CA	COB LED	90	30	3000K	24.5W	1810 lm	15°-48°	
					40	4000k		1900 lm		

FOS

FOS

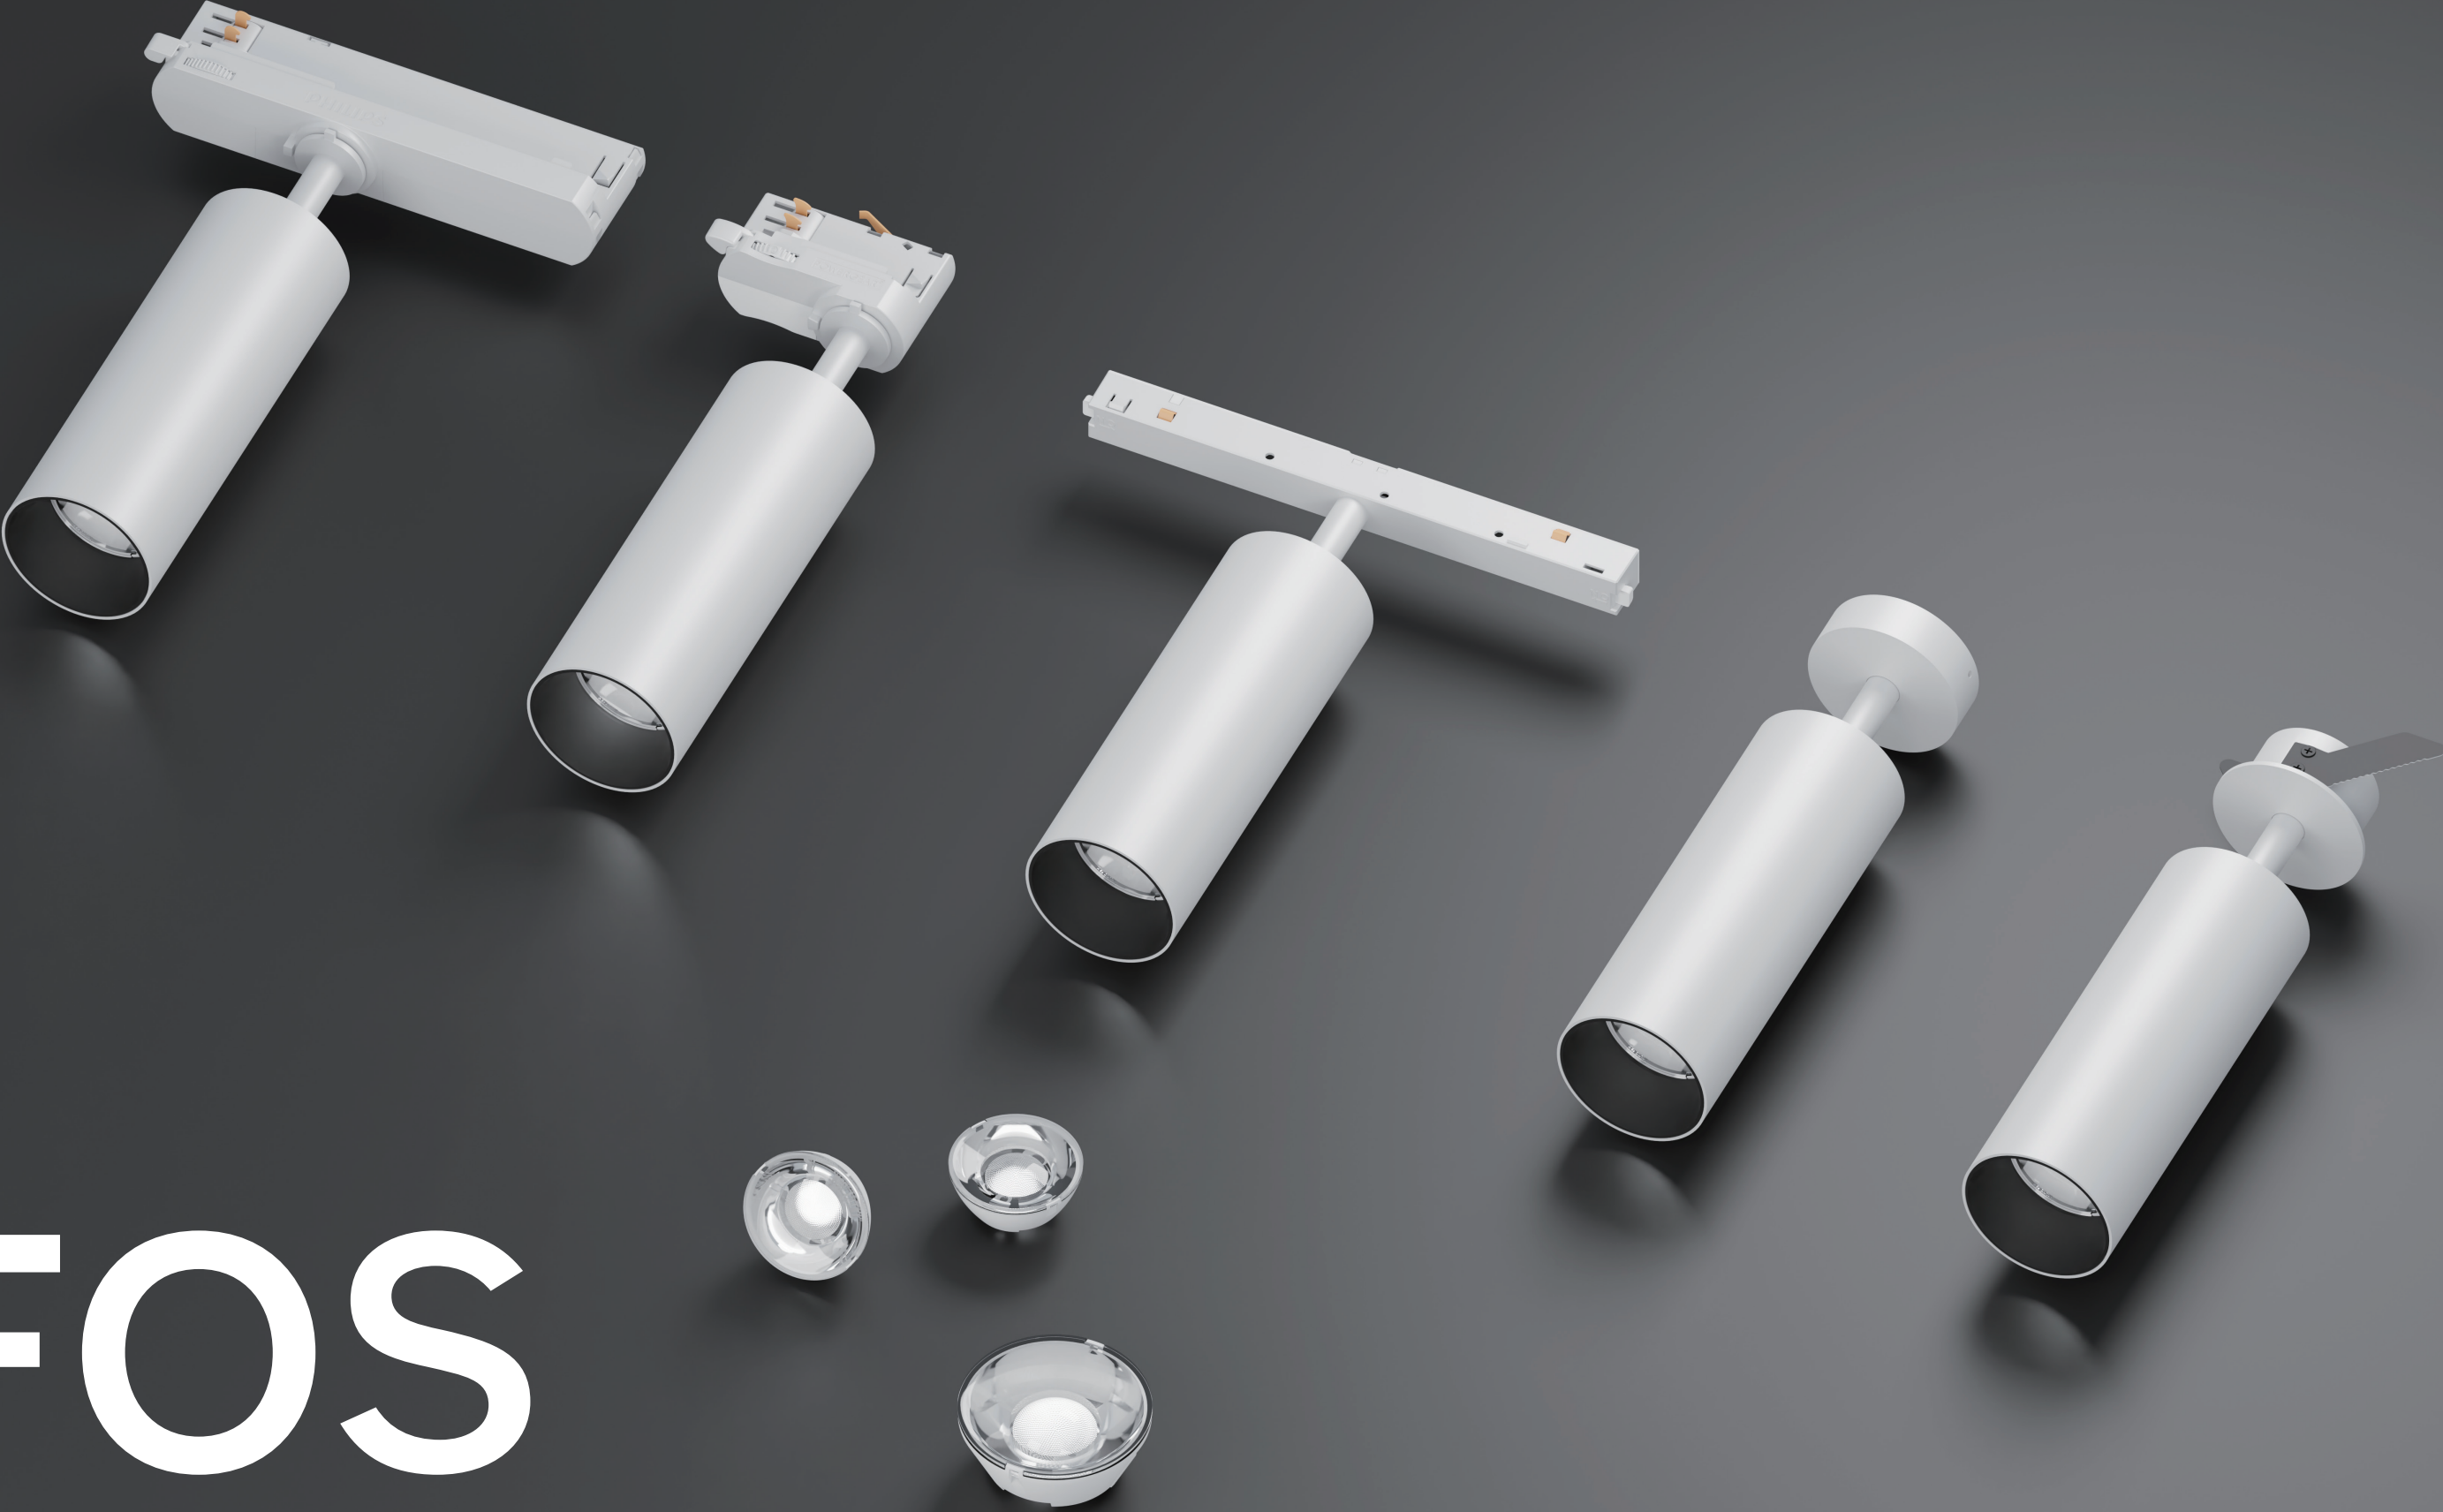

FOS TRACK LIGHTING



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre

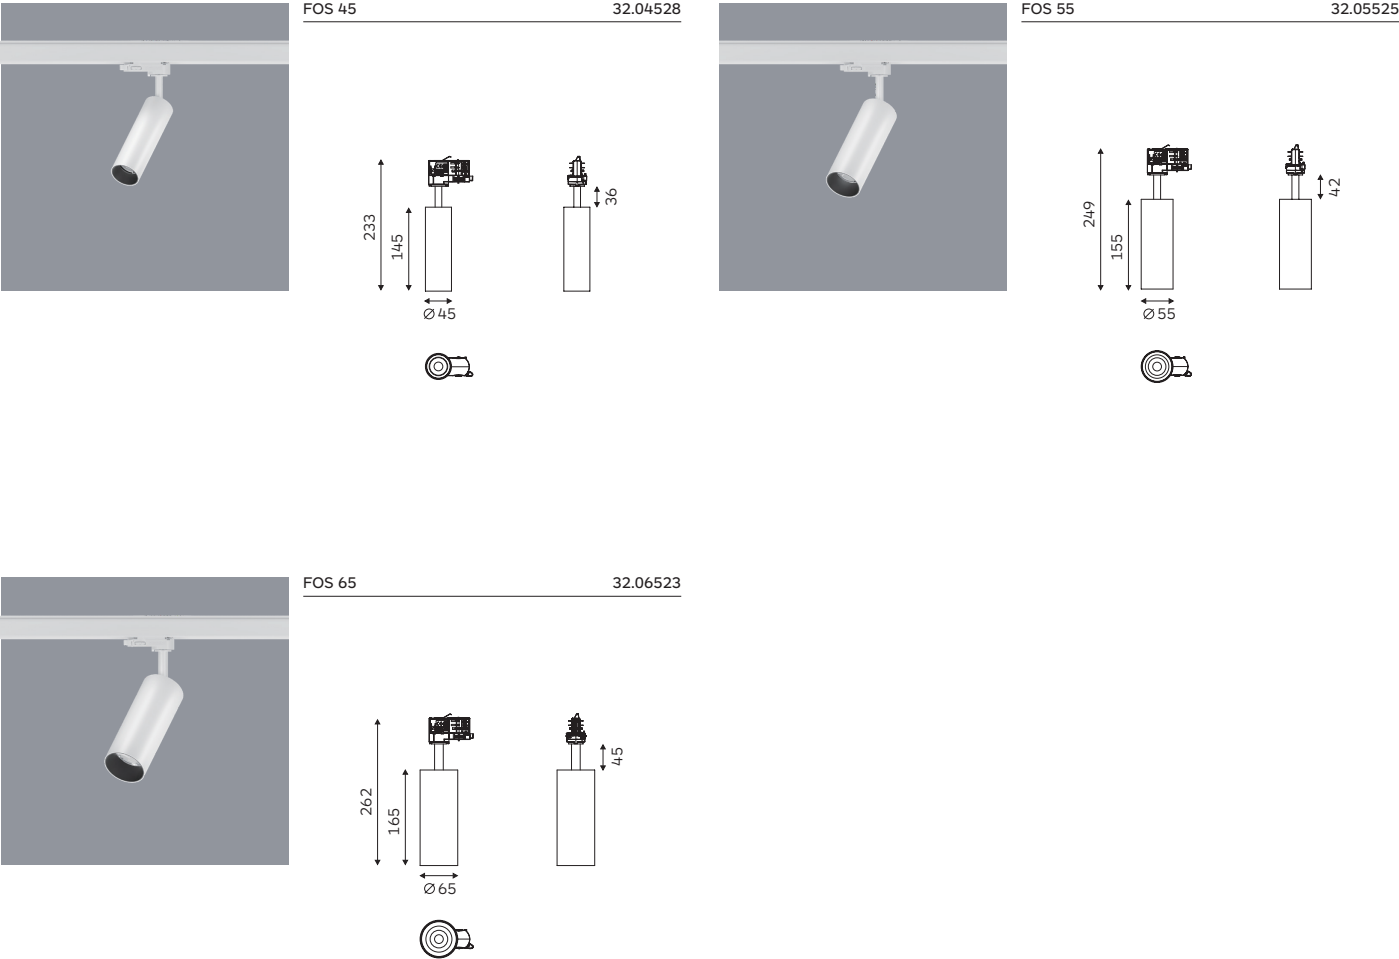


Code Ordering Example: 3 2 . 0 4 5 2 8 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
FOS 45 Track Light	32.04528	CA	COB LED	90	30 3000K	11W	808 lm	19°/23°/36°/41°	D0	No Dim	10 □ WH
					40 4000k		848 lm				20 ■ BK
FOS 55 Track Light	32.05525	CA	COB LED	90	30 3000K	16W	1871 lm	20°/32°/41°/49°			
					40 4000k		1965 lm				
FOS 65 Track Light	32.06523	CA	COB LED	90	30 3000K	24W	2678 lm	17°/27°/36°/51°			
					40 4000k		2812 lm				

ACTION TRACK LIGHTING

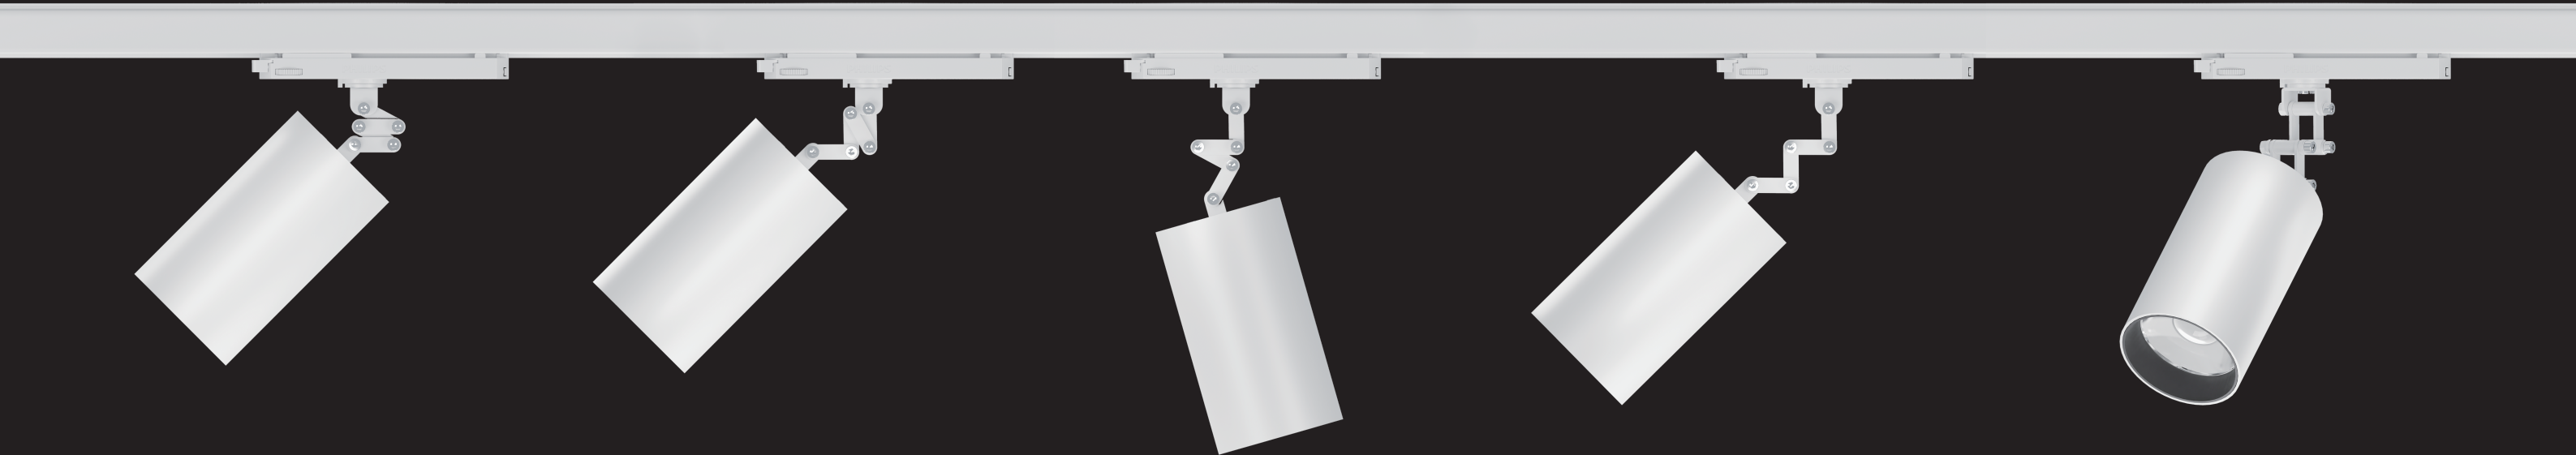

Action Track Lighting

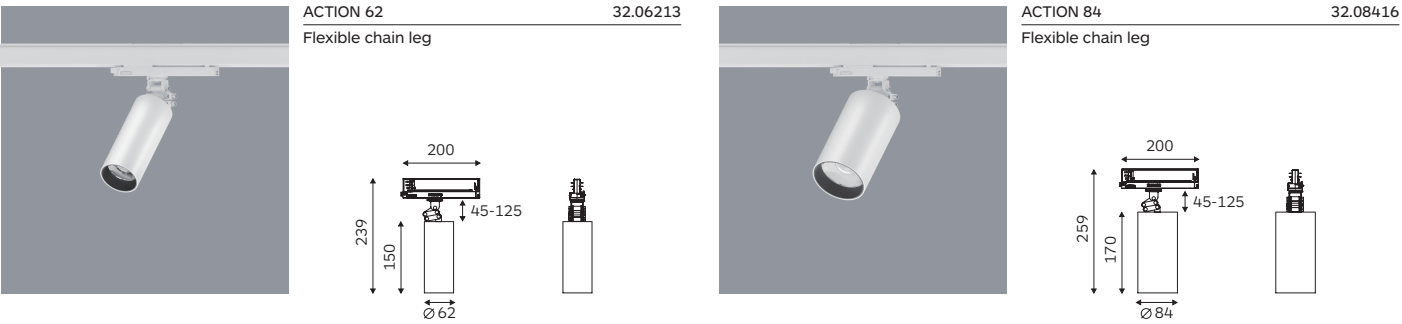

Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 3 2 . 0 6 2 1 3 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ACTION 62 Track light Flexible chain leg	32.06213	CA COB LED	90	30 3000K	24W	2753 lm	19°/25°/40°/52°	D0 No Dim	10 □ WH
				40 4000k		2890 lm		DA Dali Dim	20 ■ BK
ACTION 84 Track light Flexible chain leg	32.08416	CA COB LED	90	30 3000K	41W	5001 lm	19°/24°/38°/52°	DC 0-10V Dim	
				40 4000k		5251 lm		DT Triac Dim	

Action Track Lighting

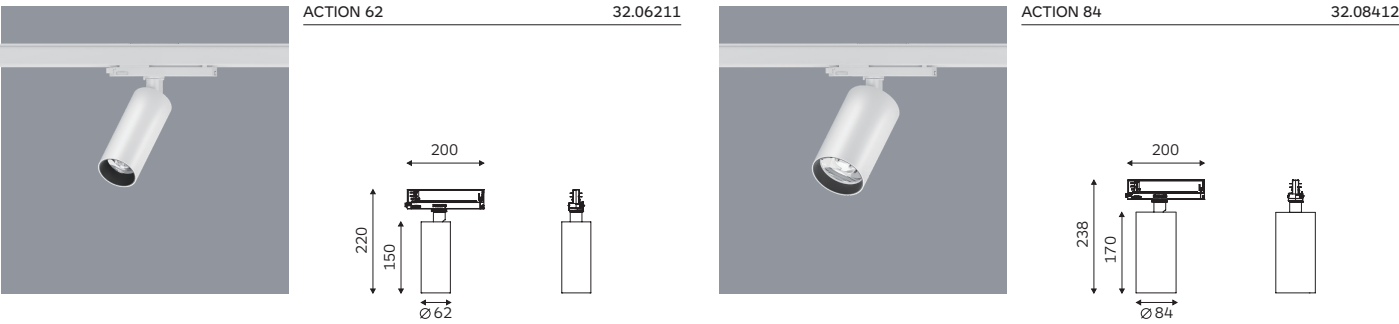

Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 3 2 . 0 6 2 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
ACTION 62 Track Light	32.06211	CA	COB LED	90	30	3000K	24W	2753 lm	19°/25°/40°/52°	D0	No Dim	10  WH
					40	4000k				2890 lm	DA	Dali Dim
ACTION 84 Track Light	32.08412	CA	COB LED	90	30	3000K	41W	5001 lm	19°/24°/38°/52°	DC	0-10V Dim	
					40	4000k				5251 lm	DT	Triac Dim

Action Track Lighting

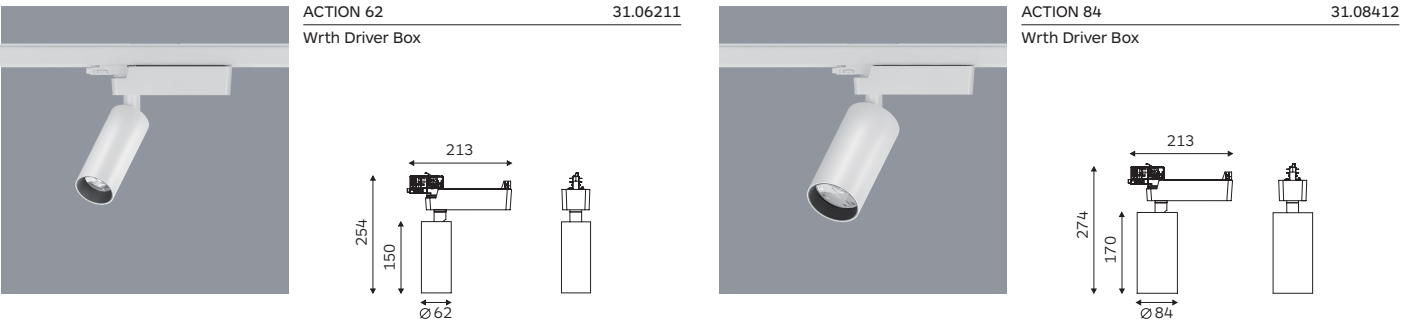

Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories



Linear Spread glass



Glass






Honeycomb louvre


Code Ordering Example: 3 1 . 0 6 2 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
ACTION 62 Track Light Wrth Driver Box	31.06211	CA	COB LED	90	30	3000K	24W	2753 lm	19°/25°/40°/52°	D0	No Dim	10 □ WH
					40	4000k		2890 lm		DA	Dali Dim	20 ■ BK
ACTION 62 Track Light Wrth Driver Box	31.08412	CA	COB LED	90	30	3000K	41W	5001 lm	19°/24°/38°/52°	DC	0-10V Dim	
					40	4000k		5251 lm		DT	Triac Dim	

ARTAX TRACK LIGHTING

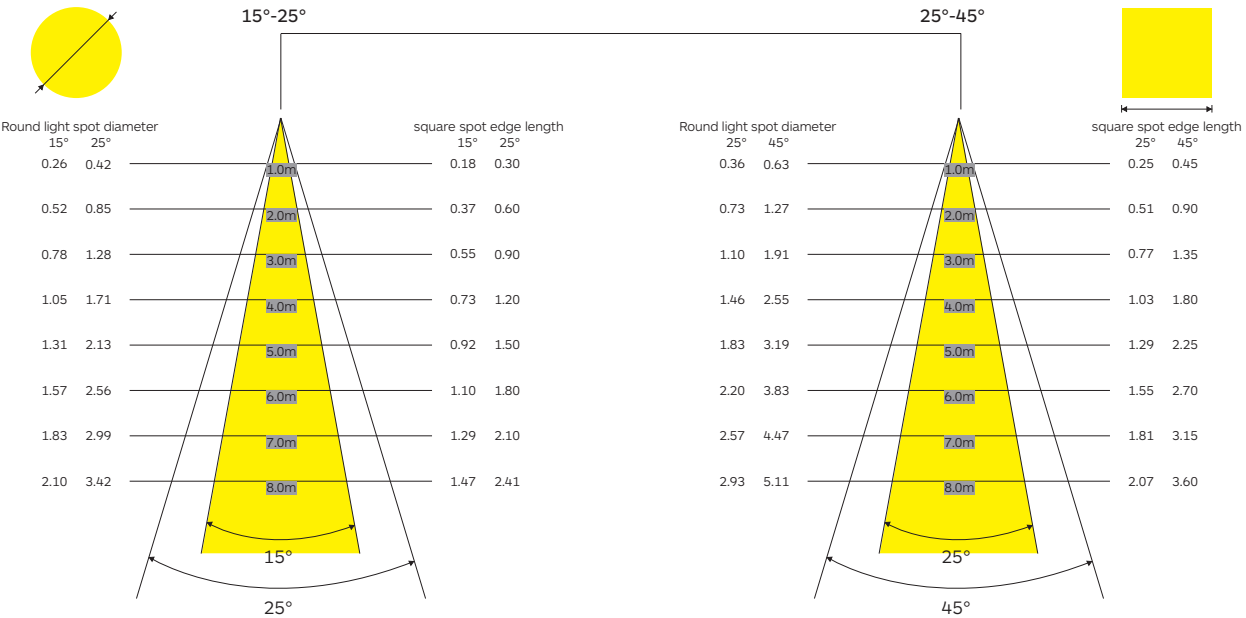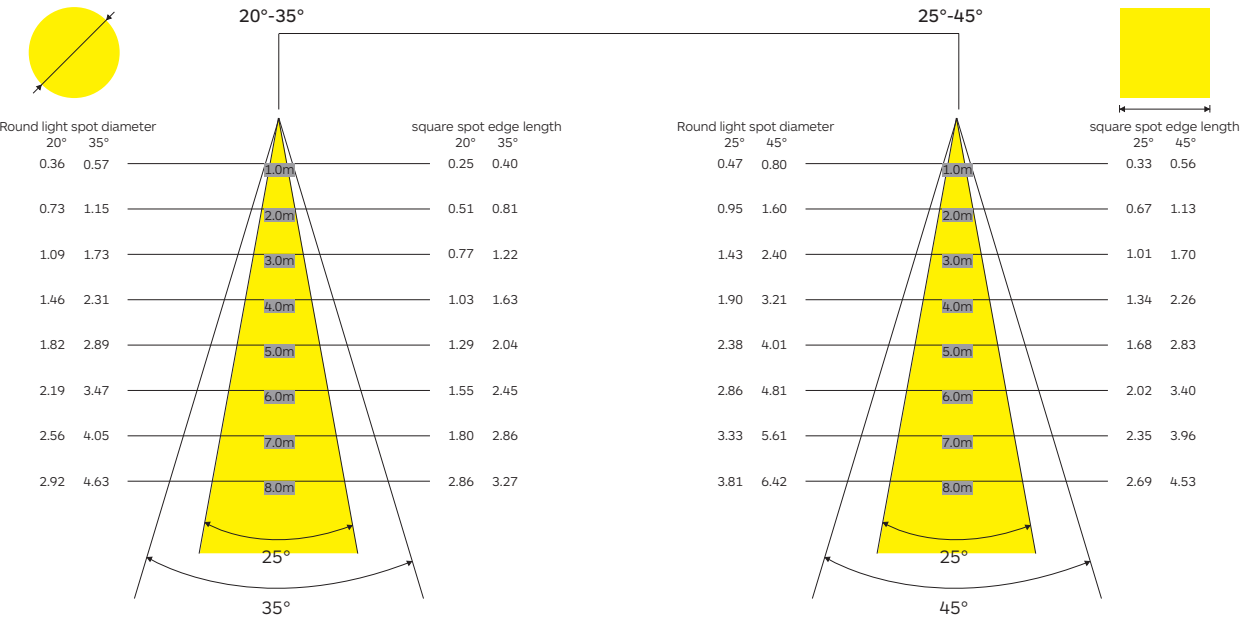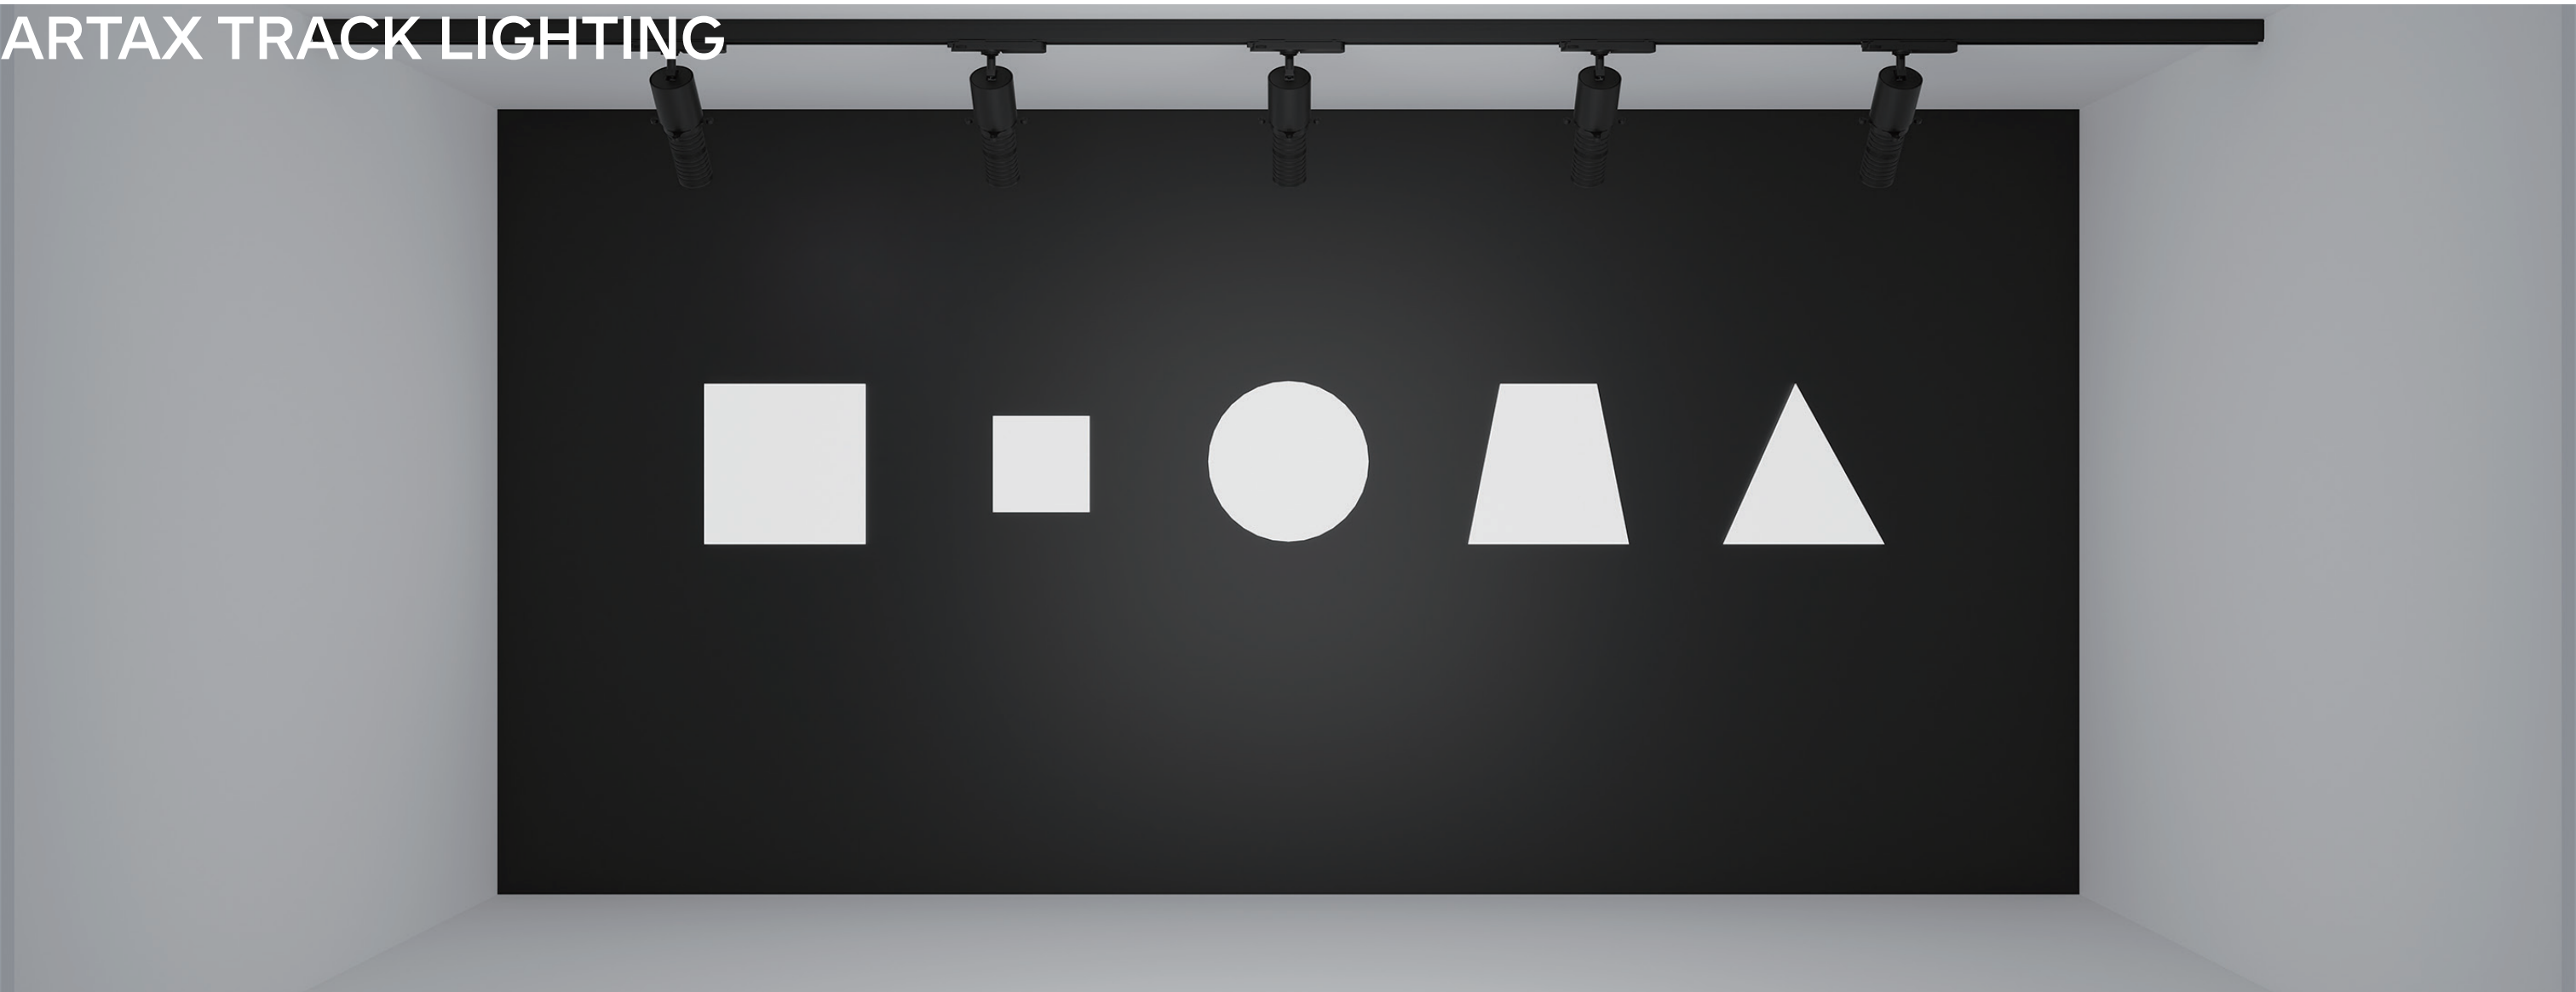

ARTAX TRACK LIGHTING

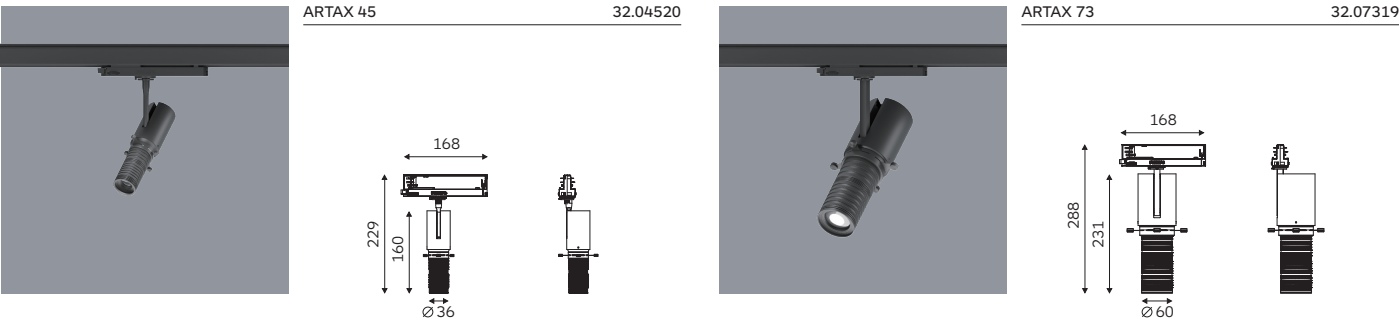

Body

A high quality track light, and the best choice to define your space.

Can free adjust the shape you requested by 4 pin at joints, can be zoom by rotate the Optics.

And the fixture is Museum style one, it has good heat dissipation effect by its solid aluminum housing.

Accessories

No.

Finish

Black.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Contour Optic.

Driver

Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.

Suitable Accessories


Code Ordering Example: 3 2 . 0 4 5 2 0 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
ARTAX 45 Track light	32.04520	CA	COB LED	90	30 3000K	9W	--	20°-35°	D0	No Dim	10 □ WH
					40 4000k		--	25°-45°	DA	Dali Dim	20 ■ BK
ARTAX 73 Track light	32.07319	CA	COB LED	90	30 3000K	20W	--	15°-25°	DC	0-10V Dim	
					40 4000k		--	25°-45°	DT	Triac Dim	


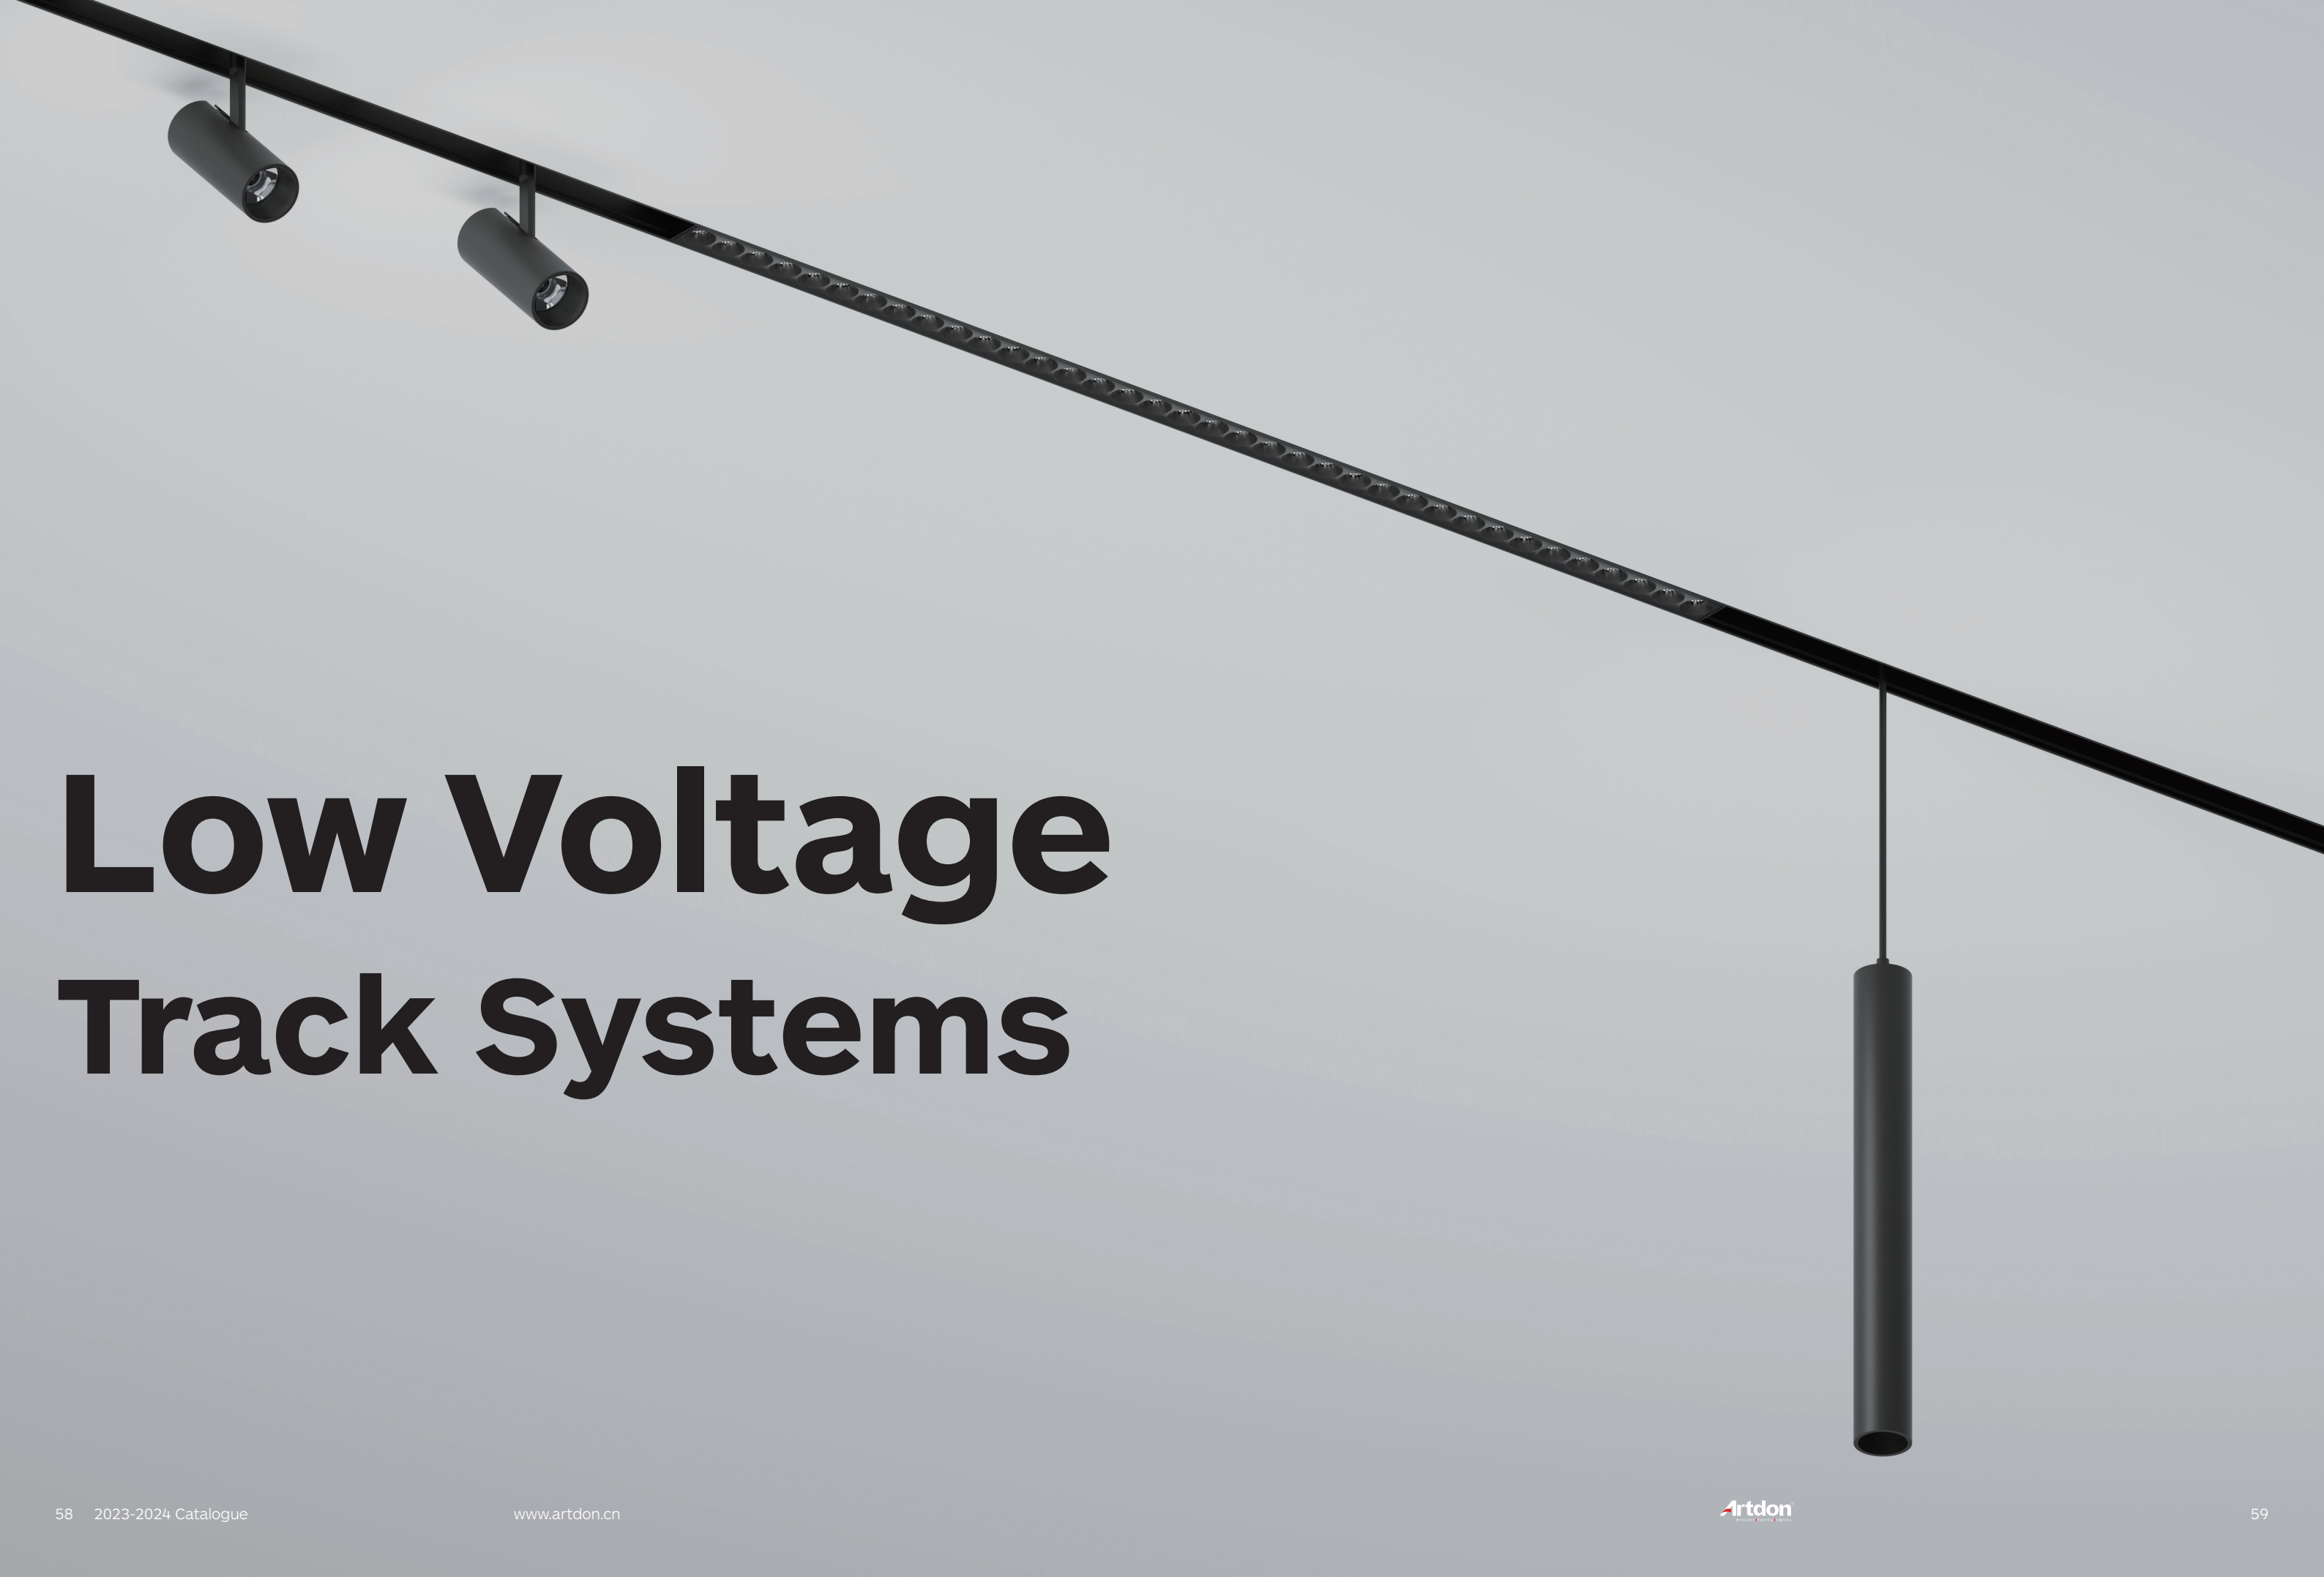


Low Voltage Track Systems


SPECTRUM LOW VOLTAGE TRACK LIGHT

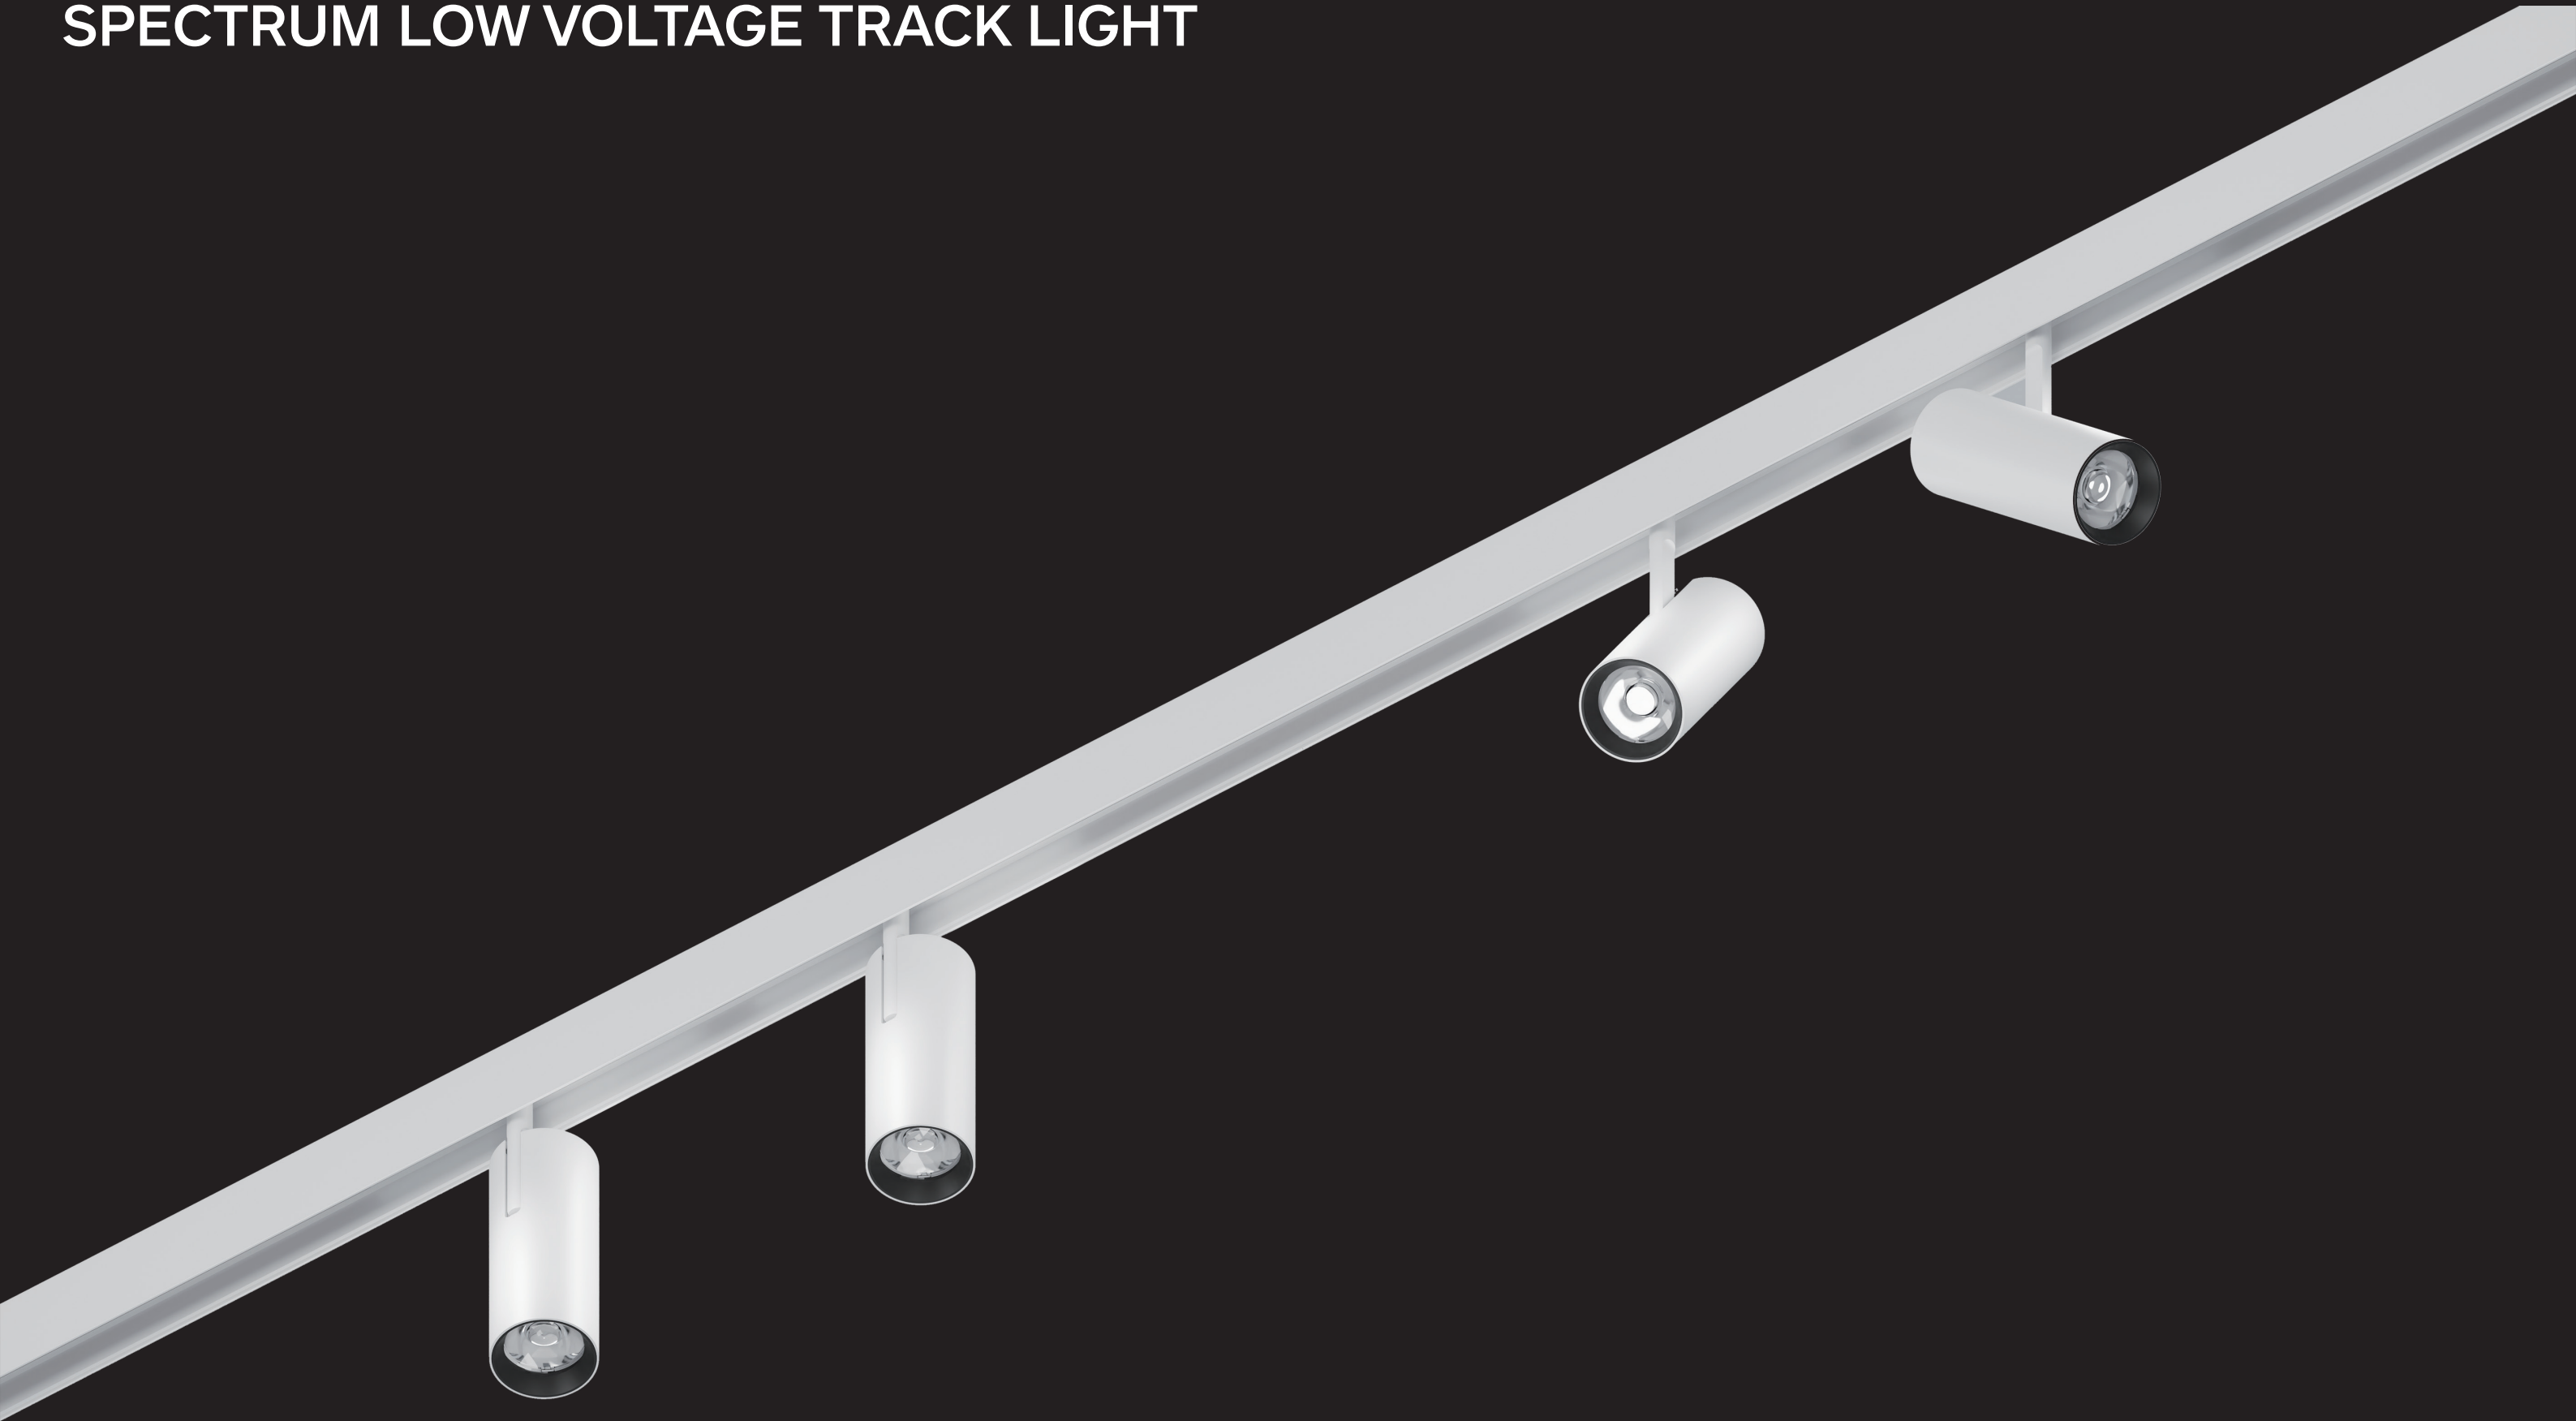


SPECTRUM LOW VOLTAGE TRACK LIGHT

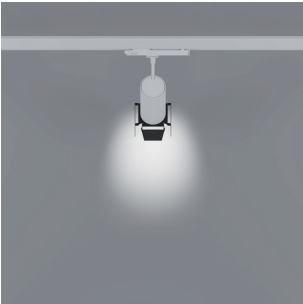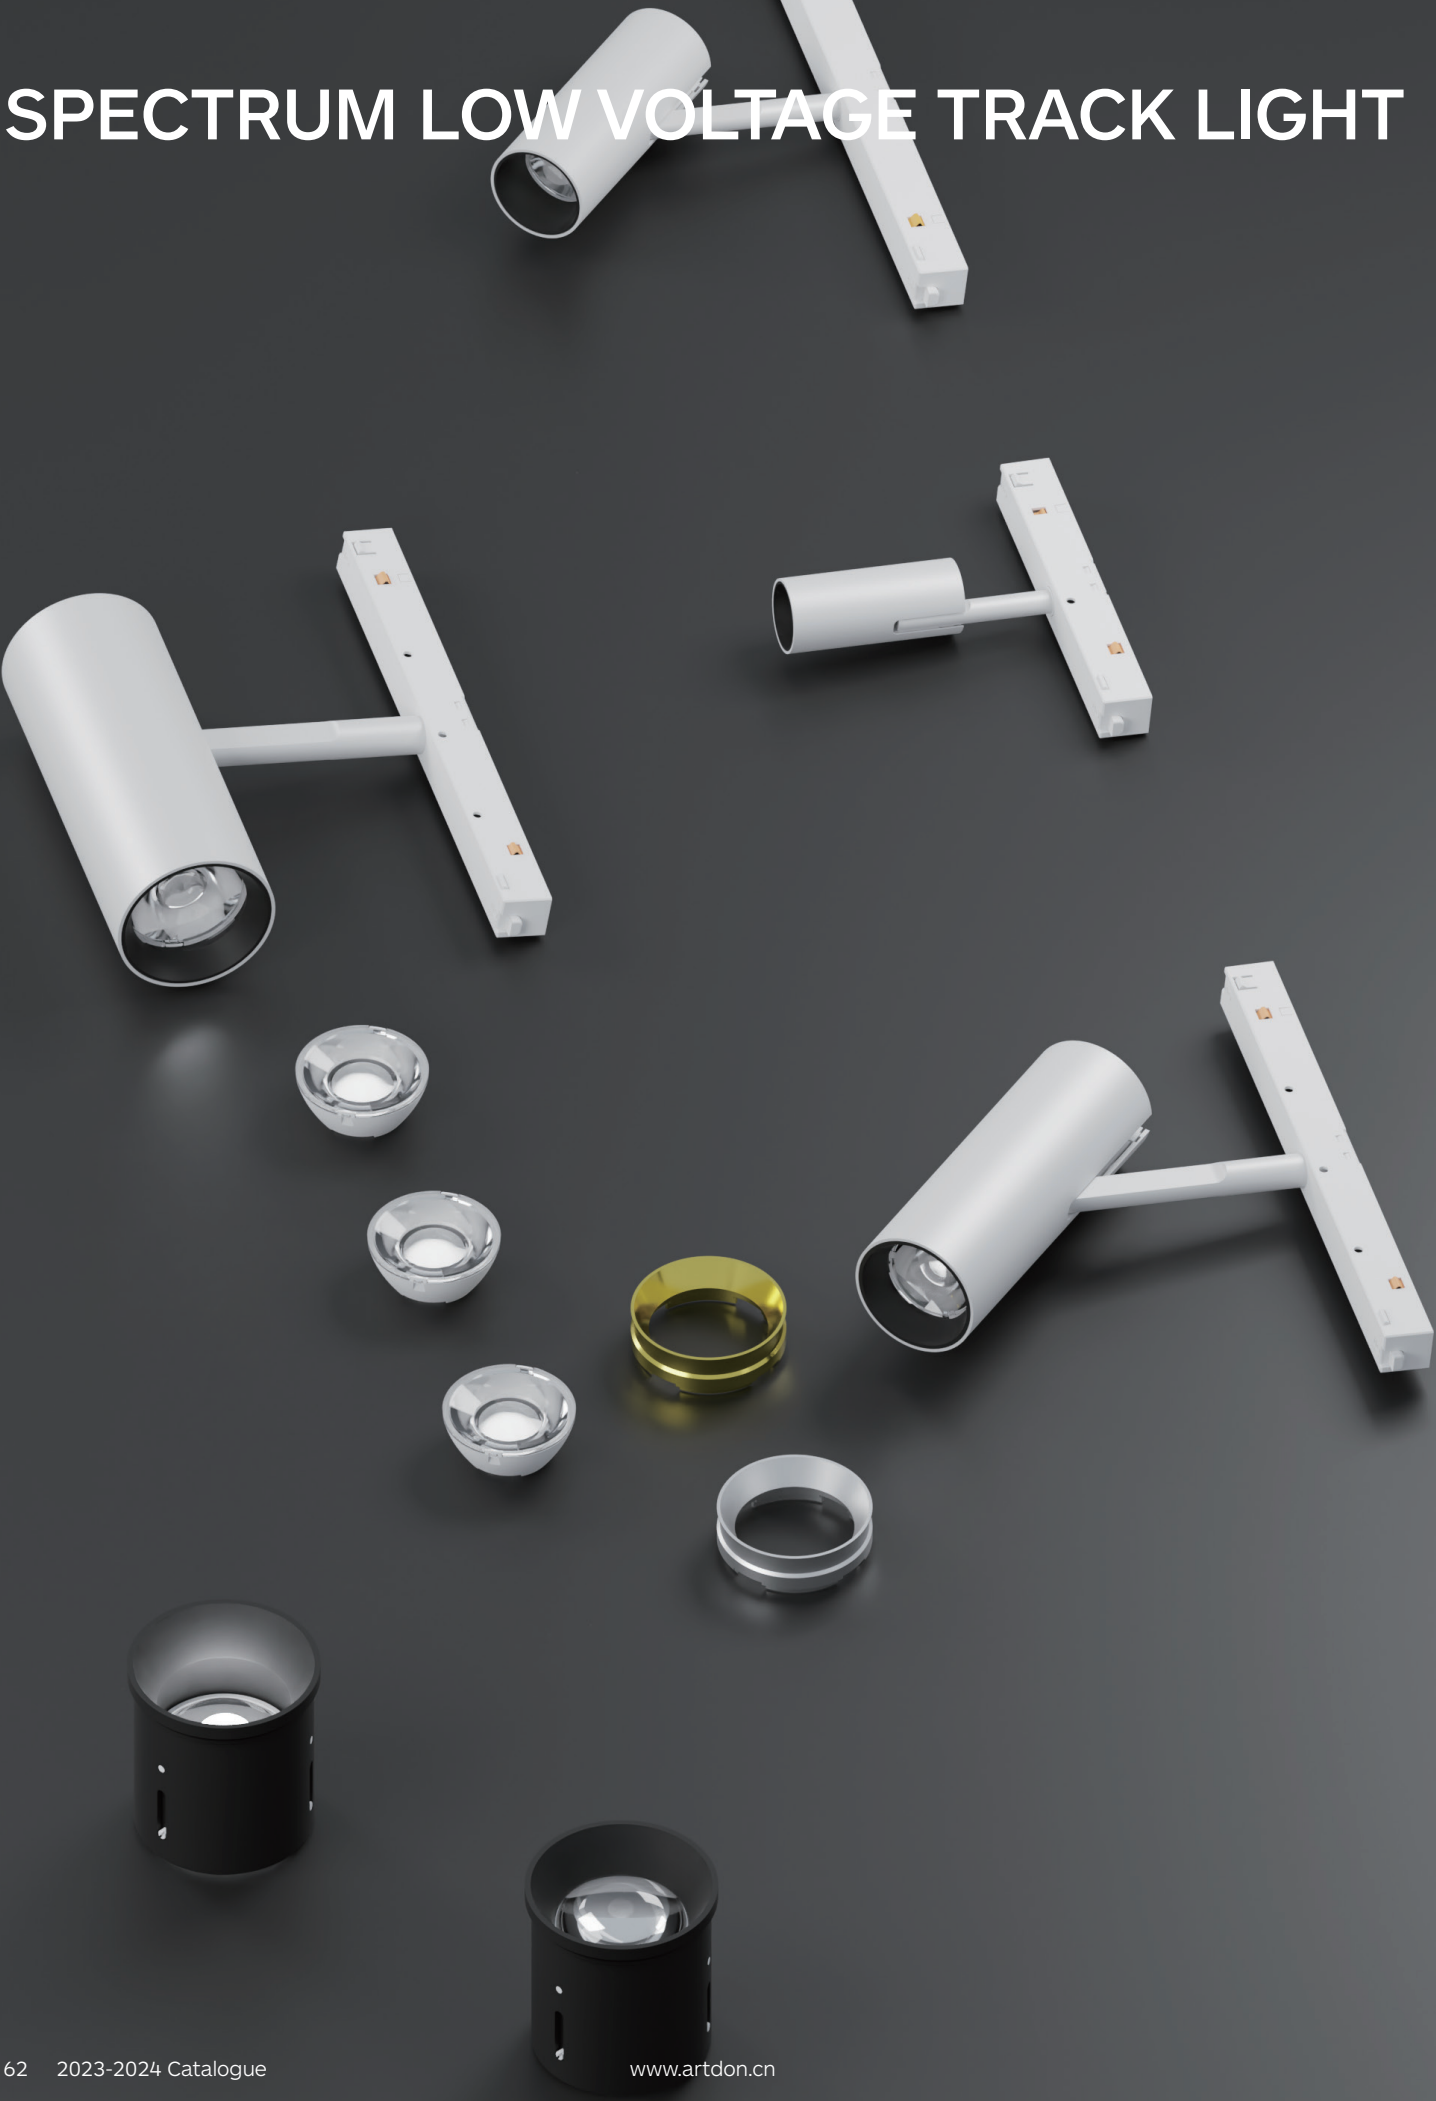


Brandoor
Suitable for: Ø45, Ø55mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

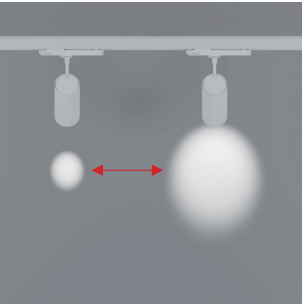


Zoom
Suitable for:
Ø35, Ø45, Ø55mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

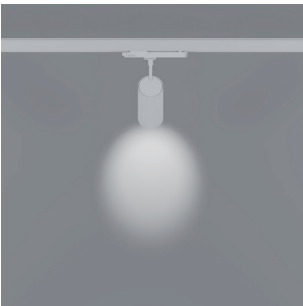

" + " Anti-glare
Suitable for:
Ø35, Ø45, Ø55mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



Ultra-narrow Angle
Accessories
Suitable for: Ø45, Ø55mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

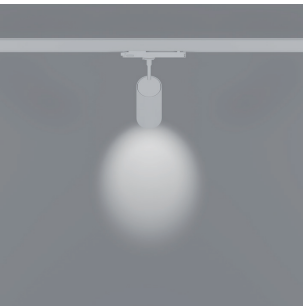

Deep Anti-glare (Cutoff Angle 30D)
Suitable for: Ø45, Ø55mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

SPECTRUM LOW VOLTAGE TRACK LIGHT



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable built-in driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

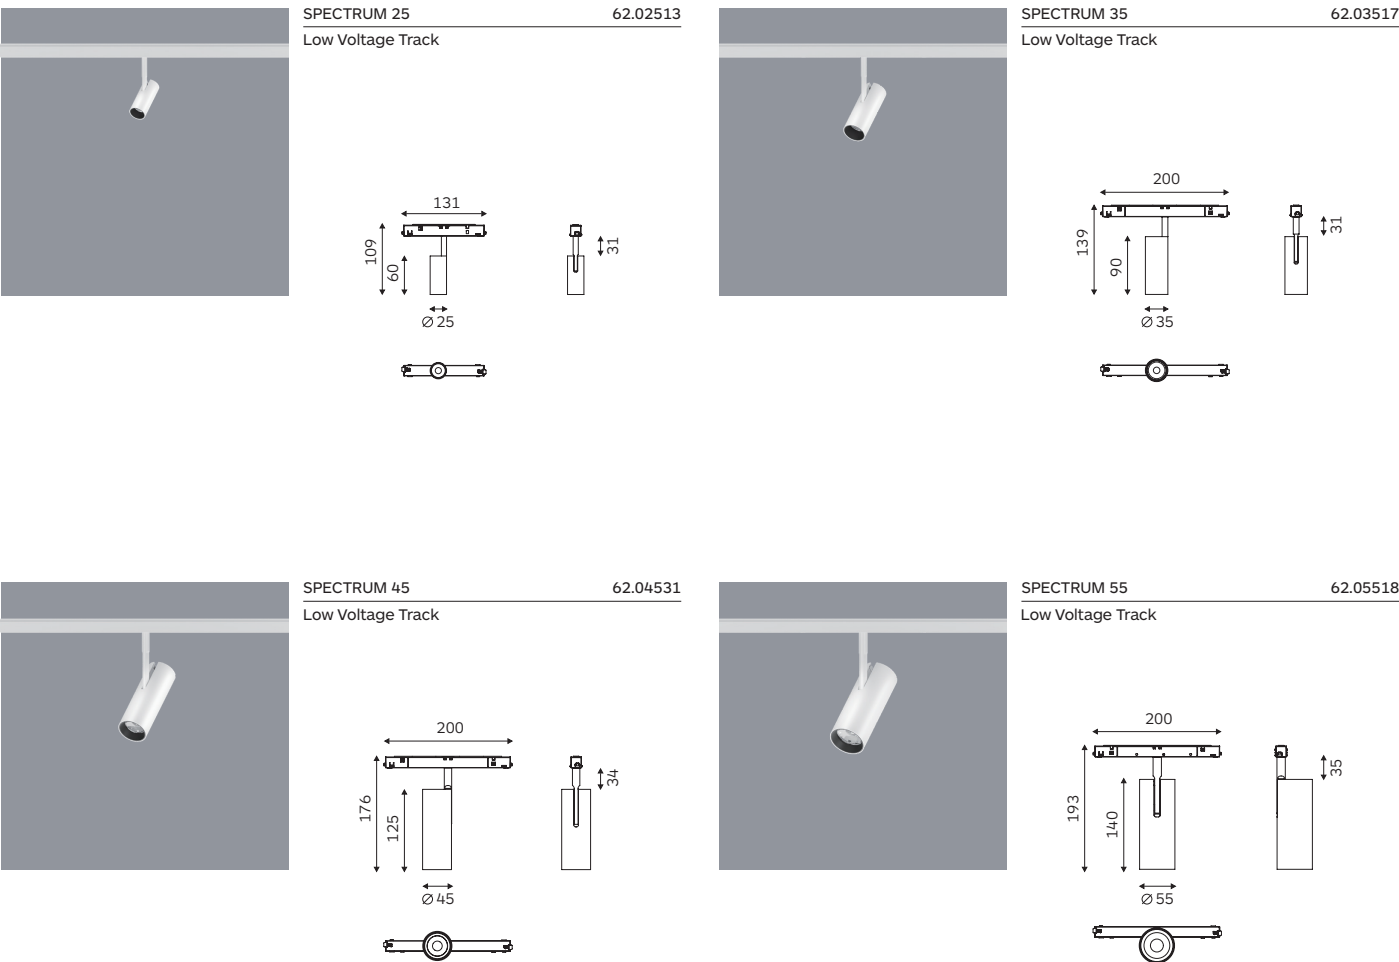

Code Ordering Example: 6 2 . 0 2 5 1 3 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SPECTRUM 25 Low Voltage Track	62.02513	CA	COB LED	90	30	3000K	3.8W	197 lm	D0	No Dim	10 □ WH
					40	4000k		207 lm			
SPECTRUM 35 Low Voltage Track	62.03517	CA	COB LED	90	30	3000K	9W	612 lm	DC	0-10V Dim	20 ■ BK
					40	4000k		643 lm			
SPECTRUM 45 Low Voltage Track	62.04531	CA	COB LED	90	30	3000K	14.3W	1083 lm			
					40	4000k		1137 lm			
SPECTRUM 55 Low Voltage Track	62.05518	CA	COB LED	90	30	3000K	24.3W	2615 lm			
					40	4000k		2745 lm			

FOS LOW VOLTAGE TRACK LIGHT



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: 0-10v Dim, Dali Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre

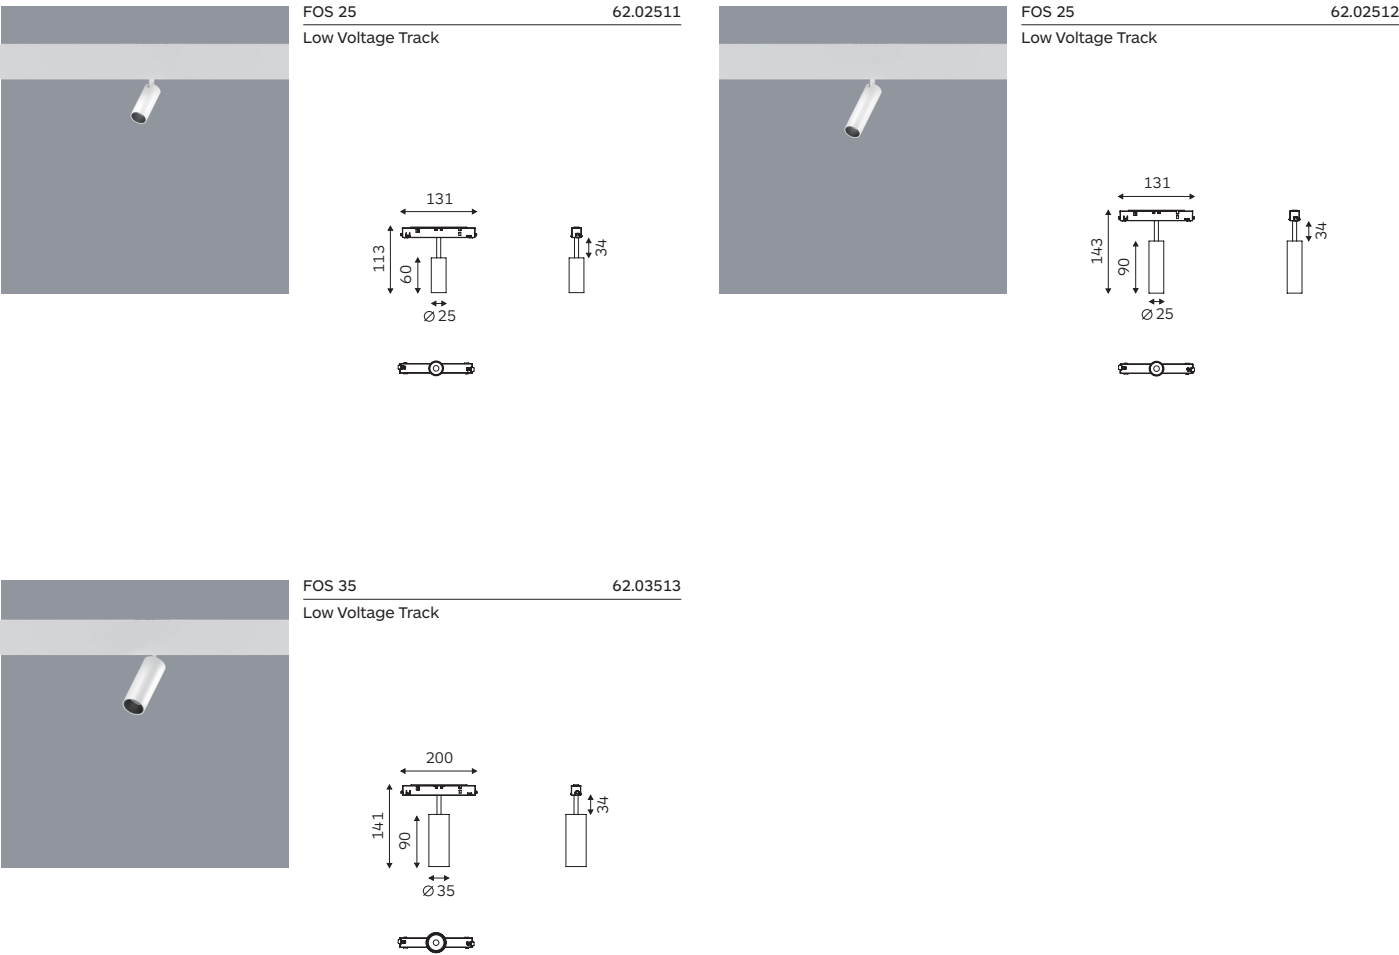

Code Ordering Example: 6 2 . 0 2 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 25 Low Voltage Track	62.02511	CA	COB LED	90	30	3000K	3.8W	197 lm	17°/26°/31°/53°
					40	4000k		207 lm	
FOS 25 Low Voltage Track	62.02512	CA	COB LED	90	30	3000K	7W	357 lm	18°/24°/40°/55°
					40	4000k		375 lm	
FOS 35 Low Voltage Track	62.03513	CA	COB LED	90	30	3000K	9W	588 lm	15°/24°/37°/50°
					40	4000k		627 lm	

FOS LOW VOLTAGE TRACK LIGHT

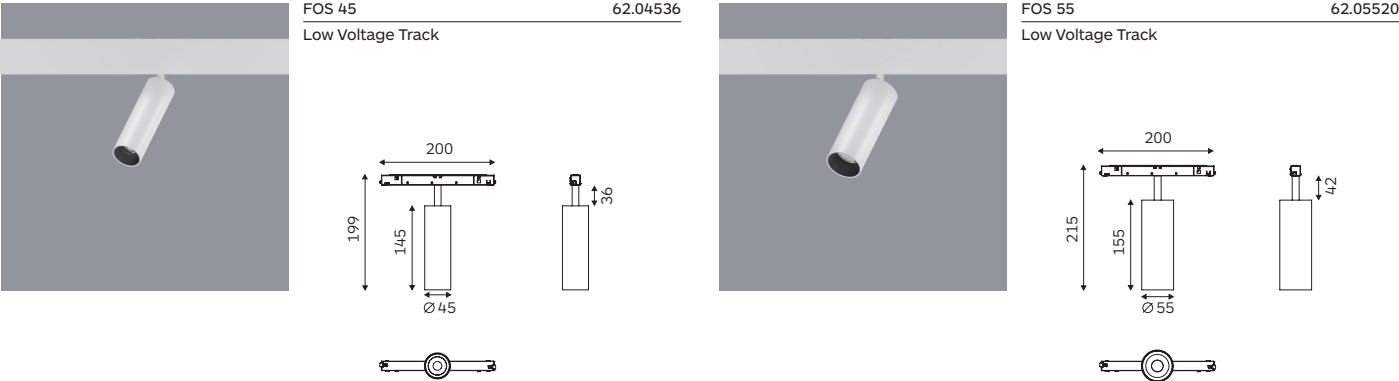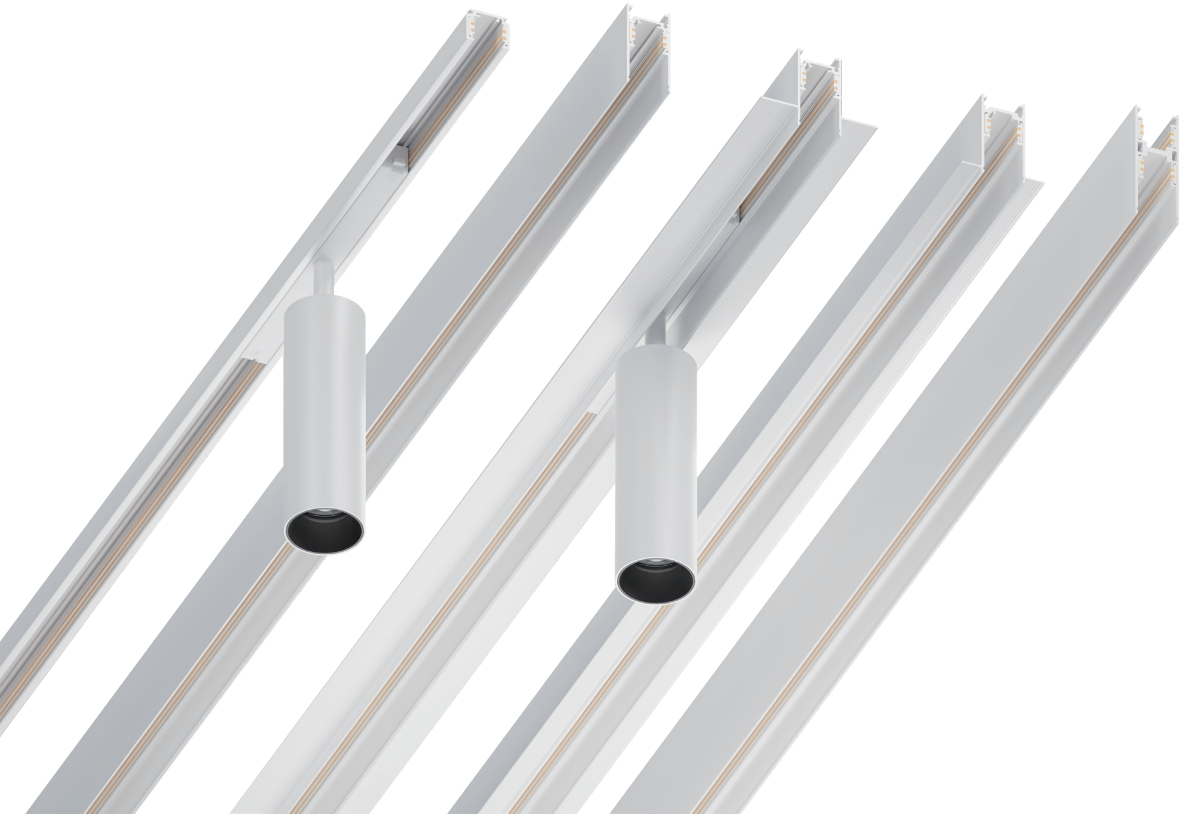

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: 0-10v Dim, Dali Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 6 2 . 0 4 5 3 6 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Low Voltage Track	62.04536	CA COB LED	90	30 3000K 40 4000k	15W	1003 lm 1053 lm	19°/23°/36°/41°	D0 No Dim DA Dali Dim	10 □ WH 20 ■ BK
FOS 55 Low Voltage Track	62.05520	CA COB LED	90	30 3000K 40 4000k	25W	2677 lm 2810 lm	20°/32°/41°/49°	DC 0-10V Dim	

EMMA LOW VOLTAGE TRACK LIGHT

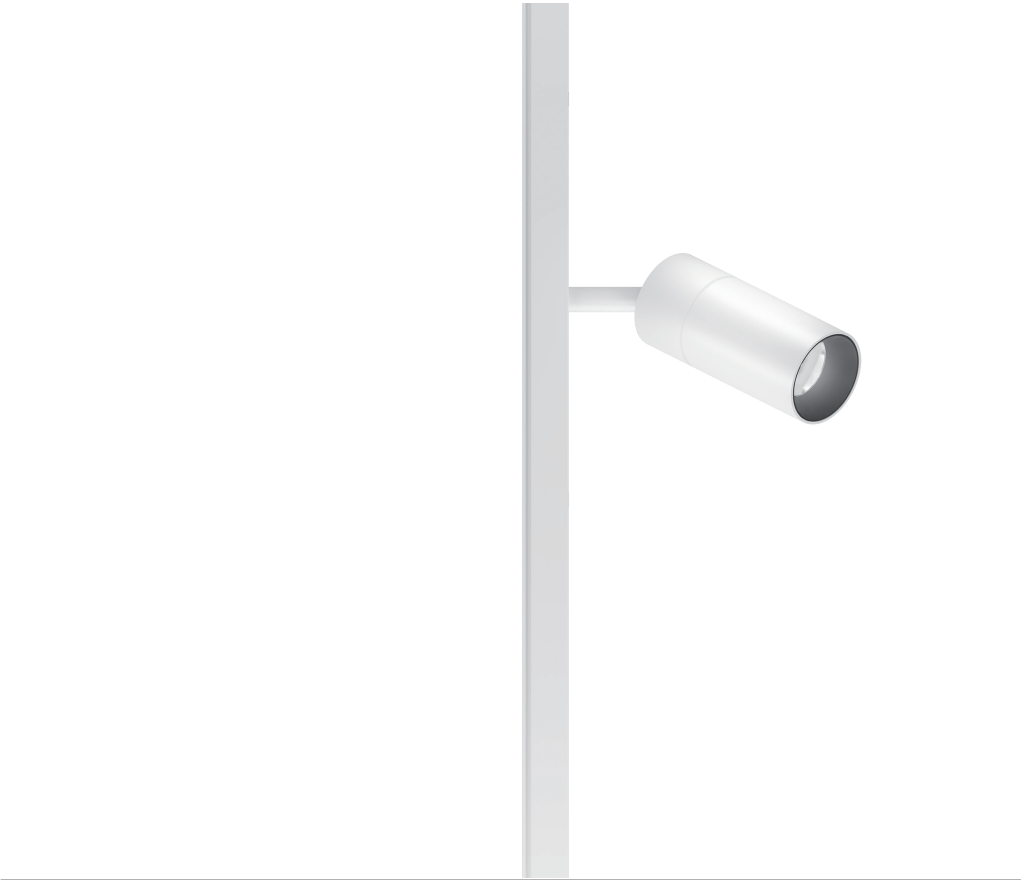

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 3 sizes and 3 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

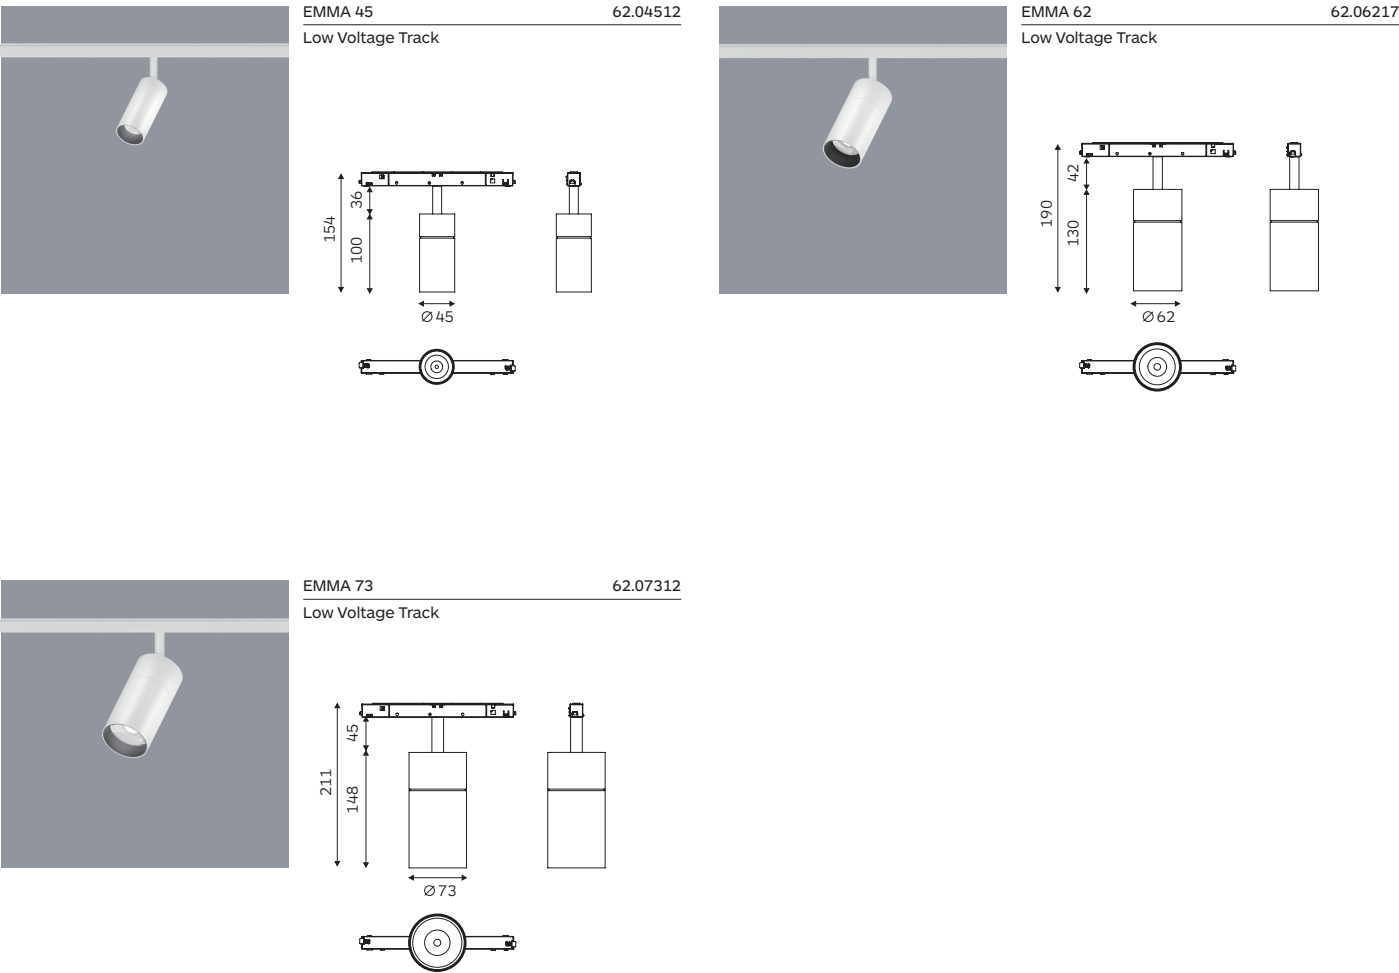

Code Ordering Example: 6 2 . 0 4 5 1 2 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
EMMA 45 Low Voltage Track	62.04512	CA	COB LED	90	30	3000K	11W	935 lm	19°/29°/44°/56°	D0	No Dim	10 ☐ WH
					40	4000k		981 lm		DA	Dali Dim	20 ☒ BK
EMMA 62 Low Voltage Track	62.06217	CA	COB LED	90	30	3000K	14W	1627 lm	18°/27°/38°/54°	DC	0-10V Dim	
					40	4000k		1708 lm				
EMMA 73 Low Voltage Track	62.07312	CA	COB LED	90	30	3000K	24W	2963 lm	14°/28°/40°/50°			
					40	4000k		3111 lm				

FEEL ZOOM LOW VOLTAGE TRACK LIGHT



Body

European-inspired fixture are designed with elongated shapes and unique materials in order to present a novel and artistic atmosphere.

With zoom optics, you can adjust it to the light spot you want, according to the needs of the usage environment.

The back cover of the luminaire is designed with a single dimming button, which is convenient for users to adjust the brightness of each luminaire according to the requirements of the usage environment, giving more flexible lighting control.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.


Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.


Suitable Accessories

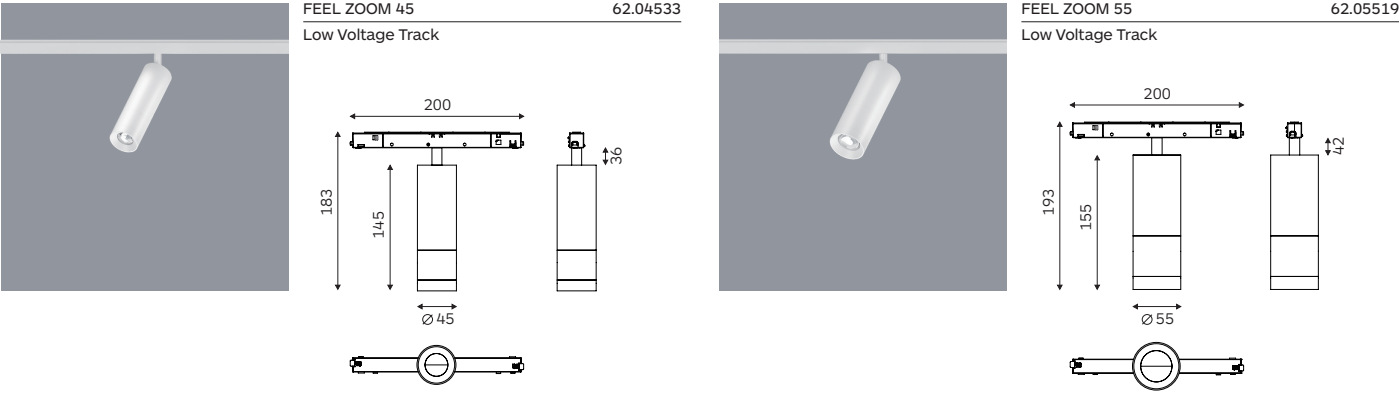

Code Ordering Example: 6 2 . 0 4 5 3 3 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code		>CRI	CCT		LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
FEEL ZOOM 45 Low Voltage Track	62.04533	CA	COB LED	90	30	3000K	9W	356 lm	15°-52°	D0	No Dim	10 □ WH
					40	4000k		374 lm		DA	Dali Dim	20 ■ BK
FEEL ZOOM 55 Low Voltage Track	62.05519	CA	COB LED	90	30	3000K	17W	888 lm	7.5°-55°	DC 0-10V Dim		
					40	4000k		932 lm				

ARTAX LOW VOLTAGE TRACK LIGHT

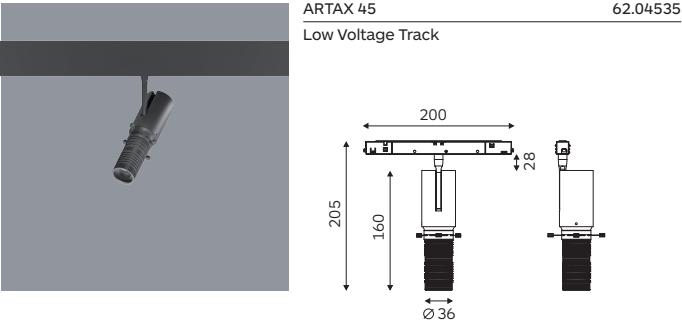

Body

A high quality track light, and the best choice to define your space.

Can free adjust the shape you requested by 4 pin at joints, can be zoom by rotate the Optics.

And the fixture is Museum style one, it has good heat dissipation effect by its solid aluminum housing.

Accessories

No.

Finish

Black.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Contour Optic.

Driver

Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications


Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.

Suitable Accessories

Code Ordering Example: 6 2 . 0 4 5 3 5 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish		
ARTAX 45 Low Voltage Track	62.04535	CA	COB LED	90	30	3000K	9W	--	20°-35°	D0	No Dim	10	□ WH
					40	4000k		--	25°-45°	DA	Dali Dim	20	■ BK
										DC	0-10V Dim		

SPARK 20 LOW VOLTAGE LINEAR LIGHT

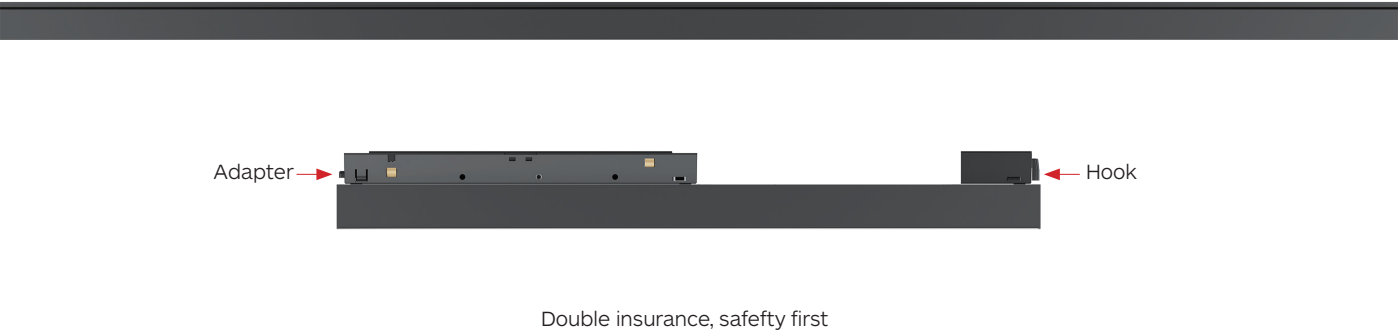

Double insurance, safety first

Body

SPARK 20 Wall Washer with luminaire body in extruded aluminium.

End caps is made by Turn-milling combined CNC machine, precision sizes, can perfect with the body without any gap.

There are 2 types of wall washer optics, one is for single lamp use and one can be used for multiple lamps.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Wall Washer.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Magnetic wall washer linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories

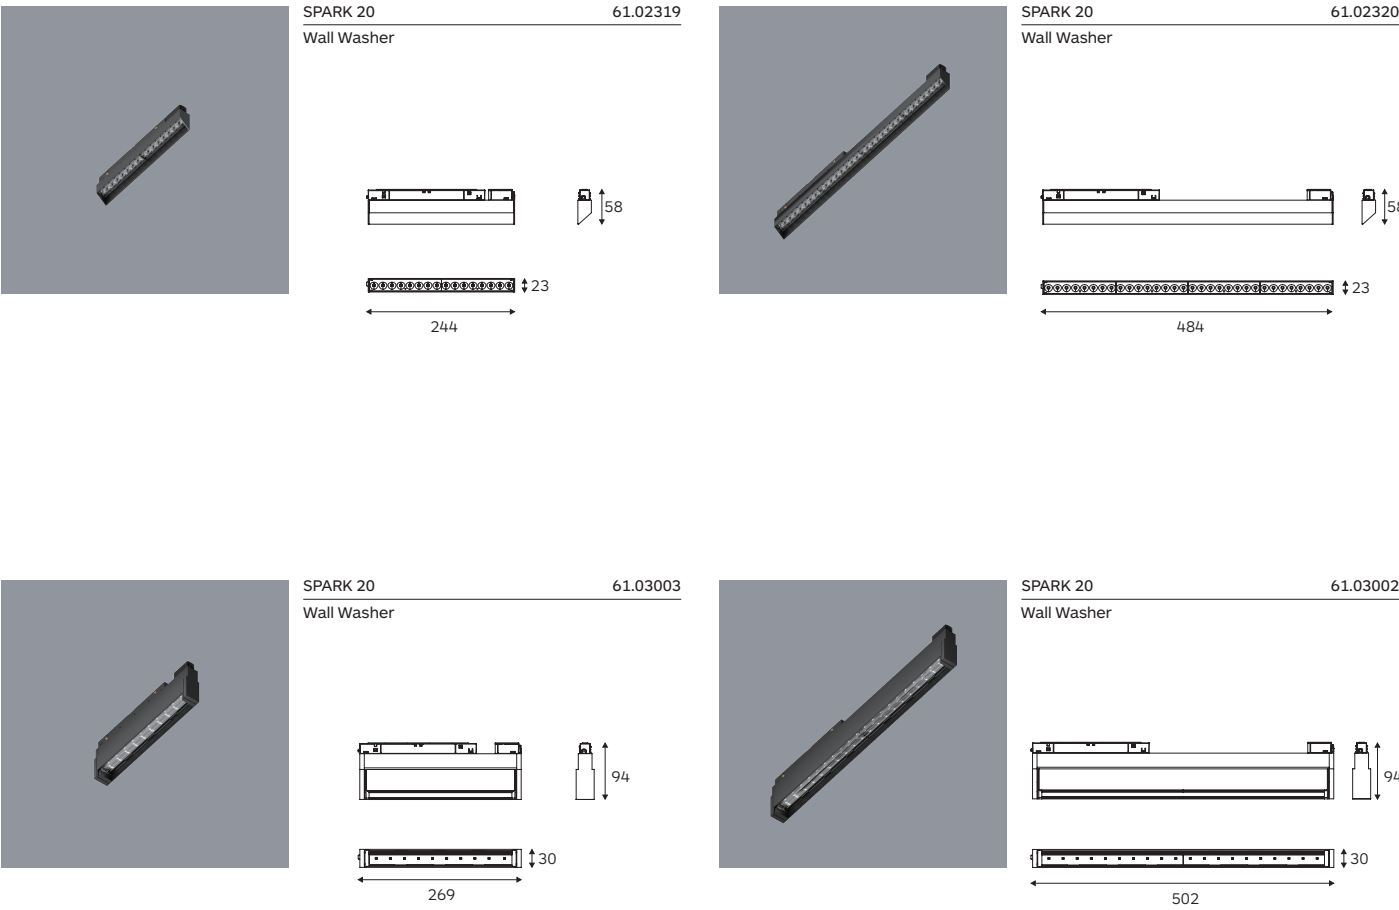

Code Ordering Example: 6 1 . 0 2 3 1 9 - 9 0 3 0 W W D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
SPARK 20 Low Voltage Track	61.02319	SA	SMD LED	90	30	3000K	10W	600 lm	WW	D0	No Dim	10 ☐ WH
					40	4000k		630 lm		DA	Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02320	SA	SMD LED	90	30	3000K	15W	900 lm	WW	DC	0-10V Dim	
					40	4000k		950 lm				
SPARK 20 Low Voltage Track	61.03003	SA	SMD LED	90	30	3000K	25W	1750 lm	WW			
					40	4000k		1837 lm				
SPARK 20 Low Voltage Track	61.03002	SA	SMD LED	90	30	3000K	40W	2800 lm	WW			
					40	4000k		2940 lm				

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Body

SPARK 20 general lighting with luminaire body in extruded aluminium.

End caps is made by Turn-milling combined CNC machine, precision sizes, can perfect with the body without any gap.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Pc Cover.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Magnetic general linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.


Suitable Accessories

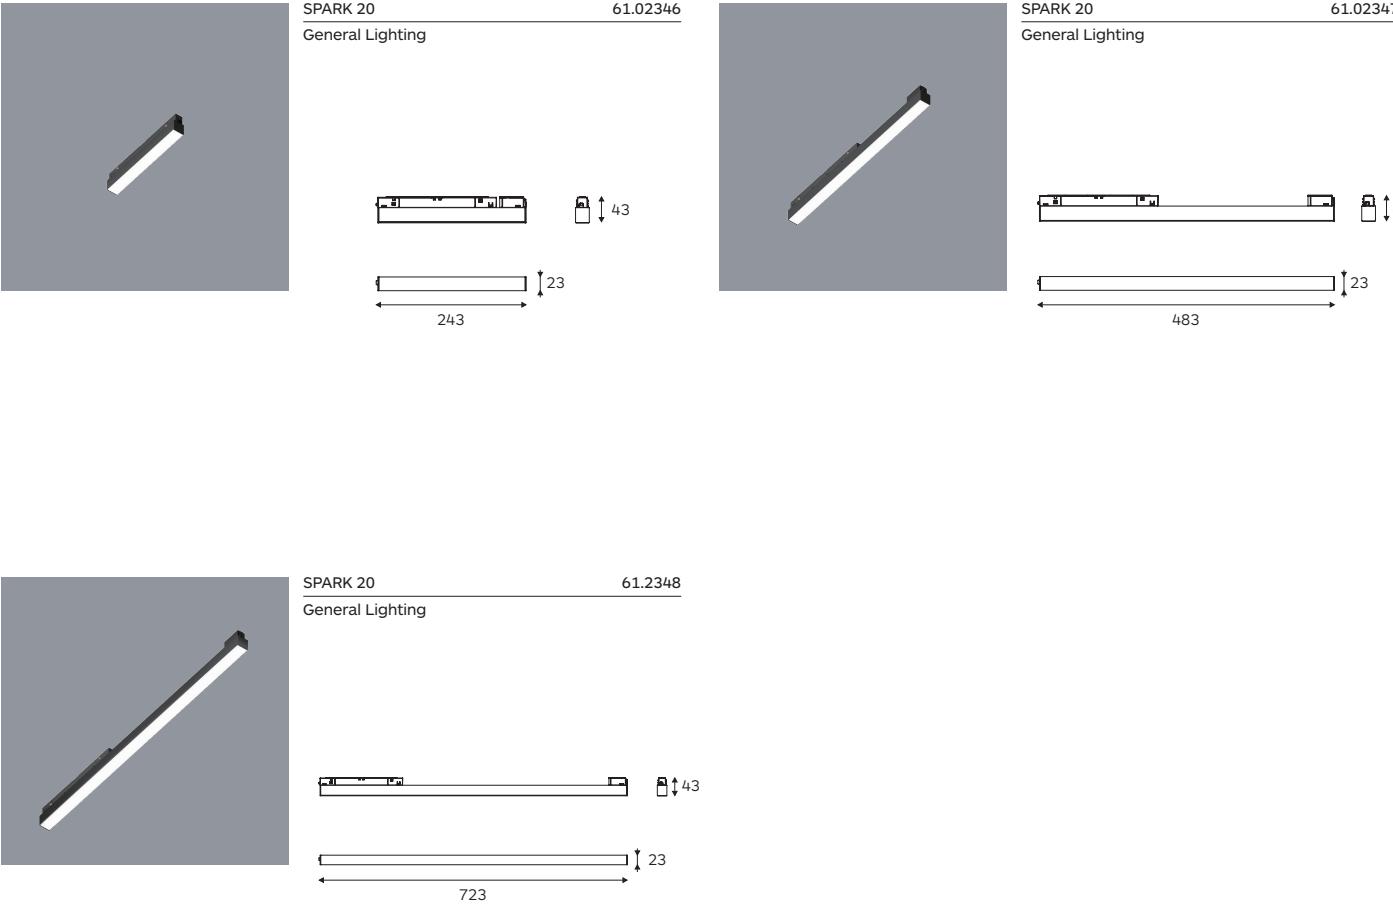

Code Ordering Example: 6 1 . 0 2 3 4 6 - 9 0 3 0 1 1 3 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
SPARK 20 Low Voltage Track	61.02346	SA	SMD LED	90	30	3000K	10W	805 lm	113°	D0	No Dim	10 ☐ WH
					40	4000k		845 lm		DA	Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02347	SA	SMD LED	90	30	3000K	15W	1211 lm	105°	DC 0-10V Dim		
					40	4000k		1271 lm				
SPARK 20 Low Voltage Track	61.02348	SA	SMD LED	90	30	3000K	20W	1750 lm	105°			
					40	4000k		1837 lm				

SPARK 20 LOW VOLTAGE LINEAR LIGHT

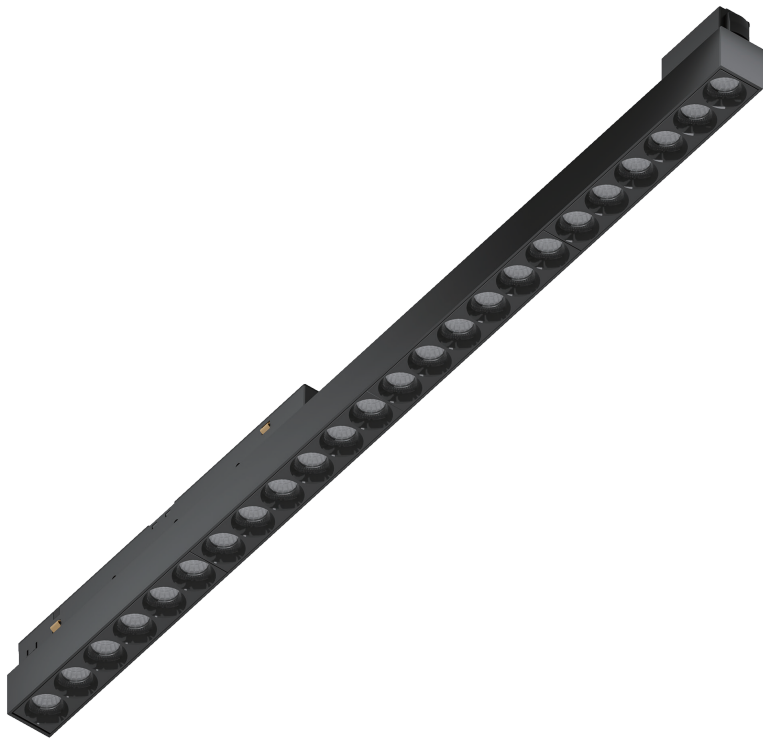

Body

SPARK 20 accent lighting with luminaire body in extruded aluminium.

End caps in die casting aluminium, with black antiglare cover, have medium and wide beam angles.

Supplied with magnetic adaptor, available in different length, also have fixed and adjustable two versions for selected.

Accessories

Honeycomb louvre.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications


Magnetic accent linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories



Honeycomb louvre

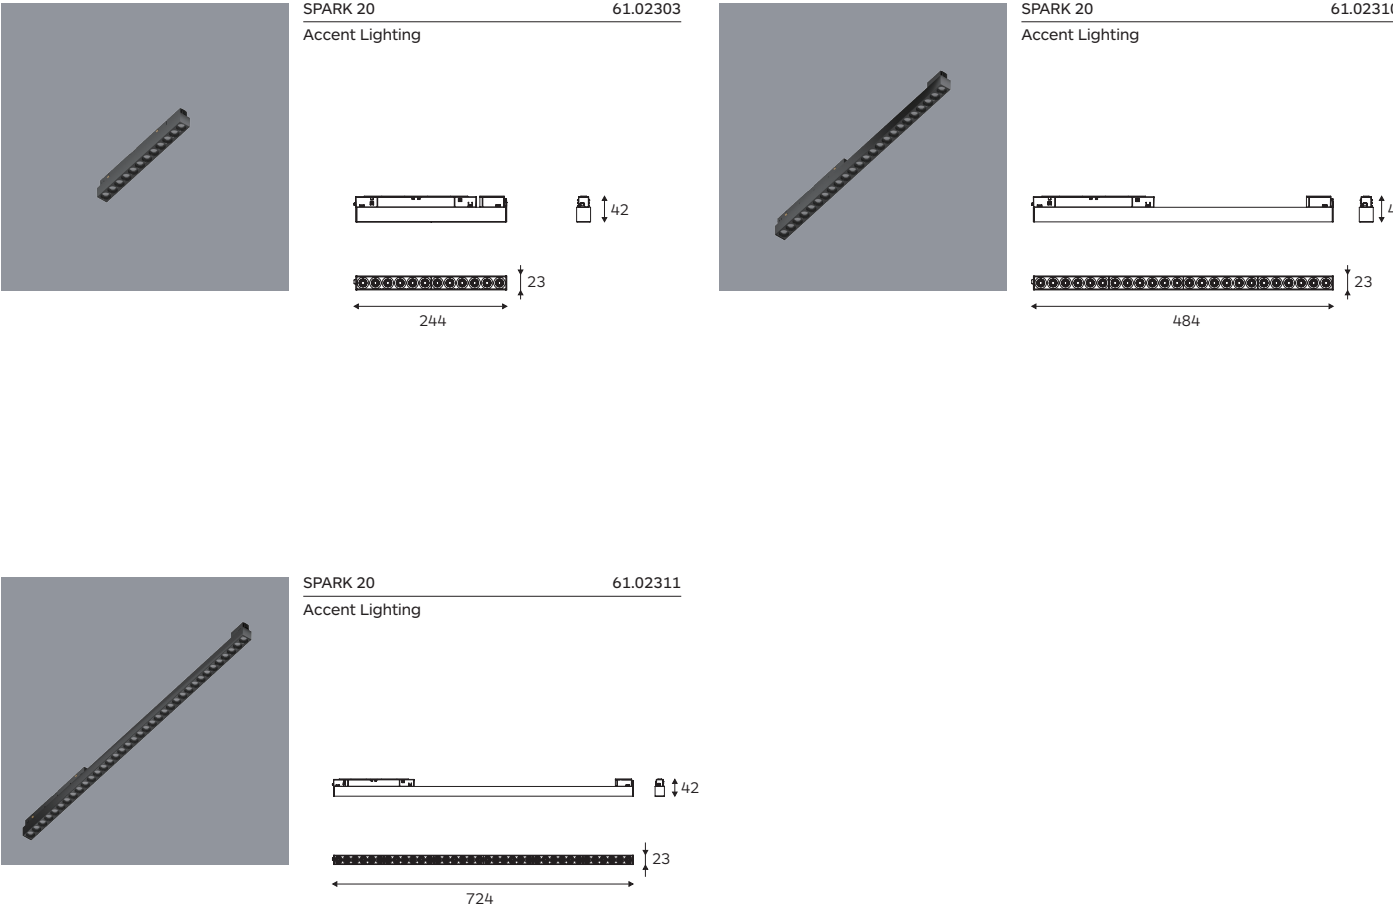

Code Ordering Example: 6 1 . 0 2 3 0 3 - 9 0 3 0 3 3 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
SPARK 20 Low Voltage Track	61.02303	SA	SMD LED	90	30	3000K	10W	682 lm	33°/49°	D0	No Dim	10 ☐ WH
					40	4000k		716 lm		DA	Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02310	SA	SMD LED	90	30	3000K	13.4W	951 lm	31°/53°	DC	0-10V Dim	
					40	4000k		998 lm				
SPARK 20 Low Voltage Track	61.02311	SA	SMD LED	90	30	3000K	20W	1384 lm	32°/46°			
					40	4000k		1453 lm				

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Body

SPARK 20 accent lighting with luminaire body in extruded aluminium.

End caps in die casting aluminium, with black antiglare cover, have medium and wide beam angles.

Supplied with magnetic adaptor, available in different length, also have fixed and adjustable two versions for selected.

Accessories

Honeycomb louvre.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications


Magnetic accent linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories





Honeycomb louvre

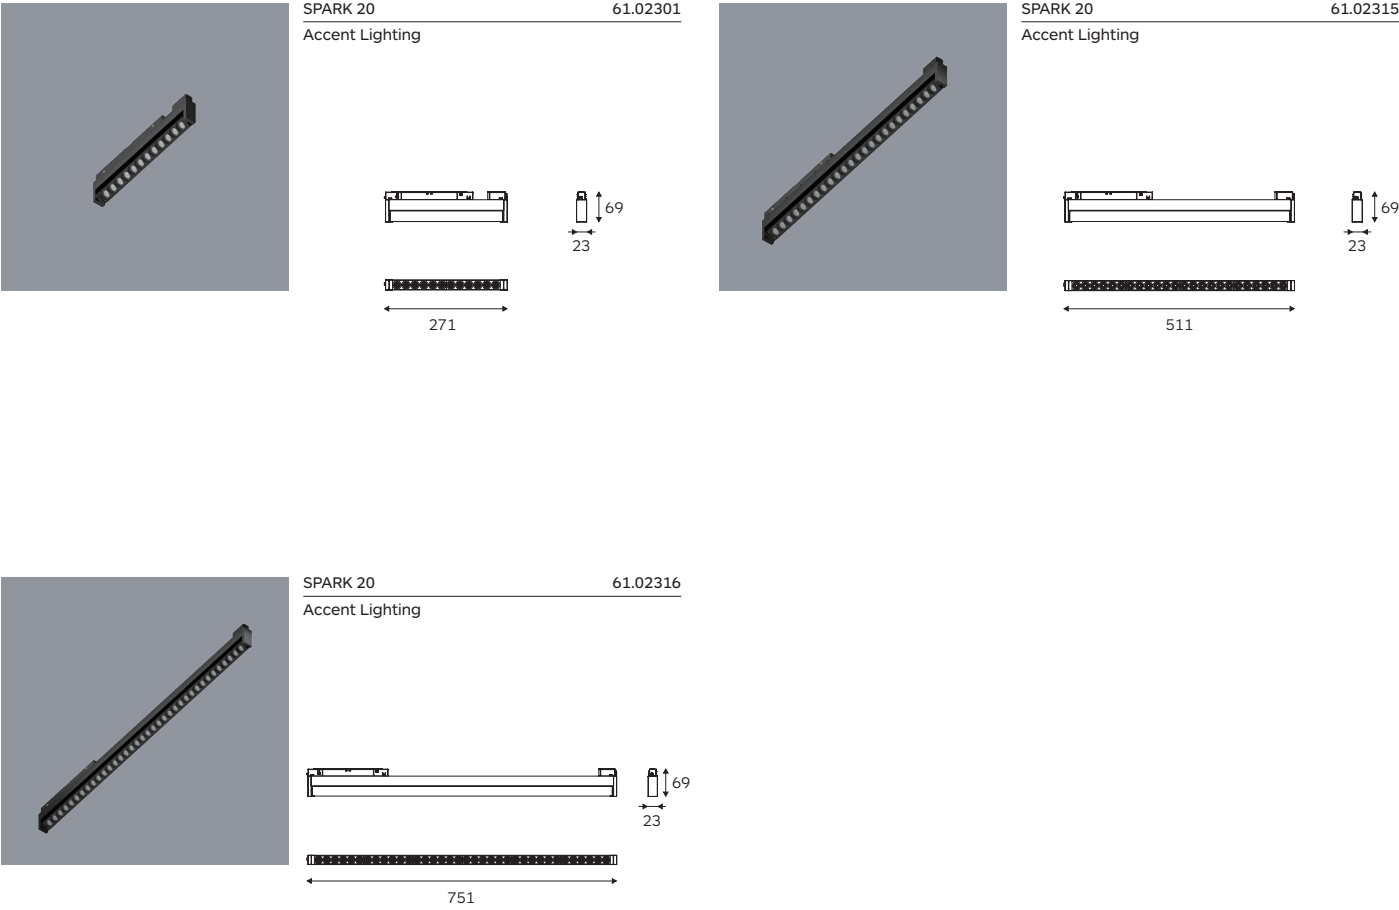


Code Ordering Example: 6 1 . 0 2 3 0 1 - 9 0 3 0 3 3 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
SPARK 20 Low Voltage Track	61.02301	SA	SMD LED	90	30	3000K	10W	682 lm	33°/49°	D0	No Dim	10 □ WH
					40	4000k		716 lm		DA	Dali Dim	20 ■ BK
SPARK 20 Low Voltage Track	61.02315	SA	SMD LED	90	30	3000K	13.4W	951 lm	31°/53°	DC	0-10V Dim	
					40	4000k		998 lm				
SPARK 20 Low Voltage Track	61.02316	SA	SMD LED	90	30	3000K	20W	1384 lm	32°/46°			
					40	4000k		1453 lm				


LOW VOLTAGE TRACK & ACCESSORIES

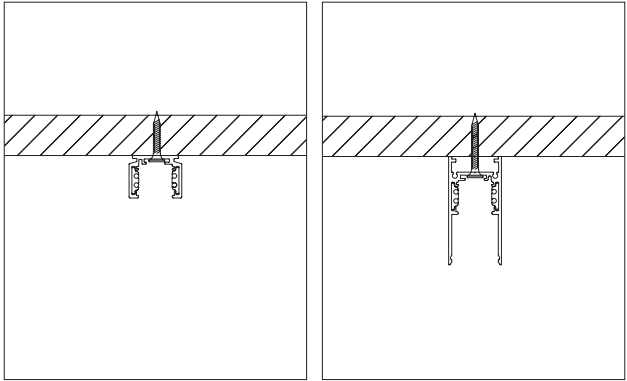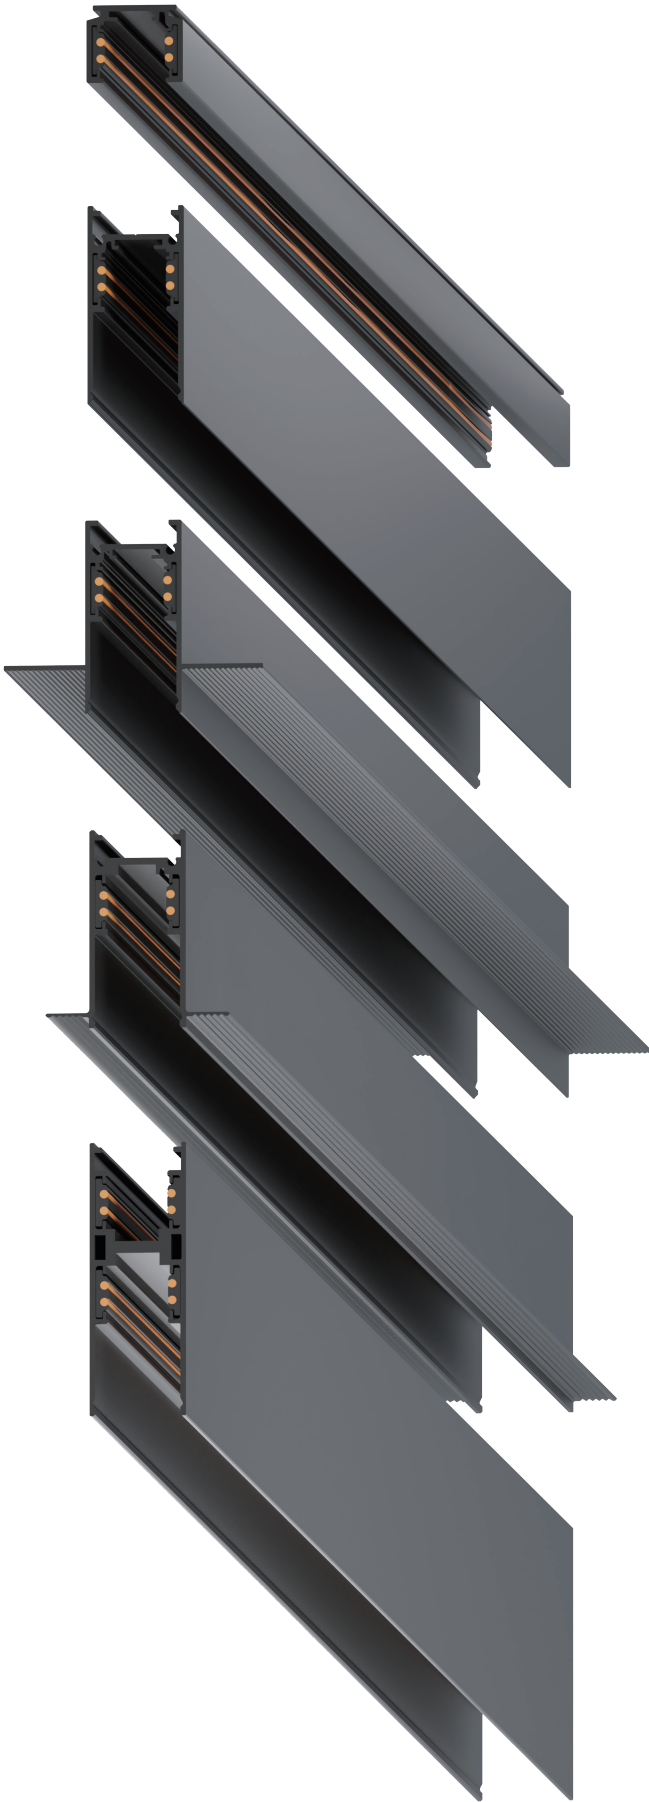

Ultra-thin Ceiling Mounted Deep Ceiling Mounted

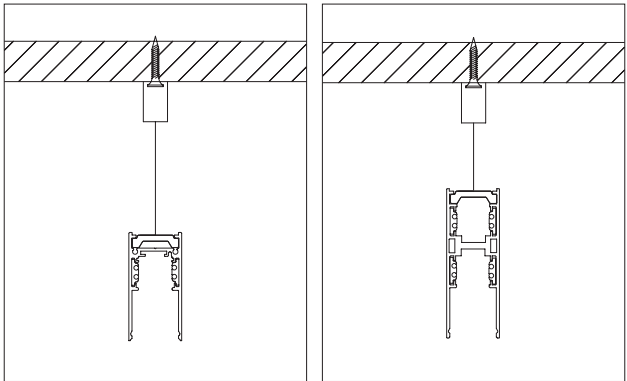


Pendant Up-Down Pendant

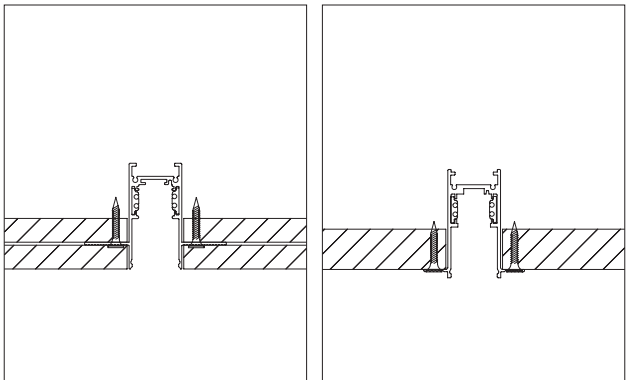


Two-Wood Recessed Trimless Recessed


LOW VOLTAGE TRACK & ACCESSORIES

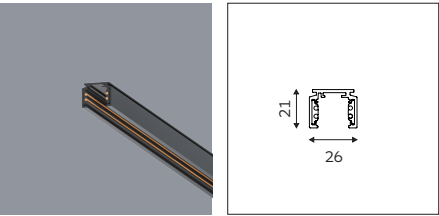


Low Voltage Magnetic Track
Ultra-Thin Ceiling Mounted
1M/1.5M/2M/3M

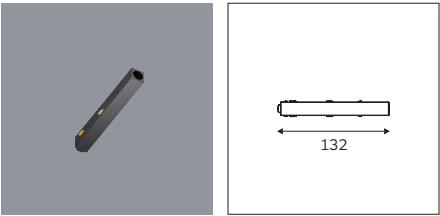


Low Voltage Magnetic Track Accessories
Live End

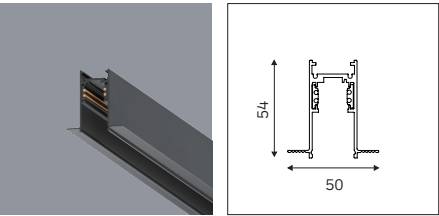


Low Voltage Magnetic Track
Recessed
1M/1.5M/2M/3M
Cut-out: 28mm

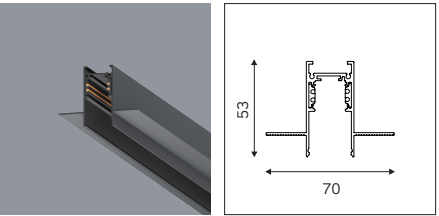


Low Voltage MagneticTrack
Recessed
1M/1.5M/2M/3M
Cut-out: 28mm

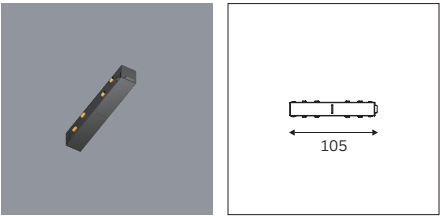


Low Voltage Magnetic Track Accessories
I Feed

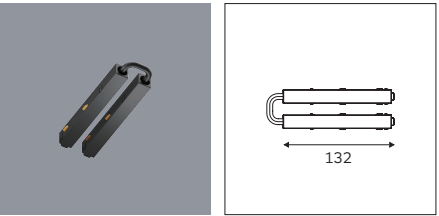


Low Voltage Magnetic Track Accessories
Flexible I Feed

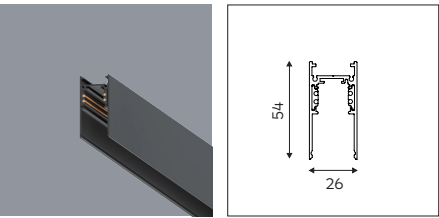


Low Voltage Magnetic Track
Ceiling Mounted and Pendant
1M/1.5M/2M/3M

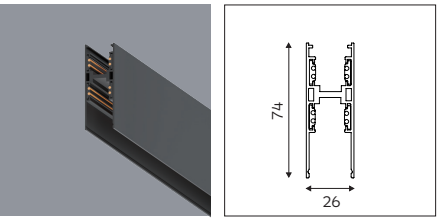

Low Voltage Magnetic Track
Pendant
1M/1.5M/2M/3M



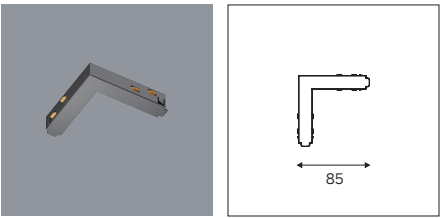


Low Voltage Magnetic Track Accessories
L Feed


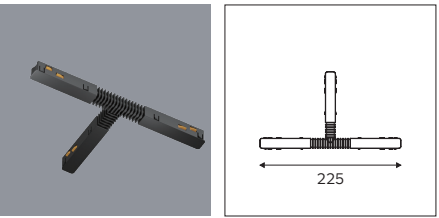


Low Voltage Magnetic Track Accessories
T Feed



LOW VOLTAGE TRACK & ACCESSORIES

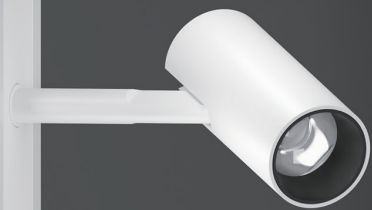



Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (External)




Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (Internal)





Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (Vertical)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (External)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (Internal)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (Vertical)



Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (External)



Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (Internal)




Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (Vertical)




TRACK AND TRACK ACCESSORIES




TRACK AND TRACK ACCESSORIES

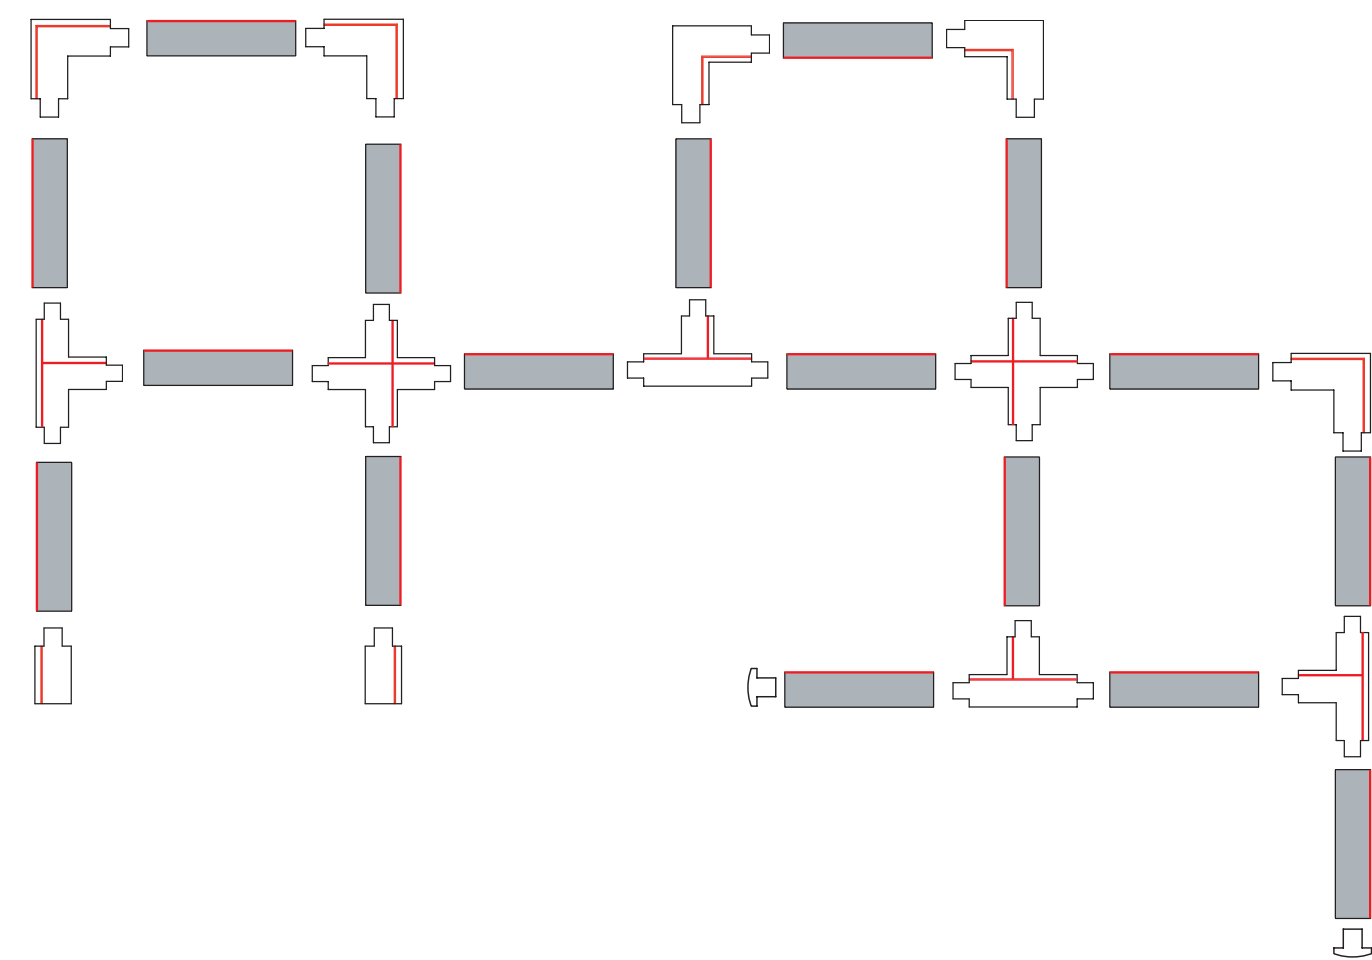

Schematic diagram of the inside of the track and the wiring

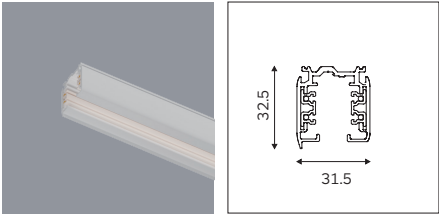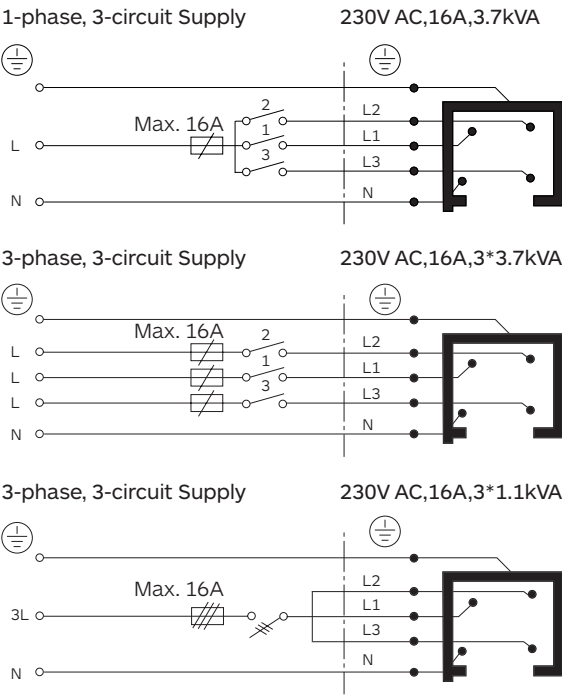
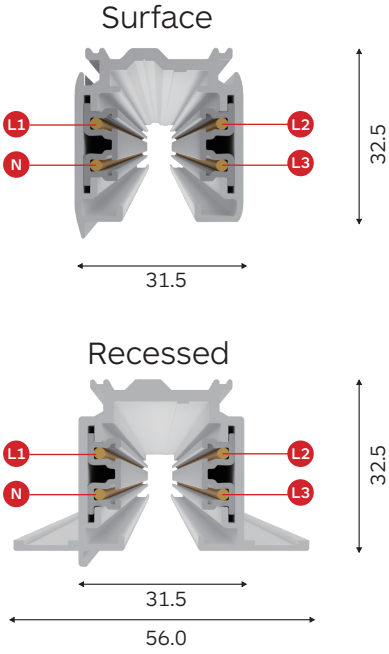


3 Circuit Track (Surface Mounted)
1M/1.5M/2M/3M Length


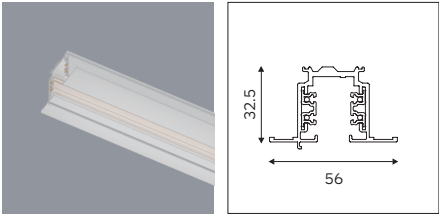


3 Circuit Track (Recessed)
1M/1.5M/2M/3M Length
Cut-out: 35mm



TRACK AND TRACK ACCESSORIES





3 Circuit Line End (L)





3 Circuit Line End (R)





3 Circuit 180 L Feed





3 Circuit L Feed (L)





3 Circuit L Feed (R)





3 Circuit + Feed





3 Circuit I Feed (External)





3 Circuit I Feed (Internal)





3 Circuit Flexible Feed



3 Circuit T Feed (L)




3 Circuit T Feed (R)








3 Circuit End Cap


TRACK AND TRACK ACCESSORIES

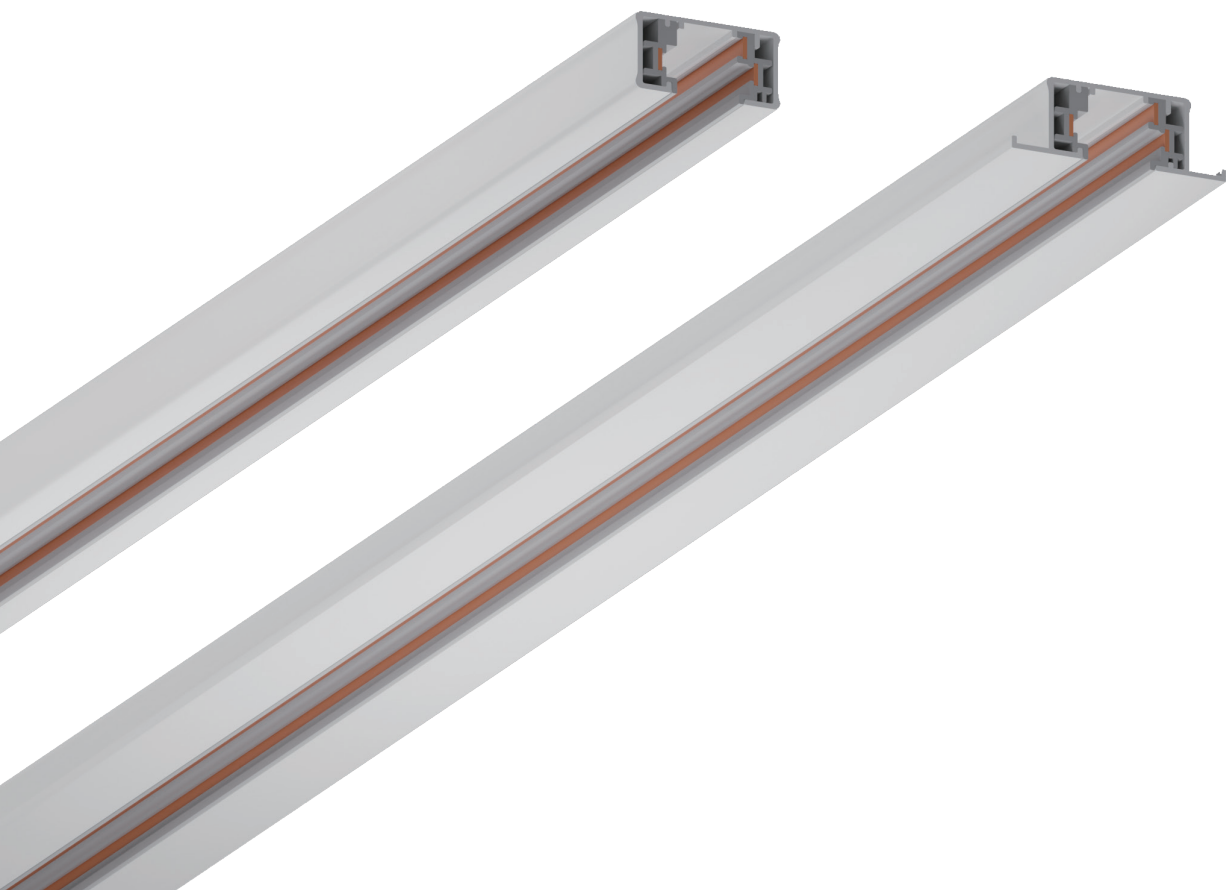

Schematic diagram of the inside of the track and the wiring

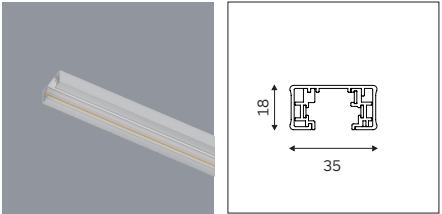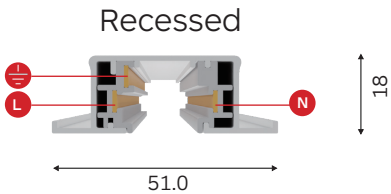
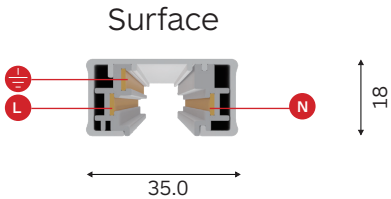


1 Circuit Track (Ceiling Mounted)
1M/1.5M/2M/3M Length


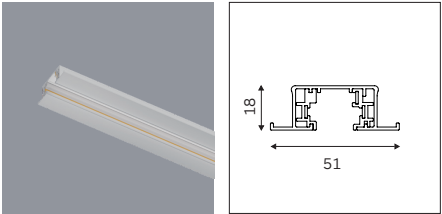


1 Circuit Track (Recessed)
1M/1.5M/2M/3M Length



TRACK AND TRACK ACCESSORIES





1 Circuit Line End





1 Circuit I Feed (Internal)





1 Circuit Flexible I Feed





1 Circuit I Feed (External)





1 Circuit L Feed



1 Circuit T Feed



1 Circuit + Feed




1 Circuit End Cap

RECESSED DOWNLIGHT




EMMA

ECO




MINI

UTH



NOVAL



SILO



LOTT

SLIM

SPECTRUM RECESSED DOWNLIGHT

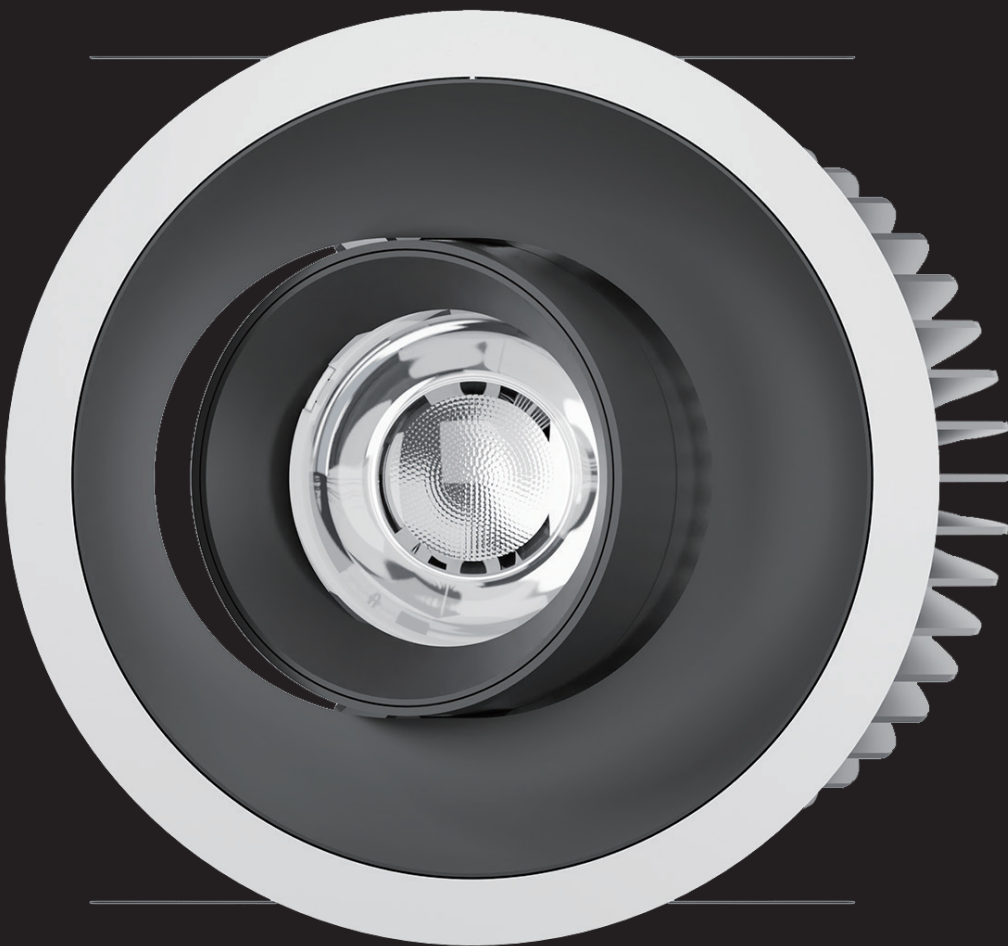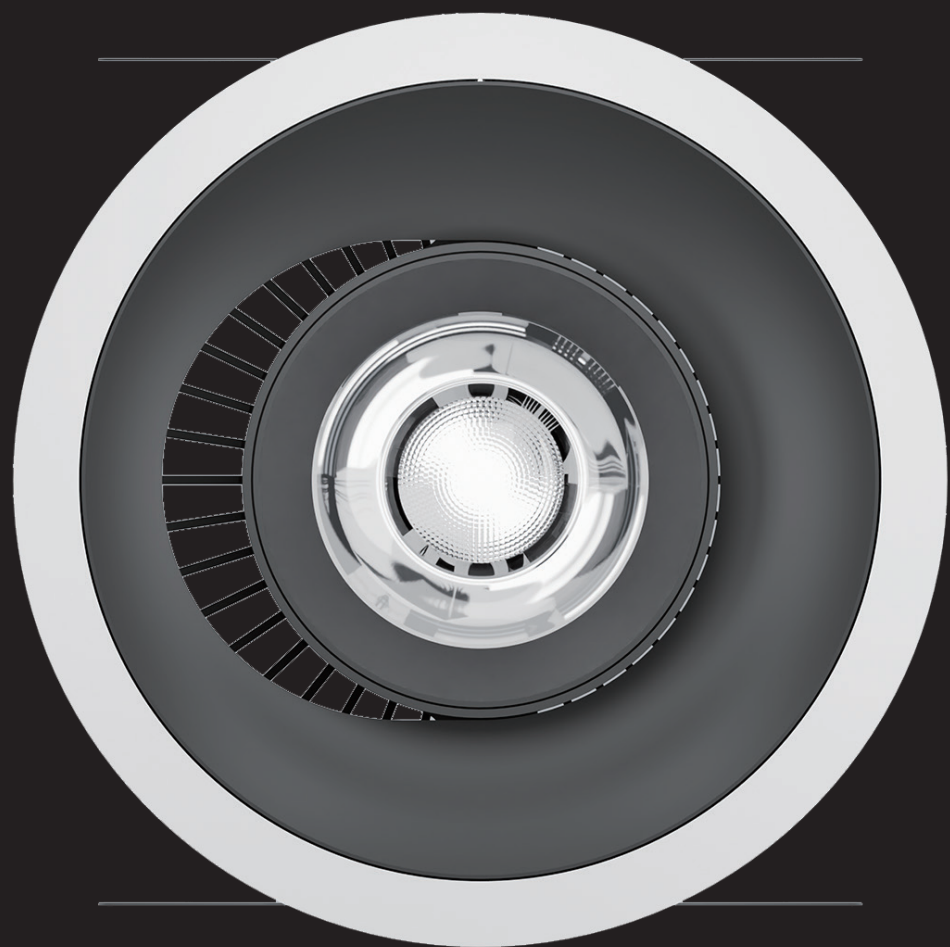

SPECTRUM
RECESSED DOWNLIGHT

SPECTRUM RECESSED DOWNLIGHT



SPECTRUM 95
Cut-out: Ø95mm
Power: 14.3W
Optic: Lens




SPECTRUM 110
Cut-out: Ø110mm
Power: 24.3W
Optic: Lens





SPECTRUM 125
Cut-out: Ø125mm
Power: 28W
Optic: Lens


SPECTRUM RECESSED DOWNLIGHT

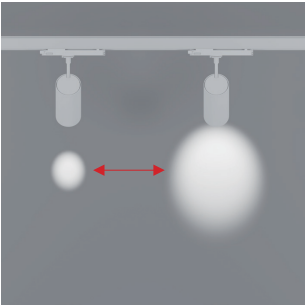


Zoom
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

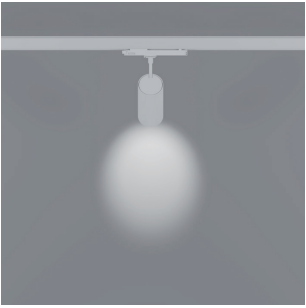

“+” Anti-glare
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



Ultra-narrow Angle
Accessories
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

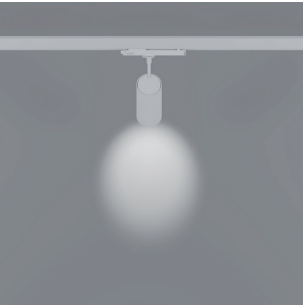

Deep Anti-glare (Cutoff Angle 30D)
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

SPECTRUM RECESSED DOWNLIGHT



Body

Greater angle adjustment (up to 30d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Share a variety of optical accessories, you can one body, free to change.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 I CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.

Application areas: High-end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



Code Ordering Example: 5 2 . 0 9 5 2 8 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SPECTRUM 95 Recessed Downlight	52.09528	CA	COB LED	90	30	3000K	14.3W	1083 lm	D0	No Dim	10 □ WH
					40	4000k		1137 lm		Dali Dim	20 ■ BK
SPECTRUM 110 Recessed Downlight	52.11012	CA	COB LED	90	30	3000K	24.3W	2615 lm	DC	0-10V Dim	
					40	4000k		2746 lm		Triac Dim	
SPECTRUM 125 Recessed Downlight	52.12516	CA	COB LED	90	30	3000K	28W	3055 lm	19°/24°/39°/52°		
					40	4000k		3208 lm			

SPECTRUM RECESSED DOWNLIGHT



Body

Greater angle adjustment (up to 30d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Share a variety of optical accessories, you can one body, free to change.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.

Application areas: High-end residential and retail projects, hotels, museums and galleries.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

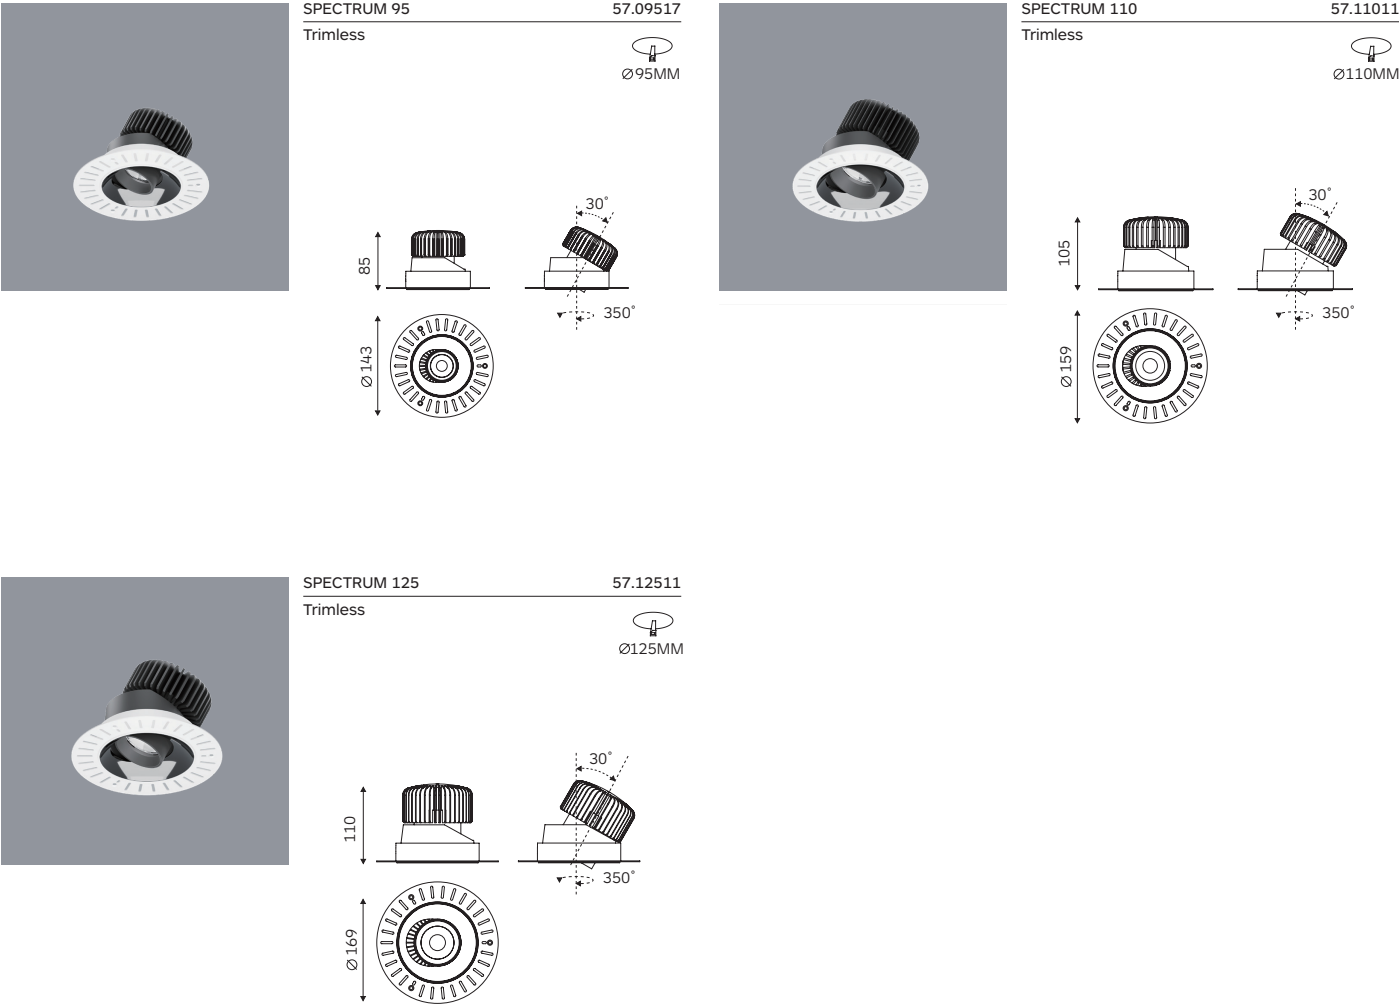

Code Ordering Example: 5 7 . 0 9 5 1 7 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SPECTRUM 95 Recessed Downlight	57.09517	CA	COB LED	90	30	3000K	14.3W	808 lm	D0	No Dim	10 □ WH
					40	4000k		848 lm	DA	Dali Dim	20 ■ BK
SPECTRUM 110 Recessed Downlight	57.11011	CA	COB LED	90	30	3000K	24.3W	1871 lm	DC	0-10V Dim	
					40	4000k		1965 lm	DT	Triac Dim	
SPECTRUM 125 Recessed Downlight	57.12511	CA	COB LED	90	30	3000K	28W	2678 lm			
					40	4000k		2812 lm			

UTH RECESSED DOWNLIGHT




Rotate 350° | Tilt 20°




Rotate 350° | Tilt 20°




Rotate 350° | Tilt 20°

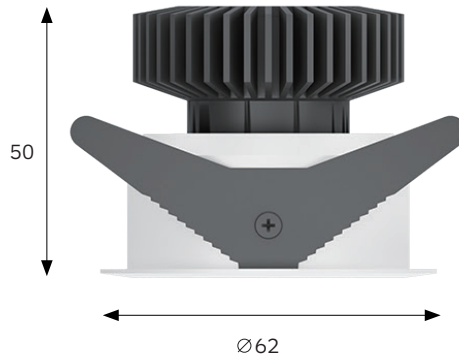

UTH 55
Cut-out: Ø55mm
Power: 7W
Optic: Lens

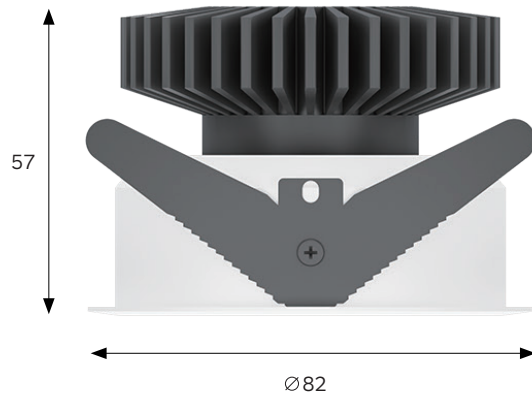


UTH 75
Cut-out: Ø75mm
Power: 8.6W
Optic: Lens

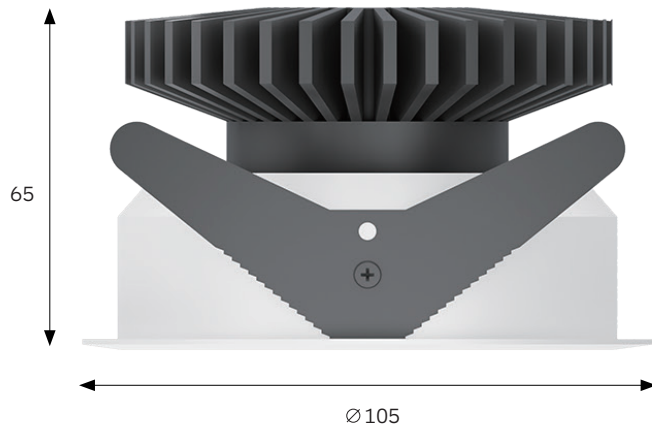

UTH 95
Cut-out: Ø95mm
Power: 14.3W
Optic: Lens

UTH RECESSED DOWNLIGHT

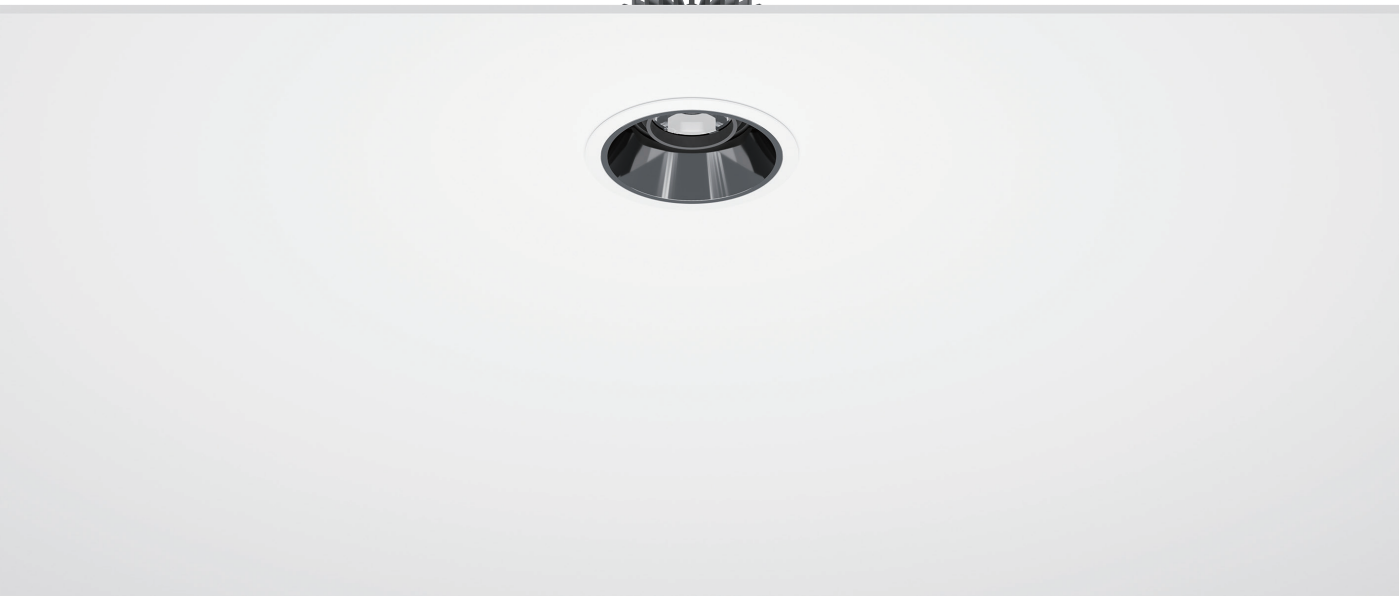

Body

Ultra-thin Anti-glare downlight, CNC machining, luminaire surface can support electroplating treatment.

With Anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories





Linear Spread glass



Glass




Honeycomb louvre

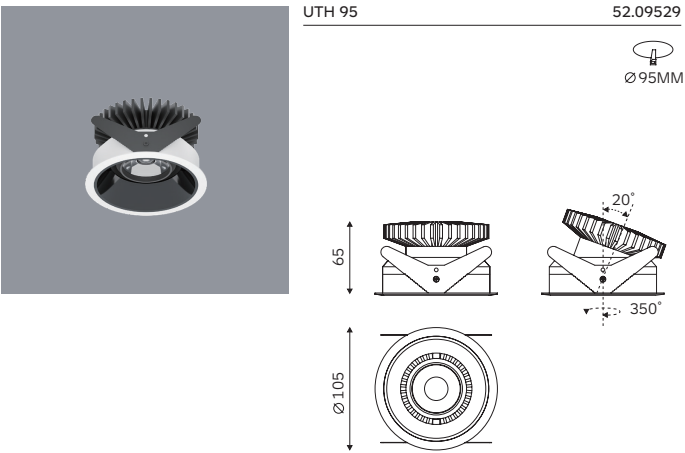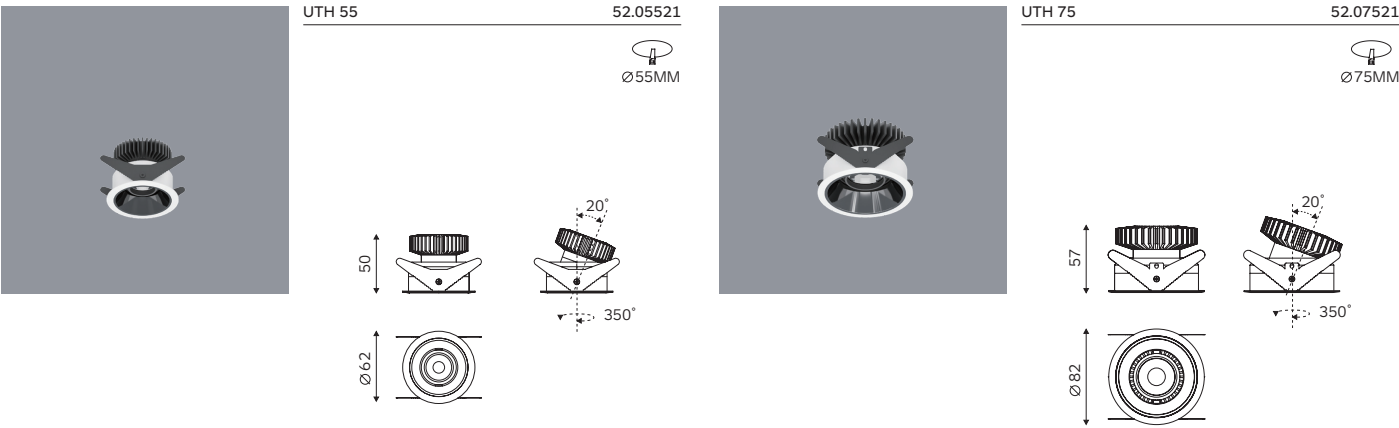

Code Ordering Example: 5 2 . 0 5 5 2 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
UTH 55 Recessed Downlight	52.05521	CA	COB LED	90	30	3000K	7W	16°/23°/35°/57°	D0 No Dim	10 □ WH
					40	4000k			DA Dali Dim	20 ■ BK
UTH 75 Recessed Downlight	52.07521	CA	COB LED	90	30	3000K	8.6W	19°/24°/36°/49°	DC 0-10V Dim	
					40	4000k			DT Triac Dim	
UTH 95 Recessed Downlight	52.09529	CA	COB LED	90	30	3000K	14.3W	21°/31°/41°/51°		
					40	4000k				

SILO RECESSED DOWNLIGHT

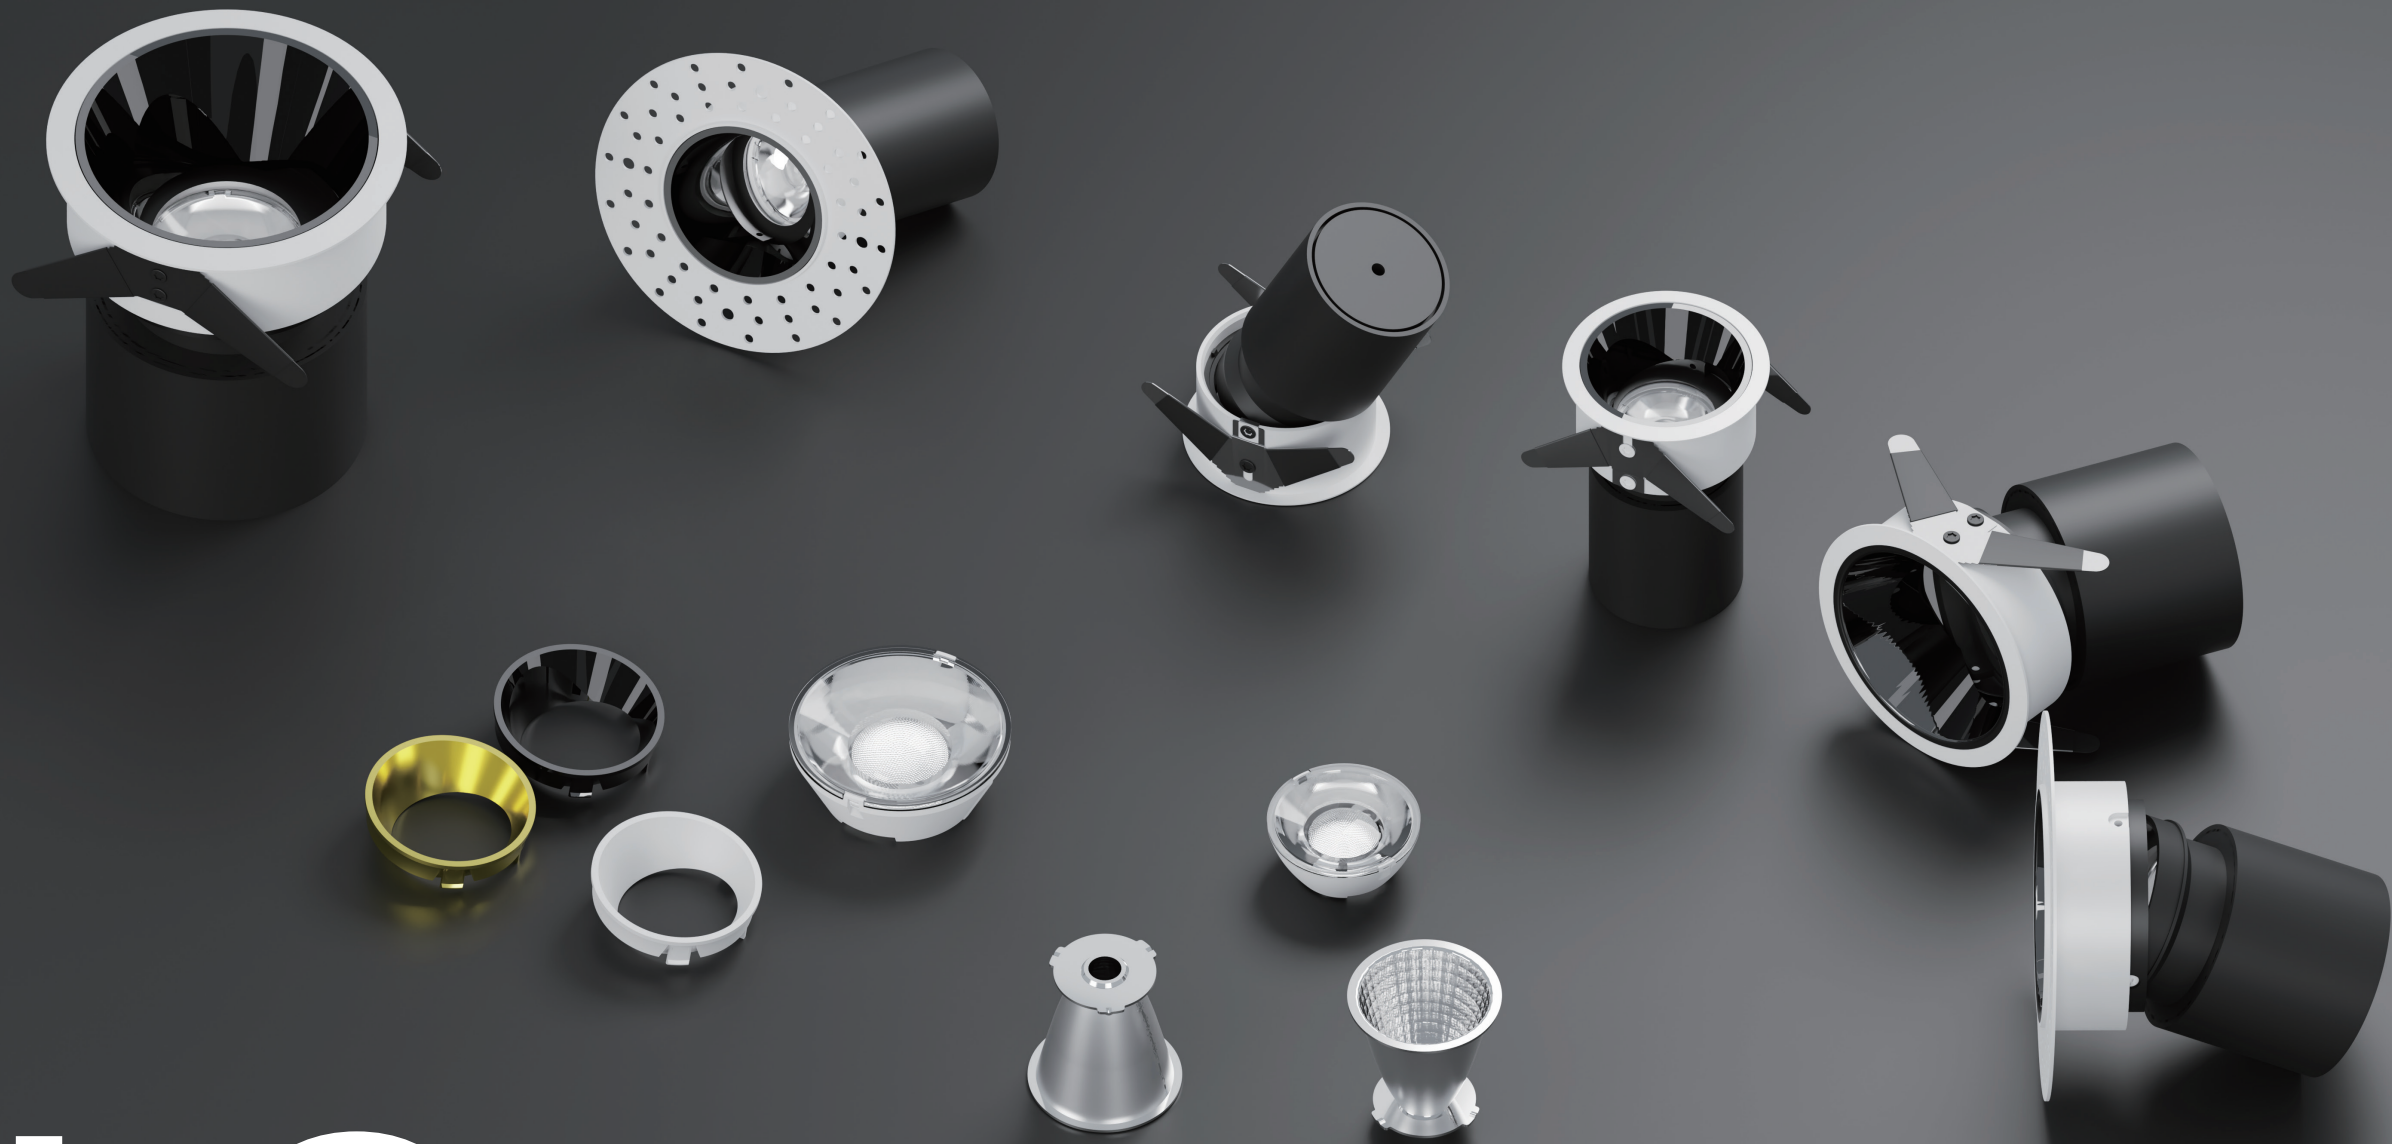

SILO

Recessed Downlight

SILO RECESSED DOWNLIGHT




1. Remove the bottom reflector



2. Take the pull ring out, as marking A, tilt angle horizontally with pull ring, which is more easily.






3. After adjusted, it can be folded back to the original position

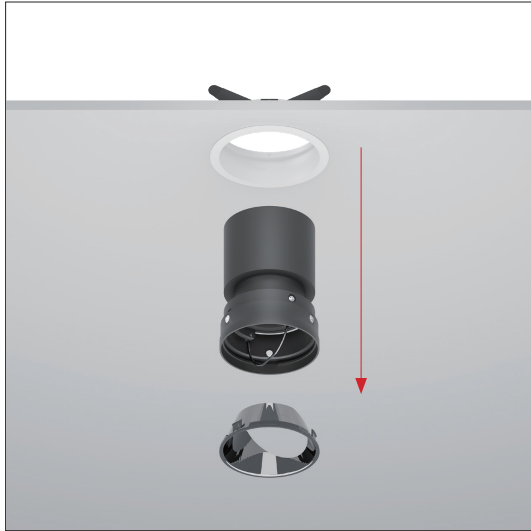


4. A pull ring allows the luminaire to be pulled down by hands without any tooling, providing great convenience for the maintenance of the luminaire


SILO RECESSED DOWNLIGHT

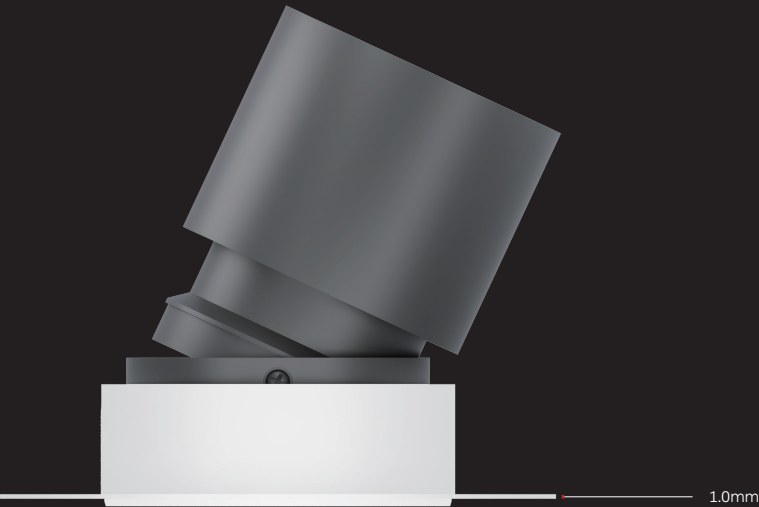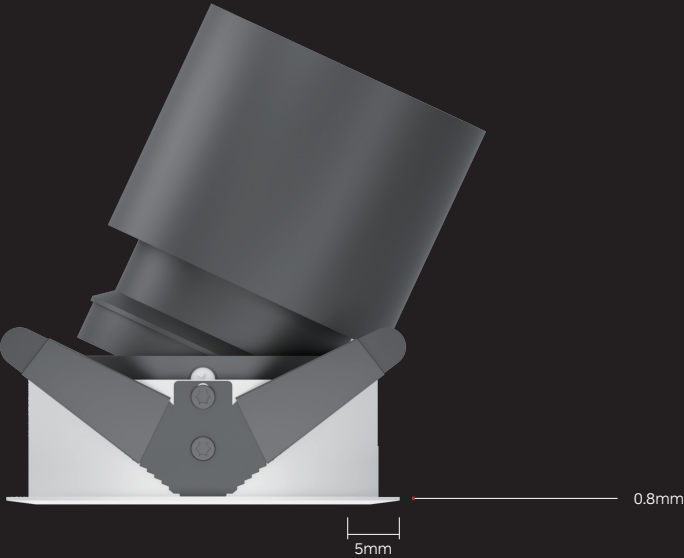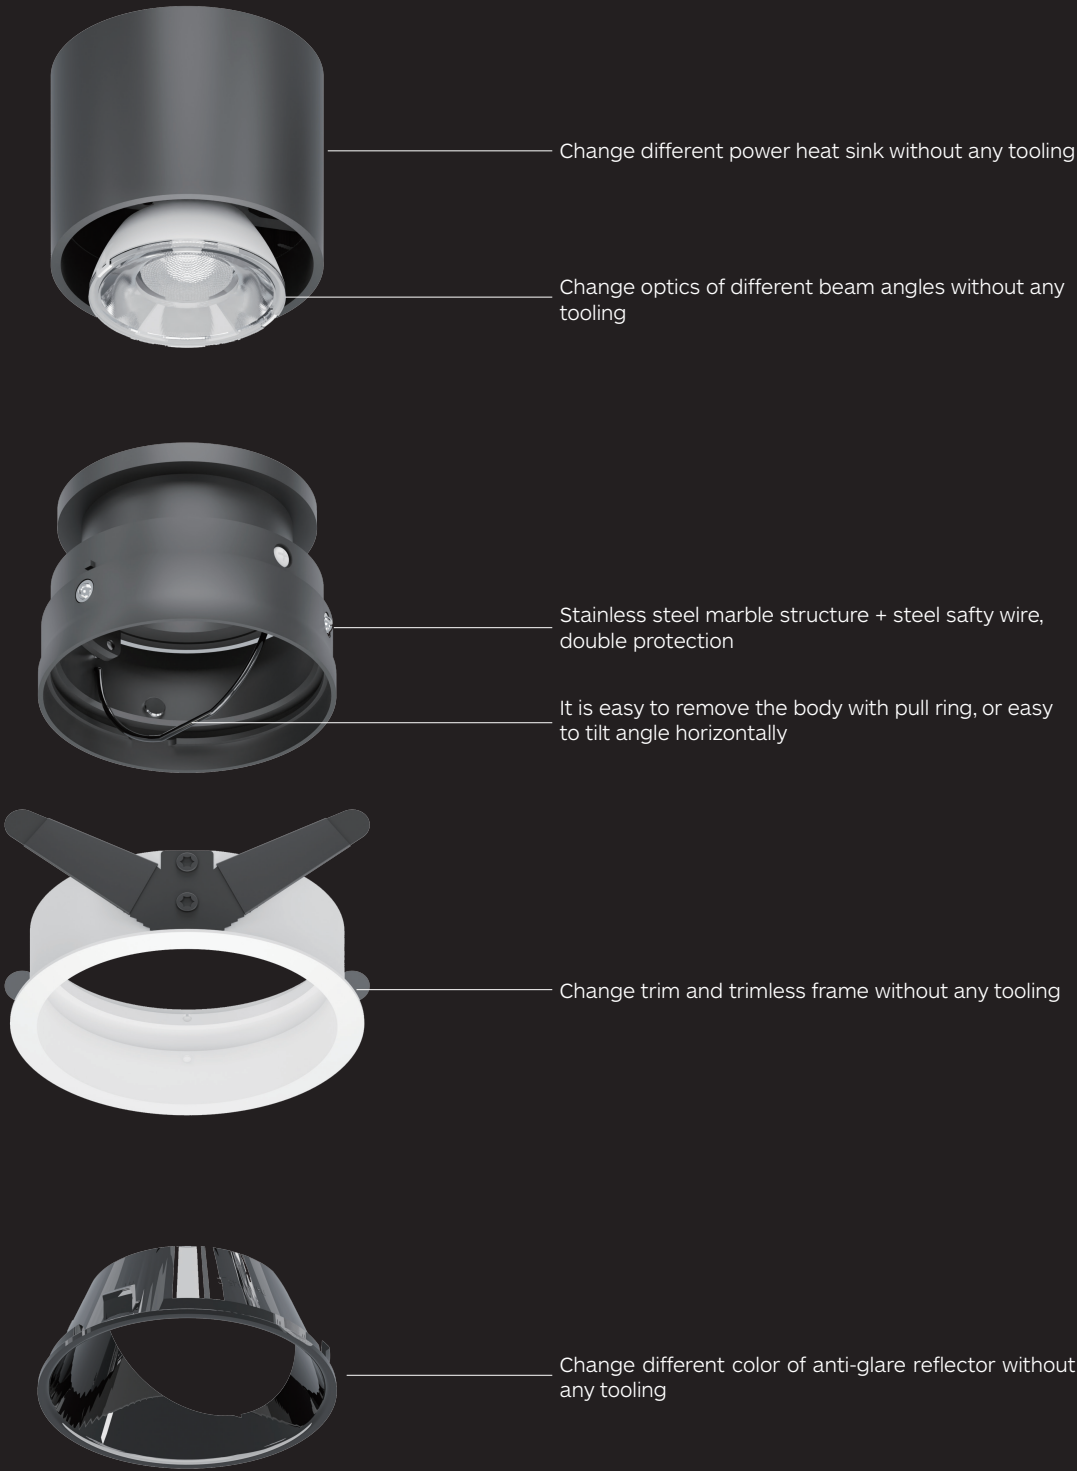

SILO RECESSED DOWNLIGHT

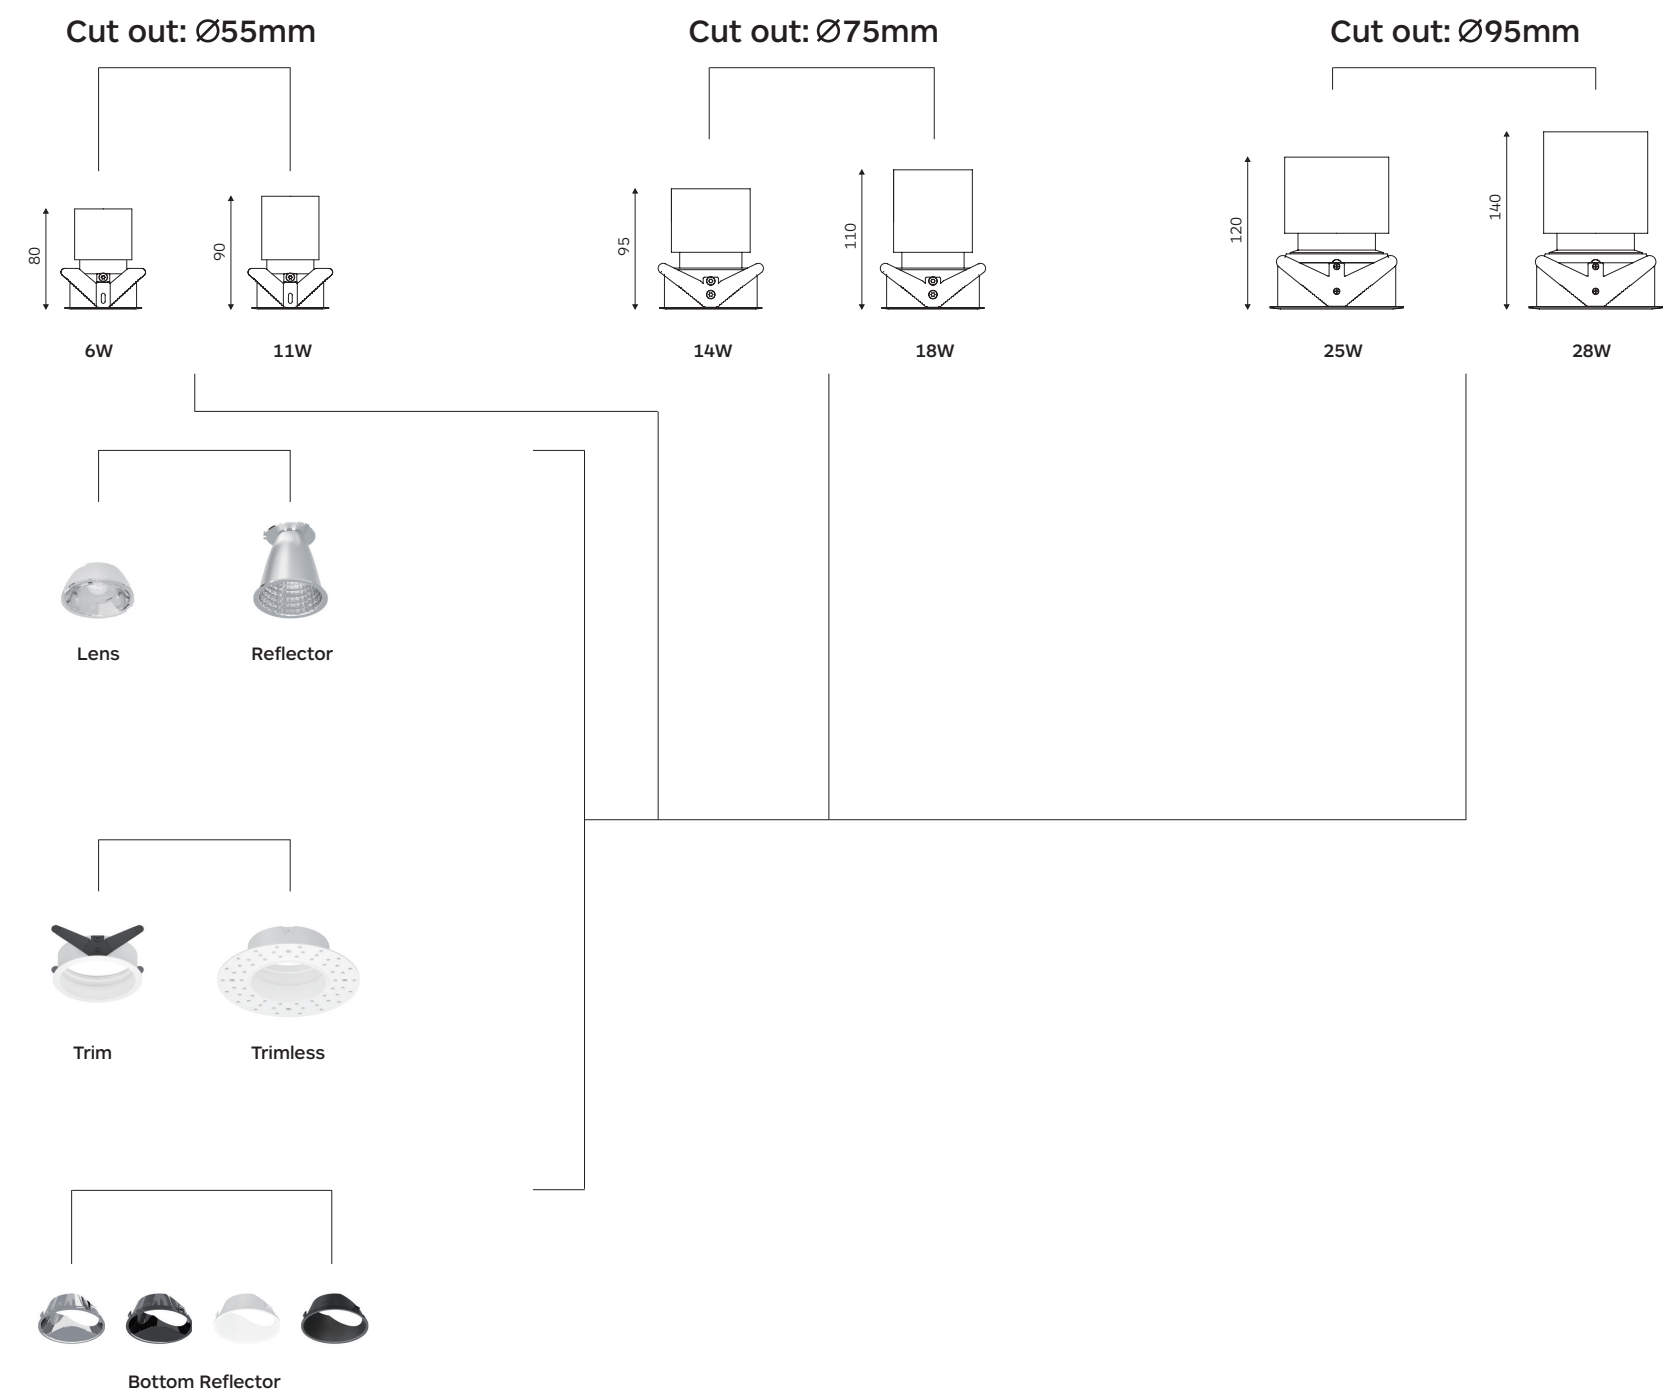

SILO RECESSED DOWNLIGHT

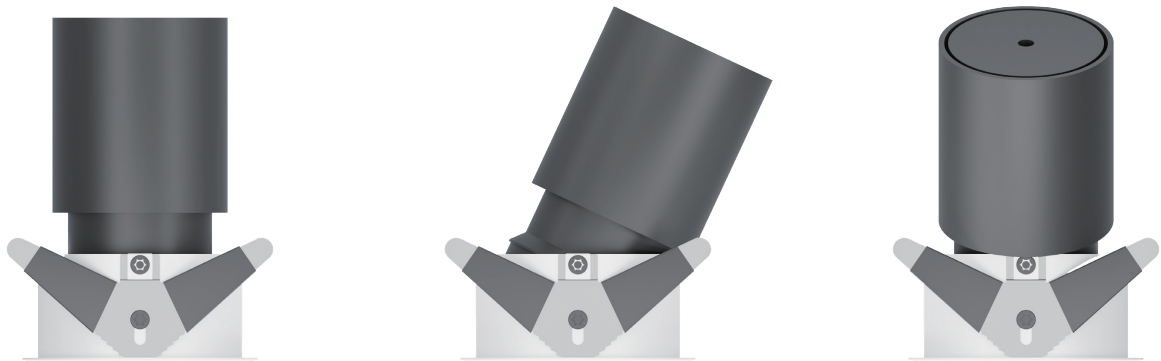

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

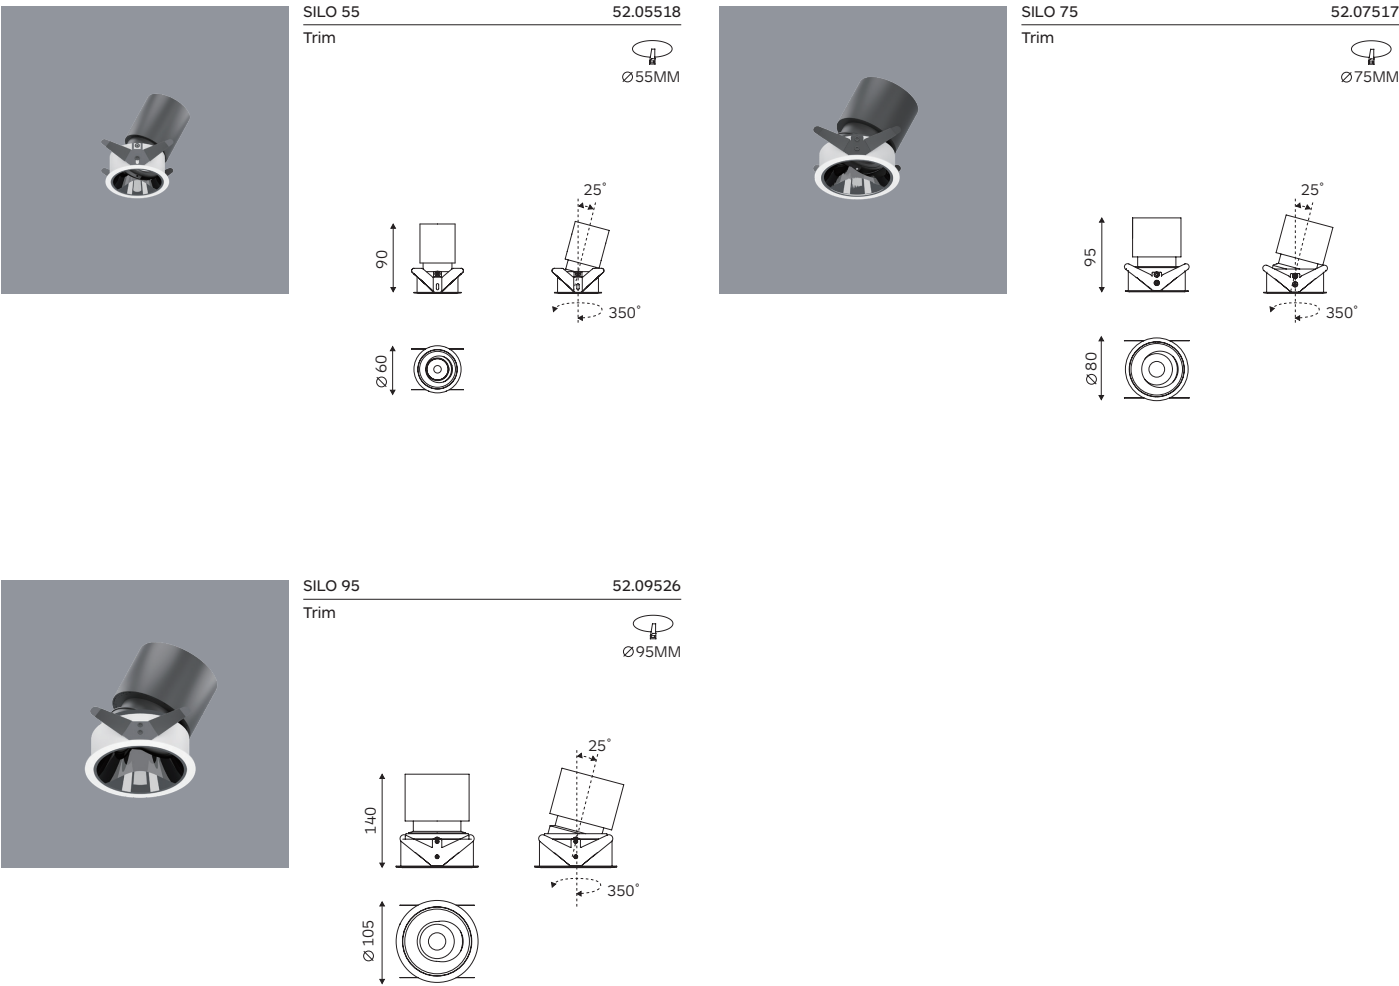

Code Ordering Example: 5 2 . 0 5 5 1 8 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SILO 55 Recessed Downlight	52.05518	CA	COB LED	90	30	3000K	11W	734 lm	D0	No Dim	10 □ WH
					40	4000k		767 lm		Dali Dim	20 ■ BK
SILO 75 Recessed Downlight	52.07517	CA	COB LED	90	30	3000K	14W	1618 lm	DC	0-10V Dim	
					40	4000k		1699 lm		Triac Dim	
SILO 95 Recessed Downlight	52.09526	CA	COB LED	90	30	3000K	28 W	2974 lm			
					40	4000k		3122 lm			
SILO 75-N Recessed Downlight	52.07517	CA	COB LED	90	30	3000K	14.8W	813 lm			
					40	4000k		854 lm			

SILO RECESSED DOWNLIGHT



Stainless steel marble structure + steel wire insurance line, double protection

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories





Linear Spread glass



Glass



Honeycomb louvre

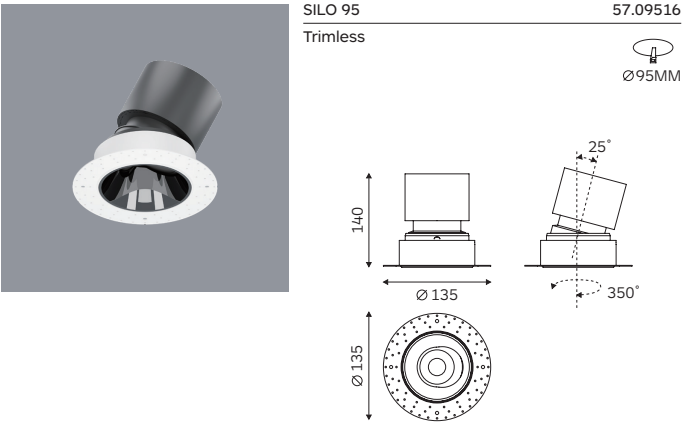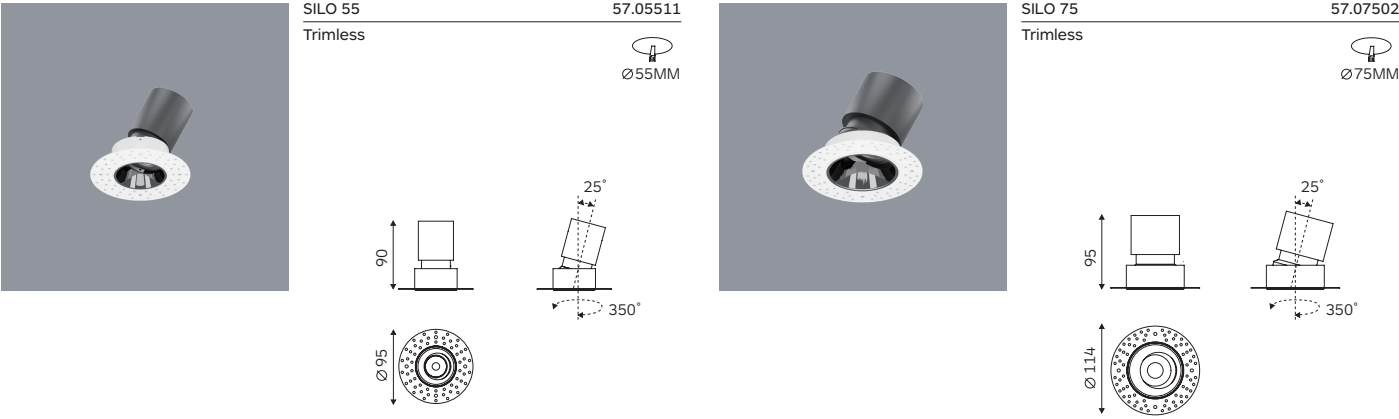


Code Ordering Example: 5 7 . 0 5 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Recessed Downlight	57.05511	CA	COB LED	90	30	3000K	11W	734 lm	D0 No Dim	10 □ WH
					40	4000k		767 lm	DA Dali Dim	20 ■ BK
SILO 75 Recessed Downlight	57.07502	CA	COB LED	90	30	3000K	14W	1618 lm	DC 0-10V Dim	
					40	4000k		1699 lm	DT Triac Dim	
SILO 95 Recessed Downlight	57.09516	CA	COB LED	90	30	3000K	28 W	2974 lm		
					40	4000k		3122 lm		
SILO 75-N Recessed Downlight	57.07502	CA	COB LED	90	30	3000K	14.8W	813 lm		
					40	4000k		854 lm		

LOTT RECESSED DOWNLIGHT



LOTT RECESSED DOWNLIGHT

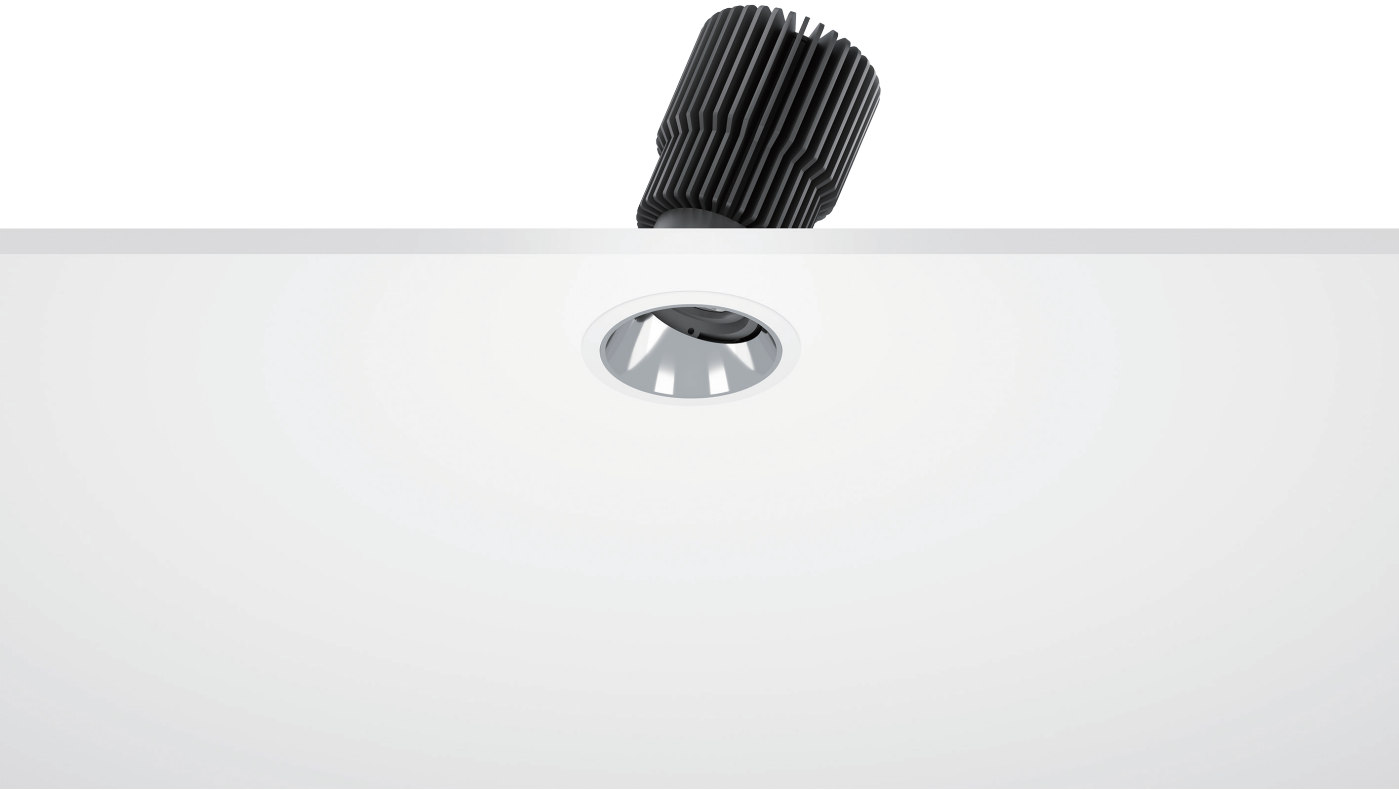

Body

Extremely small size does high wattage to meet the demand for small cut out and high lumens nowadays.

Deep anti-glare optical structure, let the space more comfortable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.

Suitable Accessories





Linear Spread glass



Glass



Honeycomb louvre

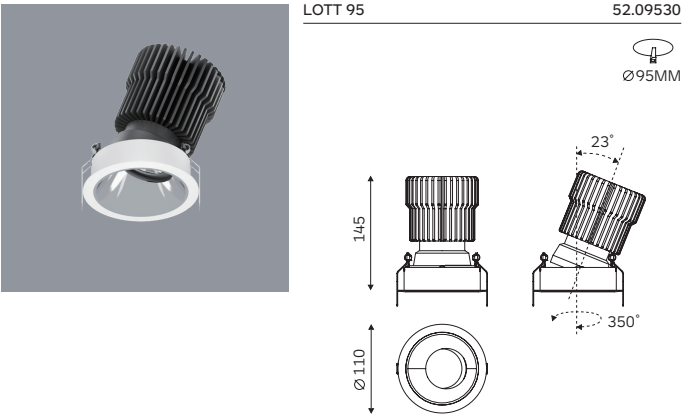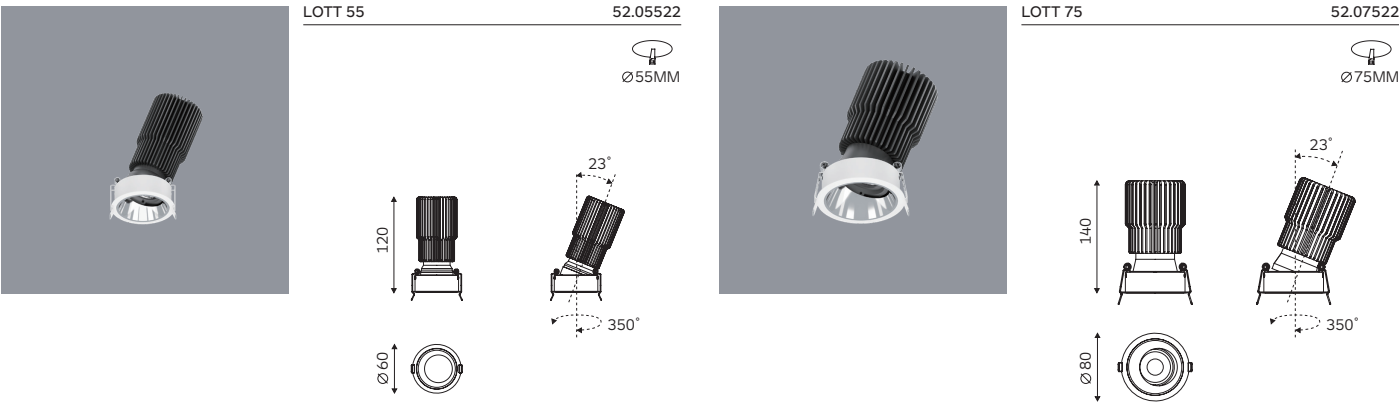

Code Ordering Example: 5 2 . 0 5 5 2 2 - 9 0 3 0 2 0 D 0 1 0



	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LOTT 55 Recessed Downlight	52.05522	CA	COB LED	90	30	3000K	1078 lm	D0	No Dim
					40	4000k		DA	Dali Dim
LOTT 75 Recessed Downlight	52.07522	CA	COB LED	90	30	3000K	2995 lm	DC	0-10V Dim
					40	4000k	3144 lm	DT	Triac Dim
LOTT 95 Recessed Downlight	52.09530	CA	COB LED	90	30	3000K	4705 lm	24°/32°/41°/52°	
					40	4000k	4940 lm		

SLIM RECESSED DOWNLIGHT


SLIM

RECESSED DOWNLIGHT

SLIM RECESSED DOWNLIGHT

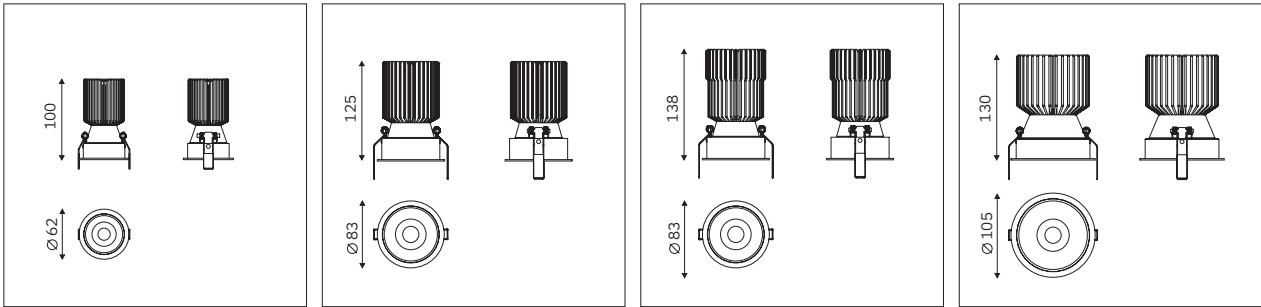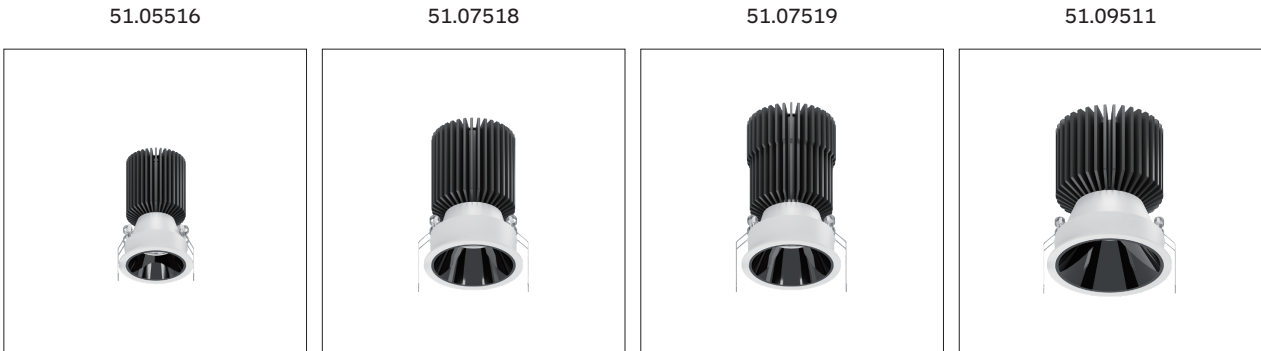


SLIM 55	SLIM 75	SLIM 75-1	SLIM 95
Watt: Max 15W	Watt: Max 25W	Watt: Max 32W	Watt: Max 40W
Cut out: 55MM	Cut out: 75MM	Cut out: 75MM	Cut out: 95MM
Beam Angle: 20°/25°/36°/47°	Beam Angle: 21°/31°/40°/50°	Beam Angle: 21°/31°/40°/50°	Beam Angle: 26°/33°/42°/51°
Optical Material: PC	Optical Material: PC	Optical Material: PC	Optical Material: PC
Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM

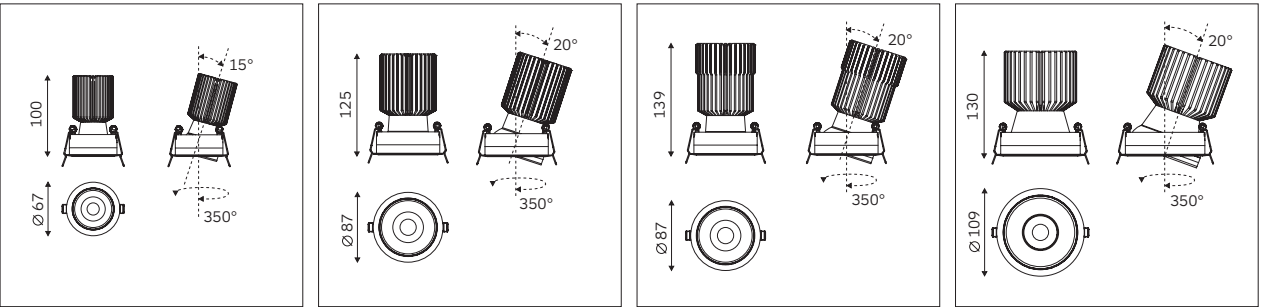

SLIM 60	SLIM 80	SLIM 80-1	SLIM 100
Watt: Max 15W	Watt: Max 25W	Watt: Max 32W	Watt: Max 40W
Cut out: 60MM	Cut out: 80MM	Cut out: 80MM	Cut out: 100MM
Beam Angle: 20°/25°/36°/47°	Beam Angle: 21°/31°/40°/50°	Beam Angle: 21°/31°/40°/50°	Beam Angle: 26°/33°/42°/51°
Optical Material: PC	Optical Material: PC	Optical Material: PC	Optical Material: PC
Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM	Suitable Ceiling: 1-25MM

SLIM RECESSED DOWNLIGHT

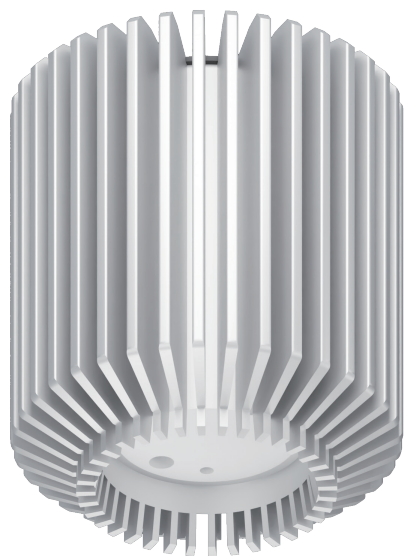


Aluminum Natural Color

Black Color






Different Beam Angle



Suitable Accessories



Fixture body can be purchase separately



Different Color Anti-glare Reflector

SLIM RECESSED DOWNLIGHT



Body

Small sizes but can be high power.

Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, can almost meet all the requirements.

With anti-glare reflector, created a comfortable environment.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre

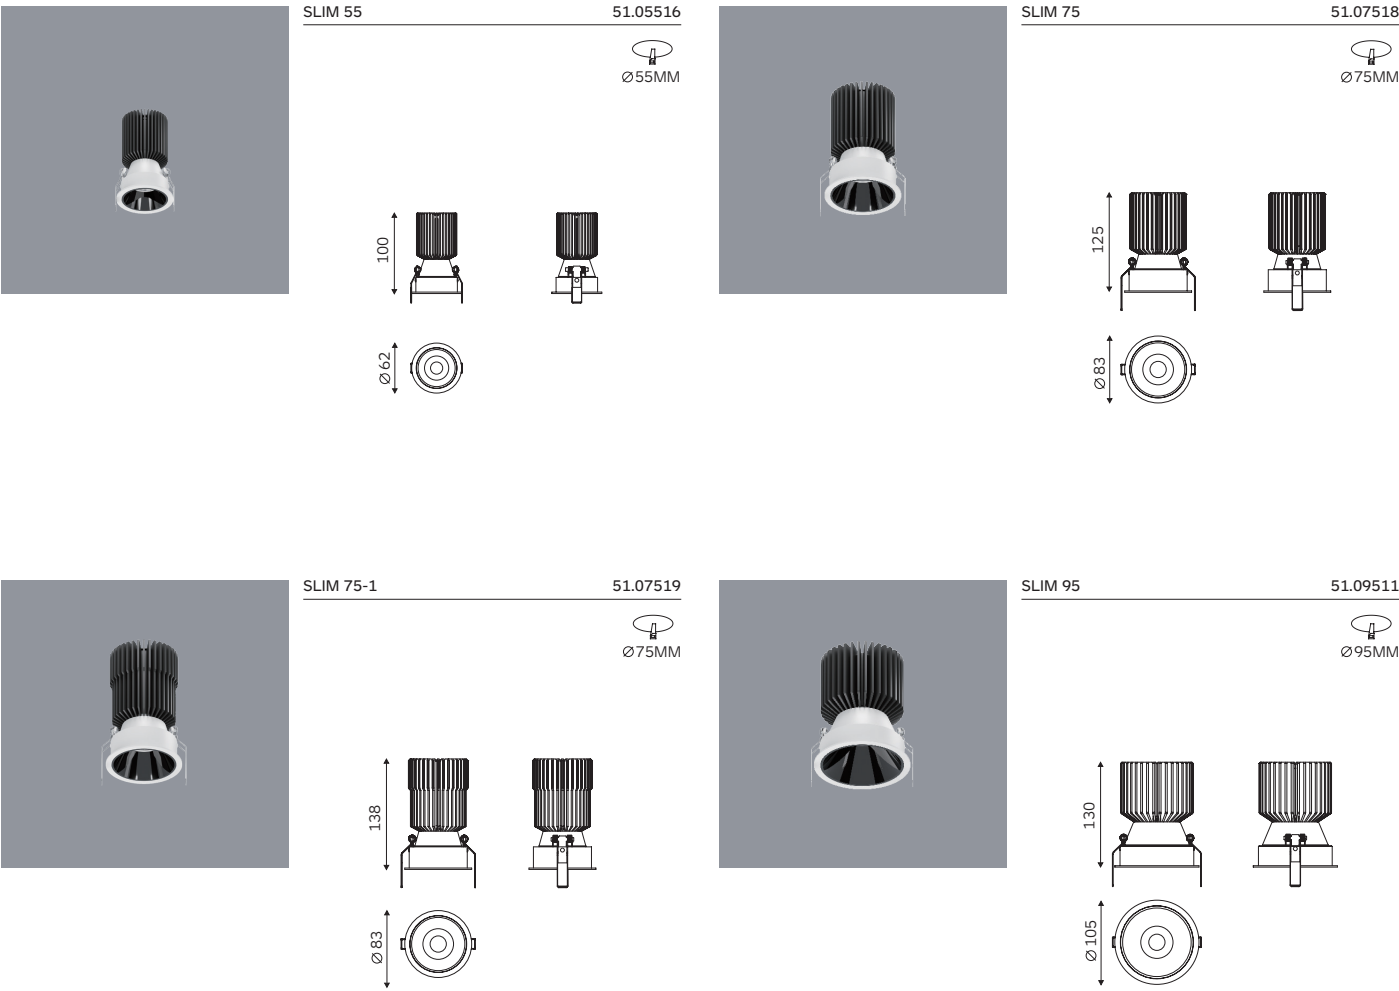

Code Ordering Example: 5 1 . 0 5 5 1 6 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SLIM 55 Recessed Downlight	51.05516	CA	COB LED	90	30	3000K	15W	1053 lm	D0	No Dim	10 □ WH
					40	4000k		1105 lm		Dali Dim	20 ■ BK
SLIM 75 Recessed Downlight	51.07518	CA	COB LED	90	30	3000K	25W	2795 lm	DC	0-10V Dim	
					40	4000k		2935 lm		Triac Dim	
SLIM 75-1 Recessed Downlight	51.07519	CA	COB LED	90	30	3000K	32W	3421 lm			
					40	4000k		3592 lm			
SLIM 95 Recessed Downlight	51.09511	CA	COB LED	90	30	3000K	36.5W	4252 lm			
					40	4000k		4465 lm			

SLIM RECESSED DOWNLIGHT

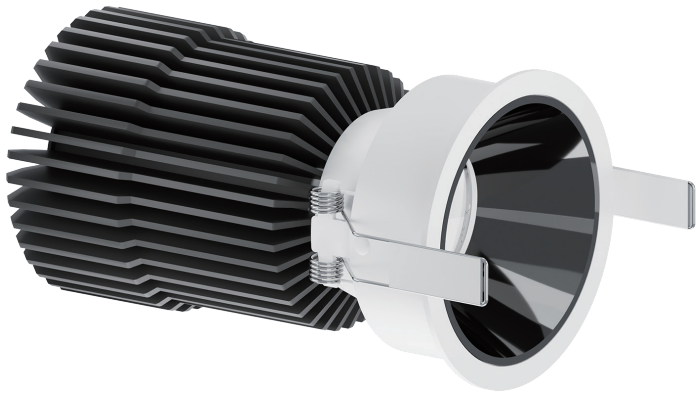

Body

Small sizes but can be high power.

Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, Can almost meet all the requirements.

With anti-glare reflector, Created a comfortable environment.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

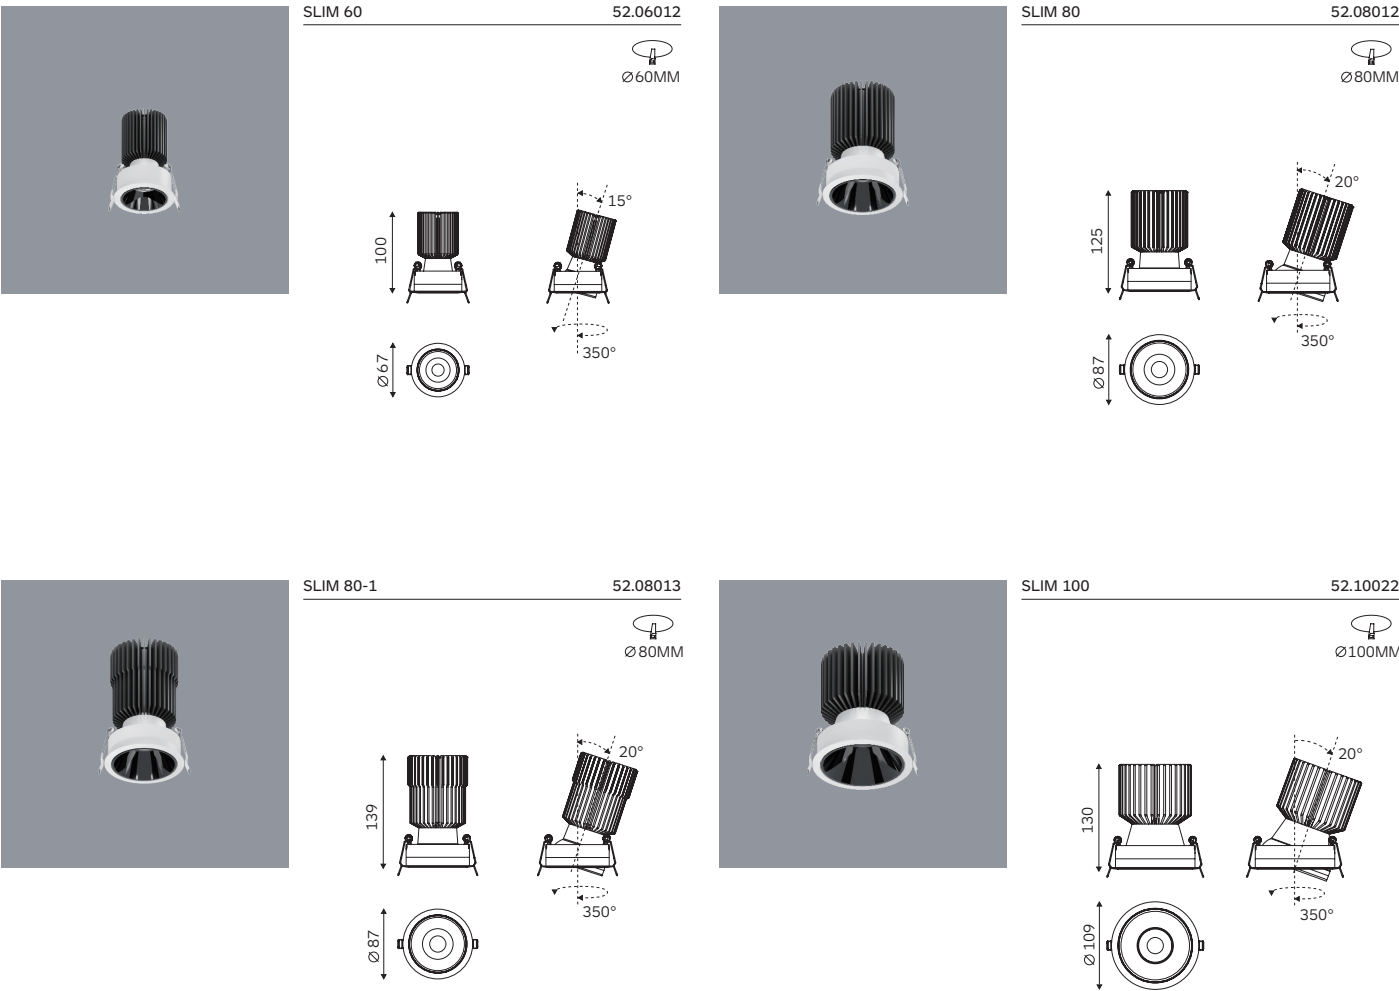

Code **Ordering Example:** 5 2 . 0 6 0 1 2 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SLIM 60 Recessed Downlight	52.06012	CA	90	30	3000K	15W	20°/25°/36°/47°	D0 No Dim	10 □ WH
				40	4000k	1105 lm		DA Dali Dim	20 ■ BK
SLIM 80 Recessed Downlight	52.08012	CA	90	30	3000K	25W	21°/31°/40°/50°	DC 0-10V Dim	
				40	4000k	2935 lm		DT Triac Dim	
SLIM 80-1 Recessed Downlight	52.08013	CA	90	30	3000K	32W	21°/31°/40°/50°		
				40	4000k	3592 lm			
SLIM 100 Recessed Downlight	52.10022	CA	90	30	3000K	36.5W	26°/33°/42°/51°		
				40	4000k	4465 lm			

ECO RECESSED DOWNLIGHT



ECO 55
Cut-out: Ø55mm
Watt: 14W
Lumen: 1762lm



ECO 80
Cut-out: Ø80mm
Watt: 19.8W
Lumen: 2294lm



ECO 100
Cut-out: Ø100mm
Watt: 28W
Lumen: 4031lm

ECO RECESSED DOWNLIGHT



Body

ECO Track light with 3 kinds of wattage, and there are also 3 kinds of common adaptor and integrated adaptor.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre

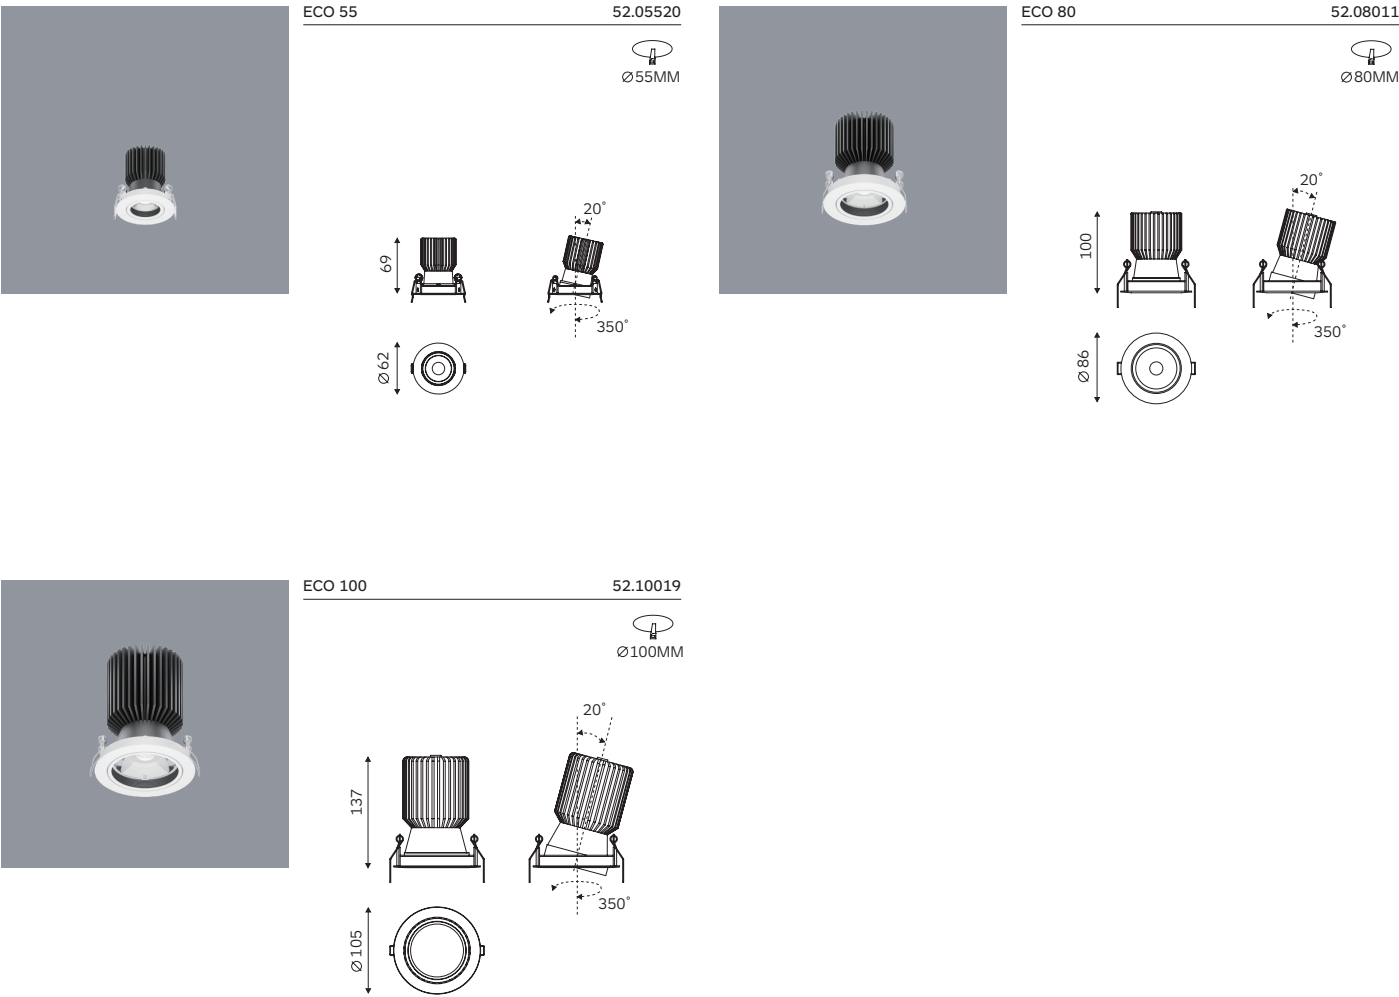

Code Ordering Example: 5 2 . 0 5 5 2 0 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 55 Recessed Downlight	52.05520	CA	COB LED	90	30	3000K	14W	1678 lm	17°/25°/36°/58°	D0 No Dim
					40	4000k		1762 lm		DA Dali Dim
ECO 80 Recessed Downlight	52.08011	CA	COB LED	90	30	3000K	19.8W	2185 lm	16°/25°/37°/58°	DC 0-10V Dim
					40	4000k		2294 lm		DT Triac Dim
ECO 100 Recessed Downlight	52.10019	CA	COB LED	90	30	3000K	28W	3839 lm	18°/24°/33°/55°	
					40	4000k		4031 lm		

EMMA RECESSED DOWNLIGHT

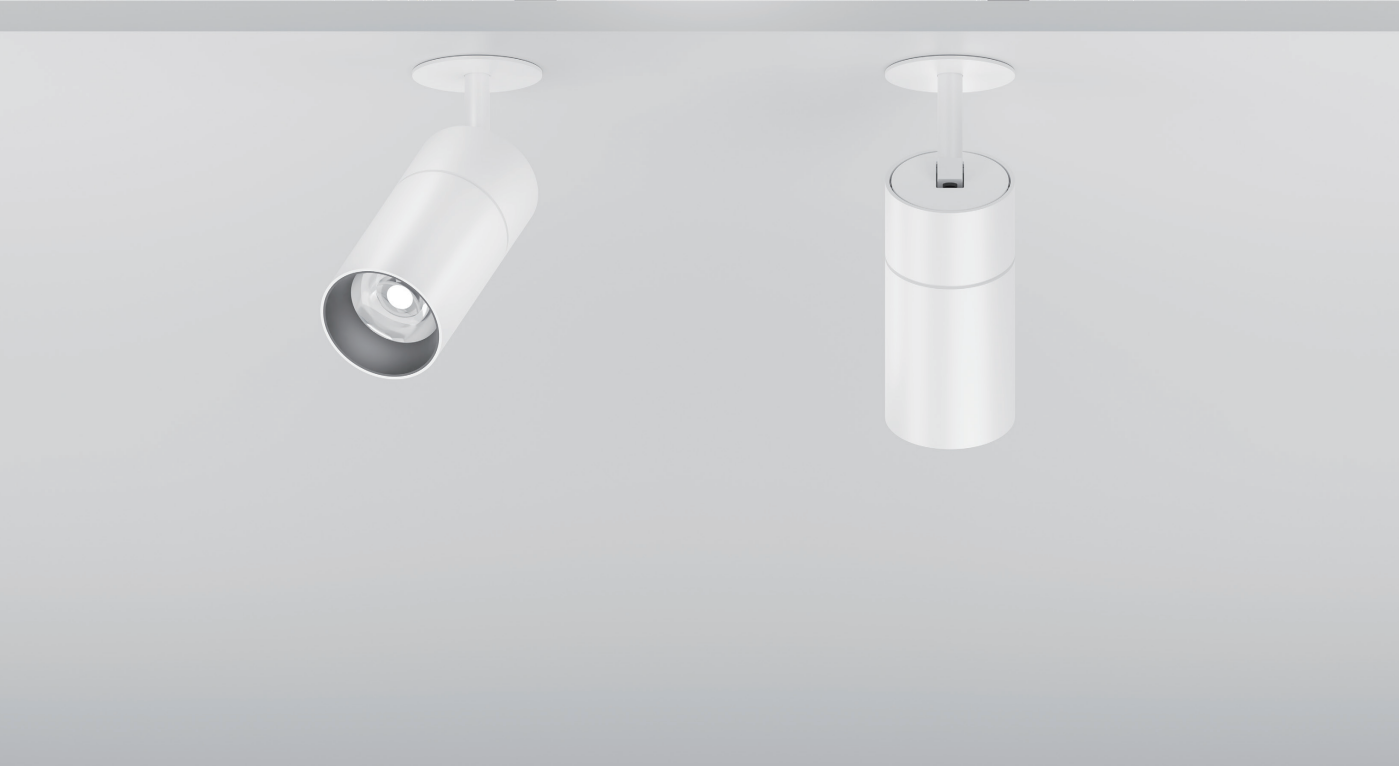

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

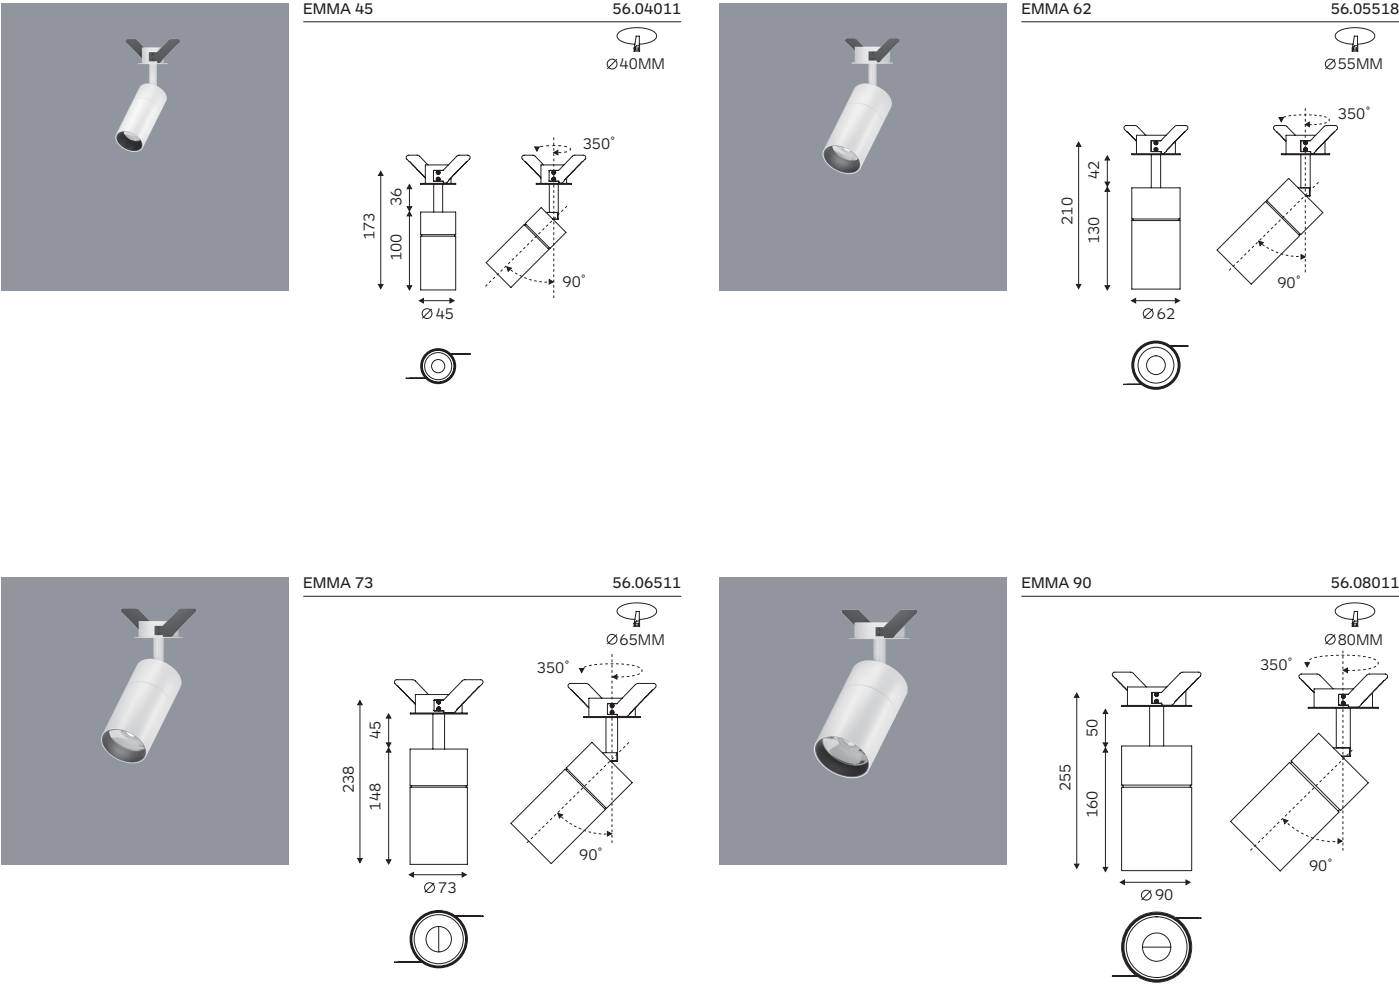

Code Ordering Example: 5 6 . 0 4 0 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
EMMA 45 Recessed Downlight	56.04011	CA	COB LED	90	30	3000K	11W	19°/29°/44°/56°	D0	No Dim	10 □ WH
					40	4000k			DA	Dali Dim	20 ■ BK
EMMA 62 Recessed Downlight	56.05518	CA	COB LED	90	30	3000K	14W	18°/27°/38°/54°	DC	0-10V Dim	
					40	4000k			DT	Triac Dim	
EMMA 73 Recessed Downlight	56.06511	CA	COB LED	90	30	3000K	24W	14°/28°/40°/50°			
					40	4000k					
EMMA 90 Recessed Downlight	56.08011	CA	COB LED	90	30	3000K	36W	16°/20°/30°/45°			
					40	4000k					

FOS RECESSED DOWNLIGHT



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories





Linear Spread glass



Glass



Honeycomb louvre

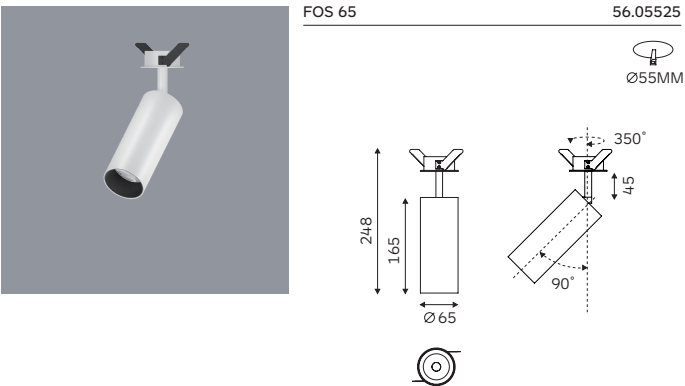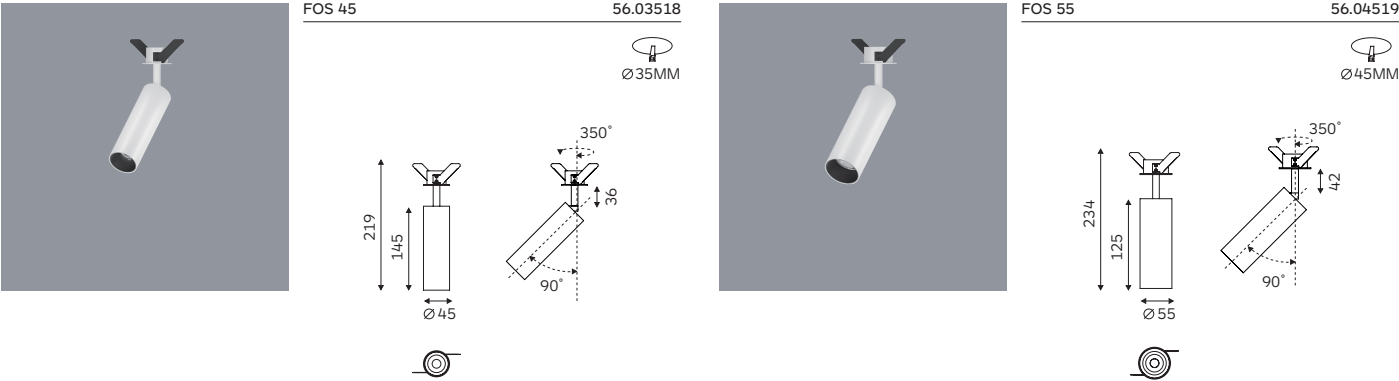



Code Ordering Example: 5 6 . 0 3 5 1 8 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
FOS 45 Recessed Downlight	56.03518	CA	COB LED	90	30	3000K	11W	19°/23°/36°/41°	D0	No Dim	10 □ WH
					40	4000k			DA	Dali Dim	20 ■ BK
FOS 55 Recessed Downlight	56.04519	CA	COB LED	90	30	3000K	16W	20°/32°/41°/49°	DC	0-10V Dim	
					40	4000k			DT	Triac Dim	
FOS 65 Recessed Downlight	56.05525	CA	COB LED	90	30	3000K	24W	17°/27°/36°/51°			
					40	4000k					

NOVAL RECESSED DOWNLIGHT



NOVAL RECESSED DOWNLIGHT

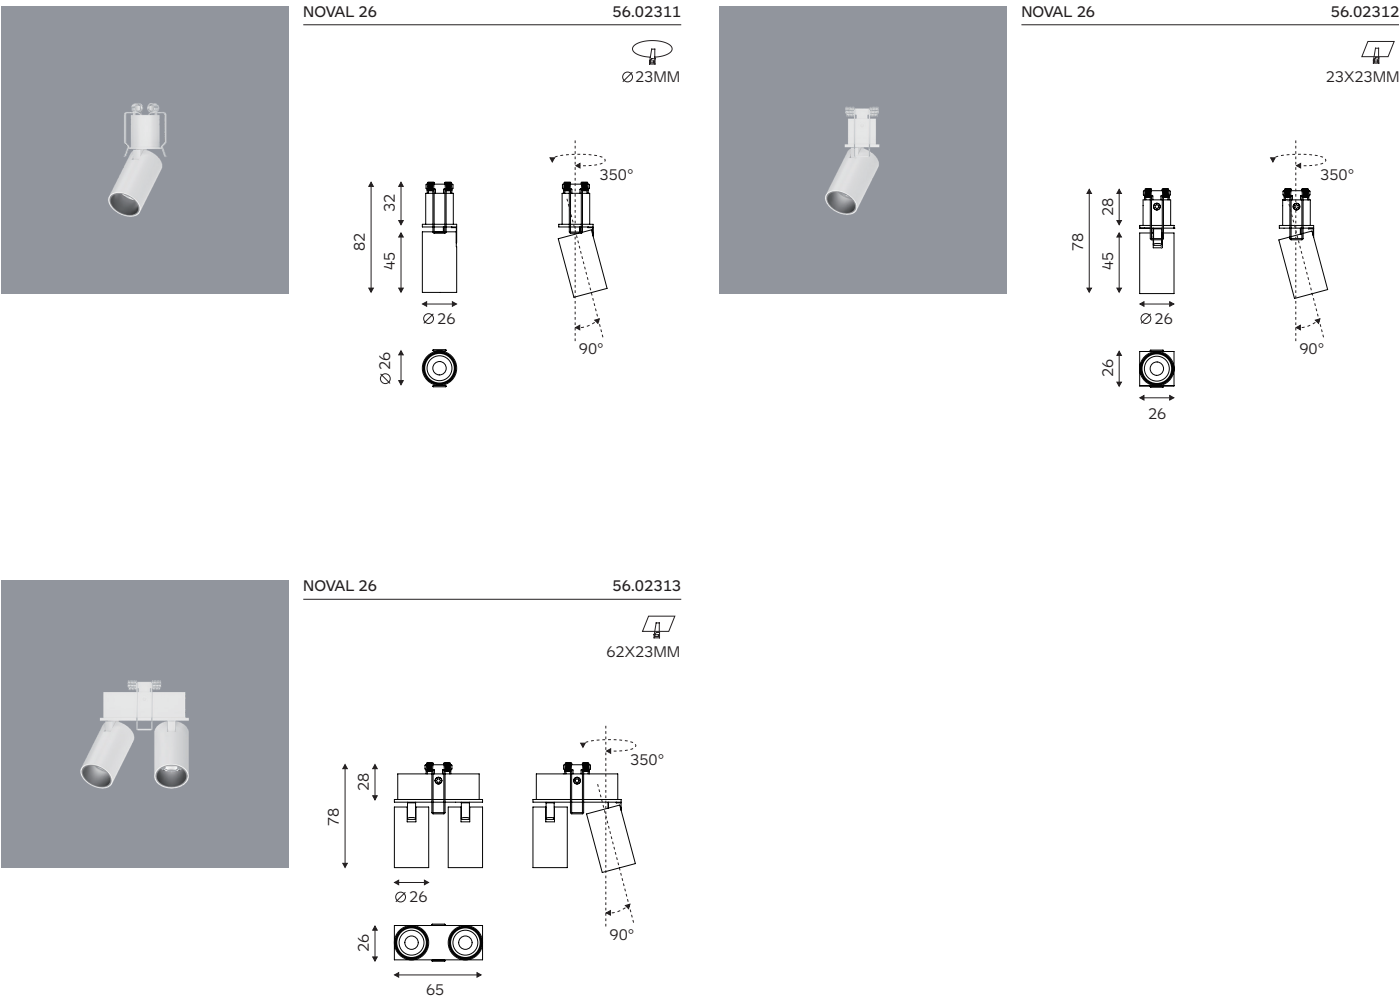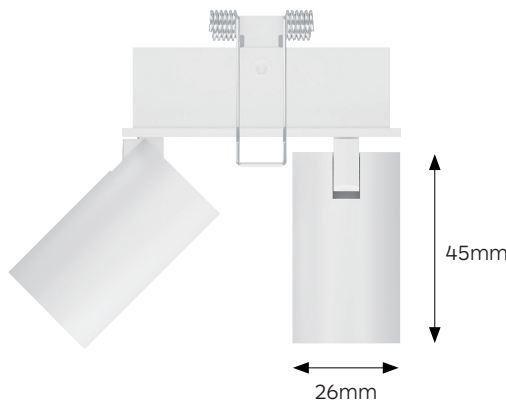

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable external driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Code Ordering Example: 5 6 . 0 2 3 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
NOVAL 26 Recessed Downlight	56.02311	CA	COB LED	90	30	3000K	4W	197 lm	17°/26°/31°/53°	D0	No Dim	10 ☐ WH
					40	4000k		207 lm		DA	Dali Dim	20 ☒ BK
NOVAL 26 Recessed Downlight	56.02312	CA	COB LED	90	30	3000K	4W	197 lm	17°/26°/31°/53°	DC	0-10V Dim	
					40	4000k		207 lm		DT	Triac Dim	
NOVAL 26 Recessed Downlight	56.02313	CA	COB LED	90	30	3000K	2*4W	2*197 lm	17°/26°/31°/53°			
					40	4000k		2*207 lm				

NOVAL RECESSED DOWNLIGHT

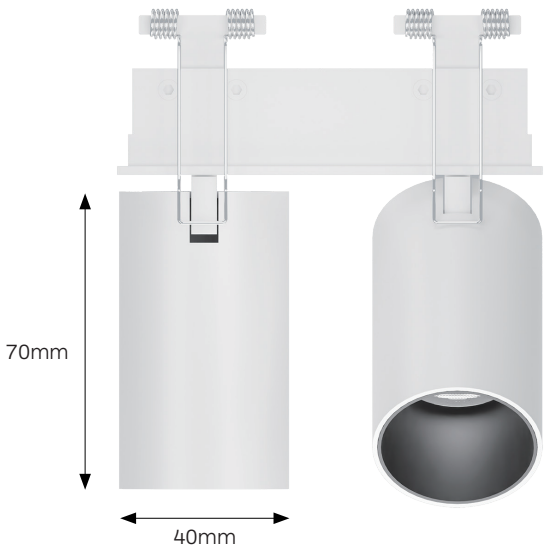

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 I CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories





Linear Spread glass



Glass




Honeycomb louvre

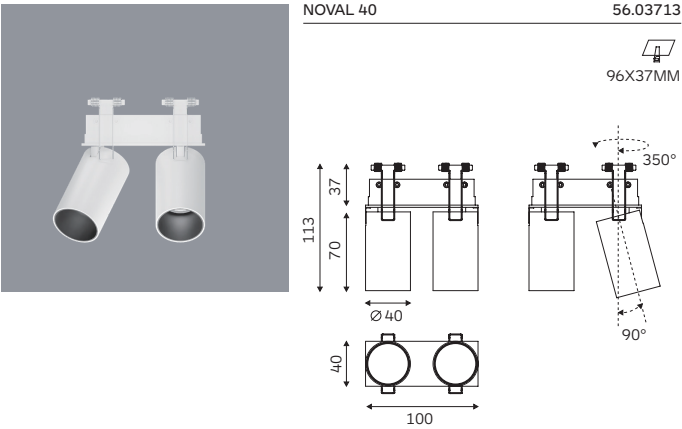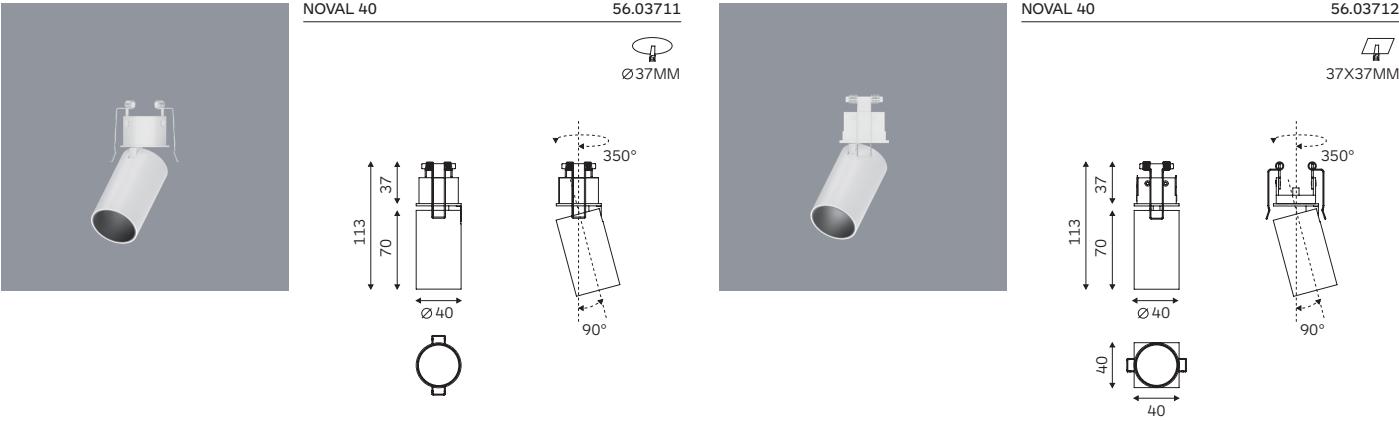


Code Ordering Example: 5 6 . 0 3 7 1 1 - 9 0 3 0 1 8 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NOVAL 40 Recessed Downlight	56.03711	CA	COB LED	90	30	3000K	478 lm	18°/23°/33°/42°	D0 No Dim	10 □ WH
					40	4000k	502 lm		DA Dali Dim	20 ■ BK
NOVAL 40 Recessed Downlight	56.03712	CA	COB LED	90	30	3000K	478 lm	18°/23°/33°/42°	DC 0-10V Dim	
					40	4000k	502 lm		DT Traic Dim	
NOVAL 40 Recessed Downlight	56.03713	CA	COB LED	90	30	3000K	2*478 lm	18°/23°/33°/42°		
					40	4000k	2*502 lm			

MINI RECESSED DOWNLIGHT

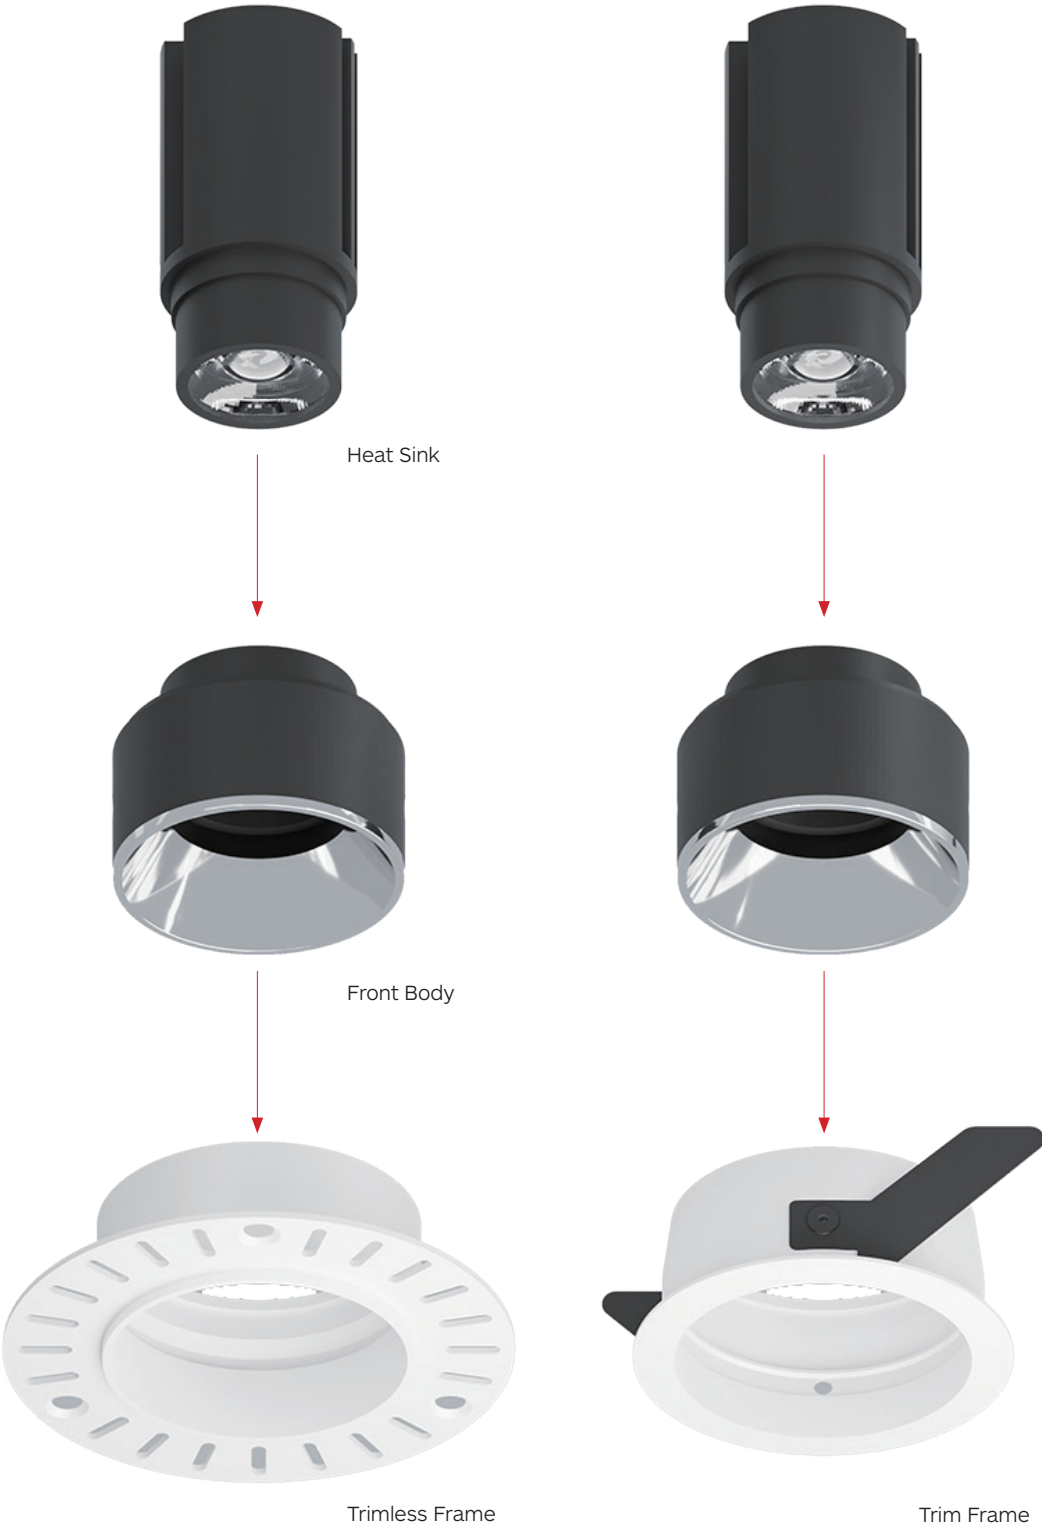

MINI RECESSED DOWNLIGHT

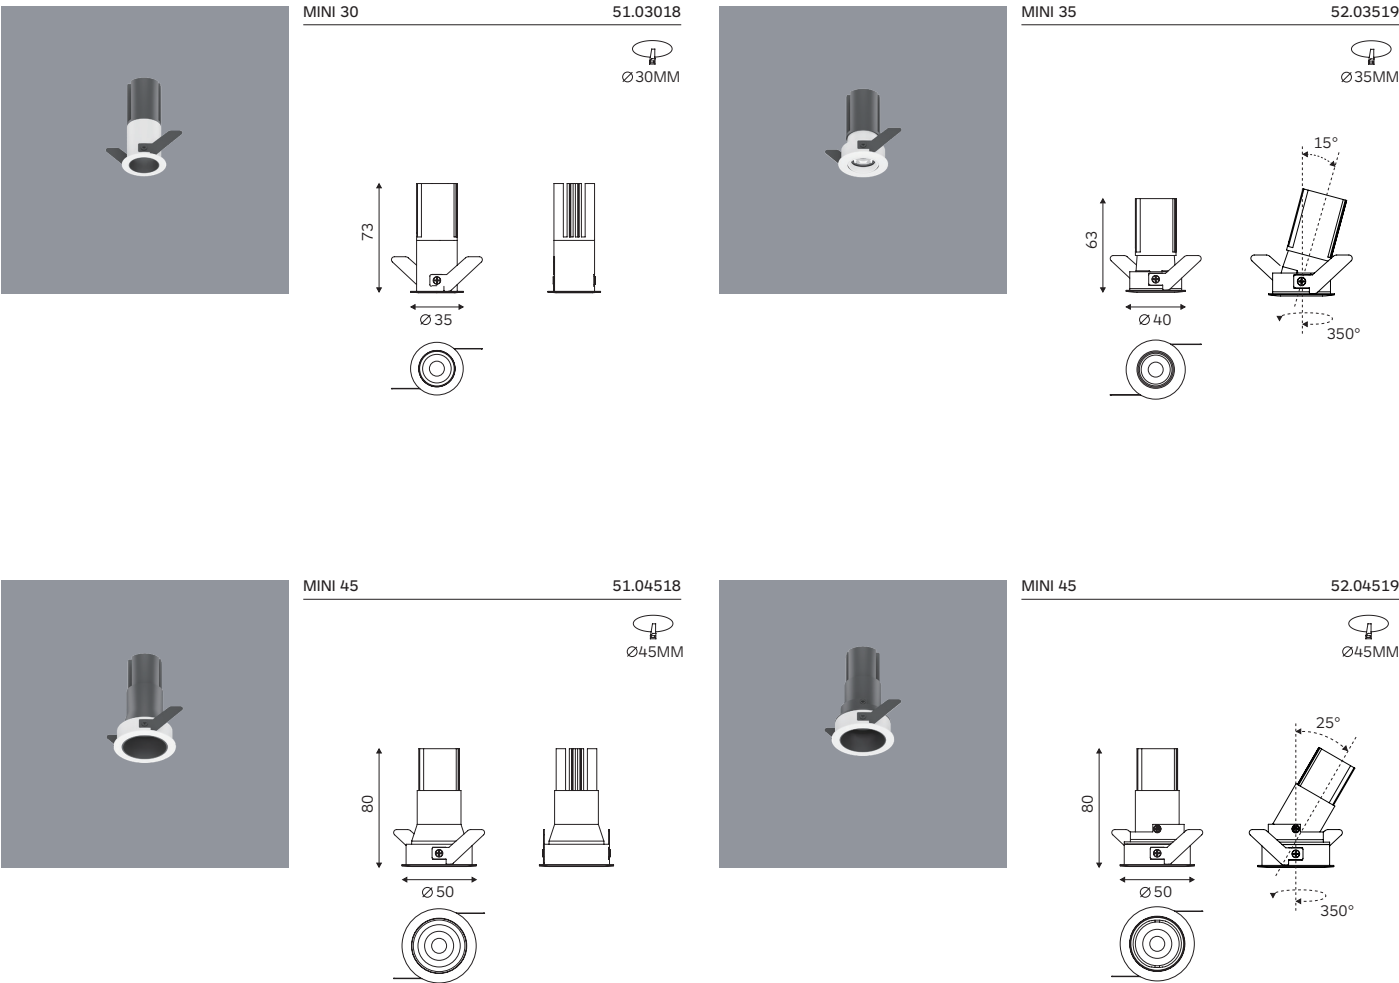

Body

The Spotify product family is a series of small recessed downlights, available in anti-glare, adjustable, flared anti-glare

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories and tool-free mounting.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications

These small but powerful luminaires create perfect accent lighting effects, together with an array of options and accessories for maximum flexibility.

Application areas: High-end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Code Ordering Example: 5 1 . 0 3 0 1 8 - 9 0 3 0 2 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
MINI 30 Recessed Downlight	51.03018	SA	SMD LED	90	30	3000K	5.8W	350 lm	D0	No Dim	10 □ WH
					40	4000k					
MINI 35 Recessed Downlight	52.03519	SA	SMD LED	90	30	3000K	5.8W	371 lm	DC	0-10V Dim	20 ■ BK
					40	4000k		390 lm			
MINI 45 Recessed Downlight	51.04518	SA	SMD LED	90	30	3000K	5.8W	366 lm			
					40	4000k		385 lm			
MINI 45 Recessed Downlight	52.04519	SA	SMD LED	90	30	3000K	5.8W	366 lm			
					40	4000k		385 lm			

MINI RECESSED DOWNLIGHT

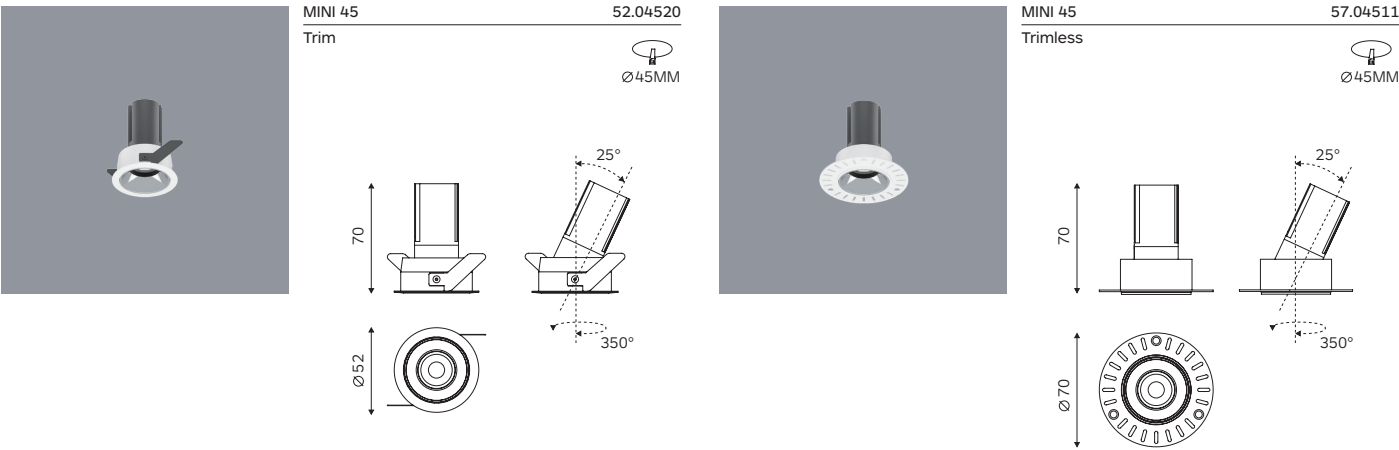

Body

This family is a series of high performance, miniature, recessed LED luminaires with a round body made in high grade aluminium, providing accent or wall wash lighting from its deep regressed light source.

Available in trim and trimless versions.

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories and tool-free mounting.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

These small but powerful luminaires create perfect accent lighting effects, together with an array of options and accessories for maximum flexibility.

Application areas: High-end residential and retail projects, hotels, museums and galleries.

Suitable Accessories



Linear Spread glass



Glass





Honeycomb louvre

Code Ordering Example: 5 2 . 0 4 5 2 0 - 9 0 3 0 2 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
MINI 45 Recessed Downlight	52.04520	SA	SMD LED	90	30	3000K	5.8W	387 lm	26°/32°/38°/48°	D0	No Dim	10 □ WH
					40	4000k		406 lm		DA	Dali Dim	20 ■ BK
MINI 45 Recessed Downlight	57.04511	SA	SMD LED	90	30	3000K	5.8W	387 lm	26°/32°/38°/48°	DC 0-10V Dim		
					40	4000k		406 lm		DT Traic Dim		

MINI RECESSED DOWNLIGHT

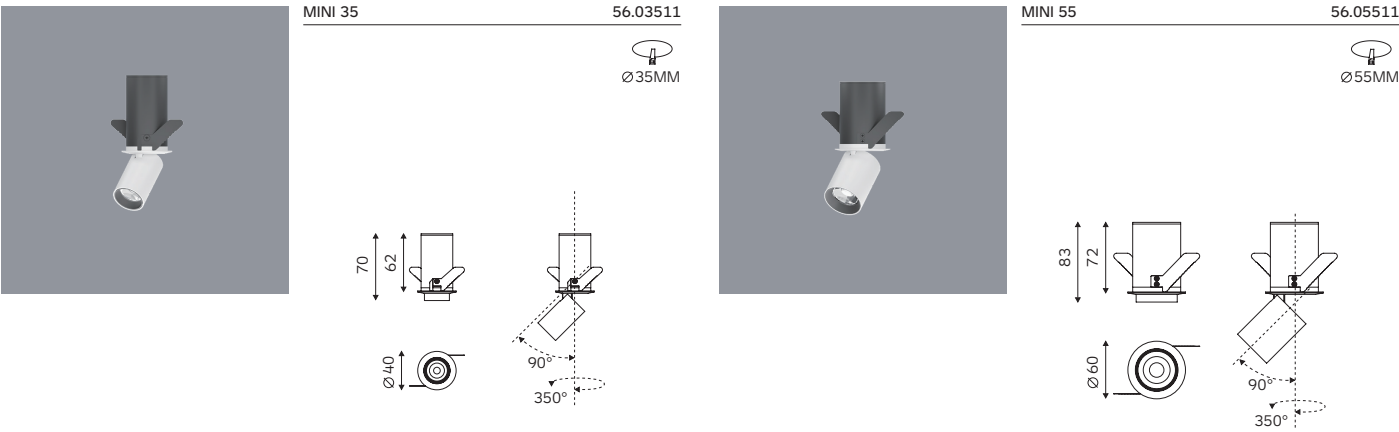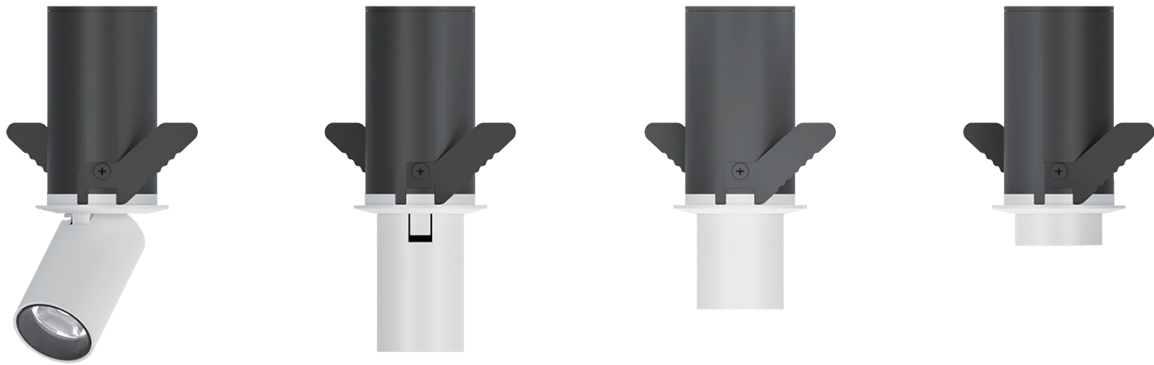

Body

The body head can be up and down and rotated by 350°.

Can be integrated into almost any room architecture. The round light heads are available in two different diameters and can be inserted into a round recessed. Housing.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Offers a variable and professional lighting. solution for illuminating accents in retail areas. and exhibition rooms where goods have to be presented in a particularly realistic way.

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 5 6 . 0 3 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
MINI 35 Recessed Downlight	56.03511	CA	COB LED	90	30	3000K	3.8W	17°/26°/31°/53°	D0	No Dim	10 □ WH
					40	4000k			DA	Dali Dim	20 ■ BK
MINI 55 Recessed Downlight	56.05511	CA	COB LED	90	30	3000K	8.8W	20°/25°/38°/51°	DC	0-10V Dim	
					40	4000k			DT	Traic Dim	


SURFACE MOUNTED LIGHT

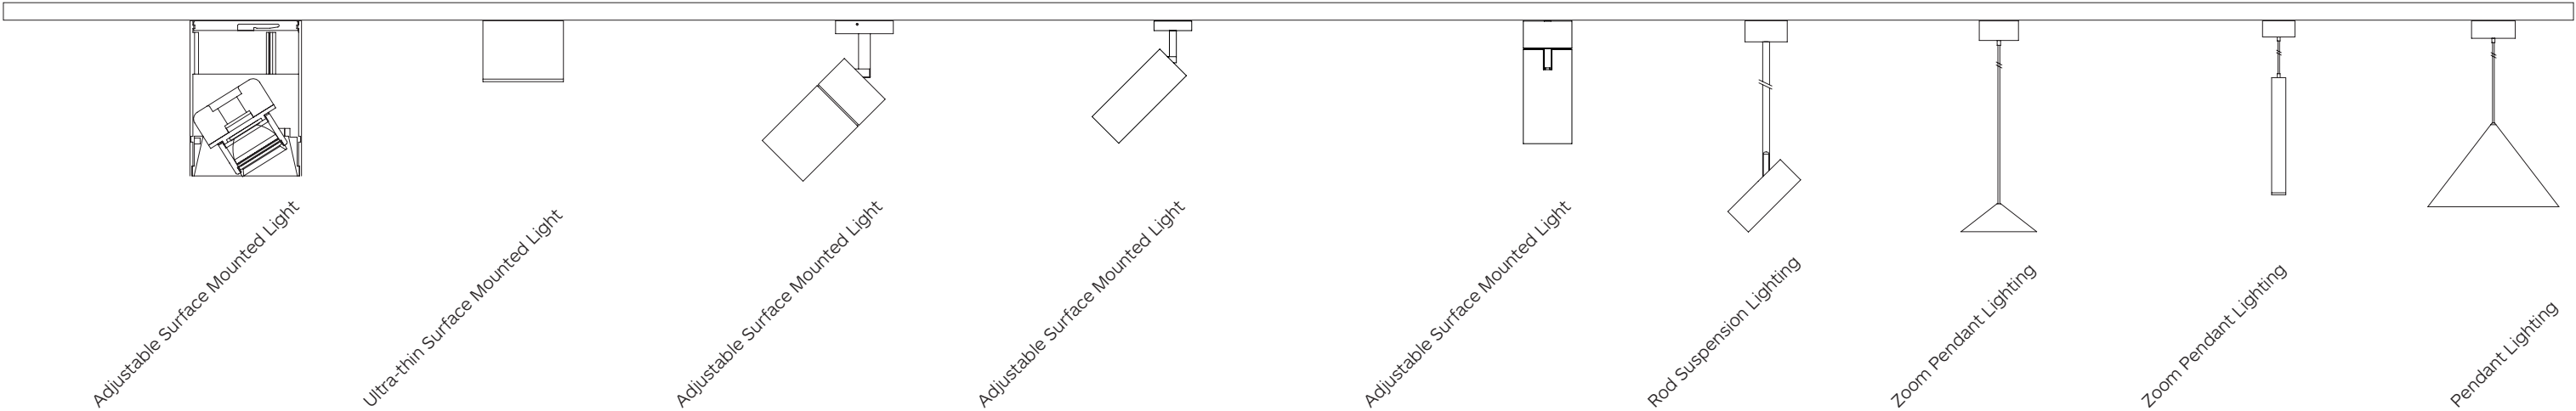



ADJ SURFACE MOUNTED LIGHT



ADJ SURFACE MOUNTED LIGHT

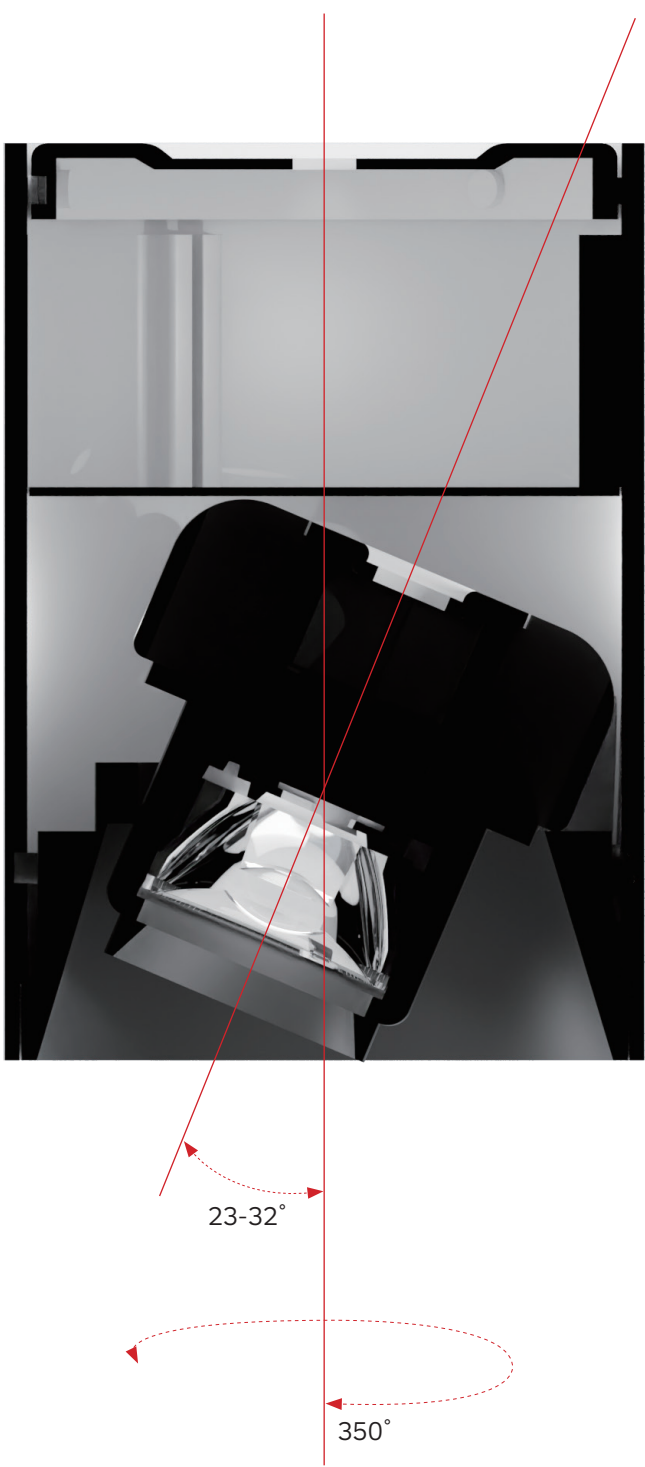

ADJ SURFACE MOUNTED LIGHT

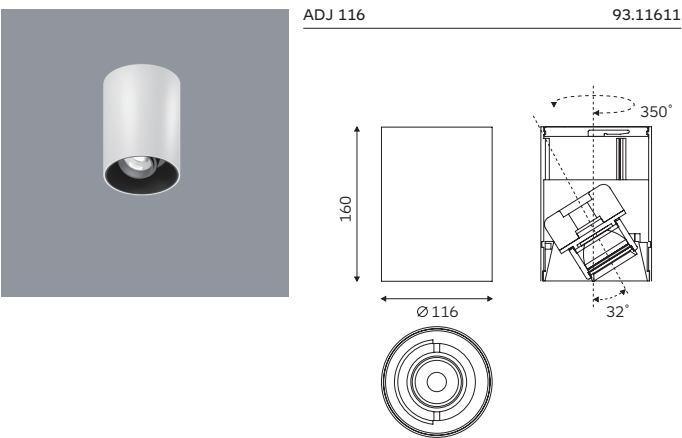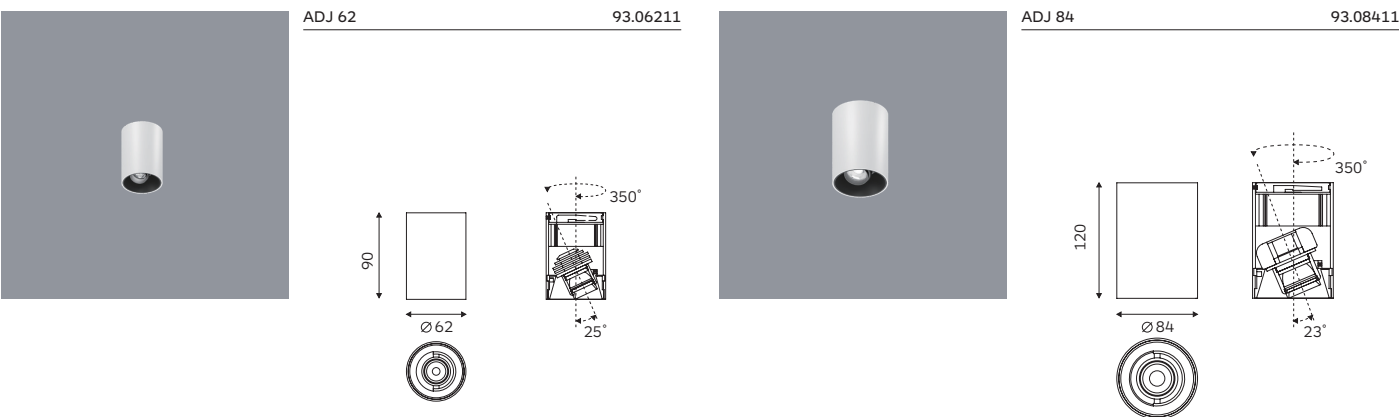

Body

A wide optional range of appearance, the whole series is included small, medium and large sizes.

The vertically adjustable angle is 25 degrees and can be rotated 350 degrees to precise adjustment of the illuminated object.

IP54 by adding protective glass.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

ADJ 62: Supplied with No-dimmable Built-in Driver.
ADJ 84/116: Supplied with No-dimmable Built-in Driver. Dimming can be 0-10v Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre



Code Ordering Example: 9 3 . 0 6 2 1 1 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ADJ 62 Surface Mounted Light	93.06211	CA COB LED	90	30 3000K	6W	445 lm	20°/25°/38°/57°	D0 No Dim	10 □ WH
				40 4000k		467 lm		DA Dali Dim	20 ■ BK
ADJ 84 Surface Mounted Light	93.08411	CA COB LED	90	30 3000K	14W	1243 lm	24°/30°/44°/53°	DC 0-10V Dim	
				40 4000k		1305 lm		DT Triac Dim	
ADJ 116 Surface Mounted Light	93.11611	CA COB LED	90	30 3000K	20W	2190 lm	19°/25°/41°/53°		
				40 4000k		2299 lm			

RECO SURFACE MOUNTED LIGHT



RECO SURFACE MOUNTED LIGHT

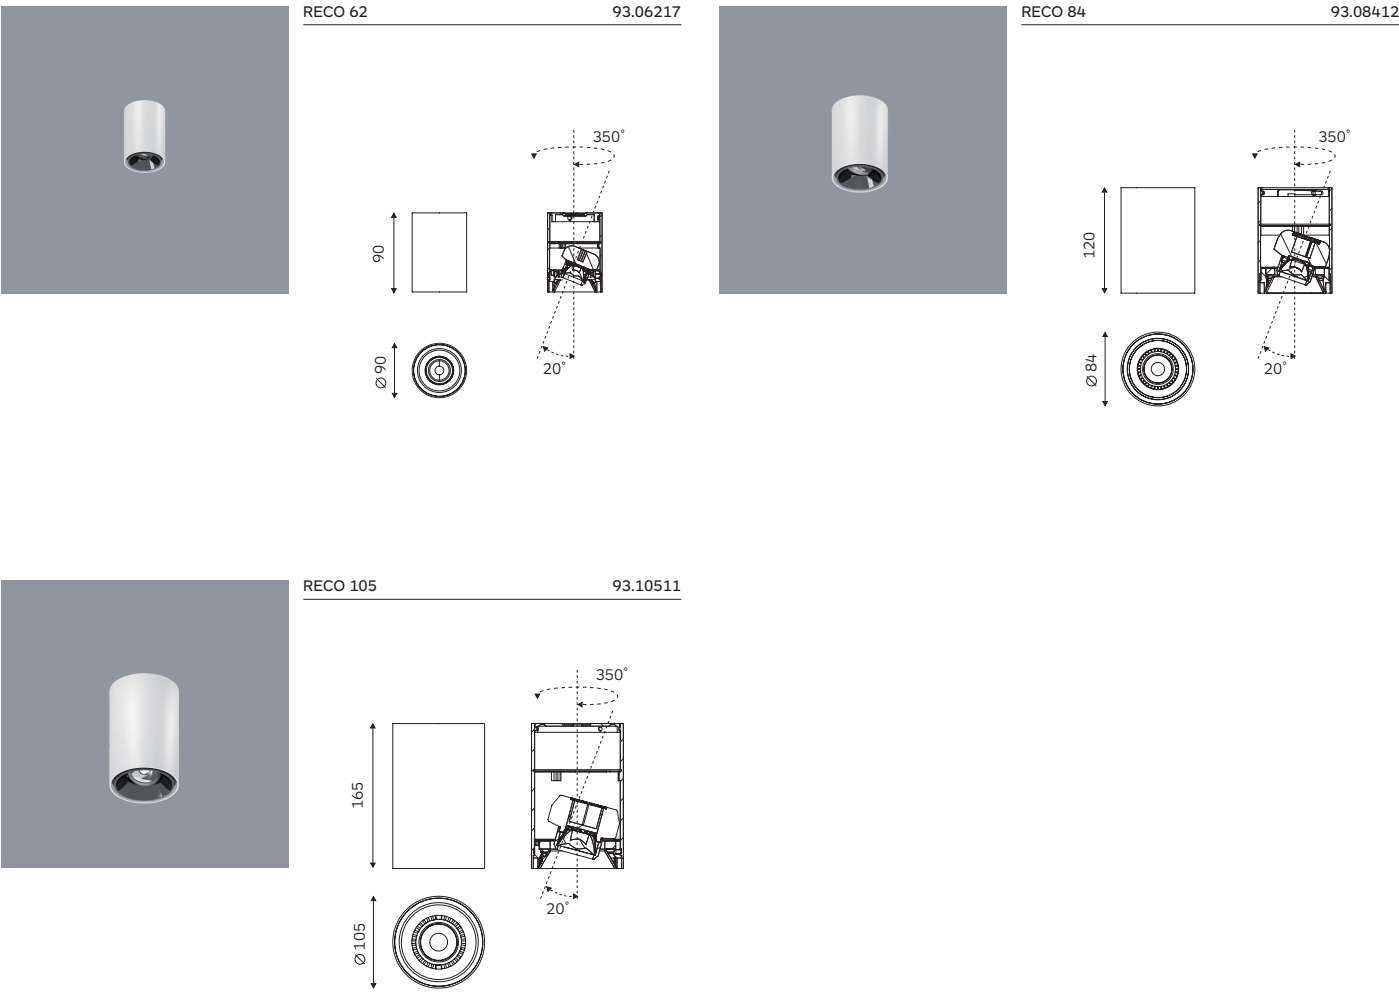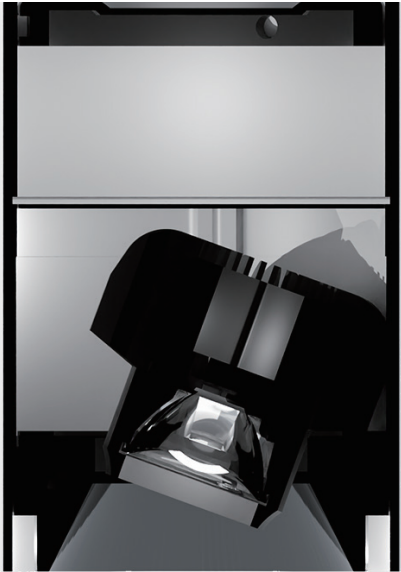

Body

Adjustable angle surface mounted luminaires, whose internal body is a module, can be easily dismantled and serviced. It is easy to replace parts or perform maintenance.

The lower cup of the luminaire offers a choice of different colours.

Compared to the traditional surface-mounted structure, this series of luminaires adopts a novel design that makes the overall appearance more modern and unique.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

RECO 62: Supplied with No-dimmable Built-in Driver.
RECO 84/105: Supplied with No-dimmable Built-in Driver. Dimming can be 0-10v Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories



Linear Spread glass



Glass





Honeycomb louvre

Code Ordering Example: 9 3 . 0 6 2 1 7 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
RECO 62 Surface Mounted Light	93.06217	CA	COB LED	90	30	3000K	7W	16°/23°/35°/57°	D0	No Dim	10 □ WH
					40	4000k				Dali Dim	20 ■ BK
RECO 84 Surface Mounted Light	93.08412	CA	COB LED	90	30	3000K	11W	19°/25°/37°/51°	DC	0-10V Dim	
					40	4000k				Triac Dim	
RECO 105 Surface Mounted Light	93.10511	CA	COB LED	90	30	3000K	20W	21°/31°/42°/51°			
					40	4000k					

UTH SURFACE MOUNTED LIGHT

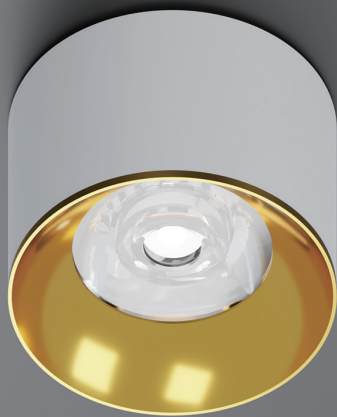

UTH SURFACE MOUNTED LIGHT



Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Ultra-thin round surface mounted light, CNC machining, luminaire surface can support electroplating treatment. With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre

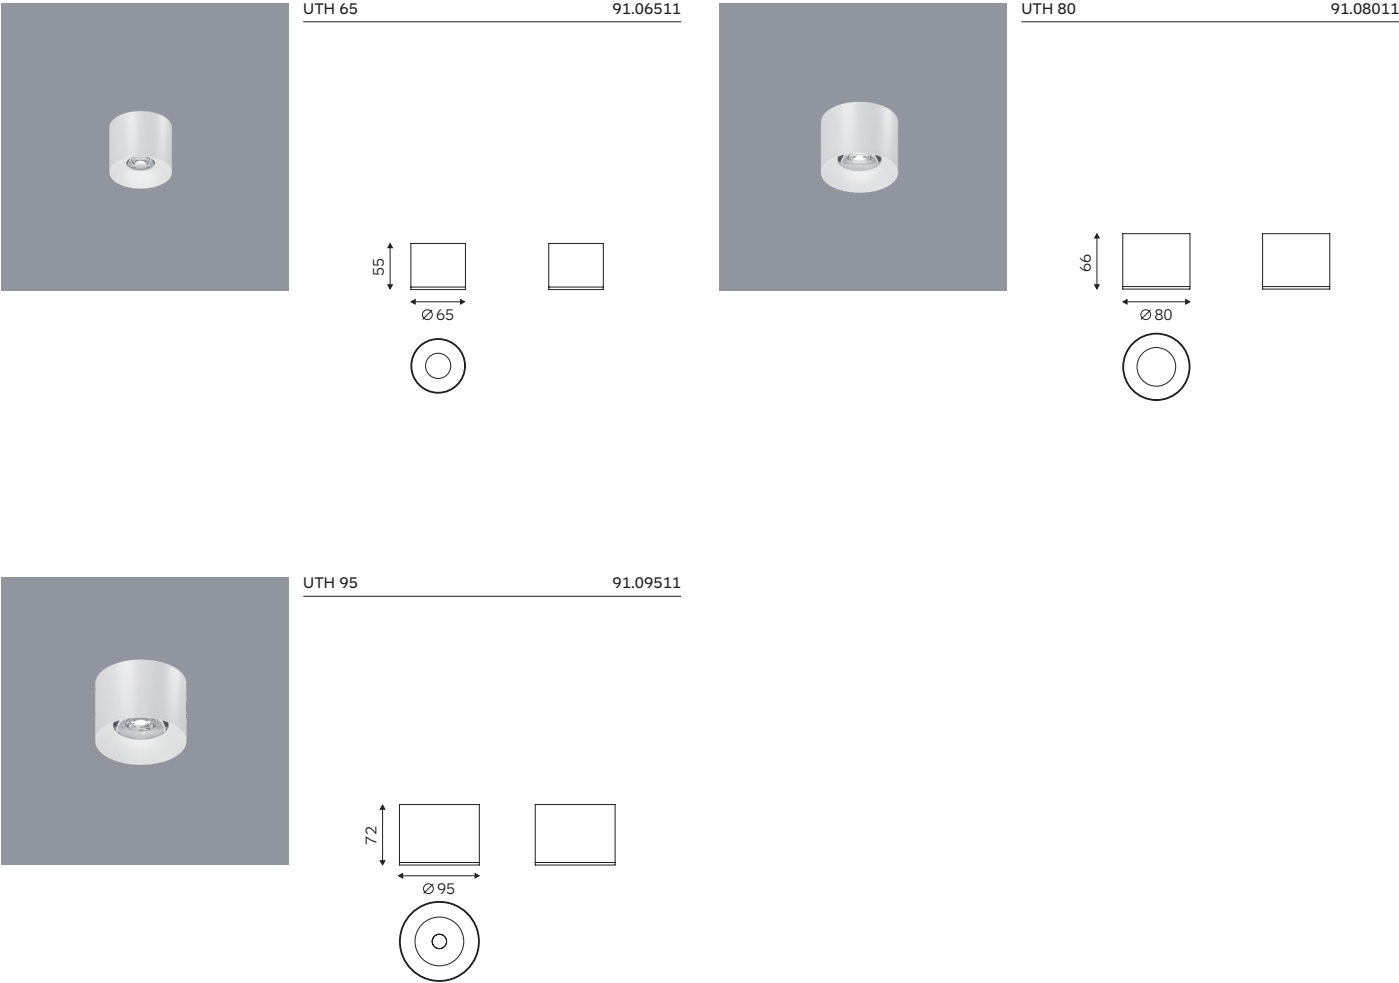



Code Ordering Example: 9 1 . 0 6 5 1 1 - 9 0 3 0 2 1 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
UTH 65 Surface Mounted Light	91.06511	CA	COB LED	90	30	3000K	562 lm	21°/27°/35°/60°	D0	No Dim	10 □ WH
					40	4000k	590 lm				20 ■ BK
UTH 80 Surface Mounted Light	91.08011	CA	COB LED	90	30	3000K	1226 lm	17°/25°/34°/60°			
					40	4000k	1287 lm				
UTH 95 Surface Mounted Light	91.09511	CA	COB LED	90	30	3000K	1694 lm	14°/25°/35°/58°			
					40	4000k	1778 lm				

SRA SURFACE MOUNTED LIGHT



SRA SURFACE MOUNTED LIGHT

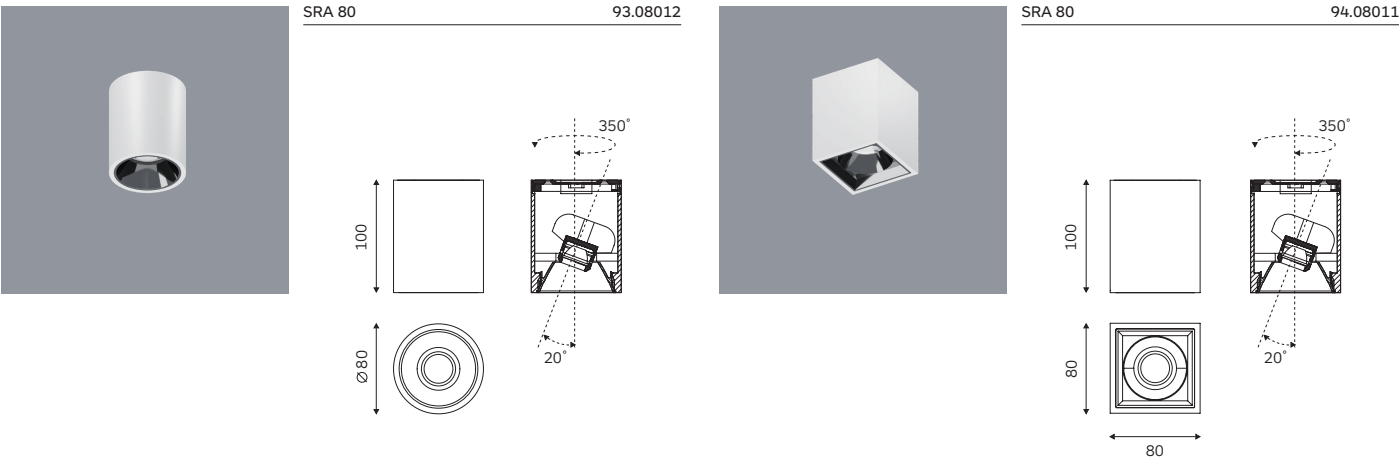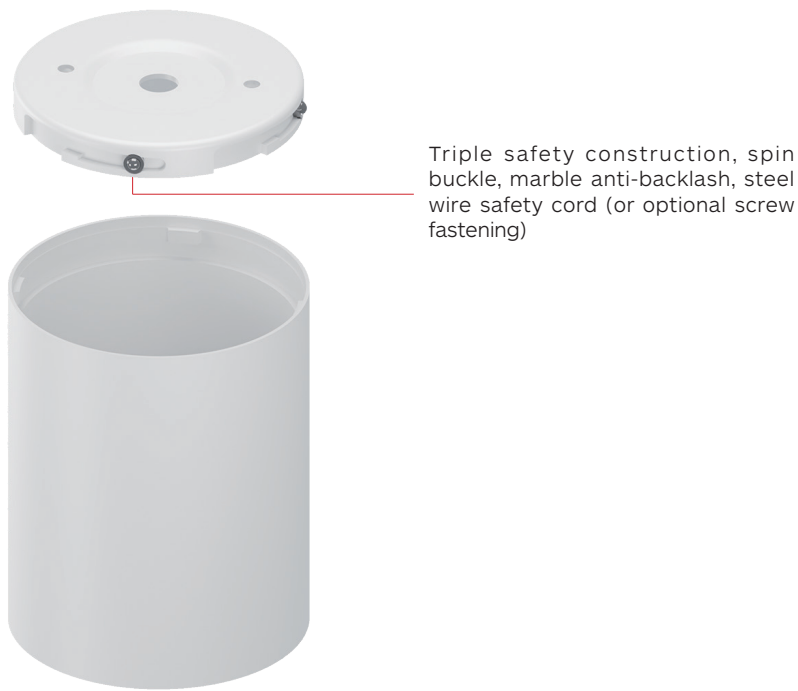

Body

Anti-glare adjustable surface mounted light, breaks the conventional fixed model, internally able to adjustable.

Have round and square 2 shapes for selected, can meet different groups people requirement.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Non-dimmable Built-in driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre

Code Ordering Example: 9 3 . 0 8 0 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SRA 80 Surface Mounted Light	93.08012	CA COB LED	90	30 3000K	8.5W	657 lm	19°/24°/35°/48°	D0 No Dim	10 □ WH
				40 4000k		690 lm			20 ■ BK
SRA 80 Surface Mounted Light	94.08011	CA COB LED	90	30 3000K	8.5W	657 lm	19°/24°/35°/48°		
				40 4000k		690 lm			

EMMA SURFACE MOUNTED LIGHT

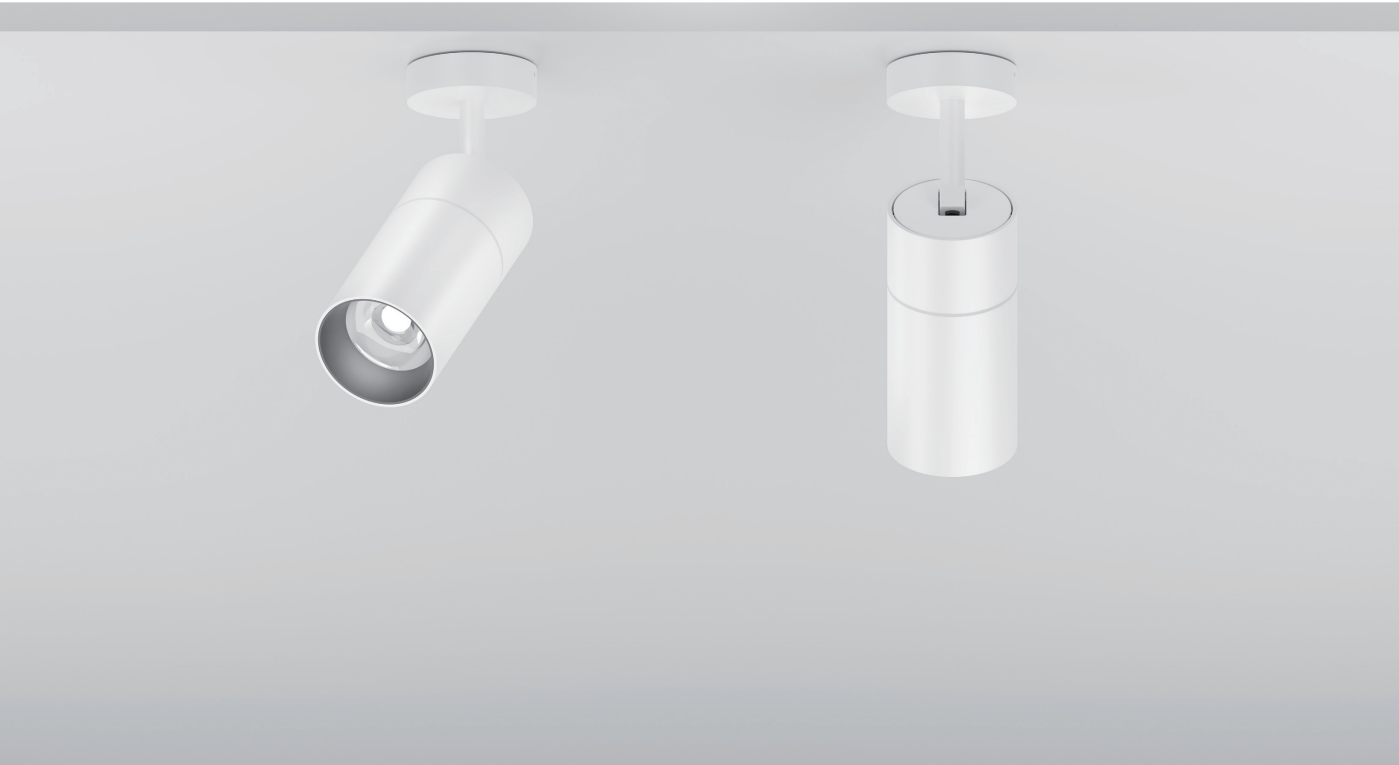

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre

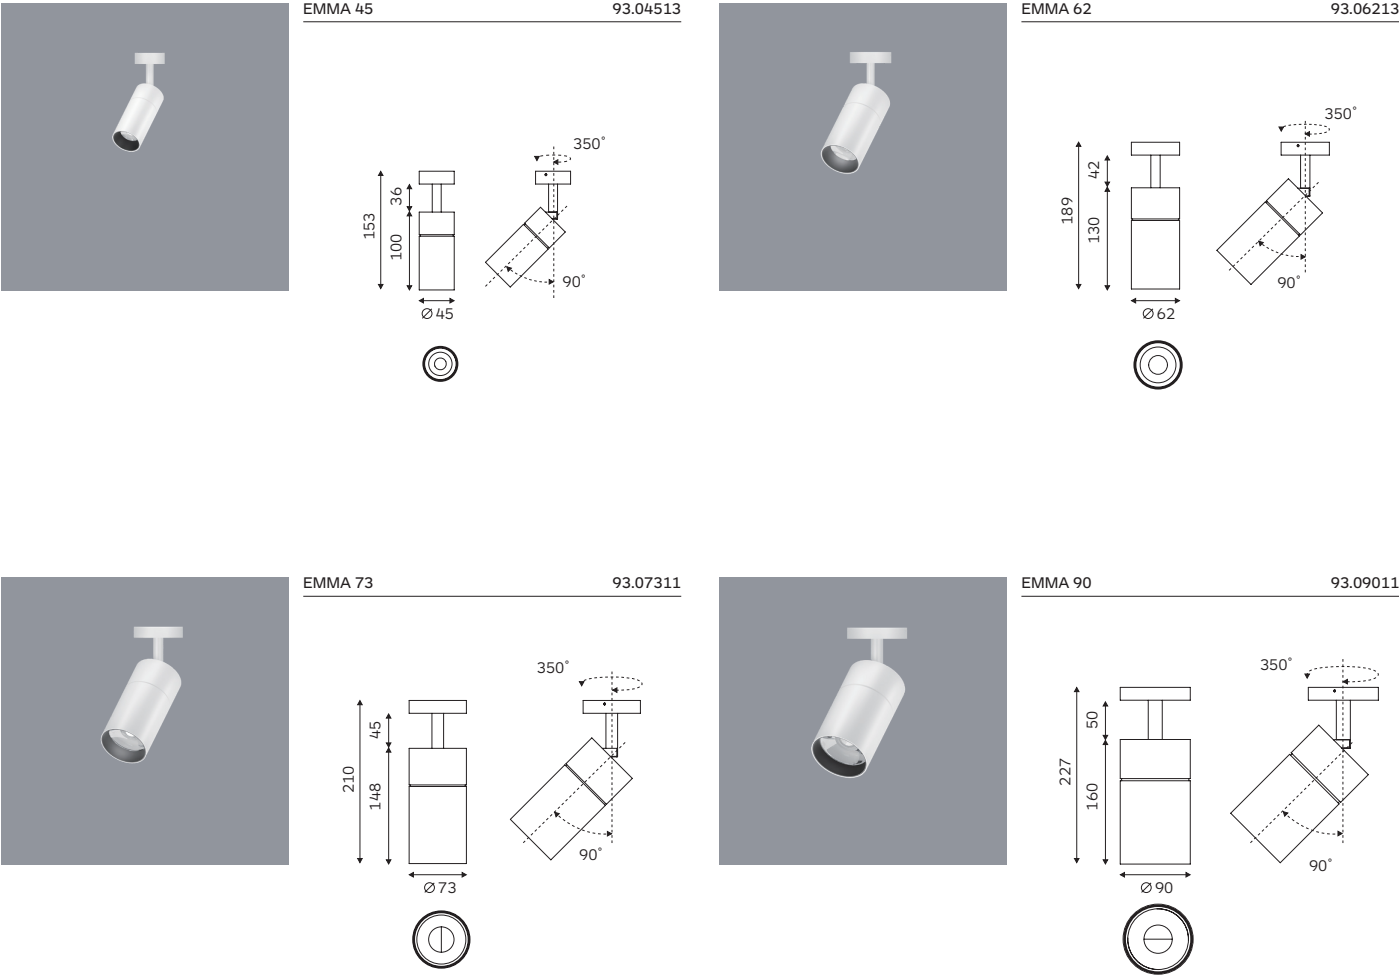

Code Ordering Example: 9 3 . 0 4 5 1 3 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Surface Mounted Light	93.04513	CA	COB LED	90	30 3000K 40 4000k	11W	935 lm 981 lm	19°/29°/44°/56°	D0 No Dim	10 □ WH 20 ■ BK
EMMA 62 Surface Mounted Light	93.06213	CA	COB LED	90	30 3000K 40 4000k	14W	1627 lm 1708 lm	18°/27°/38°/54°		
EMMA 73 Surface Mounted Light	93.07311	CA	COB LED	90	30 3000K 40 4000k	24W	2963 lm 3111 lm	14°/28°/40°/50°		
EMMA 90 Surface Mounted Light	93.09011	CA	COB LED	90	30 3000K 40 4000k	36W	4509 lm 4734 lm	16°/20°/30°/45°		

FOS SURFACE MOUNTED LIGHT



Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable built-in driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

Suitable Accessories





Linear Spread glass



Glass




Honeycomb louvre

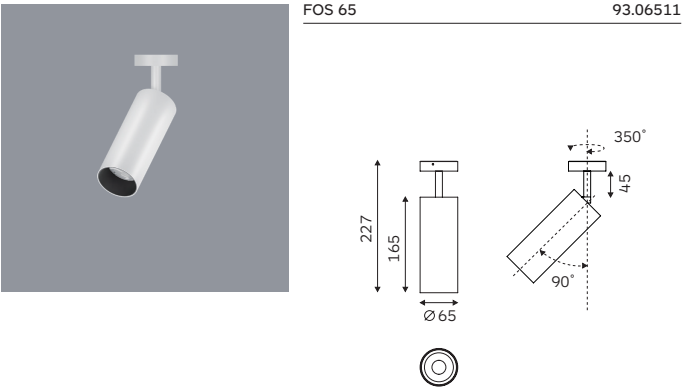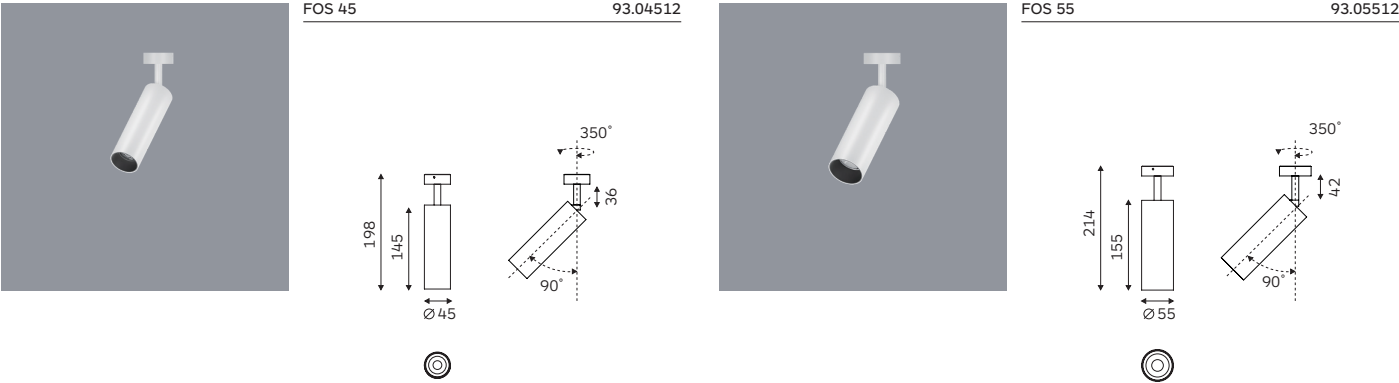

Code Ordering Example: 9 3 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
FOS 45 Surface Mounted Light	93.04512	CA	COB LED	90	30 3000K	11W	808 lm	19°/23°/36°/41°	D0	No Dim	10 □ WH
					40 4000k		848 lm				20 ■ BK
FOS 55 Surface Mounted Light	93.05512	CA	COB LED	90	30 3000K	16W	1871 lm	20°/32°/41°/49°			
					40 4000k		1965 lm				
FOS 65 Surface Mounted Light	93.06511	CA	COB LED	90	30 3000K	24W	2678 lm	17°/27°/36°/51°			
					40 4000k		2812 lm				

ECO SURFACE MOUNTED LIGHT

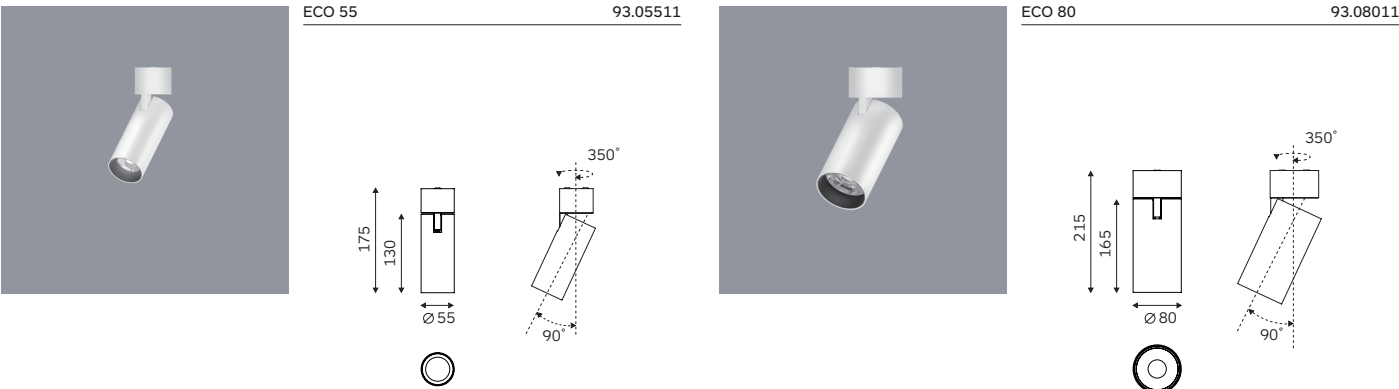

Body

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.
Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 9 3 . 0 5 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish	
ECO 55 Surface Mounted Light	93.05511	CA	COB LED	90	30	3000K	14W	1563 lm	22°/27°/38°/56°	D0	No Dim	10 ☐ WH
					40	4000k		1641 lm		DA	Dali Dim	20 ☒ BK
ECO 80 Surface Mounted Light	93.08011	CA	COB LED	90	30	3000K	31W	3843 lm	18°/26°/33°/55°	DC	0-10V Dim	
					40	4000k		4035 lm		DT	Triac Dim	


PENDANT LIGHTING



SPECTRUM ROD SUSPENSION LIGHTING



SPECTRUM ROD SUSPENSION LIGHTING

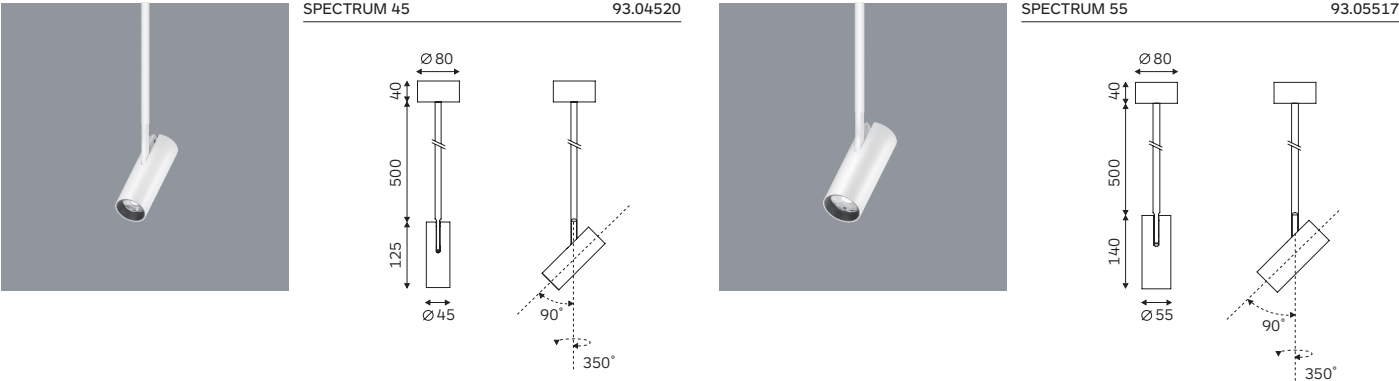

Body

Decorative suspended Luminaire in aluminum, breaking away from traditional installations.

Good glare reduction due to recessed light point out, have different beam angle for selected.

Can be 350° rotatable and 90° tiltable, can meet different area lighting requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A pendant luminaire featuring a clean aesthetic, ideal also for high ceiling spaces and for local 'task' lighting when placed over counters and tables.

Application areas: restaurants, hotels, lobbies, residential, retail.

Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 9 3 . 0 4 5 2 0 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT		LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SPECTRUM 45 Rod Suspension Lighting	93.04520	CA	COB LED	90	30	3000K	14.3W	1083 lm	20°/24°/36°/43°	D0	No Dim	10 □ WH
					40	4000k		1137 lm		DA	Dali Dim	20 ■ BK
SPECTRUM 55 Rod Suspension Lighting	93.05517	CA	COB LED	90	30	3000K	24.2W	2615 lm	20°/31°/43°/43°	DC	0-10V Dim	
					40	4000k		2745 lm		DT	Triac Dim	

SWING PENDANT LIGHTING



SWING PENDANT LIGHTING



Body

Pendant track mounted luminaire with the cylindrical light.

Body in extruded aluminum. Light Body is available in three diameters (26mm, 35mm and 45mm) .

Supplied with magnetic track and suspension installed, with pendant cable.

Accessories

Swing 25: Honeycomb louvre, Linear Spread glass, glass.
Swing 35/45: No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 I CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Swing 25: Lens, with narrow, medium, and wide beam angle.
Swing 35/45: with zoom optics.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative, with its numerous accessories.

Application areas, residential, hotels, restaurants, retails and corridors.

Suitable Accessories

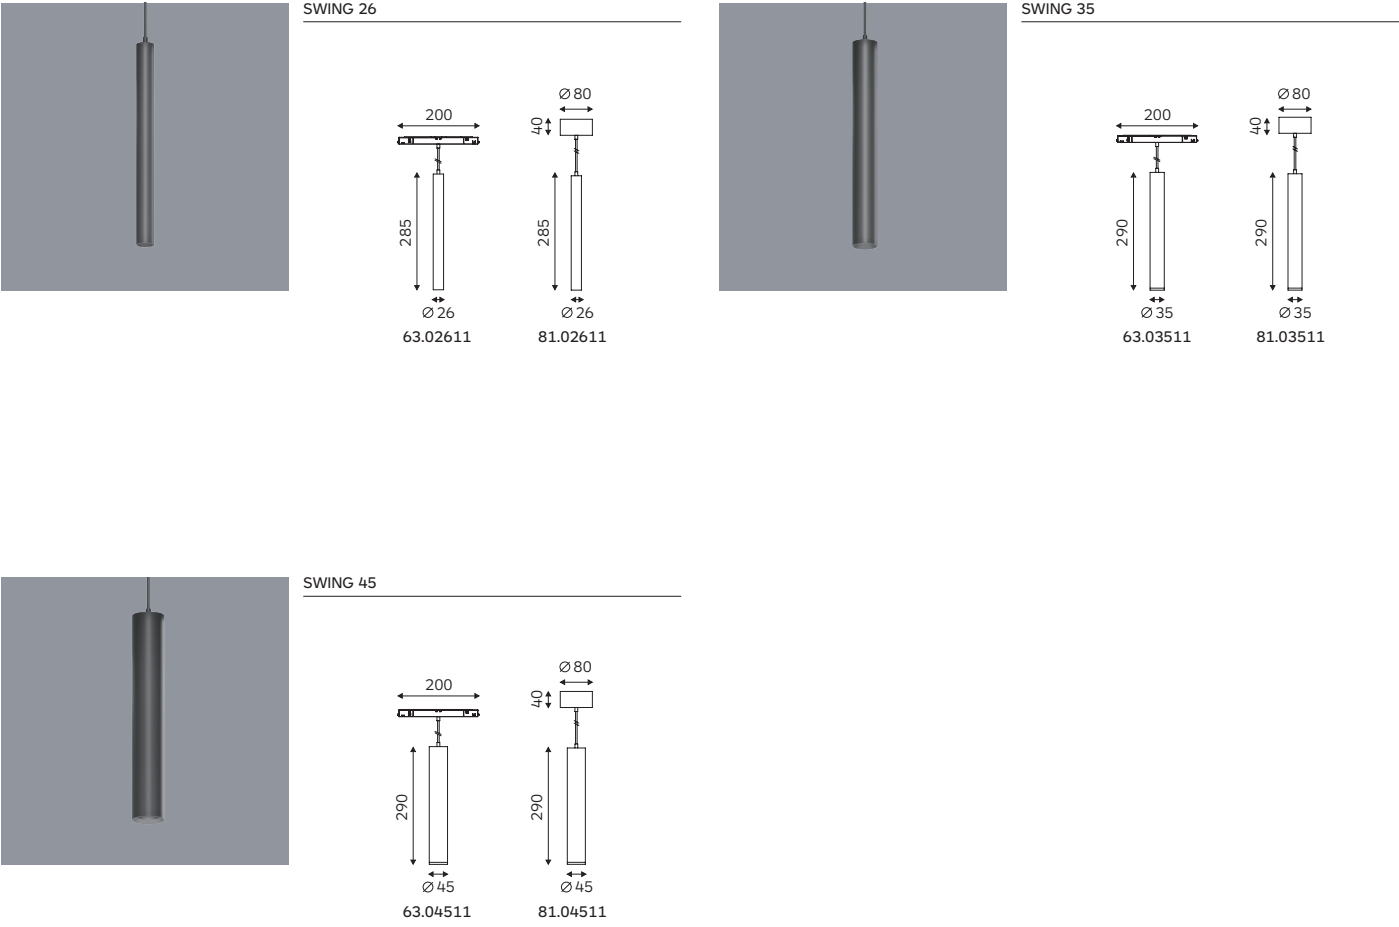


Code Ordering Example: 6 3 . 0 2 6 1 1 - 9 0 3 0 1 7 D 0 1 0


	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
SWING 26 Pendant Lighting Low Voltage Track	63.02611	CA	COB LED	90	30	3000K	197 lm	17°/26°/31°/53°	D0	No Dim	10 □ WH
					40	4000k	207 lm		DA	Dali Dim	20 ■ BK
SWING 35 Pendant Lighting Low Voltage Track	63.03511	CA	COB LED	90	30	3000K	238 lm	8-38°	DC 0-10V Dim		
					40	4000k	250 lm				
SWING 45 Pendant Lighting Low Voltage Track	63.04511	CA	COB LED	90	30	3000K	455 lm	13-44°			
					40	4000k	478 lm				
SWING 26 Pendant Lighting	81.02611	CA	COB LED	90	30	3000K	197 lm	17°/26°/31°/53°	D0	No Dim	10 □ WH
					40	4000k	207 lm		DA	Dali Dim	20 ■ BK
SWING 35 Pendant Lighting	81.03511	CA	COB LED	90	30	3000K	238 lm	8-38°	DC 0-10V Dim		
					40	4000k	250 lm				
SWING 45 Pendant Lighting	81.04511	CA	COB LED	90	30	3000K	455 lm	13-44°			
					40	4000k	478 lm				



DELTA PENDANT LIGHTING

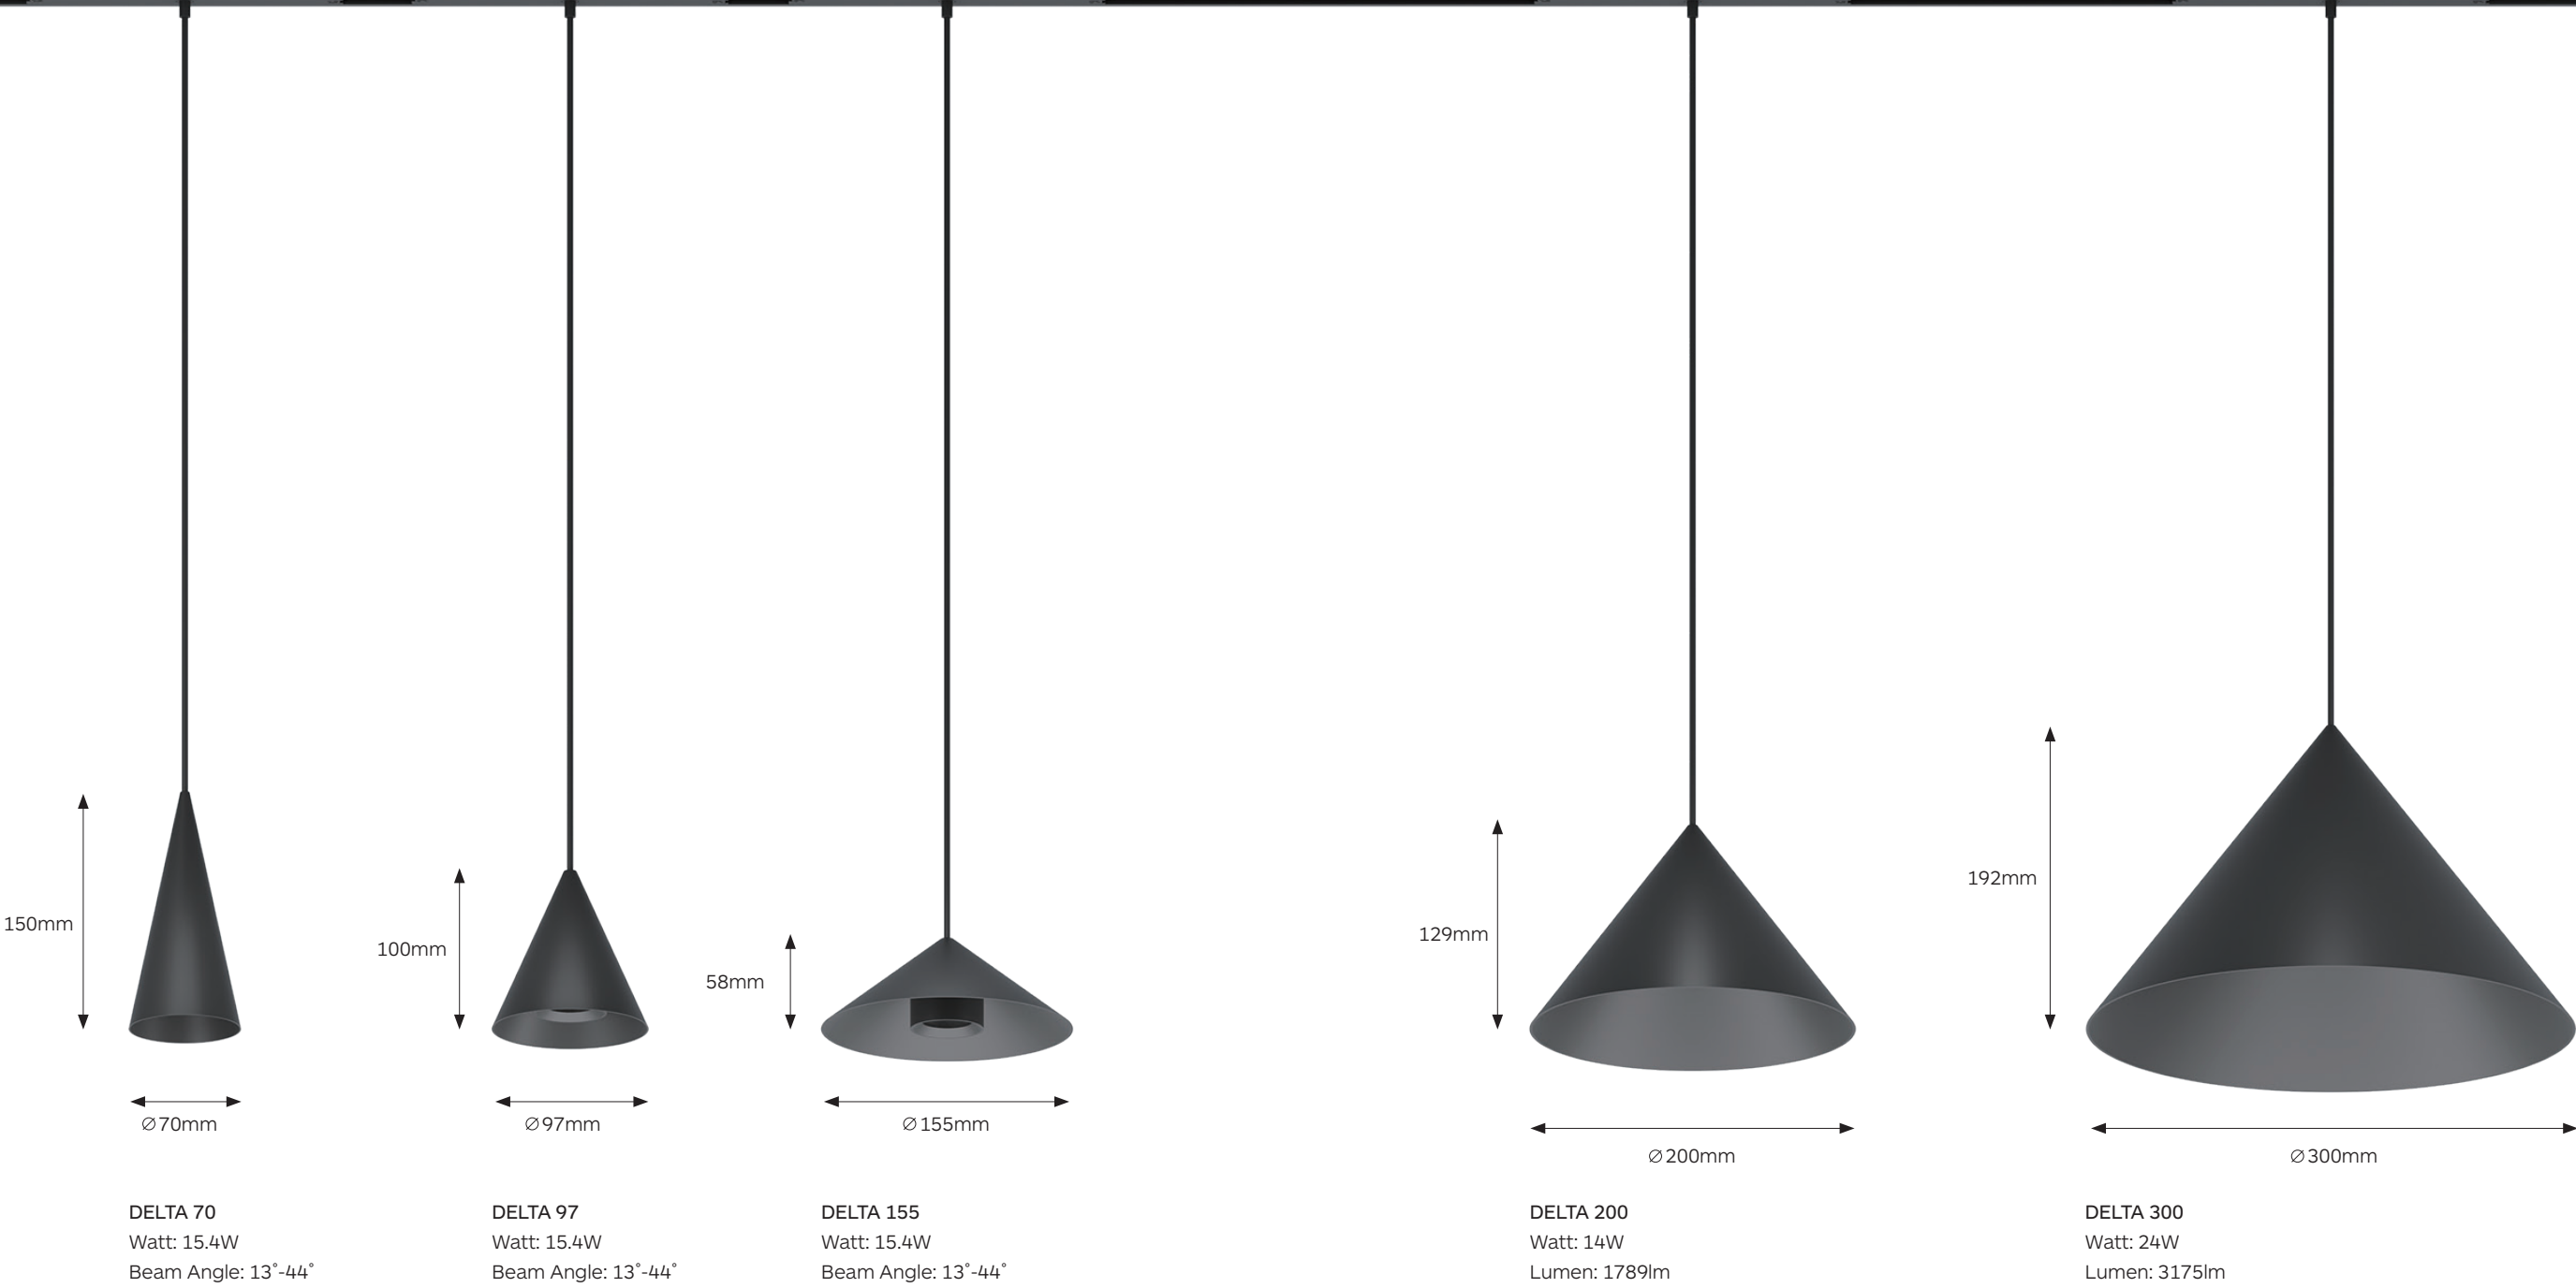

DELTA PENDANT LIGHTING

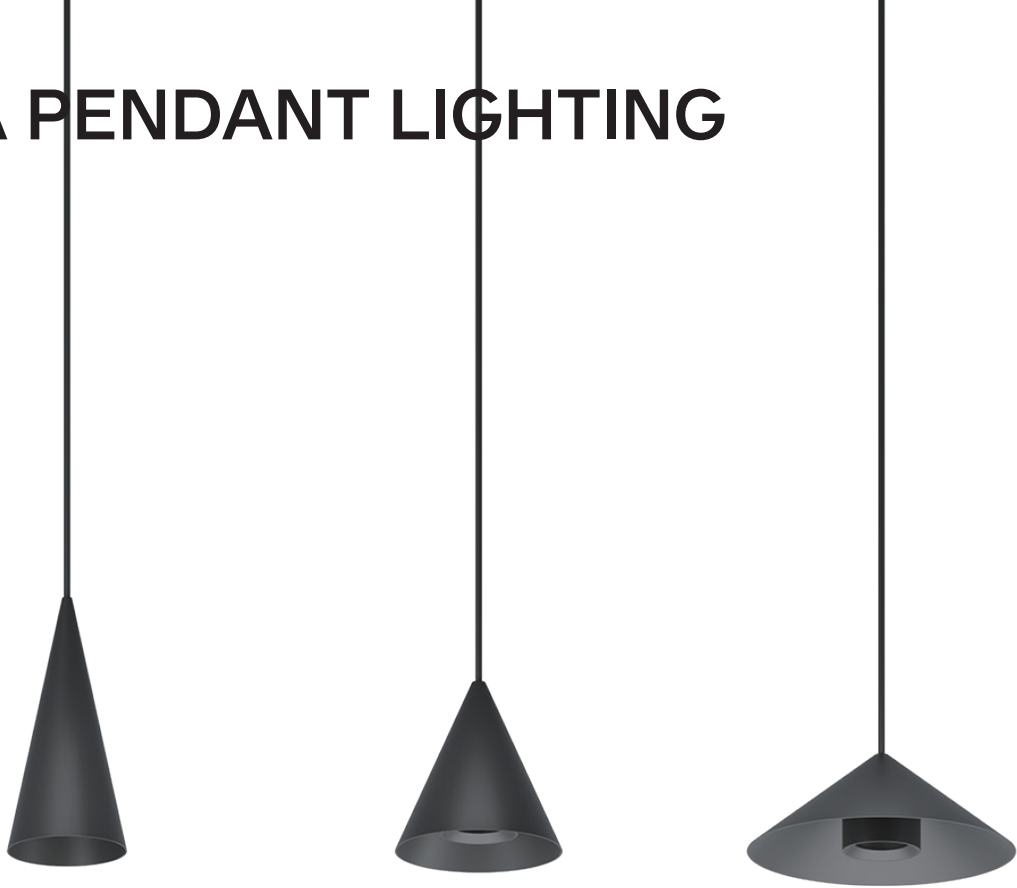

Body

The elegant DELTA represent a re-invention of our lighting classic.

Lighting designer gave the much-loved luminaire a transformative aesthetic with updated Lighting technology.

Used zoom optics, which can be well combined with use of the environment to adjust the beam angle you want.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.

Driver



Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A multi-faceted lighting system, that offers a play between forms and elegant lighting effects.

Application areas, residential, hotels, restaurants, retails and corridors.


Suitable Accessories

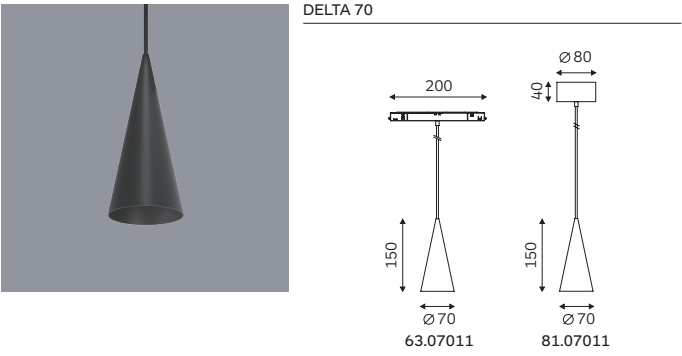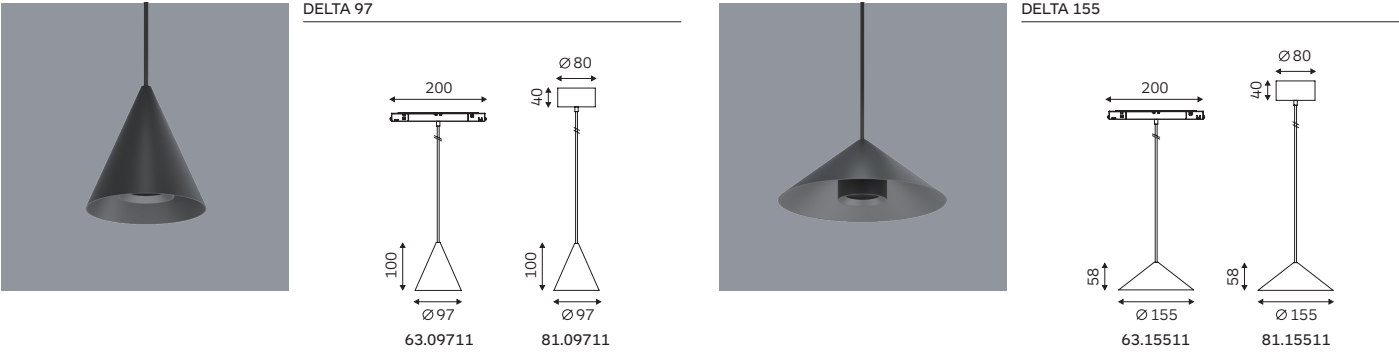

Code Ordering Example: 63 . 0 9 7 1 1 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
DELTA 97 Pendant Lighting Low Voltage Track	63.09711	CA	COB LED	90	30	3000K	455 lm	13°-44°	D0	No Dim	10 □ WH
					40	4000k	478 lm		DA	Dali Dim	20 ■ BK
DELTA 155 Pendant Lighting Low Voltage Track	63.15511	CA	COB LED	90	30	3000K	455 lm	13°-44°	DC 0-10V Dim		
					40	4000k	478 lm				
DELTA 70 Pendant Lighting Low Voltage Track	63.07011	CA	COB LED	90	30	3000K	455 lm	13°-44°			
					40	4000k	478 lm				
DELTA 97 Pendant Lighting	81.09711	CA	COB LED	90	30	3000K	455 lm	13°-44°			
					40	4000k	478 lm				
DELTA 155 Pendant Lighting	81.15511	CA	COB LED	90	30	3000K	455 lm	13°-44°			
					40	4000k	478 lm				
DELTA 70 Pendant Lighting	81.07011	CA	COB LED	90	30	3000K	455 lm	13°-44°			
					40	4000k	478 lm				

DELTA PENDANT LIGHTING

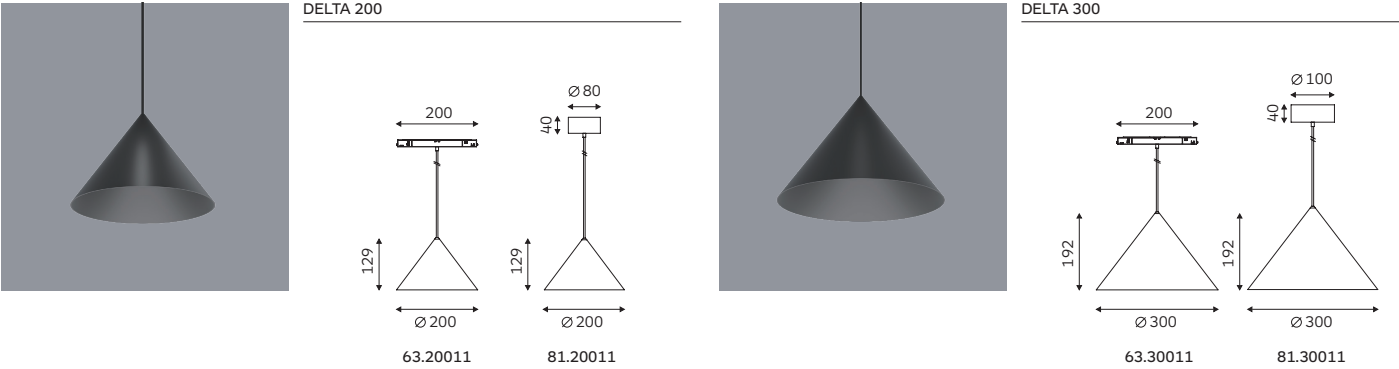

Body

The elegant DELTA represent a re-invention of our lighting classic.

Lighting designer gave the much-loved luminaire a transformative aesthetic with updated Lighting technology.

It is available in series and two mounting options including suspension and magnetic track.

Accessories

Honeycomb louvre, linear spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A multi-faceted lighting system, that offers a play between forms and elegant lighting effects.

Application areas, residential, hotels, restaurants, retails and corridors.

Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre


Code Ordering Example: 6 2 . 2 0 0 1 1 - 9 0 3 0 1 4 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT		LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options		Finish
DELTA 200 Pendant Lighting Low Voltage Track	63.20011	CA	COB LED	90	30	3000K	14W	1704 lm	14°/22°/36°/61°	D0	No Dim	10 □ WH
					40	4000k		1789 lm		DA	Dali Dim	20 ■ BK
DELTA 300 Pendant Lighting Low Voltage Track	63.30011	CA	COB LED	90	30	3000K	24W	3024lm	15°/25°/33°/60°	DC 0-10V Dim		
					40	4000k		3175 lm				
DELTA 200 Pendant Lighting	81.20011	CA	COB LED	90	30	3000K	14W	1704 lm	14°/22°/36°/61°			
					40	4000k		1789 lm				
DELTA 300 Pendant Lighting	81.30011	CA	COB LED	90	30	3000K	24W	3024 lm	15°/25°/33°/65°			
					40	4000k		3175 lm				

20

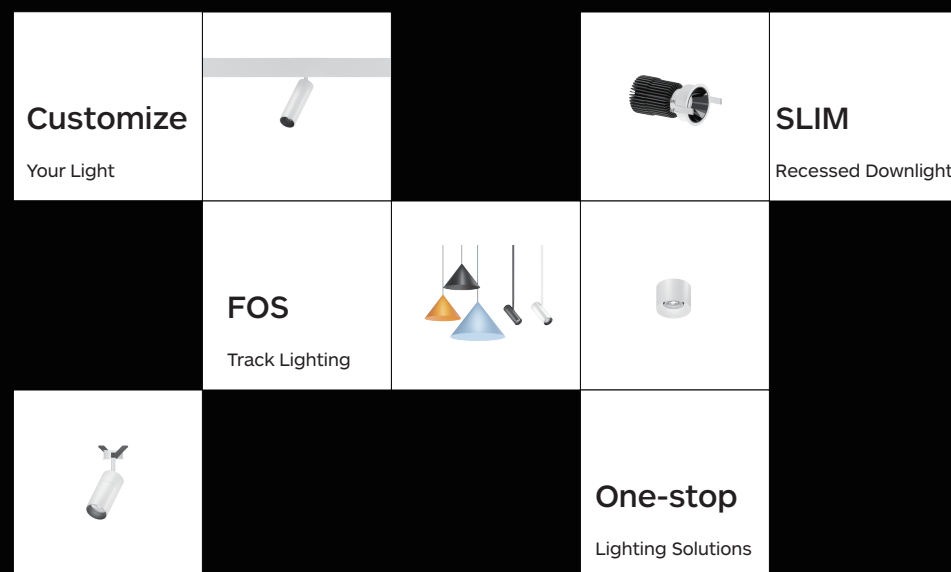

Artdon Lighting Limited
Tel: 86-760-22211886
Fax: 86-760-22211890
sales@artdon.cn
www.artdon.cn
No. 15, Zhihe 3rd Street,
Yumin Community, Xiaolan Town,
Zhongshan City, Guangdong Province, China



www.artdon.cn

24



2023-2024 catalogue