

Track Lighting | Profile Systems

Recessed Downlight | Surface Mounted Light | Low Voltage Track Systems | Pendant Lighting



2024-2025 catalogue



TRACK LIGHTING

HIGH LUMEN PRO
Track Lighting



23



23

ARMI
Track Lighting



27



27



27

MINE
Track Lighting



33



33



33

MINE
Track Lighting



35



35



35

LANKY
Track Lighting



37



37



37

SPECTRUM
Track Lighting



47



47




47




47

TRACK LIGHTING

ECO
Track Lighting

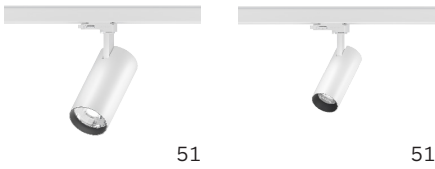

EMMA
Track Lighting

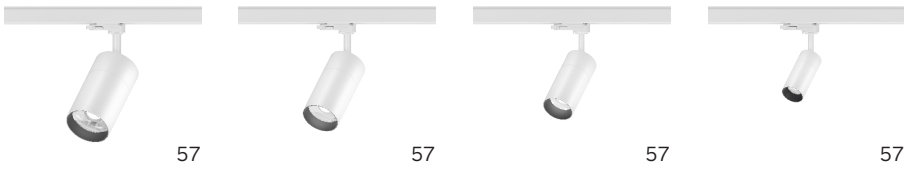


FEEL ZOOM
Track Lighting




FOS
Track Lighting



ACTION
Track Lighting

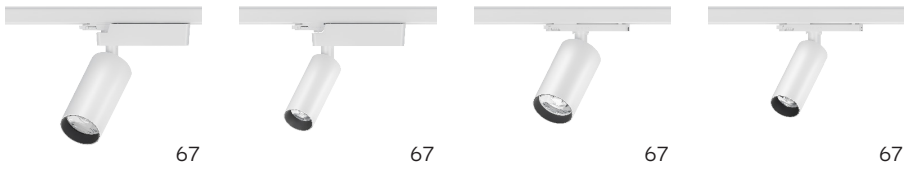


ARTAX
Track Lighting

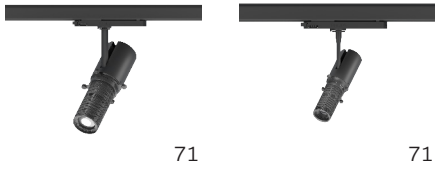


LOW VOLTAGE TRACK SYSTEM


LANKY
Low Voltage Track Light

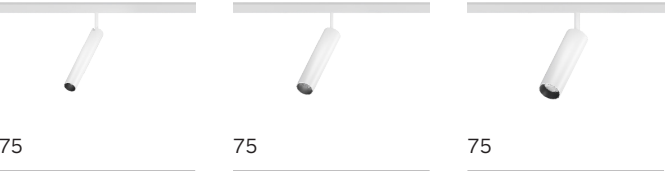

SPECTRUM
Low Voltage Track Light

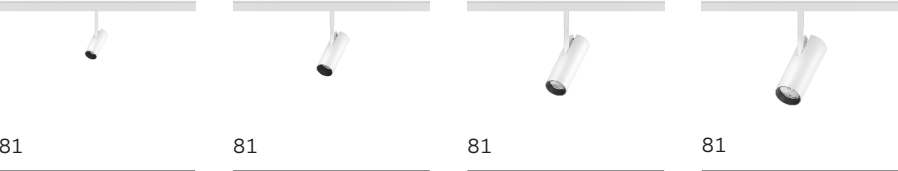


FOS
Low Voltage Track Light

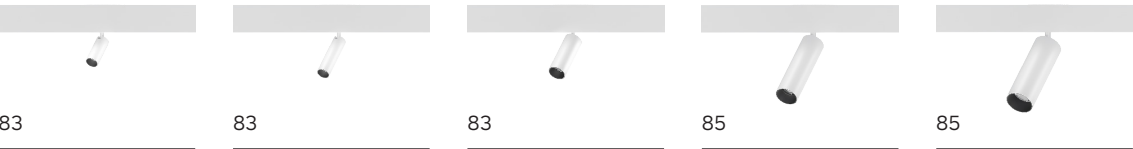

EMMA
Low Voltage Track Light



FEEL ZOOM
Low Voltage Track Light

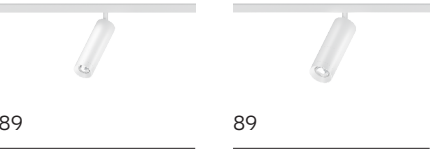

ARTAX
Low Voltage Track Light



LOW VOLTAGE TRACK SYSTEM

SPARK 20 Low Voltage Linear Light-Wall Washer



93



93



93



93

SPARK 20 Low Voltage Linear Light-General Lighting



95



95



95

SPARK 20 Low Voltage Linear Light-Accent Lighting



97



97




97

SPARK 20 Low Voltage Linear Light-Accent Lighting



99




99



99

LOW VOLTAGE TRACK & ACCESSORIES

Low Voltage
Track




102




102



102



102



102

Low Voltage
Accessories



103



103



103



103



103


Low Voltage
Accessories



105




105



105



105




105




105


Low Voltage
Accessories



105



105



105

TRACK & ACCESSORIES

3-Circuit Track & Accessories Track



109



109

3-Circuit Track & Accessories Accessories



110



110



110



110



110



110

3-Circuit Track & Accessories Accessories



111



111



111



111



111



111

1-Circuit Track & Accessories Track



113



113

1-Circuit Track & Accessories Accessories



115



115



115



114



114



114

1-Circuit Track & Accessories Accessories





114







114

PROFILE SYSTEMS





AURO TUBE 60
Profile Systems




ENKO 20
Profile Systems



CANNEX 50
Profile Systems



RECO 35
Profile Systems





PROFILE SYSTEMS

AURO TUBE 60 Profile Systems



CANNEX 50 Profile Systems




RECESSED DOWNLIGHT

INTERO
Recessed Downlight



SLIM
Recessed Downlight

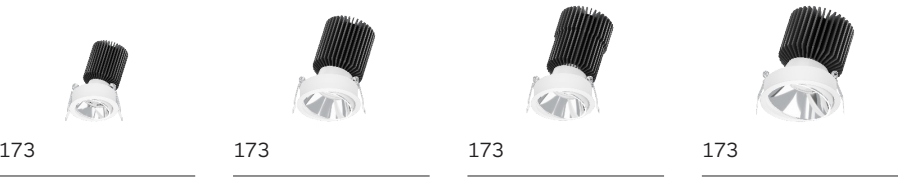

SLIM
Recessed Downlight



LOTT
Recessed Downlight



LEKO
Recessed Downlight



REFLEX
Recessed Downlight



RECESSED DOWNLIGHT

MINE
Recessed Downlight



MINE
Recessed Downlight



SPECTRUM
Recessed Downlight



SPECTRUM
Recessed Downlight



UTH
Recessed Downlight



RECESSED DOWNLIGHT

SILO
Recessed Downlight



205



205



205

SILO
Recessed Downlight



207



207



207

ECO
Recessed Downlight



209



209

LANKY
Recessed Downlight



211



211



211

EMMA
Recessed Downlight



213



213



213



213

FOS
Recessed Downlight



215



215



215

RECESSED DOWNLIGHT

NOVAL
Recessed Downlight



221



221



221



219



219



219

EURO
Recessed Downlight



223



223

MINI
Recessed Downlight



225



225



225



225

MINI
Recessed Downlight



229



229



229



229

MINI PRO
Recessed Downlight



233



233



233



233

MINI
Recessed Downlight



235



235

SURFACE MOUNTED LIGHT

MINE
Surface Mounted Light



241



241



241

MINE
Surface Mounted Light



245



245



245



245

TLA
Surface Mounted Light



249



249



249

CLA
Surface Mounted Light



251



251



251

ADJ
Surface Mounted Light



257



257



257

UTH
Surface Mounted Light



261



261



261

SRA
Surface Mounted Light




265



265

SURFACE MOUNTED LIGHT

EMMA
Surface Mounted Light

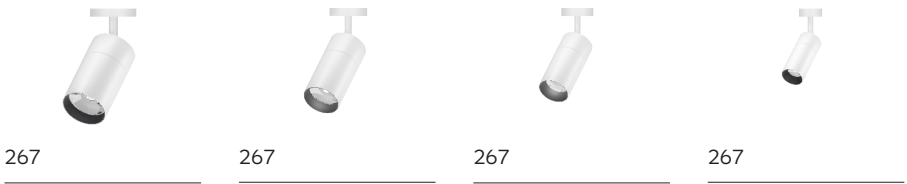


FOS
Surface Mounted Light



PENDANT LIGHTING

SPECTRUM
Rod Suspension Lighting

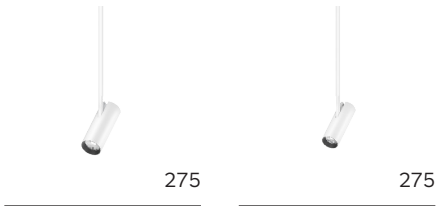


SWING
Pendant Lighting




DELTA
Pendant Lighting





TRACK LIGHTING

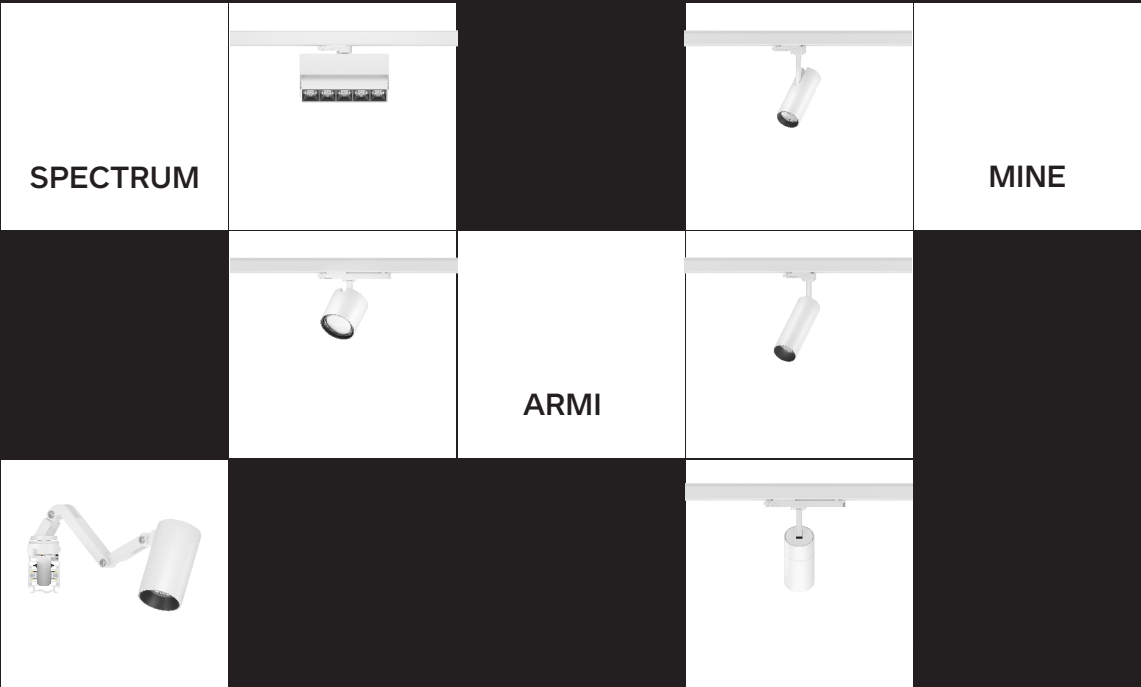

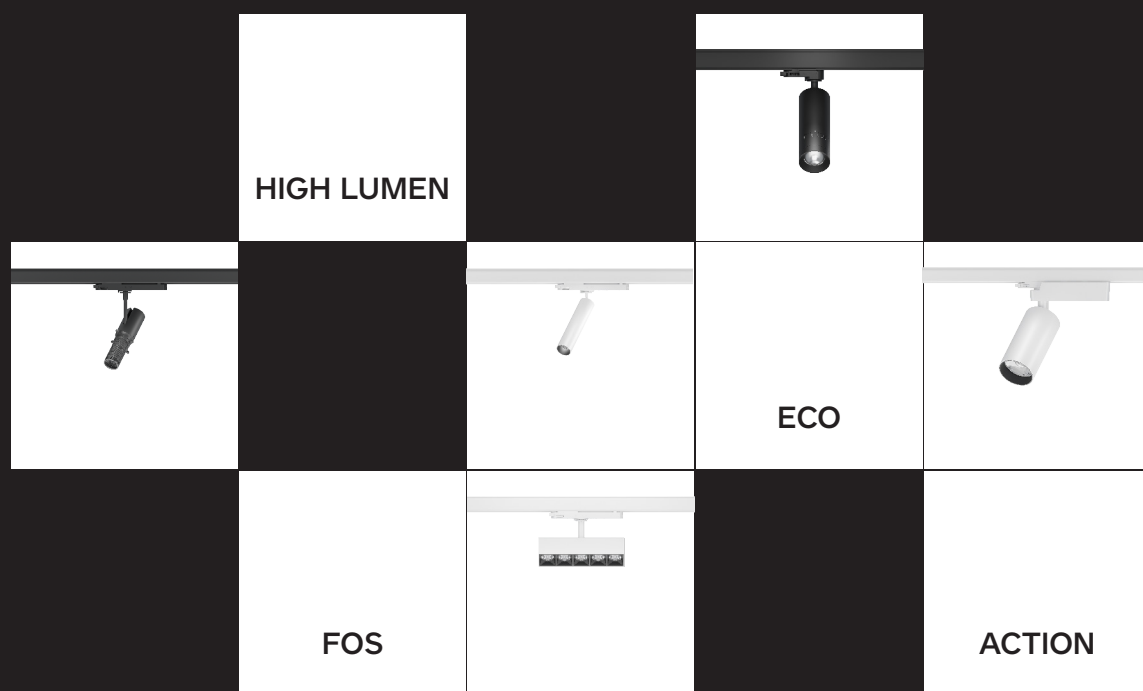

HIGH LUMEN PRO TRACK LIGHTING

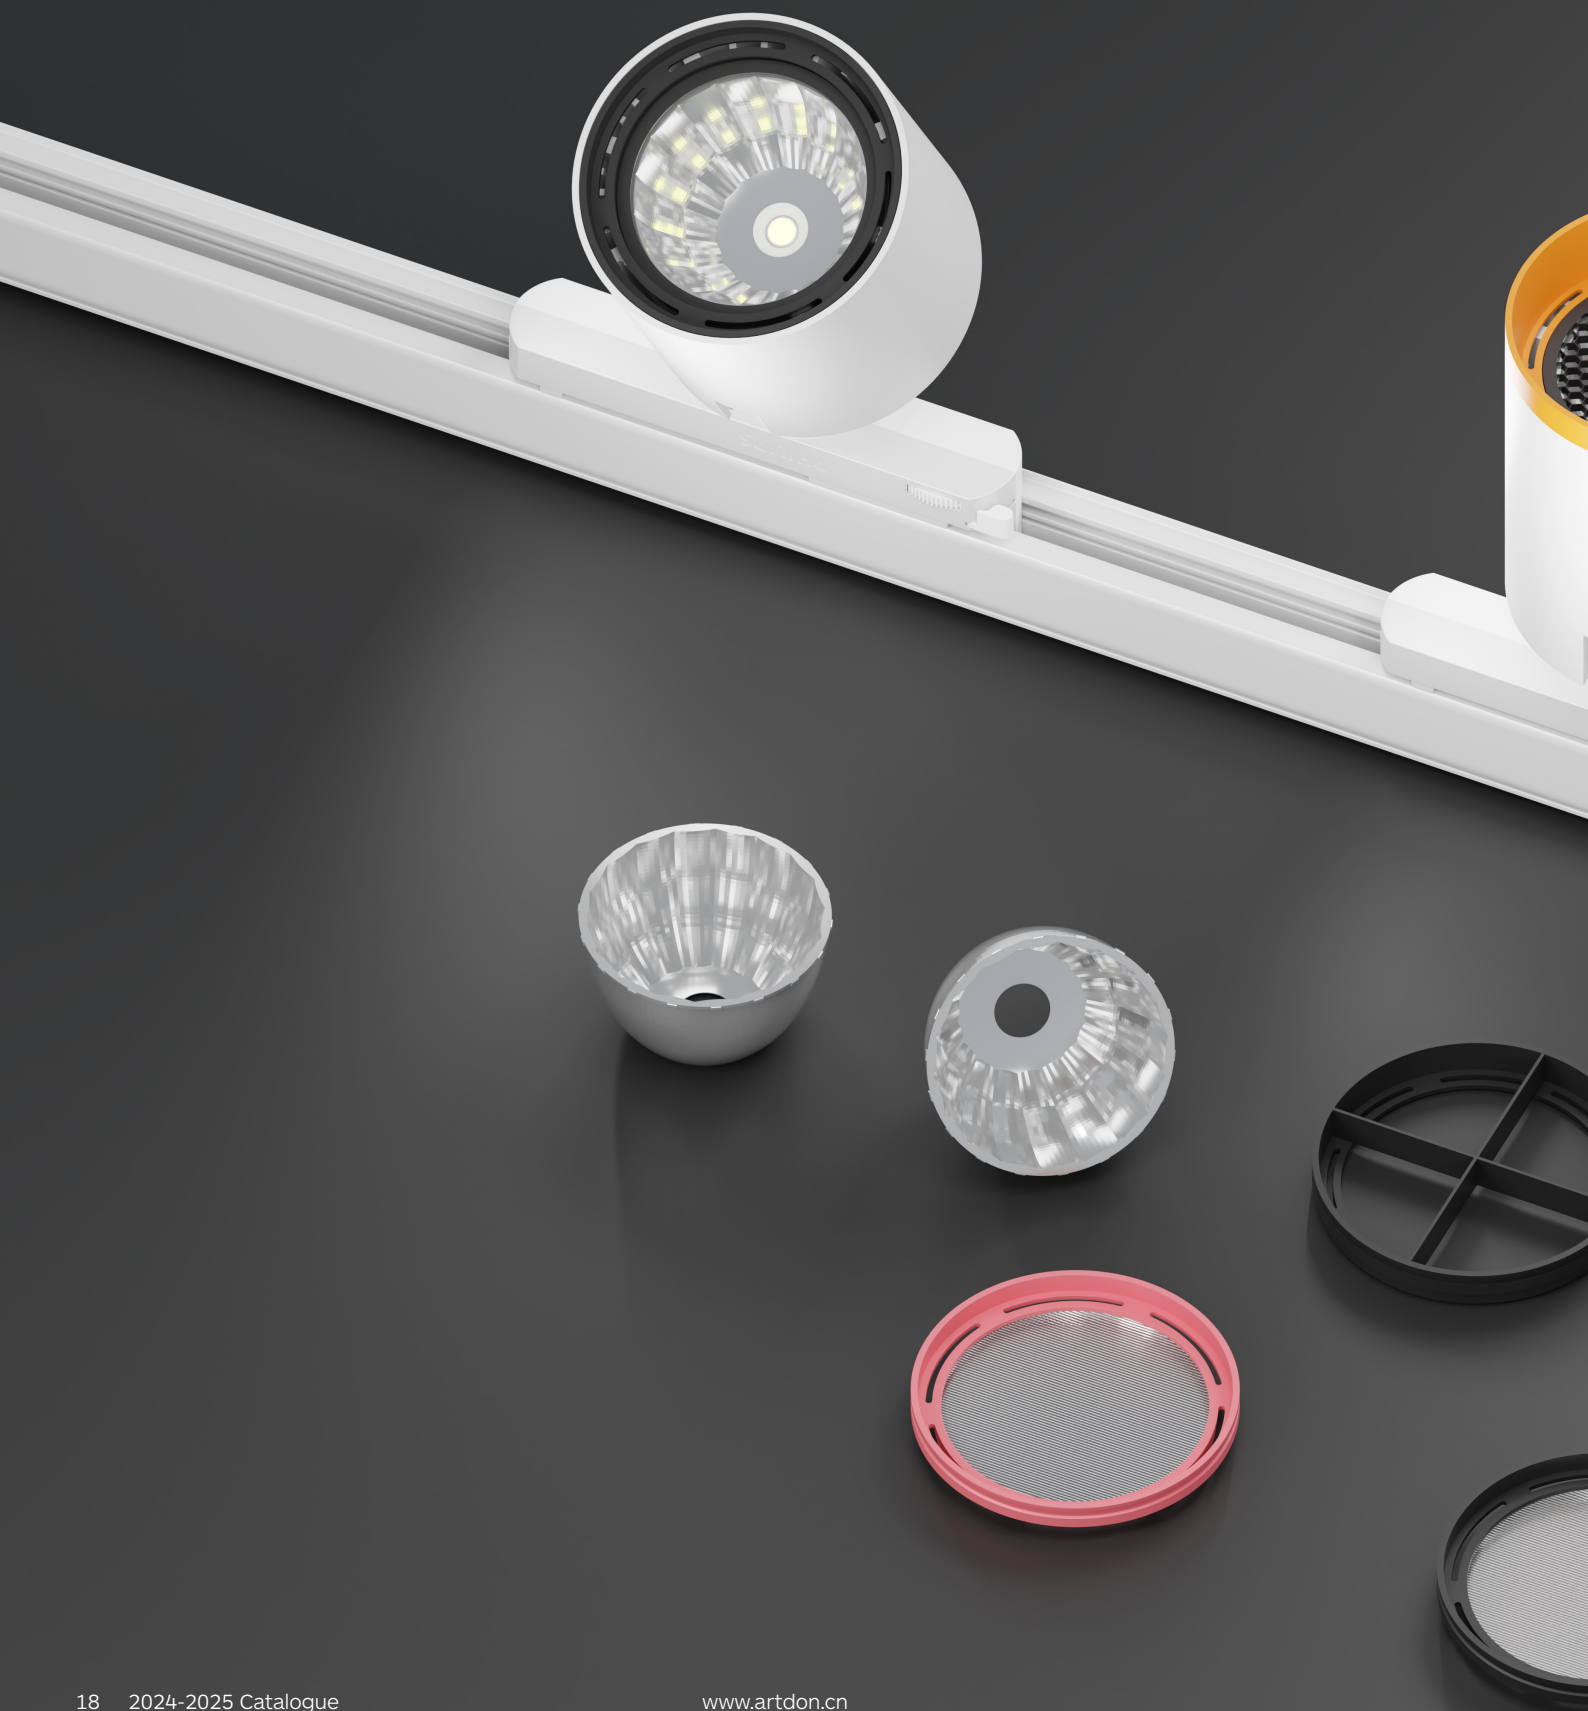

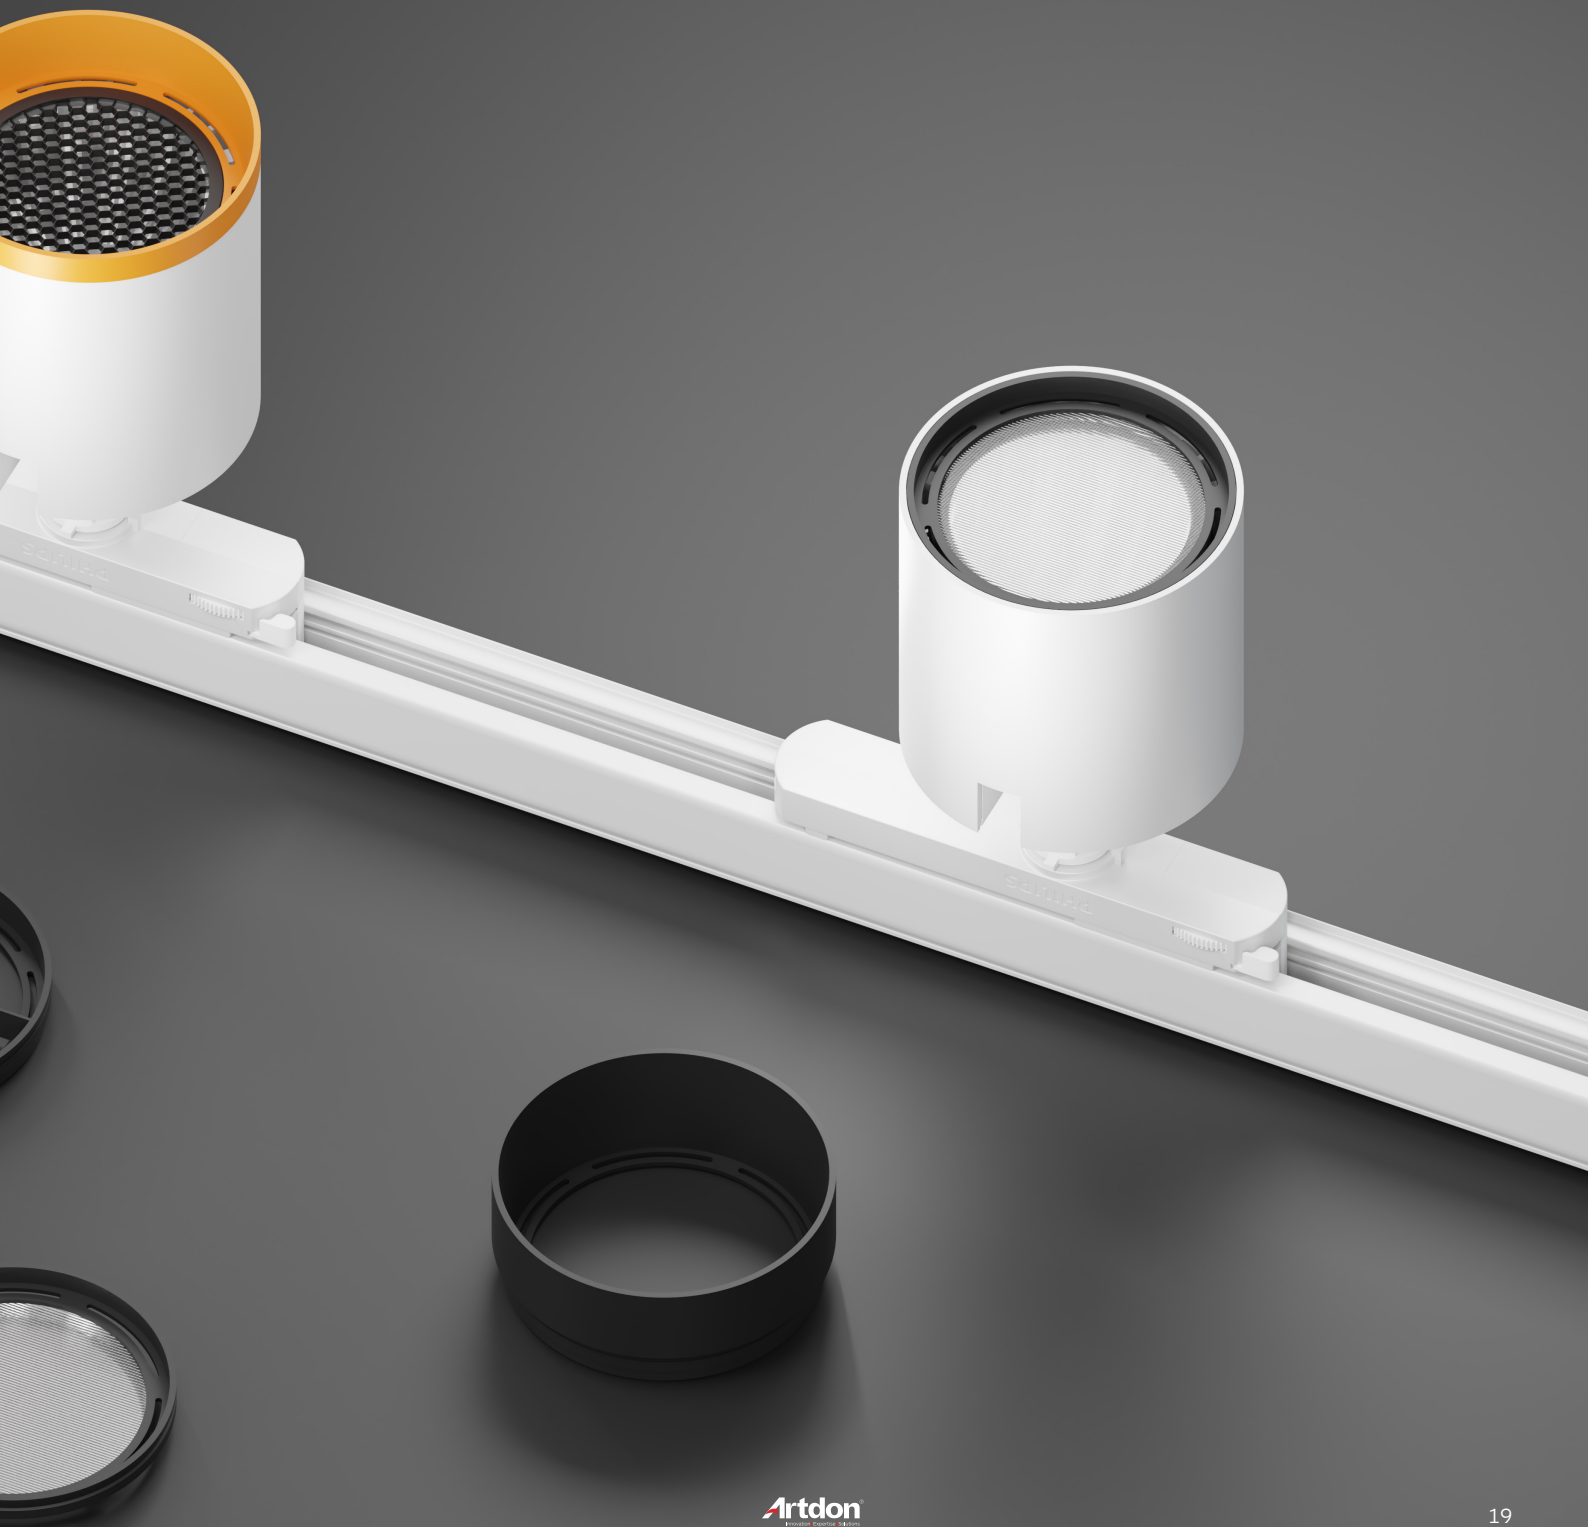

HIGH LUMEN PRO TRACK LIGHTING



Wall Washer




50D Cut-off Angle Glare Cover



60D Cut-off Angle Glare Cover



Honeycomb Louvre




"+" Anti-glare



Linear spread glass

HIGH LUMEN PRO TRACK LIGHTING

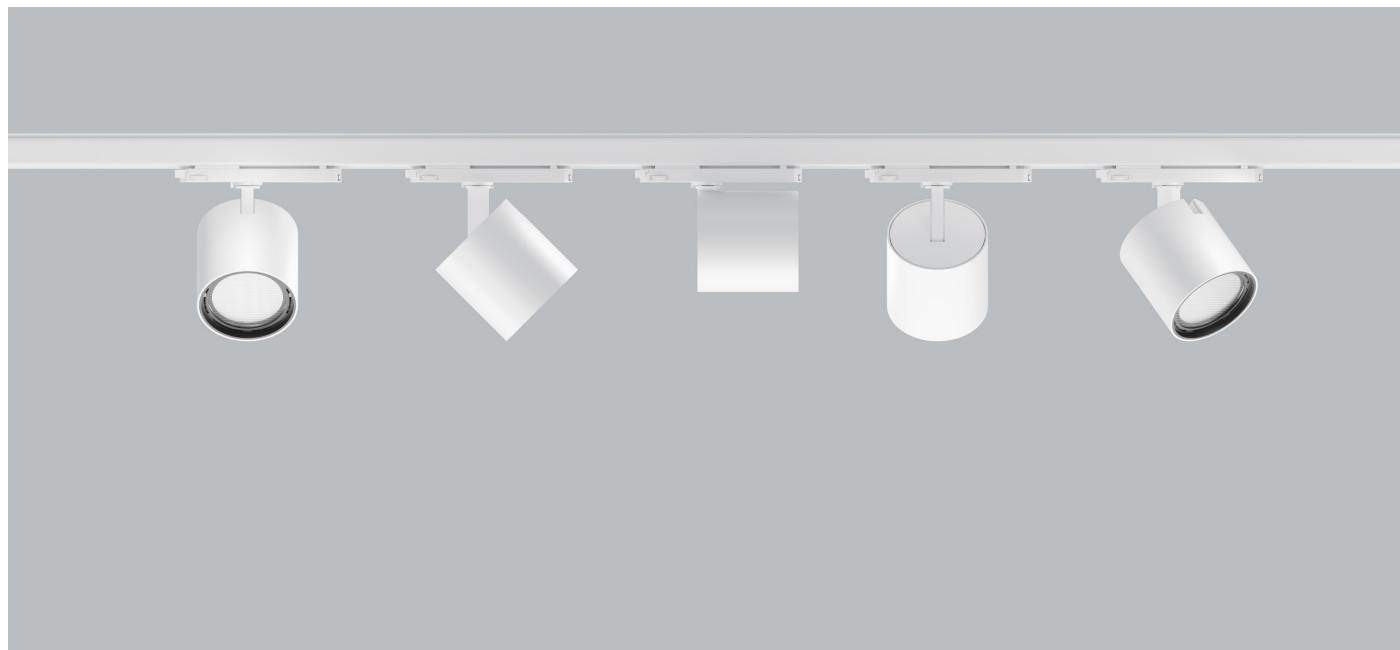

Body

Front to back is circulation structure, good heat dissipation, longer life.

Different optical accessories are available to meet the needs of different designers and spaces.

High efficiency with imported Alanod reflector.

Accessories

Wall Washer, 50D Cut-off Angle Glare Cover, 60D Cut-off Angle Glare Cover, Honeycomb louvre, "+" Anti-glare and Linear Spread glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Reflector: Alanod Reflector or Normal Aluminum Reflector.
Narrow, medium and wide beam angle available.

Driver

Supplied with intrack adaptor.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Application areas: Commercial spaces, malls, stores, retail projects, hotels, museums and gyms.

Suitable Accessories



50D Cut-off Angle Glare Cover



60D Cut-off Angle Glare Cover



Wall Washer



Honeycomb Louvre



"+" Anti-glare




Linear spread glass




HIGH LUMEN PRO 84

32.08423



HIGH LUMEN PRO 101


32.10111




Code Ordering Example: 3 2 . 0 8 4 2 3 - 9 0 3 0 1 4 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
HIGH LUMEN PRO 84 Track Light	32.08423	CA	COB LED	90	30 3000K	20W	2828 lm	14°/23°/43°/61°	D0 No Dim	10 ☐ WH
					40 4000k		2969 lm		DA Dali Dim	20 ☒ BK
HIGH LUMEN PRO 101 Track Light	32.10111	CA	COB LED	90	30 3000K	32W	4251 lm	18°/25°/47°/64°	DC 0-10V Dim	
					40 4000k		4463 lm		DT Triac Dim	

ARMI TRACK LIGHTING

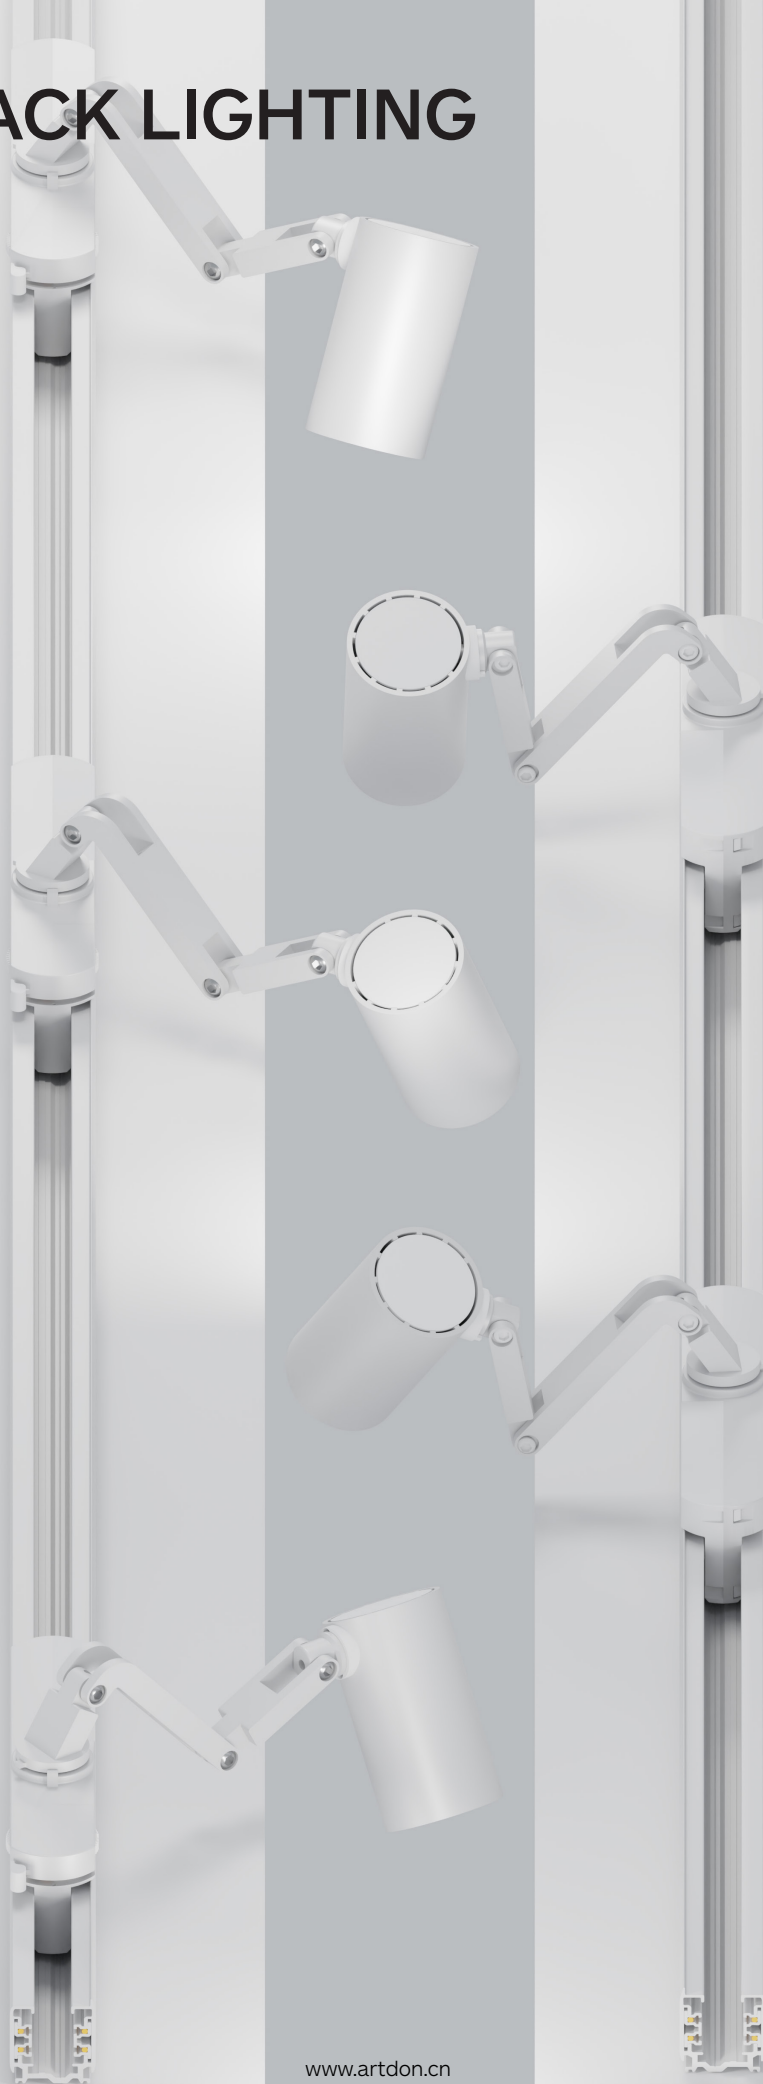


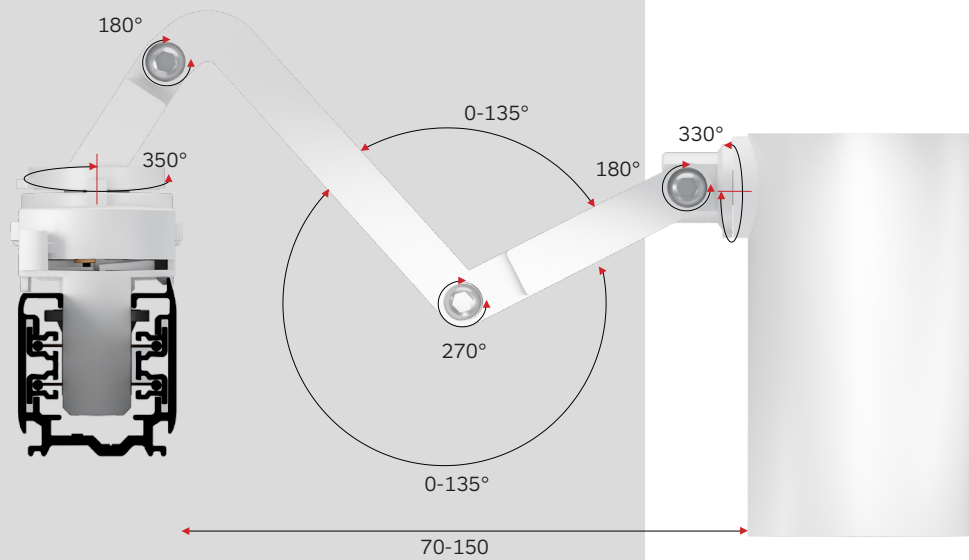

Each parts rotation and adjustment angle.



ARMI TRACK LIGHTING

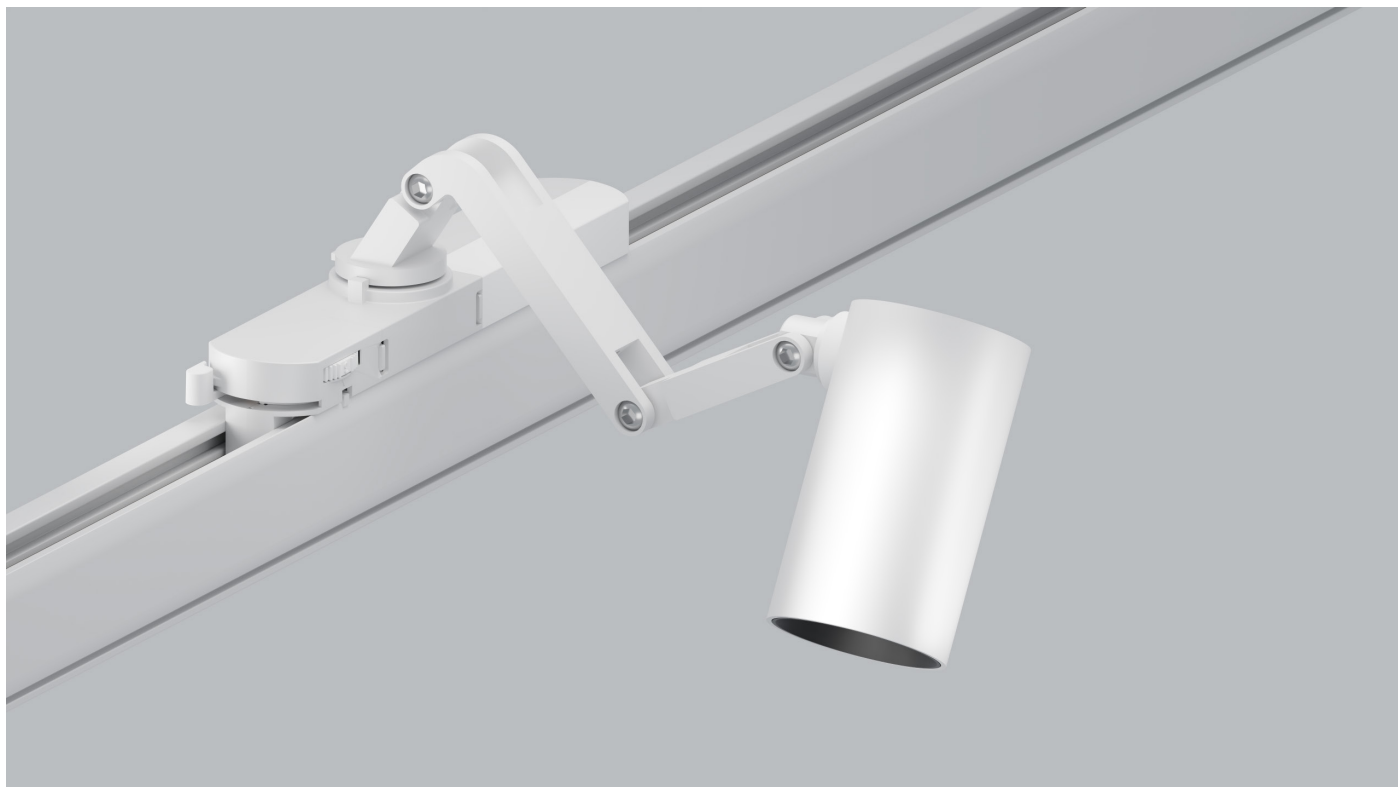

Body

Suitable for spaces that need to be slotted.

Flexible legs allow the fixture to swivel, adjust and straighten out to meet a variety of depths and complexity of slotted spaces.

The special construction means that no drop off, no matter how it is adjusted.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with intrack adaptor.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Mainly used for the need to open the slotted, to realize the lights do not see the fixture of the high-end commercial space.


Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre




ARMI 45 32.04530



ARMI 65 32.06528



ARMI 73 32.07326




Code Ordering Example: 3 2 . 0 4 5 3 0 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ARMI 45 Track Light	32.04530	CA COB LED	90	30 3000K	11W	935 lm	19°/29°/44°/56°	D0 No Dim	10 □ WH
				40 4000k		981 lm		DA Dali Dim	20 ■ BK
ARMI 65 Track Light	32.06528	CA COB LED	90	30 3000K	14W	1627 lm	18°/27°/38°/54°	DC 0-10V Dim	
				40 4000k		1708 lm		DT Triac Dim	
ARMI 73 Track Light	32.07326	CA COB LED	90	30 3000K	24W	2963 lm	14°/28°/40°/50°		
				40 4000k		3111 lm			





MINE

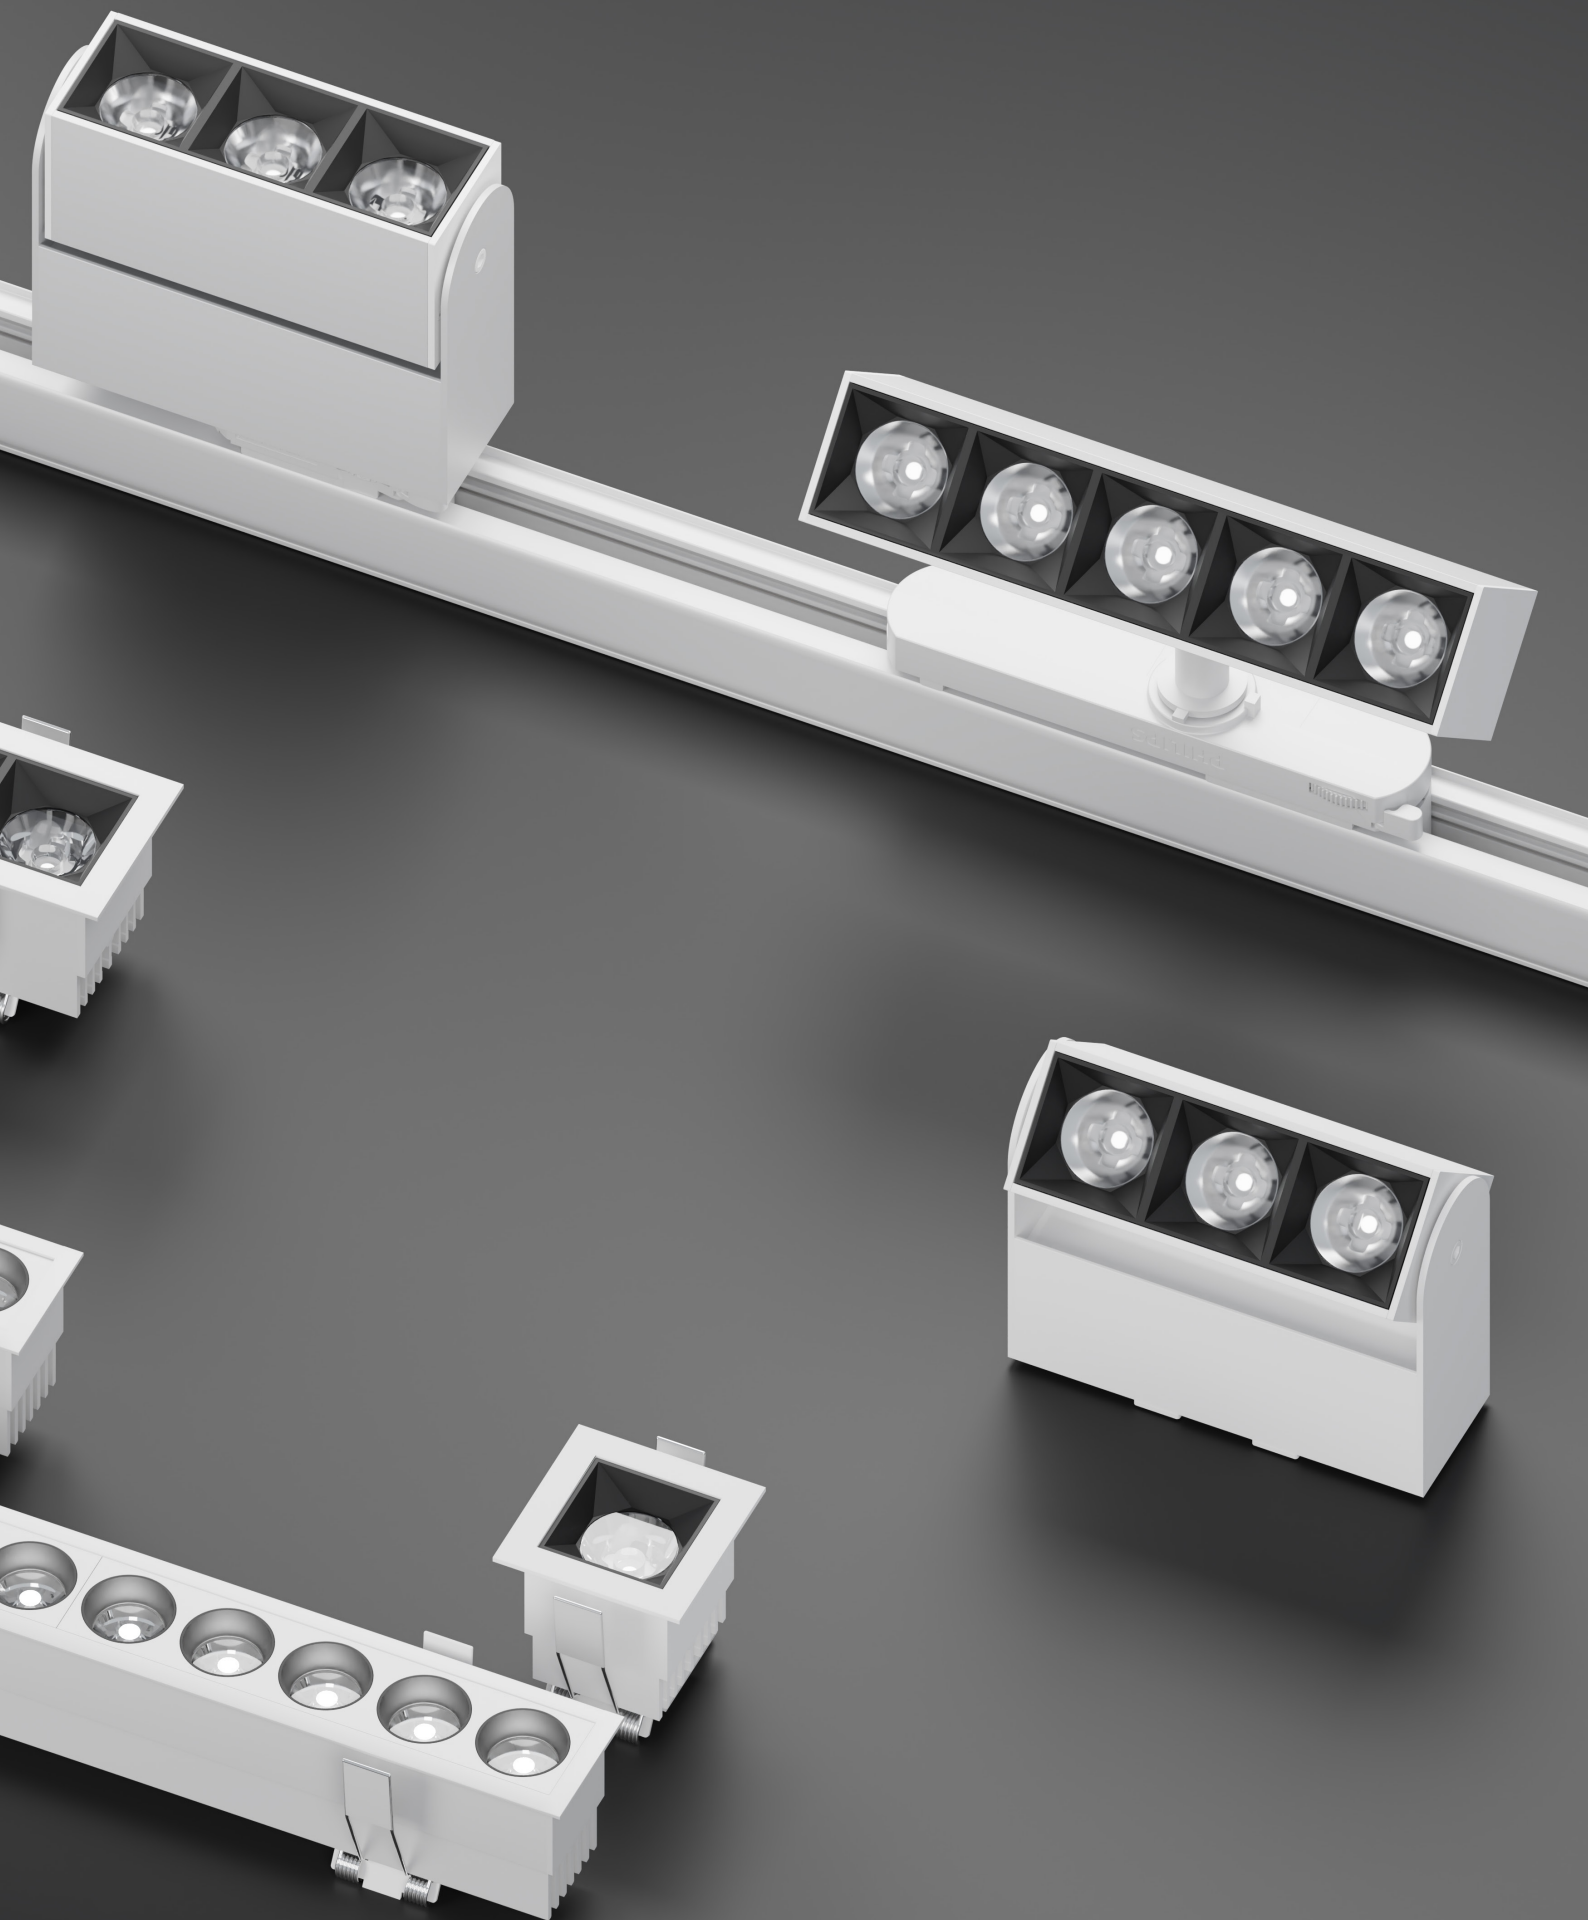


MINE TRACK LIGHTING

MINE series luminaires, a wide range of options for different places. It can be track rail, recessed and surface mounted, and can be made in any length, so let's make our own lamps together.

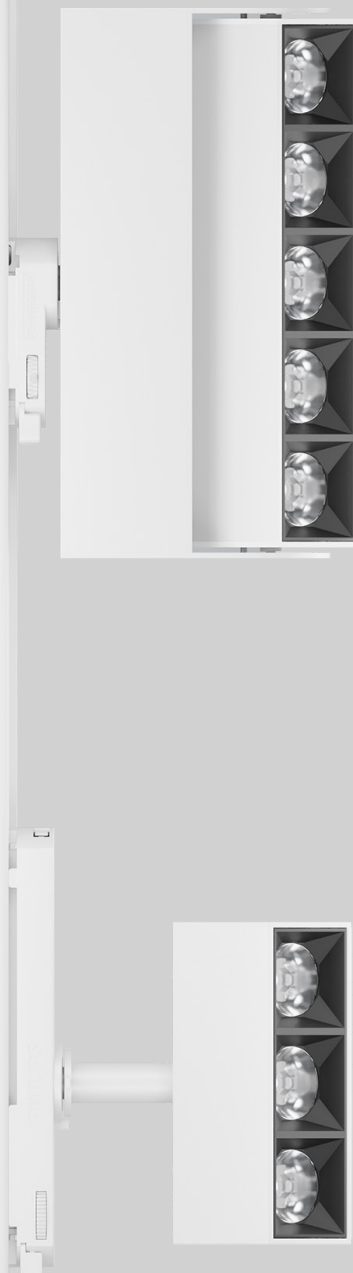





Connectable

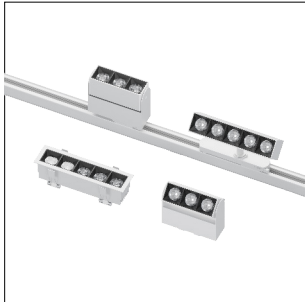

Different installed options



Double spring




Any length



1H Maximum 5W

MINE TRACK LIGHTING

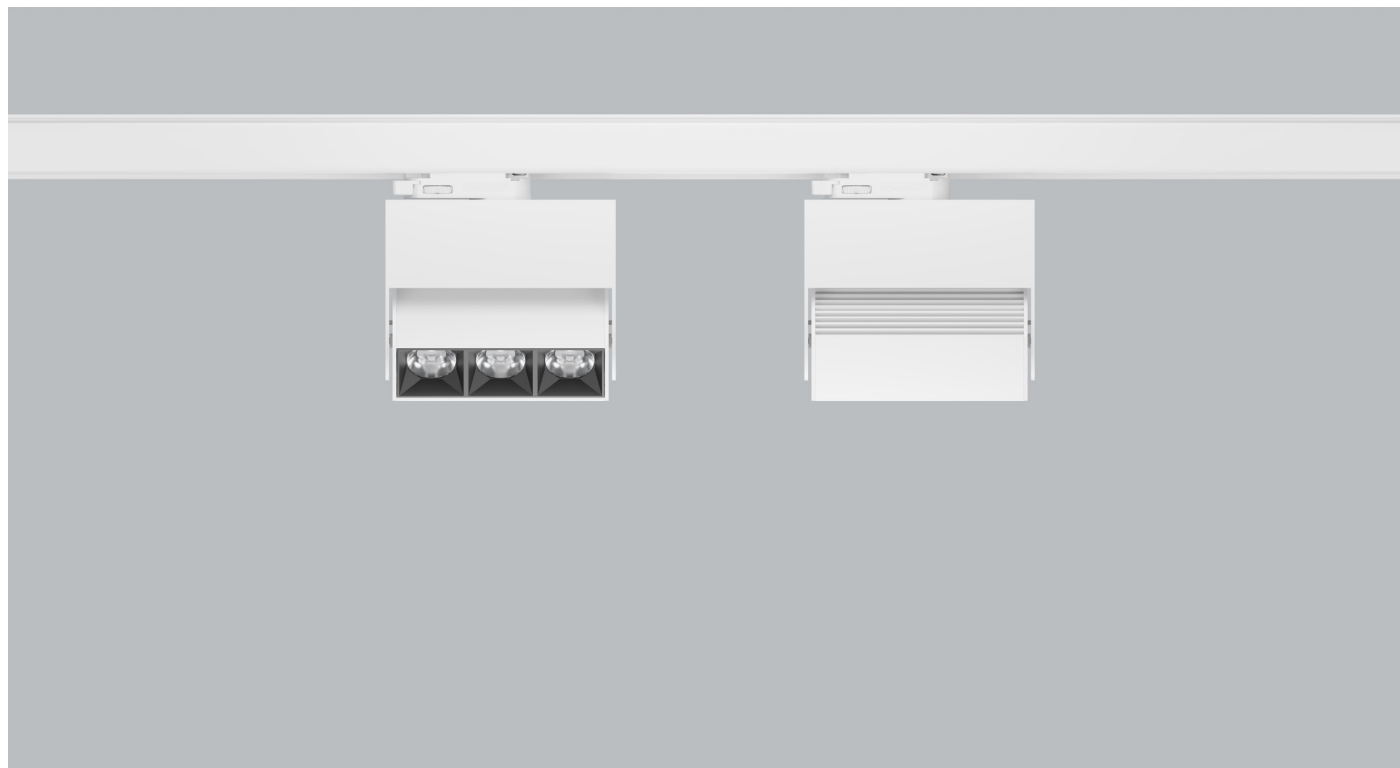

Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.

Driver

Supplied with Built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.



Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.



Suitable Accessories




MINE 40 31.04512



MINE 40 31.04513




MINE 40 31.04515



Code Ordering Example: 3 1 . 0 4 5 1 2 - 9 0 3 0 2 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 40 Track Light	31.04512	SA SMD LED	90	30 3000K	12W	1049 lm	23°/50°	D0 No Dim	10 ☐ WH
				40 4000k		1101 lm		DA Dali Dim	20 ☒ BK
MINE 40 Track Light	31.04513	SA SMD LED	90	30 3000K	20W	1824 lm	23°/50°	DC 0-10V Dim	
				40 4000k		1915 lm		DT Triac Dim	
MINE 40 Track Light	31.04515	SA SMD LED	90	30 3000K	40W	3485 lm	23°/49°		
				40 4000k		3659 lm			

MINE TRACK LIGHTING

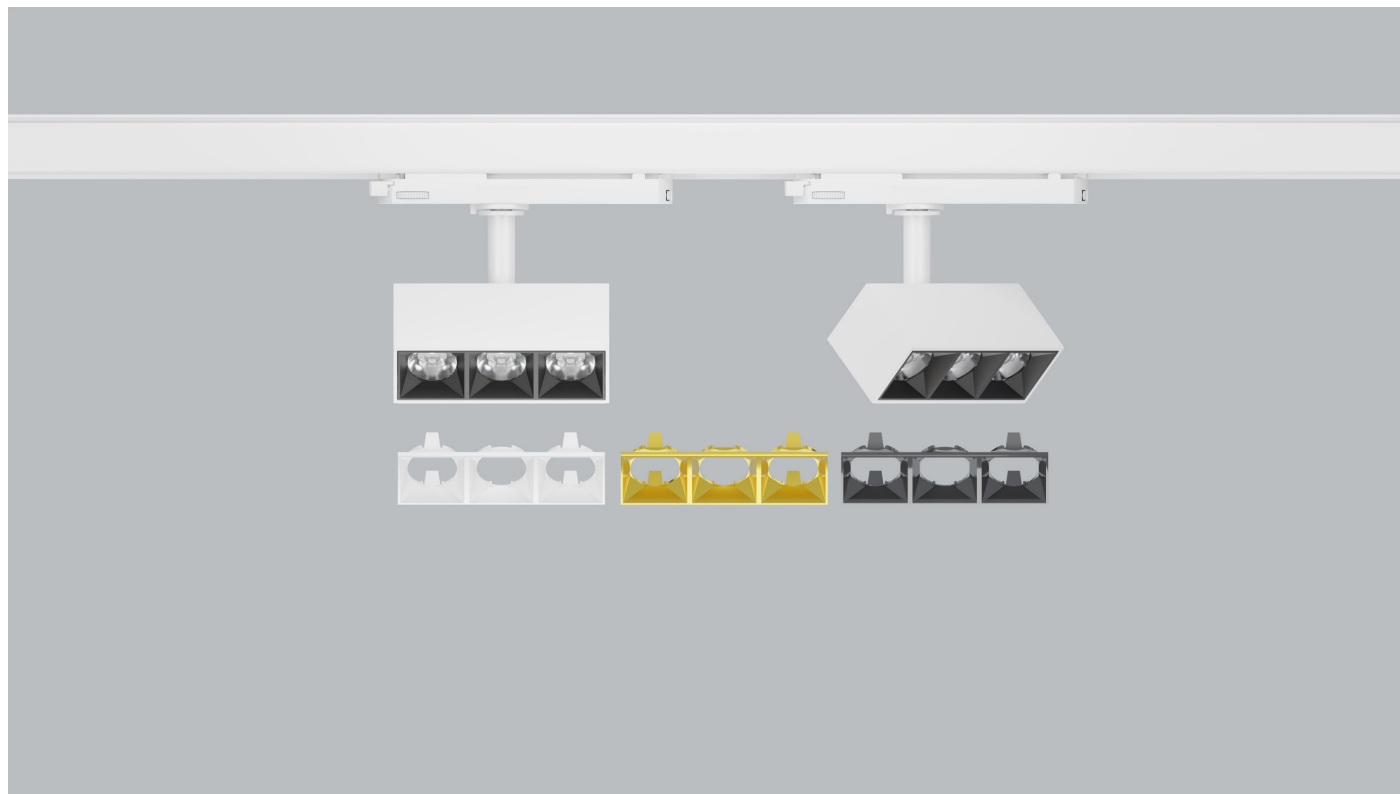

Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available. Also high power, 1H can be max 4W, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.


Driver

Driver:
Supplied with intrack adaptor.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.



Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.



Suitable Accessories




MINE 40 32.04532



MINE 40 32.04533




MINE 40 32.04535



Code Ordering Example: 3 2 . 0 4 5 3 2 - 9 0 3 0 2 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 40 Track Light	32.04532	SA SMD LED	90	30 3000K	12W	1049 lm	23°/50°	D0 No Dim	10 ☐ WH
				40 4000k		1101 lm		DA Dali Dim	20 ☒ BK
MINE 40 Track Light	32.04533	SA SMD LED	90	30 3000K	20W	1824 lm	23°/50°	DC 0-10V Dim	
				40 4000k		1915 lm		DT Triac Dim	
MINE 40 Track Light	32.04535	SA SMD LED	90	30 3000K	40W	3485 lm	23°/49°		
				40 4000k		3659 lm			

LANKY TRACK LIGHTING

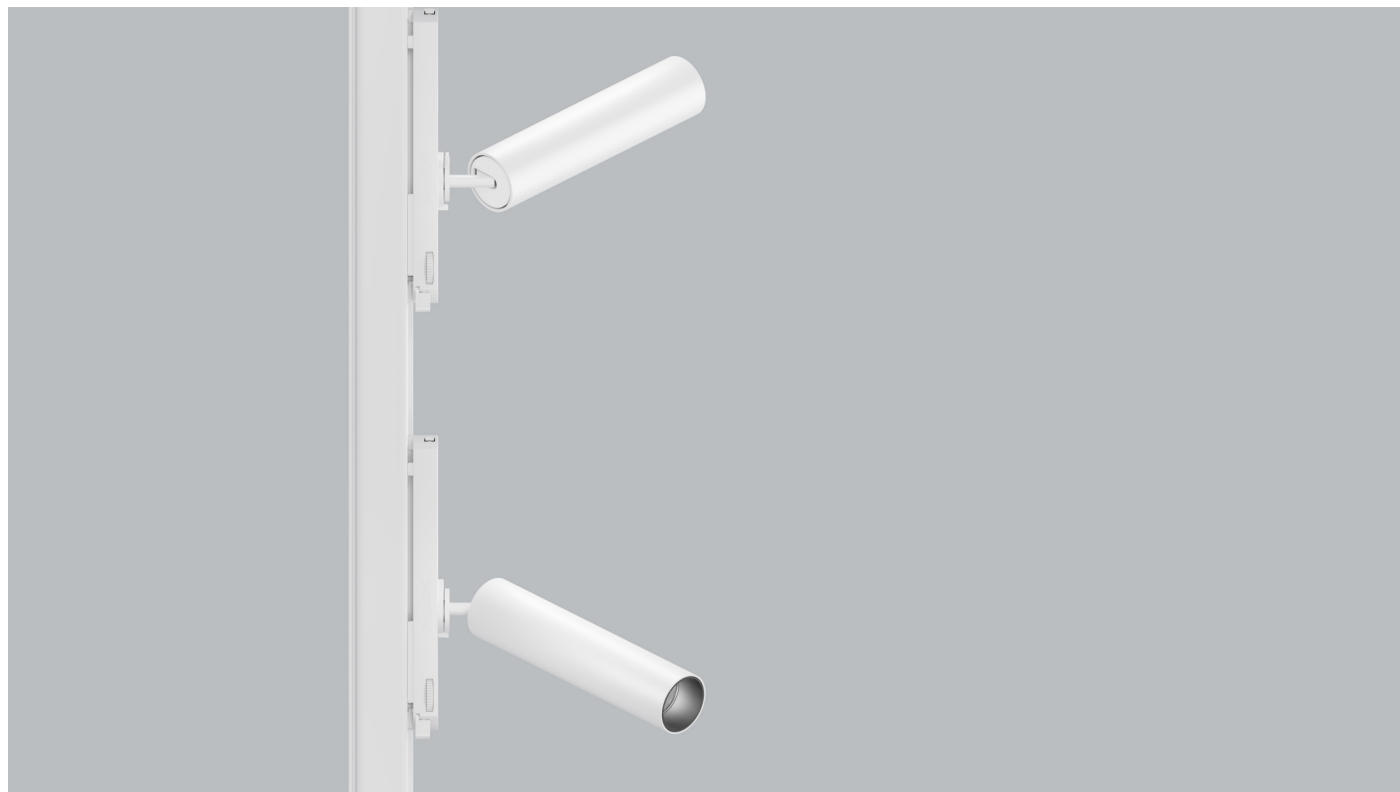

Body

Long and thin, blends in well with the space.

Small diameter, high wattage.

Unique structure and appearance of the back cover, 200 times adjustment still the same tightness.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.

Driver


Supplied with intrack adaptor.

Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Application areas: clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, professional windows, and other high-end commercial places.


Suitable Accessories




Linear Spread glass





Glass





Honeycomb louvre




LANKY 25 32.02511



LANKY 35 32.03512




LANKY 45 32.04531



Code Ordering Example: 3 2 . 0 2 5 1 1 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LANKY 25 Track Light	32.02511	CA	COB LED	90	30 3000K	9W	510 lm	20°/25°/35°/55°	D0 No Dim	10 ☐ WH
					40 4000k		535 lm		DA Dali Dim	20 ☒ BK
LANKY 35 Track Light	32.03512	CA	COB LED	90	30 3000K	12W	1036 lm	26°/35°/46°/57°	DC 0-10V Dim	
					40 4000k		1087 lm		DT Triac Dim	
LANKY 45 Track Light	32.04531	CA	COB LED	90	30 3000K	20W	1926 lm	28°/34°/48°/58°		
					40 4000k		2022 lm			

SPECTRUM TRACK LIGHTING

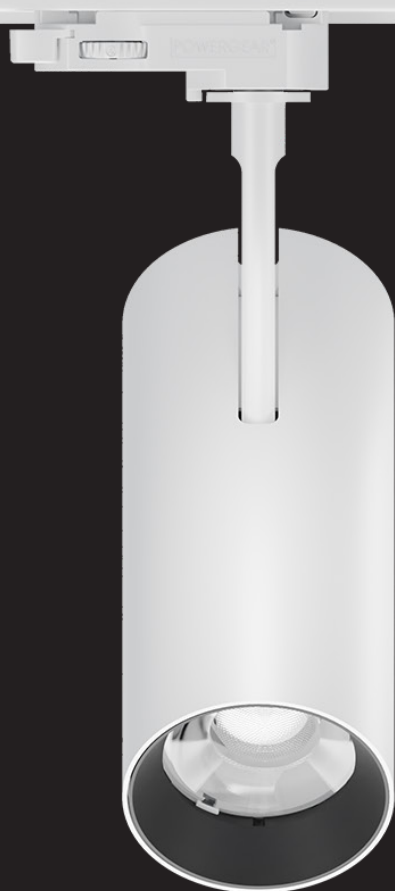


Wall Washer




Brandoor




Zoom



“+” Anti-glare




Deep Anti-glare
(Cutoff Angle 30D)




Ultra-narrow Angles Accessories


SPECTRUM TRACK LIGHTING

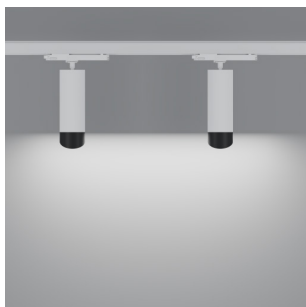


Wall Washer
Suitable for: Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

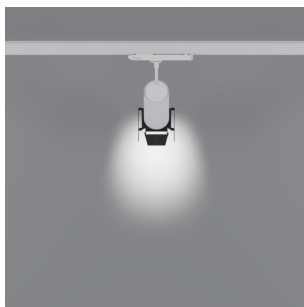


Brandoor
Suitable for:
Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC

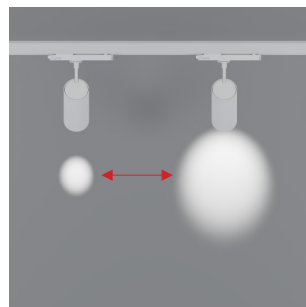


Zoom
Suitable for:
Ø35, Ø 45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



" + " Anti-glare
 Suitable for:
 Ø35, Ø45, Ø55, Ø65, Ø90mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC



Ultra-narrow Angle
Accessories
 Suitable for:
 Ø45, Ø55, Ø65, Ø90mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC




Deep Anti-glare (Cutoff Angle 30D)
 Suitable for:
 Ø45, Ø55, Ø65, Ø90mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC

SPECTRUM TRACK LIGHTING




Ø35	Ø45	Ø55	Ø65	Ø90
9.4W	15.4W	21W	24W	38W
8-38°	13-44°	14-50°	16-46°	10-55°
505-2535cd	981-5967cd	1505-8444cd	3145-13030cd	1811-16722cd
Track	Track/Downlight	Track/Downlight	Track/Downlight	Track



Zoom
Suitable for:
Ø35, Ø45, Ø55, Ø65, Ø90mm
Body Material: Aluminum/Iron
Color: Black
Optical Material: PC



Ø45	Ø55	Ø65	Ø90
7.4W	15W	21.6W	38W
5.4°	6.4°	5.4°	7.5°
7239cd	12732cd	30269cd	39400cd
Track/Downlight	Track/Downlight	Track/Downlight	Track



Ultra-narrow Angle

Accessories

Suitable for :

Ø45, Ø55, Ø65, Ø90mm

Body Material: Aluminum/Iron

Color: Black

Optical Material: PC

SPECTRUM TRACK LIGHTING



One Main Body, the following accessories can be freely changeable.





SPECTRUM TRACK LIGHTING



Body

A range of sizes and wattage options to accommodate various environmental needs. Also can be 48V magnetic and AC220V.

A novel proportion design that provides even light distribution and optimal lighting effects.

Have different optical accessories to customize their lighting effects.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




SPECTRUM 45

32.04526




SPECTRUM 55

32.05522




SPECTRUM 65

32.06519



SPECTRUM 90

32.09017



Code Ordering Example: 3 2 . 0 4 5 2 6 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 45 Track Light	32.04526	CA	COB LED	90	30 3000K	11.5W	808 lm	16°/19°/28°/40°	D0 No Dim	10 ☐ WH
					40 4000k		848 lm			20 ☐ BK
SPECTRUM 55 Track Light	32.05522	CA	COB LED	90	30 3000K	14.3W	1244 lm	17°/28°/39°/49°		
					40 4000k		1306 lm			
SPECTRUM 65 Track Light	32.06519	CA	COB LED	90	30 3000K	19.7W	2388 lm	19°/24°/39°/51°		
					40 4000k		2507 lm			
SPECTRUM 90 Track Light	32.09017	CA	COB LED	90	30 3000K	36.5W	4573 lm	18°/25°/38°/51°		
					40 4000k		4802 lm			

ECO TRACK LIGHTING



ECO 55

Body Sizes: Ø55XH130mm

Watt: 14W

ECO

TRACK LIGHTING



ECO 80
Body Sizes: Ø80XH165mm
Watt: 31W

ECO TRACK LIGHTING



Body

ECO Track light with 2 kinds of wattage, and there are also 2 kinds of common adaptor and integrated adaptor.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Deep front cover, low UGR, creates a comfortable space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Options1: Supplied with No-dimable built-in driver.
Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre



ECO 55 32.05511




ECO 80 32.08011



Code Ordering Example: 3 2 . 0 5 5 1 1 - 9 0 3 0 2 2 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 55 Track Light	32.05511	CA	COB LED	90	30 3000K	14W	1563 lm	22°/27°/38°/56°	D0 No Dim	10 ☐ WH
					40 4000k		1641 lm			20 ☐ BK
ECO 80 Track Light	32.08011	CA	COB LED	90	30 3000K	31W	3843 lm	18°/26°/33°/55°		
					40 4000k		4035 lm			



EMMA

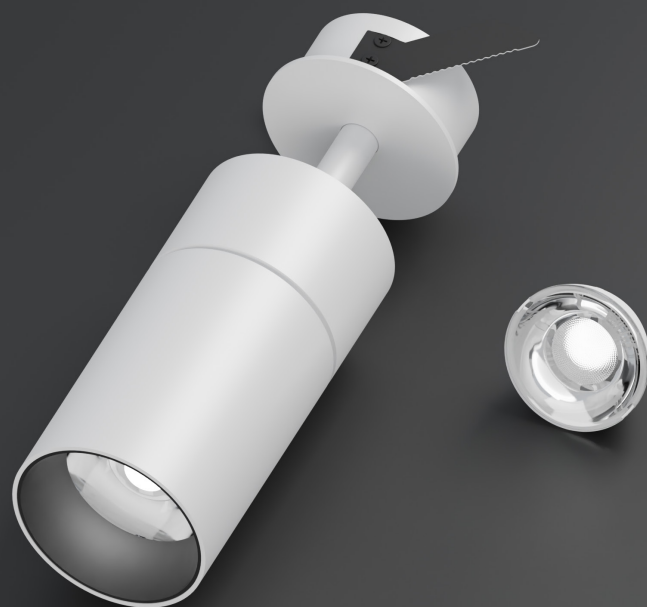


EMMA




EMMA TRACK LIGHTING

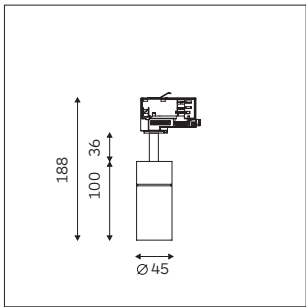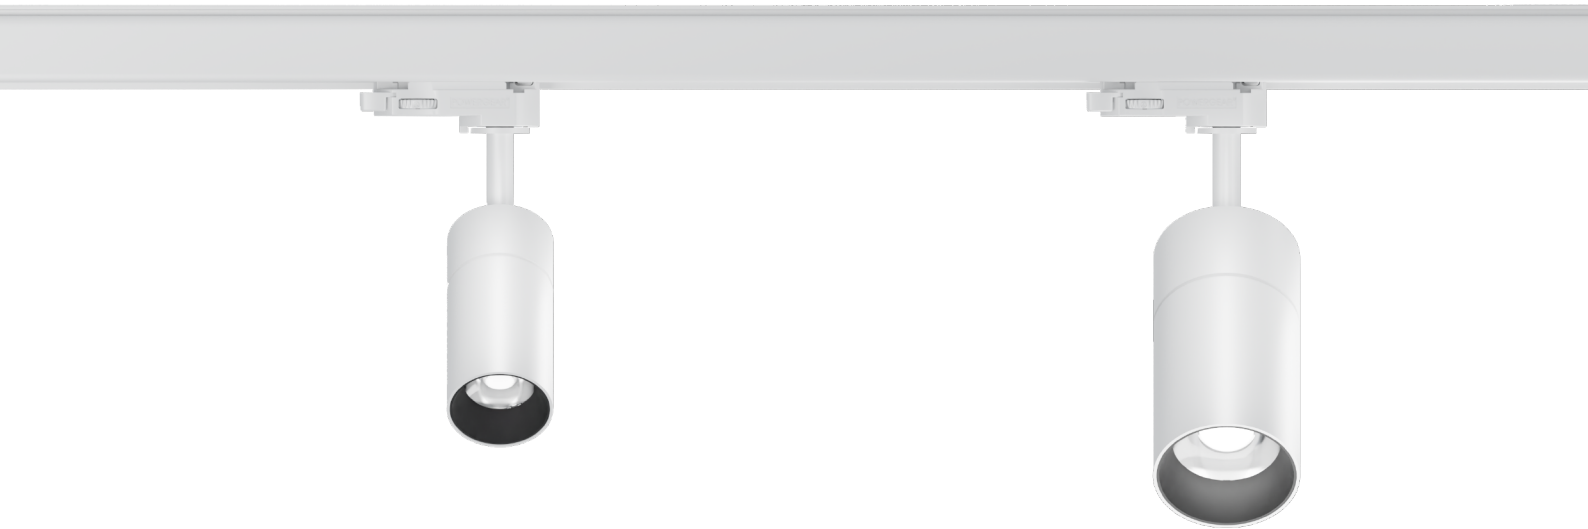

EMMA 45
Body Sizes: Ø45XH100mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens

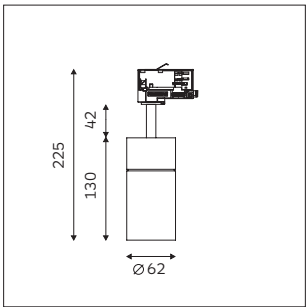

EMMA 62
Body Sizes: Ø62XH130mm
Body Material: Aluminum/Iron
Color: White/Black
Optic: Lens




EMMA 73

Body Sizes: Ø73XH148mm

Body Material: Aluminum/Iron

Color: White/Black

Optic: Lens



EMMA 90


Body Sizes: Ø90XH160mm

Body Material: Aluminum/Iron

Color: White/Black

Optic: Lens

EMMA TRACK LIGHTING

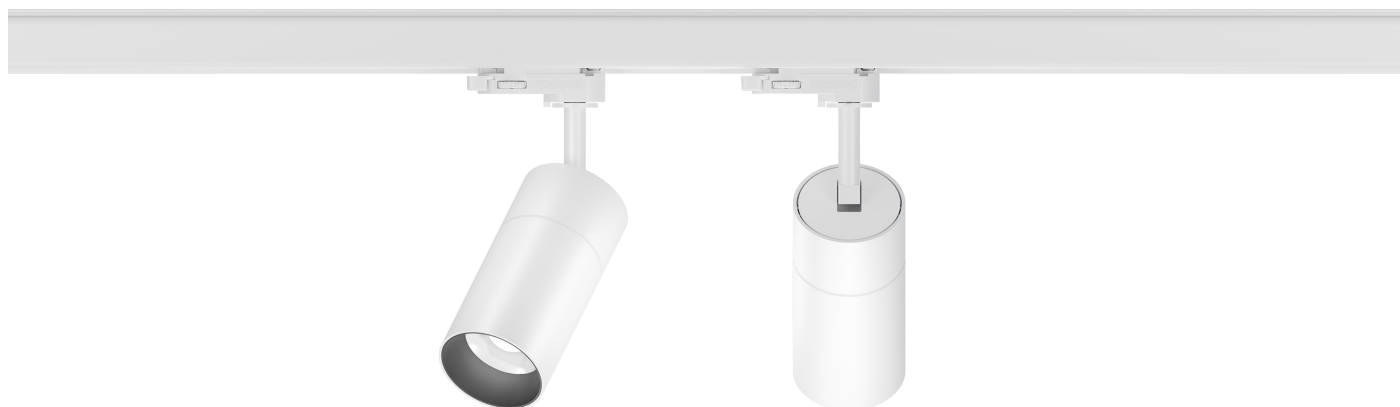

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Options1: Supplied with No-dimable built-in driver.


Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre






EMMA 45

32.04515





EMMA 62

32.06219





EMMA 73

32.07313



EMMA 90


32.09013



Code Ordering Example: 3 2 . 0 4 5 1 5 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Track Light	32.04515	CA	COB LED	90	30 3000K	11W	935 lm	19°/29°/44°/56°	D0 No Dim	10 ☐ WH
					40 4000k		981 lm			20 ☐ BK
EMMA 62 Track Light	32.06219	CA	COB LED	90	30 3000K	14W	1627 lm	18°/27°/38°/54°		
					40 4000k		1708 lm			
EMMA 73 Track Light	32.07313	CA	COB LED	90	30 3000K	24W	2963 lm	14°/28°/40°/50°		
					40 4000k		3111 lm			
EMMA 90 Track Light	32.09013	CA	COB LED	90	30 3000K	36W	4509 lm	16°/20°/30°/45°		
					40 4000k		4734 lm			

FEEL ZOOM TRACK LIGHTING

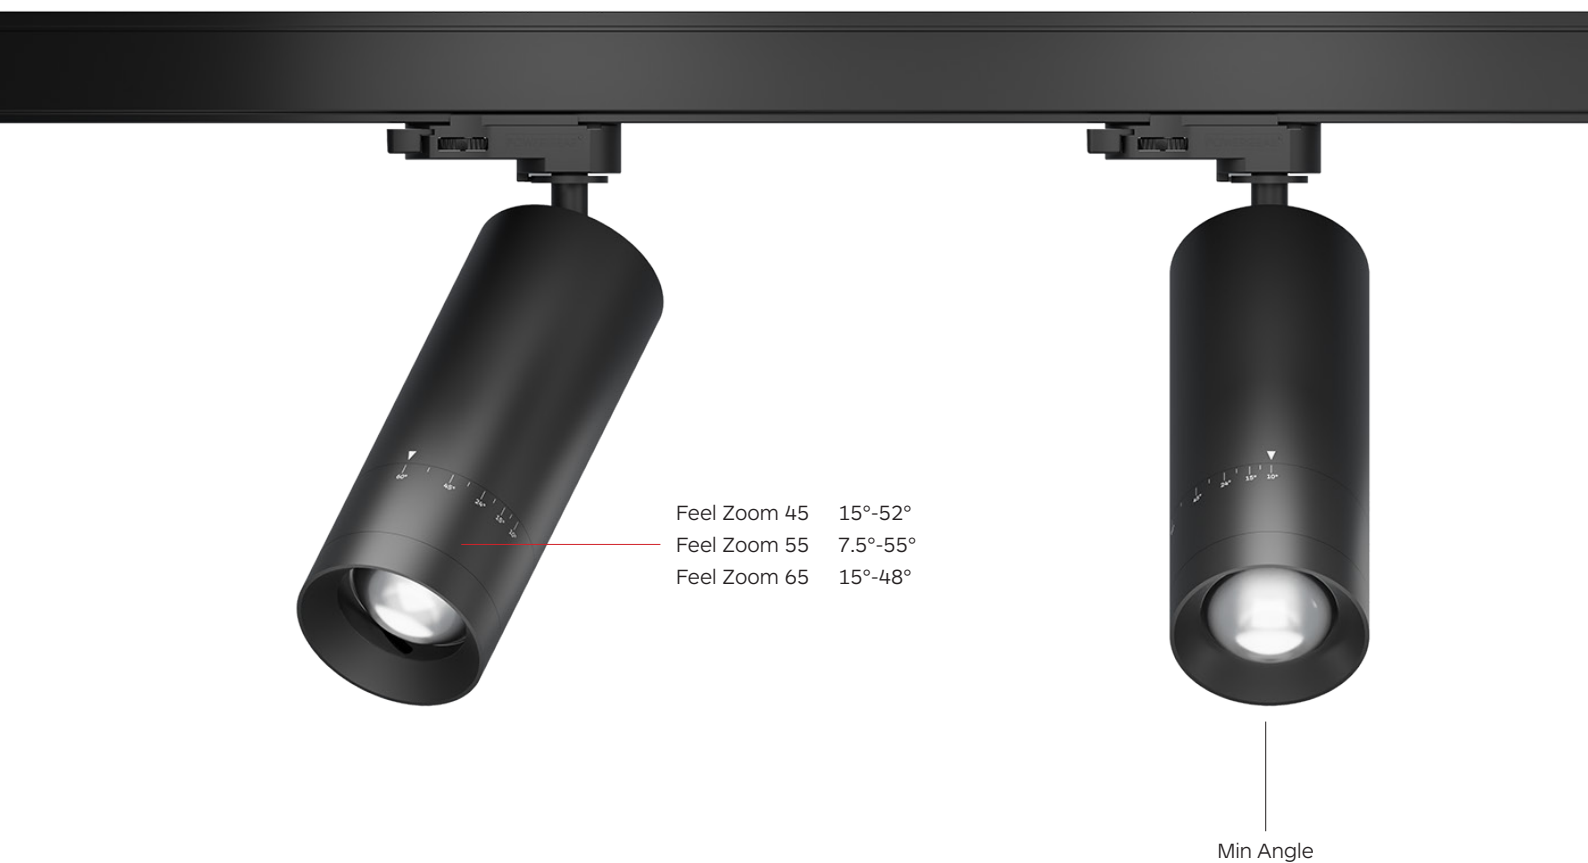



Max Angle

The zoom lens is adjusted by means of a three-part beveled groove (CNC machined) with a rotating ring. Min to maxi angle without changing the appearance of the luminaire.

FEEL ZOOM TRACK LIGHTING



Body

Adjustable lens allowing opening angle calibration from narrow to wide.

The zoom lens is adjusted by means of a three-part beveled groove (CNC machined) with a rotating ring. Min to maxi angle without changing the appearance of the luminaire.

Can be both track systems, 220V and 48V, semi-recessed and surface option.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.

Driver

Supplied with No-dimable built-in driver.


Suitable Accessories

Applications


An excellent and flexible accent lighting solution for restaurants, residential spaces, retail stores and galleries.




FEEL ZOOM 45 32.04521



FEEL ZOOM 55 32.05517




FEEL ZOOM 65 32.06513




Code Ordering Example: 3 2 . 0 4 5 2 1 - 9 0 3 0 Z O D 0 1 0


	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FEEL ZOOM 45 Track Light	32.04521	CA	COB LED	90	30 3000K	9W	356 lm	15°-52°	D0 No Dim	10 ☐ WH
					40 4000k		373 lm			20 ☐ BK
FEEL ZOOM 55 Track Light	32.05517	CA	COB LED	90	30 3000K	17W	888 lm	7.5°-55°		
					40 4000k		932 lm			
FEEL ZOOM 65 Track Light	32.06513	CA	COB LED	90	30 3000K	24.5W	1810 lm	15°-48°		
					40 4000k		1900 lm			

FOS

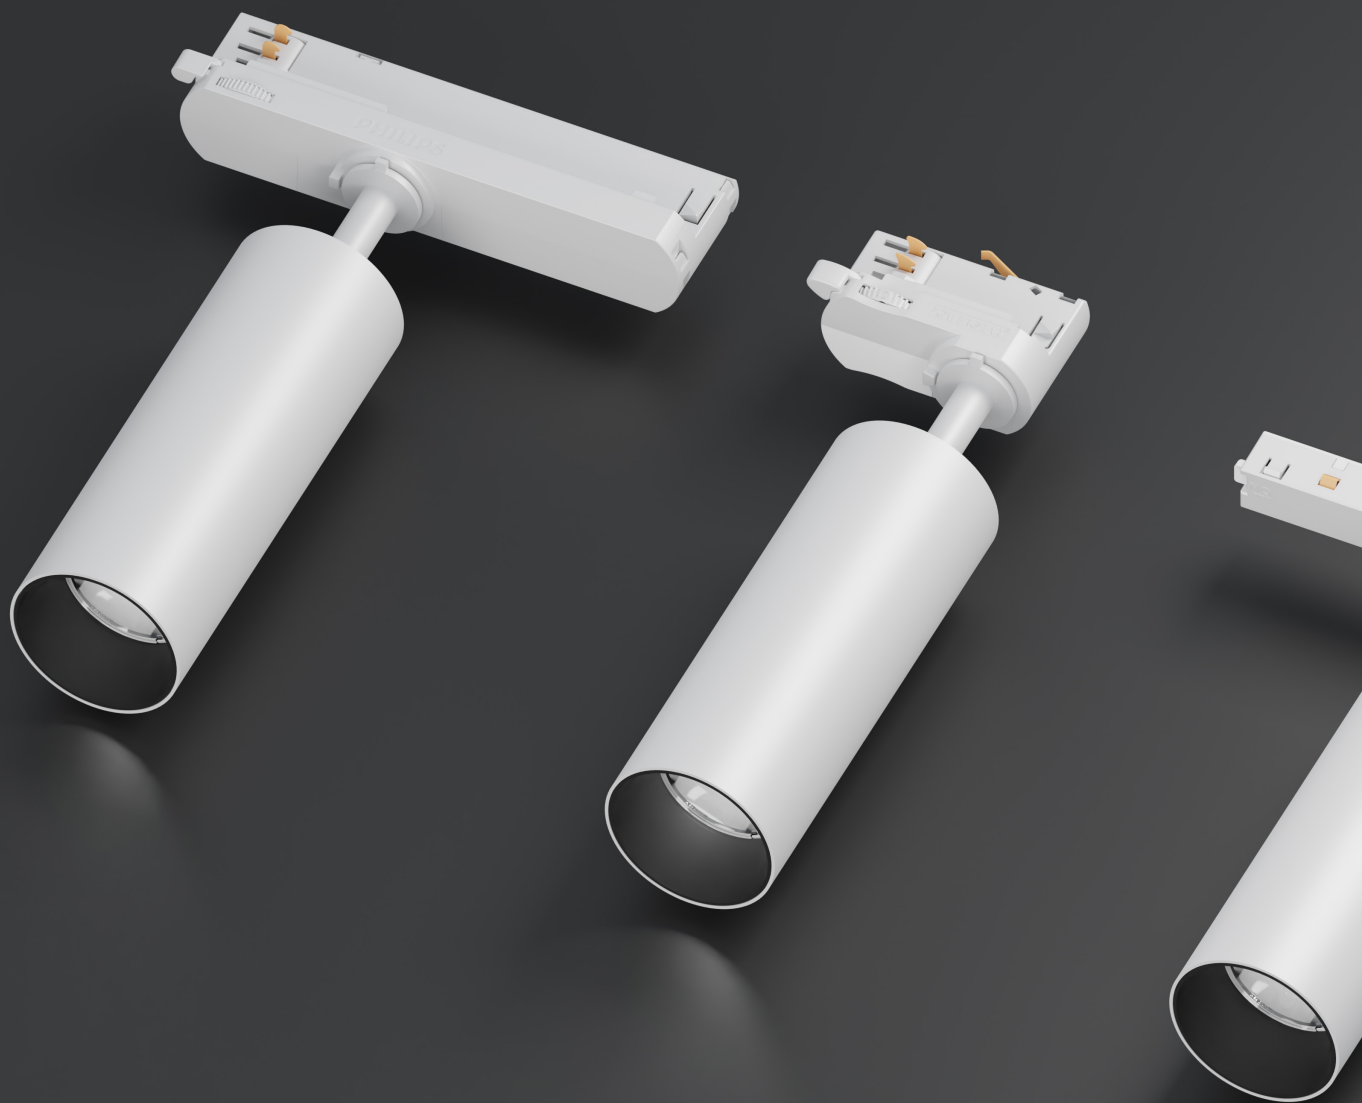

FOS

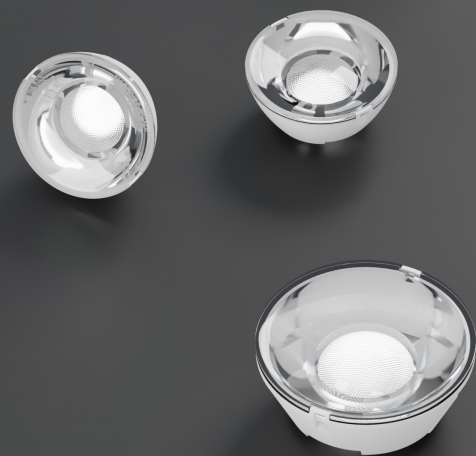

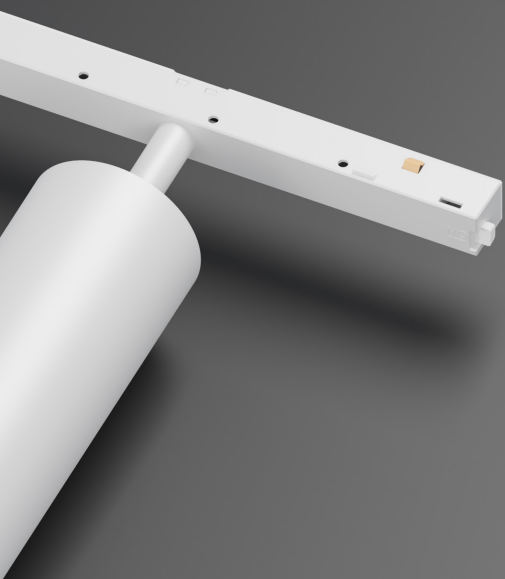

FOS TRACK LIGHTING



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Long and thin, blends in well with the space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Options1: Supplied with No-dimable built-in driver.

Options2: Supplied with intrack driver. Diming can be 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass





Glass





Honeycomb louvre




FOS 45 32.04528



FOS 55 32.05525



FOS 65 32.06523



Code Ordering Example: 3 2 . 0 4 5 2 8 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Track Light	32.04528	CA COB LED	90	30 3000K	11W	808 lm	19°/23°/36°/41°	D0 No Dim	10 ☐ WH
				40 4000k		848 lm			20 ☐ BK
FOS 55 Track Light	32.05525	CA COB LED	90	30 3000K	16W	1871 lm	20°/32°/41°/49°		
				40 4000k		1965 lm			
FOS 65 Track Light	32.06523	CA COB LED	90	30 3000K	24W	2678 lm	17°/27°/36°/51°		
				40 4000k		2812 lm			

ACTION TRACK LIGHTING



Body

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage.

There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box model can do different kind of dimmable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications


A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre





ACTION 62

32.06211



ACTION 84


32.08412



ACTION 62

With Driver Box


31.06211



ACTION 84

With Driver Box



31.08412





Code Ordering Example: 3 2 . 0 6 2 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ACTION 62 Track Light	32.06211	CA	COB LED	90	30 3000K	24W	2753 lm	19°/25°/40°/52°	D0 No Dim	10 ☐ WH
					40 4000k		2890 lm		DA Dali Dim	20 ☒ BK
ACTION 84 Track Light	32.08412	CA	COB LED	90	30 3000K	41W	5001 lm	19°/24°/38°/52°	DC 0-10V Dim	
					40 4000k		5251 lm		DT Triac Dim	
ACTION 62 Track Light With Driver Box	31.06211	CA	COB LED	90	30 3000K	24W	2753 lm	19°/25°/40°/52°		
					40 4000k		2890 lm			
ACTION 84 Track Light With Driver Box	31.08412	CA	COB LED	90	30 3000K	41W	5001 lm	19°/24°/38°/52°		
					40 4000k		5251 lm			

ARTAX TRACK LIGHTING

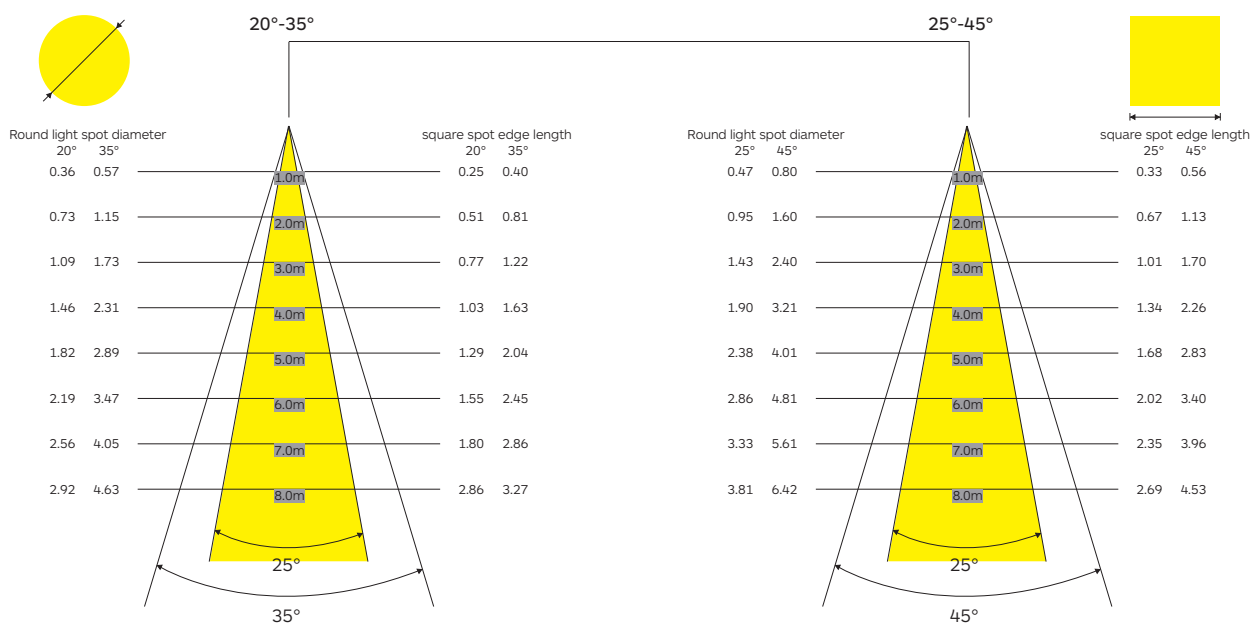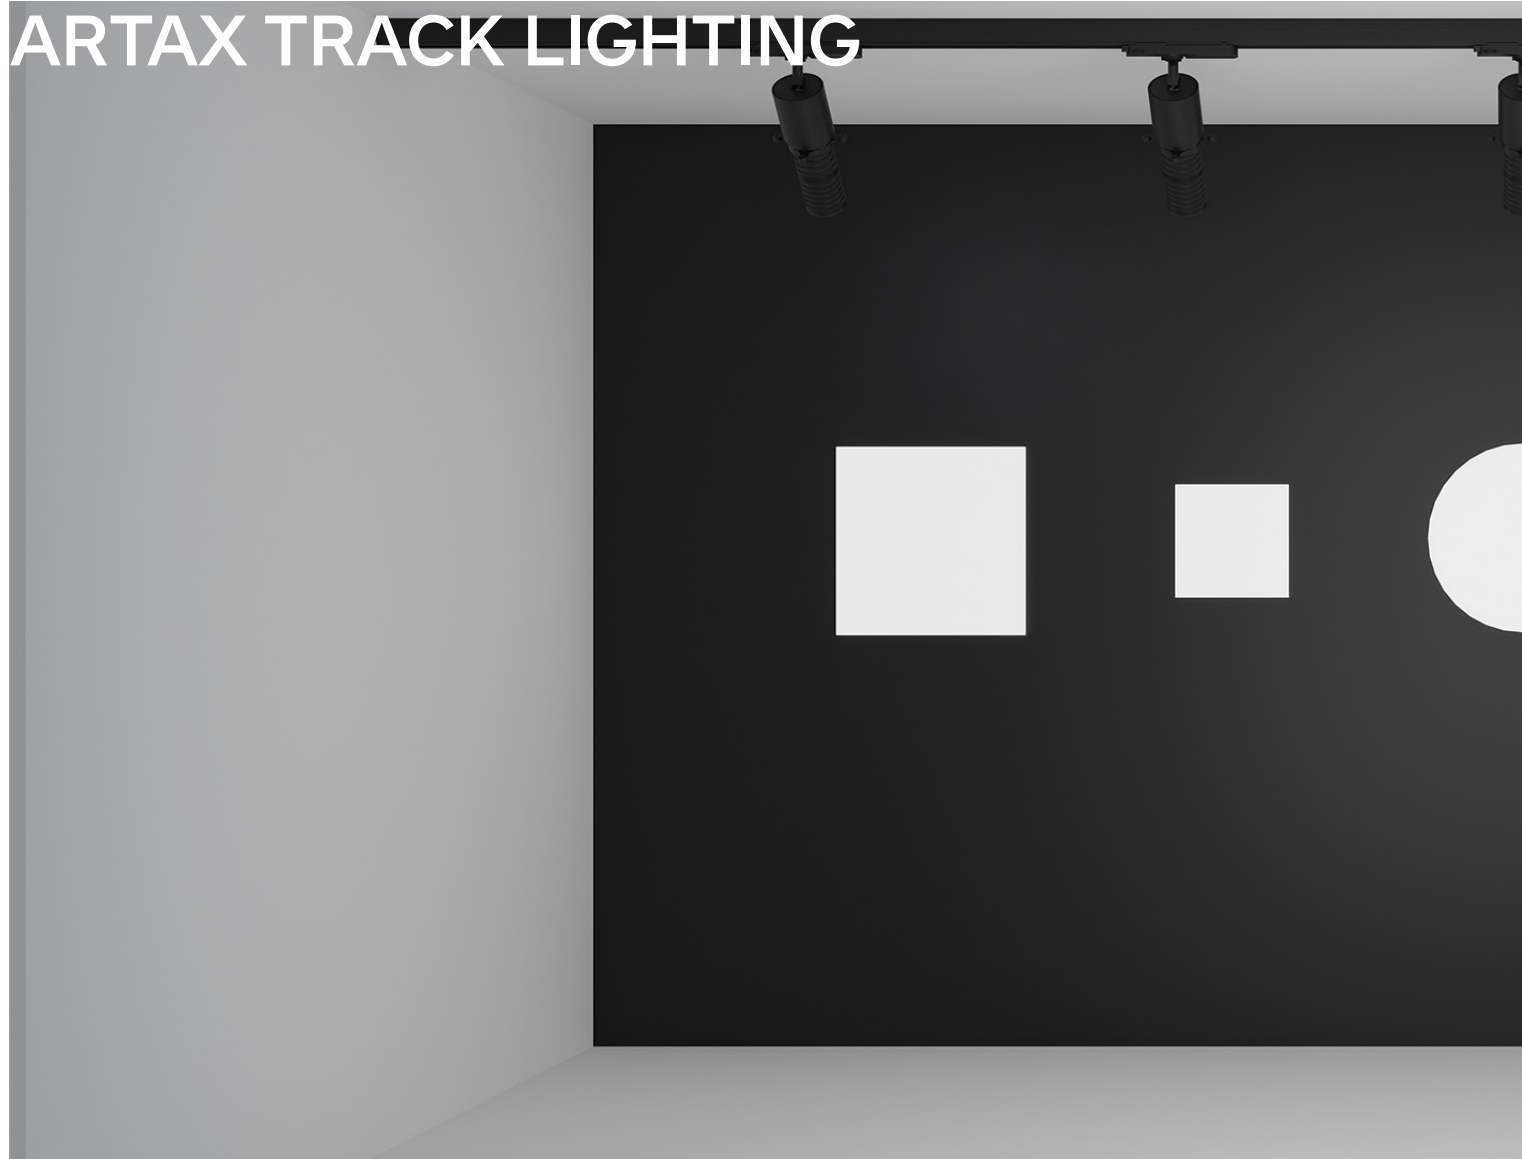

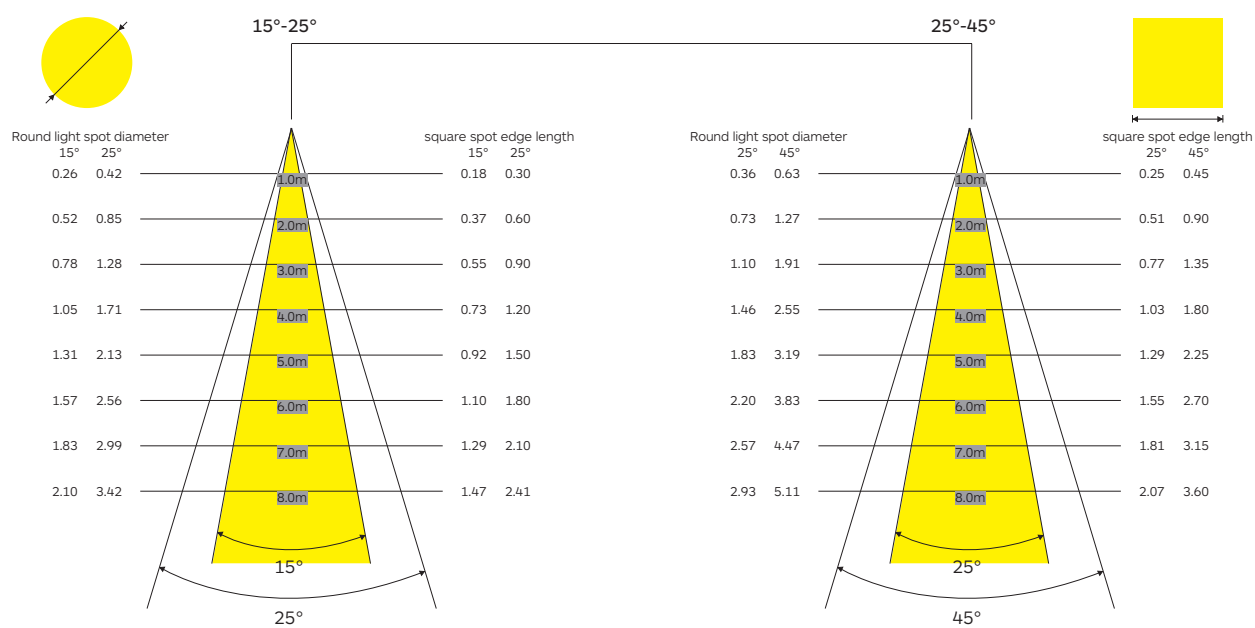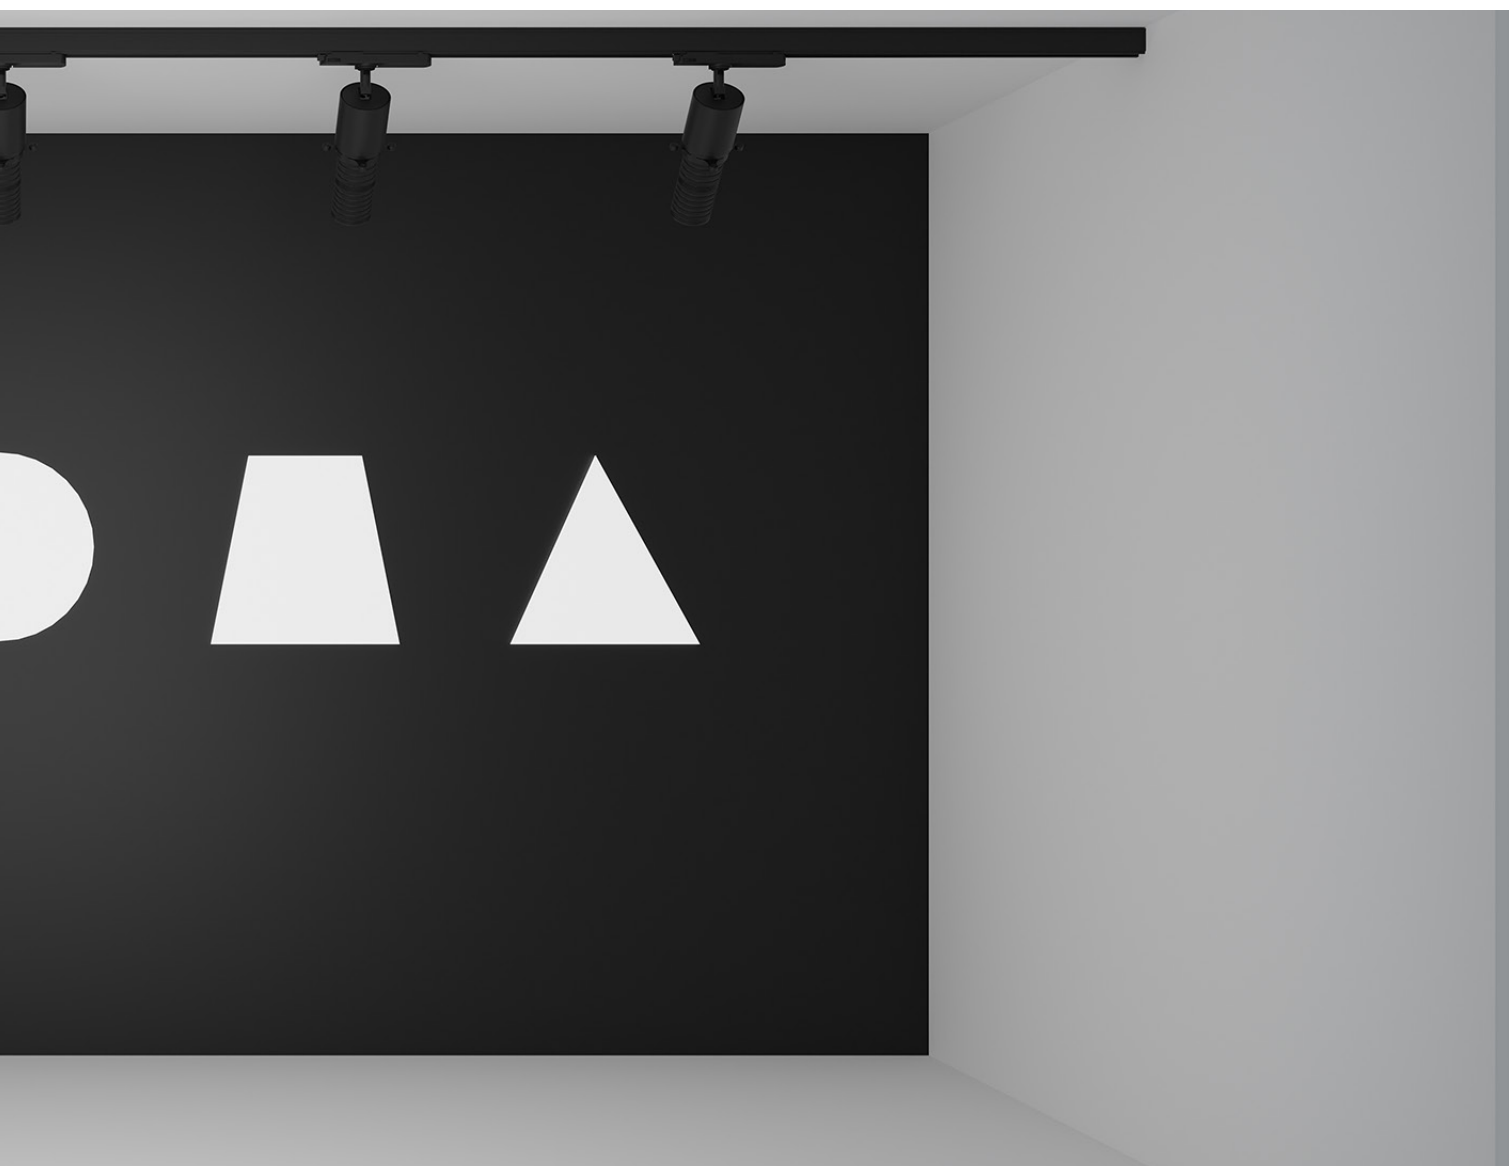

Unit: m

ARTAX TRACK LIGHTING



Body

A high quality track light, and the best choice to define your space.

Can free adjust the shape you requested by 4 pin at joints, can be zoom by rotate the Optics.

And the fixture is Museum style one, it has good heat dissipation effect by its solid aluminum housing.

Accessories

No.

Finish

Black.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Contour Optic.

Driver

Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications


Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.

Suitable Accessories




ARTAX 45

32.04520



ARTAX 73

32.07319



Code Ordering Example: 3 2 . 0 4 5 2 0 - 9 0 3 0 Z O D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ARTAX 45 Track light	32.04520	CA COB LED	90	30 3000K	9W	--	20°-35°	D0 No Dim	10 ☐ WH
				40 4000k		--	25°-45°	DA Dali Dim	20 ☒ BK
ARTAX 73 Track light	32.07319	CA COB LED	90	30 3000K	20W	--	15°-25°	DC 0-10V Dim	
				40 4000k		--	25°-45°	DT Triac Dim	



Low Voltage Track Systems



LANKY LOW VOLTAGE TRACK LIGHT

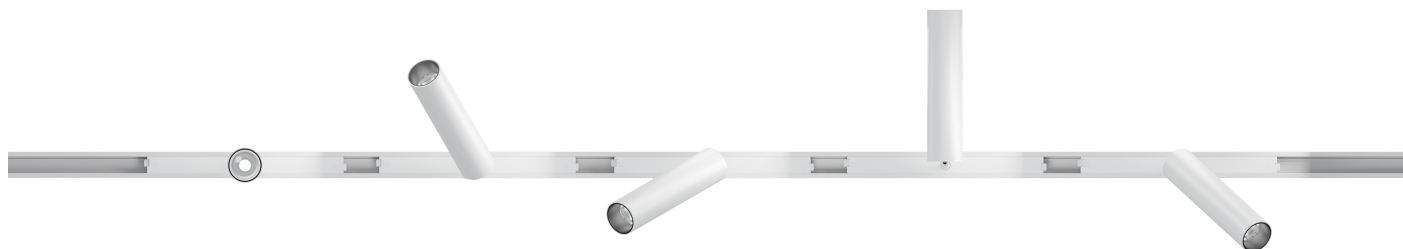

Body

Long and thin, blends in well with the space.
Small diameter, high wattage.

Unique structure and appearance of the back cover,
200 times adjustment still the same tightness.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle
available.


Driver

Supplied with No-dimable built-in driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Application areas: clothing shops, furniture
shops and other brand boutiques, car displays,
jewelry, star hotels, high-end clubs, museums,
professional windows, and other high-end
commercial places.


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre

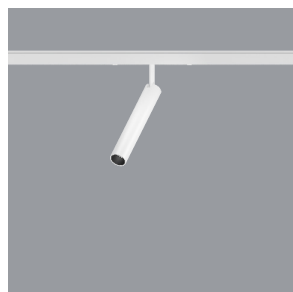



LANKY 25
Low Voltage Track

62.02515

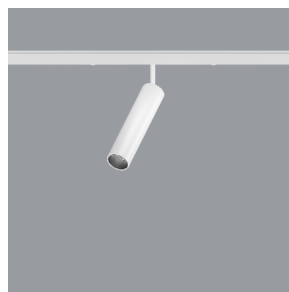


LANKY 35
Low Voltage Track

62.03518

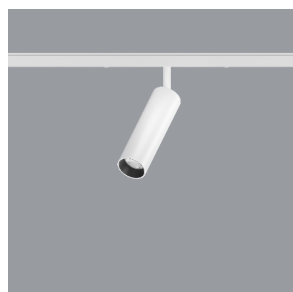

LANKY 45
Low Voltage Track

62.04537




Code Ordering Example: 6 2 . 0 2 5 1 5 - 9 0 3 0 2 0 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LANKY 25 Low Voltage Track	62.02515	CA COB LED	90	30 3000K	9W	510 lm	20°/25°/35°/55°	D0 No Dim	10 ☐ WH
				40 4000k		535 lm		DA Dali Dim	20 ☒ BK
LANKY 35 Low Voltage Track	62.03518	CA COB LED	90	30 3000K	12W	1036 lm	27°/35°/46°/57°	DC 0-10V Dim	
				40 4000k		1087 lm			
LANKY 45 Low Voltage Track	62.04537	CA COB LED	90	30 3000K	20W	1926 lm	29°/34°/48°/58°		
				40 4000k		2022 lm			


SPECTRUM LOW VOLTAGE TRACK LIGHT



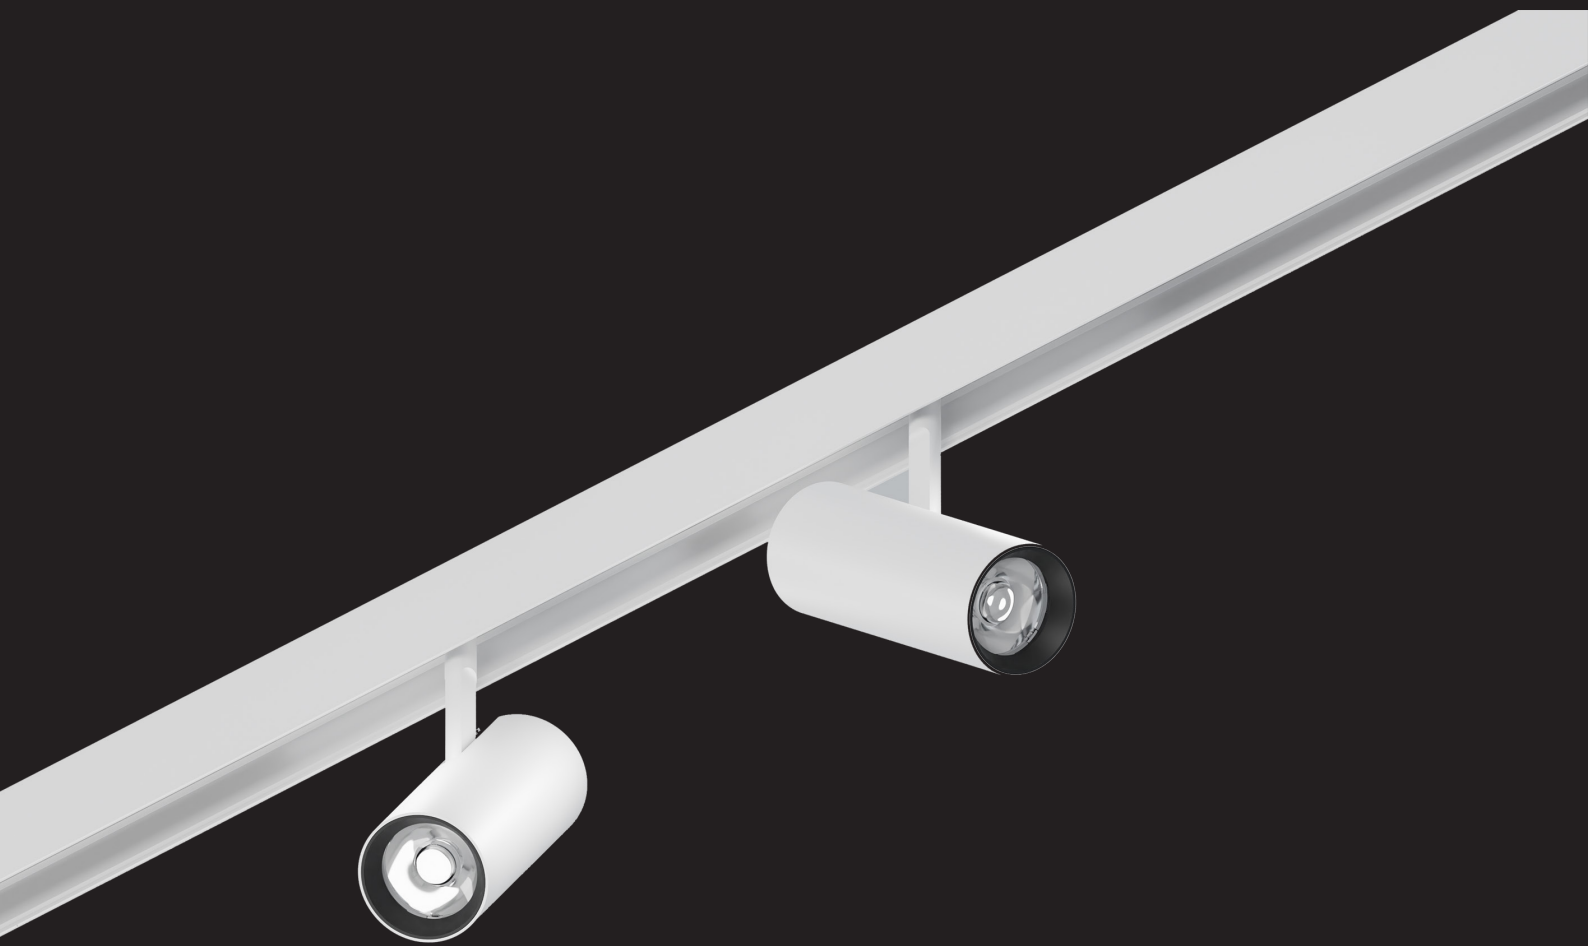


SPECTRUM LOW VOLTAGE TRACK LIGHT

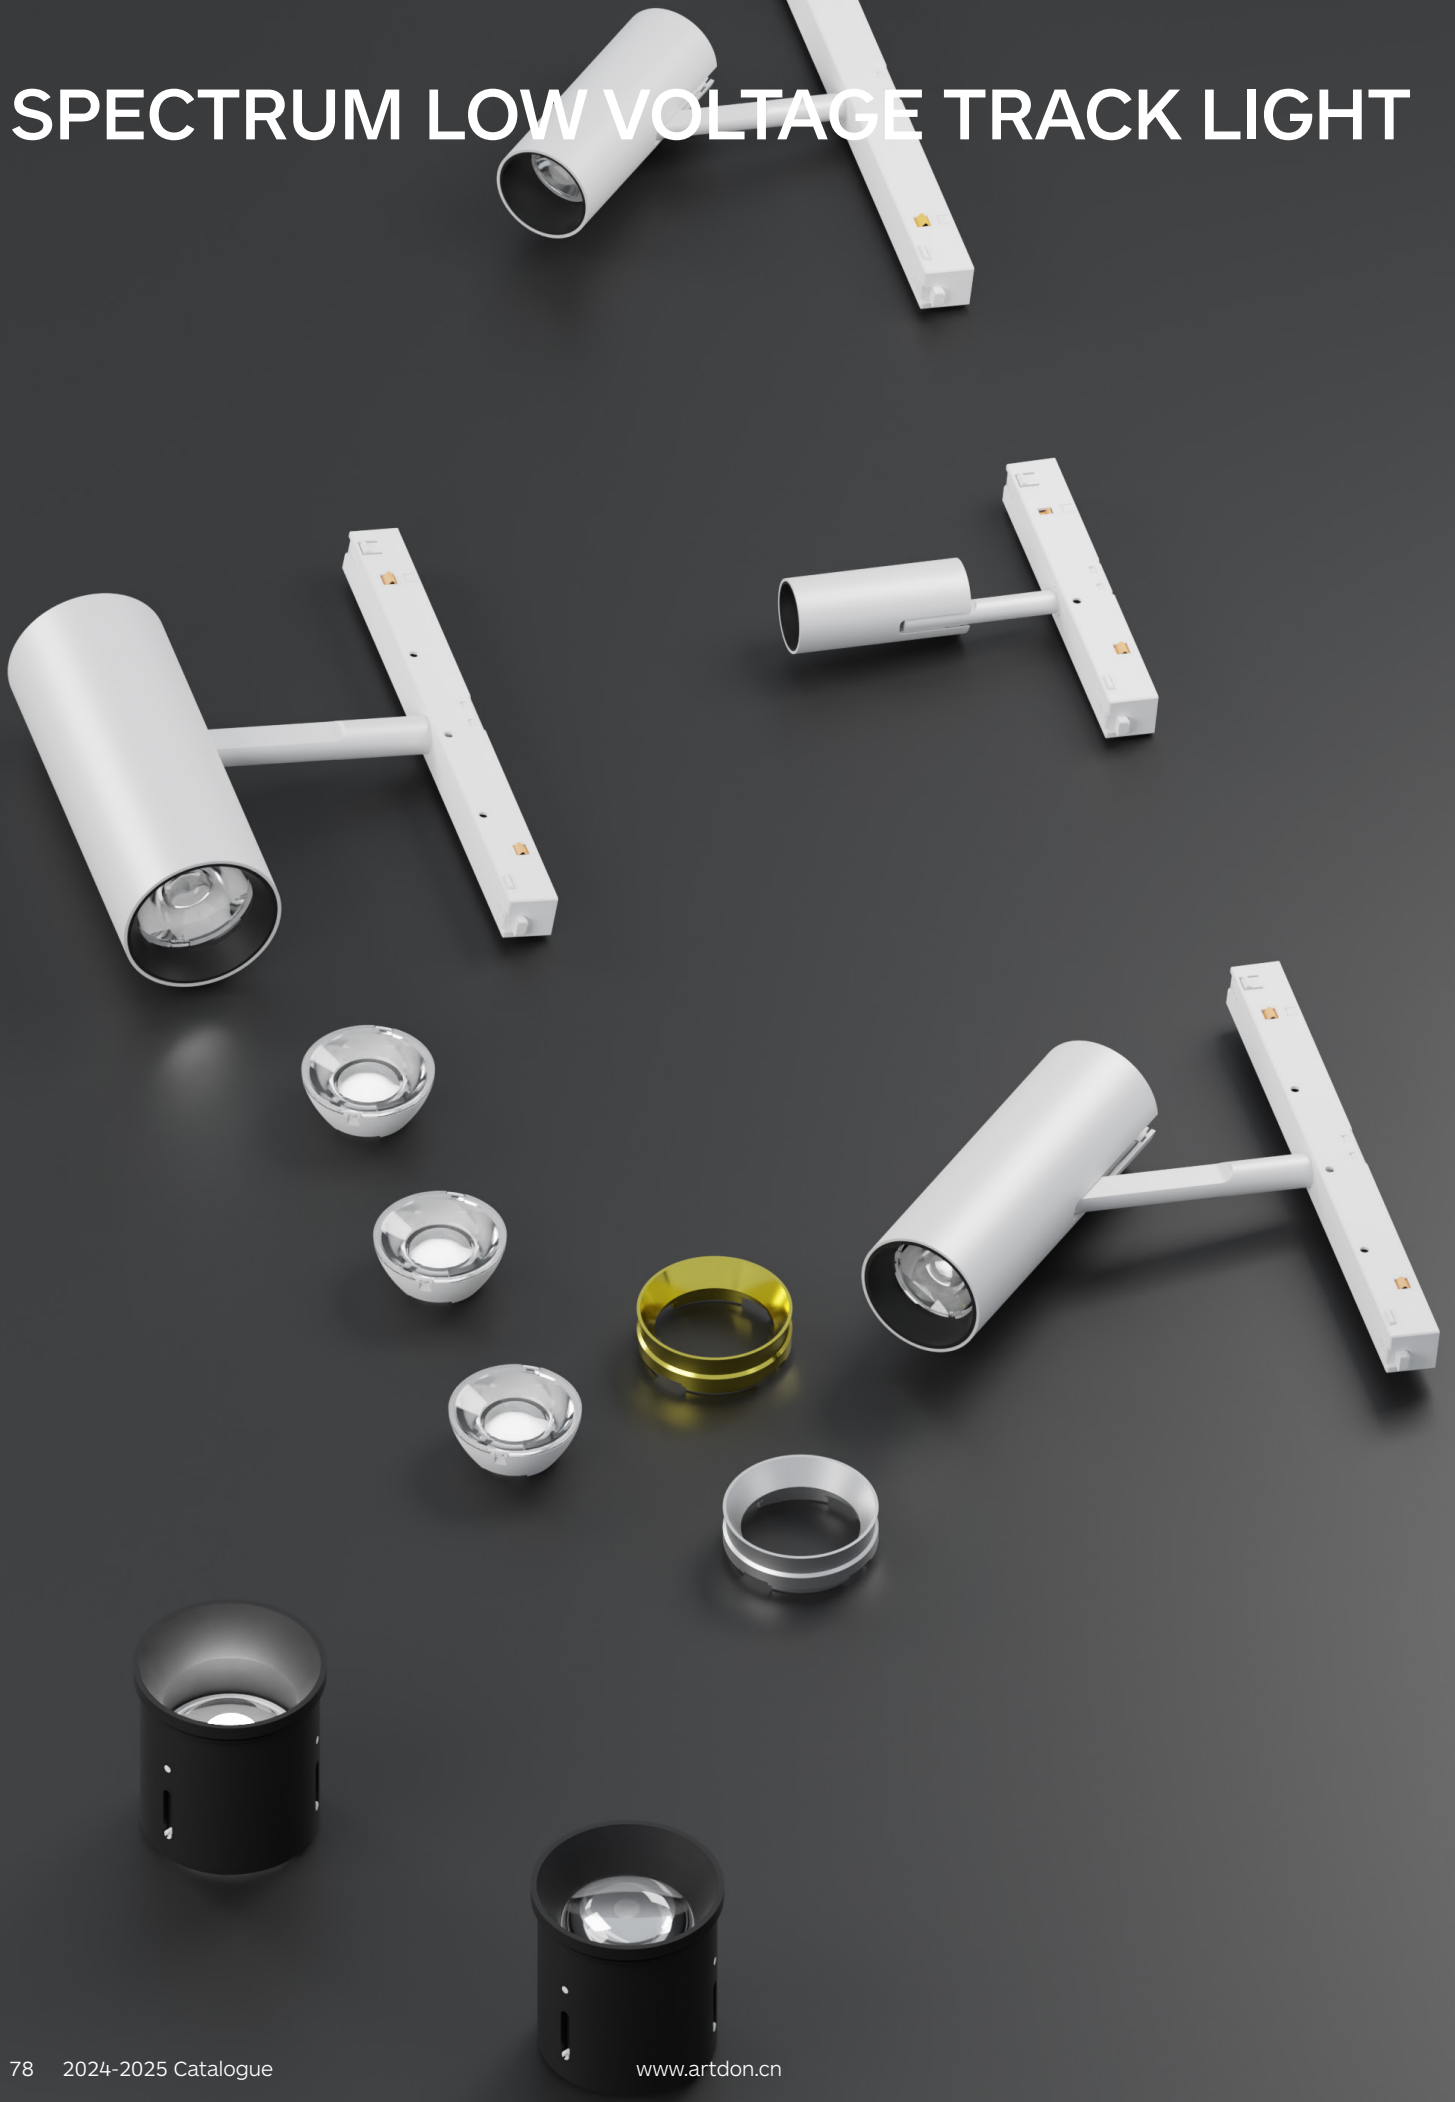




Brandoor

Suitable for: Ø45, Ø55mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC




Zoom

Suitable for:
 Ø35, Ø45, Ø55mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC




"+" Anti-glare

Suitable for:
 Ø35, Ø45, Ø55mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC



Ultra-narrow Angle Accessories


Suitable for: Ø45, Ø55mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC



Deep Anti-glare (Cutoff Angle 30D)

Suitable for: Ø45, Ø55mm
 Body Material: Aluminum/Iron
 Color: Black
 Optical Material: PC

SPECTRUM LOW VOLTAGE TRACK LIGHT

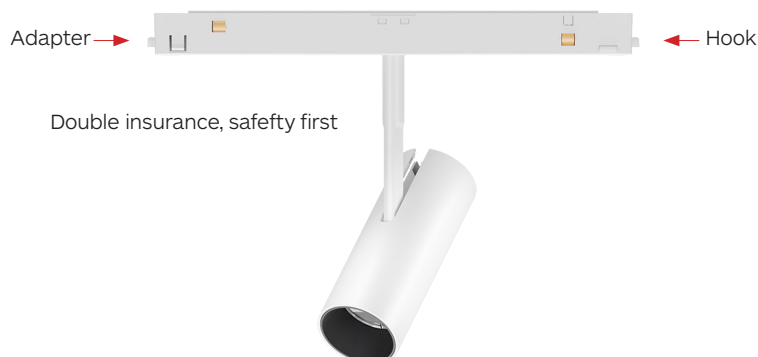

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable built-in driver.
Diming Options: 0-10V Dim, Dali Dim.


Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre

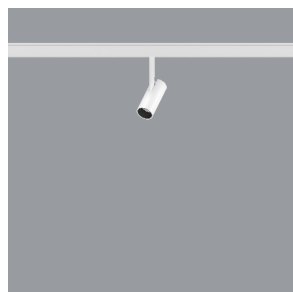



SPECTRUM 25
Low Voltage Track

62.02513

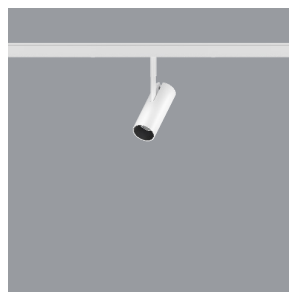



SPECTRUM 35
Low Voltage Track

62.03517

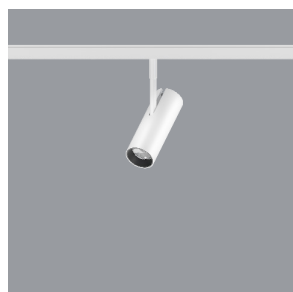


SPECTRUM 45
Low Voltage Track

62.04531

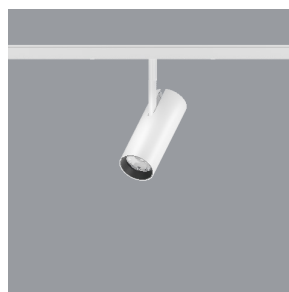

SPECTRUM 55
Low Voltage Track

62.05518



Code Ordering Example: 6 2 . 0 2 5 1 3 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 25 Low Voltage Track	62.02513	CA	COB LED	90	30 3000K	3.8W	197 lm	17°/26°/31°/53°	D0 No Dim	10 ☐ WH
					40 4000k		207 lm		DA Dali Dim	20 ☒ BK
SPECTRUM 35 Low Voltage Track	62.03517	CA	COB LED	90	30 3000K	9W	612 lm	16°/23°/38°/49°	DC 0-10V Dim	
					40 4000k		643 lm			
SPECTRUM 45 Low Voltage Track	62.04531	CA	COB LED	90	30 3000K	14.3W	1083 lm	19°/24°/36°/43°		
					40 4000k		1137 lm			
SPECTRUM 55 Low Voltage Track	62.05518	CA	COB LED	90	30 3000K	24.3W	2615 lm	20°/31°/43°/52°		
					40 4000k		2745 lm			

FOS LOW VOLTAGE TRACK LIGHT



Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Long and thin, blends in well with the space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: 0-10v Dim, Dali Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre





FOS 25
Low Voltage Track

62.02511




FOS 25
Low Voltage Track

62.02512

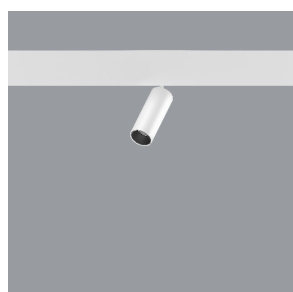

FOS 35
Low Voltage Track


62.03513



Code Ordering Example: 6 2 . 0 2 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 25 Low Voltage Track	62.02511	CA COB LED	90	30 3000K	3.8W	197 lm	17°/26°/31°/53°	D0 No Dim	10 ☐ WH
				40 4000k		207 lm		DA Dali Dim	20 ☒ BK
FOS 25 Low Voltage Track	62.02512	CA COB LED	90	30 3000K	7W	357 lm	18°/24°/40°/55°	DC 0-10V Dim	
				40 4000k		375 lm			
FOS 35 Low Voltage Track	62.03513	CA COB LED	90	30 3000K	9W	588 lm	15°/24°/37°/50°		
				40 4000k		627 lm			

FOS LOW VOLTAGE TRACK LIGHT

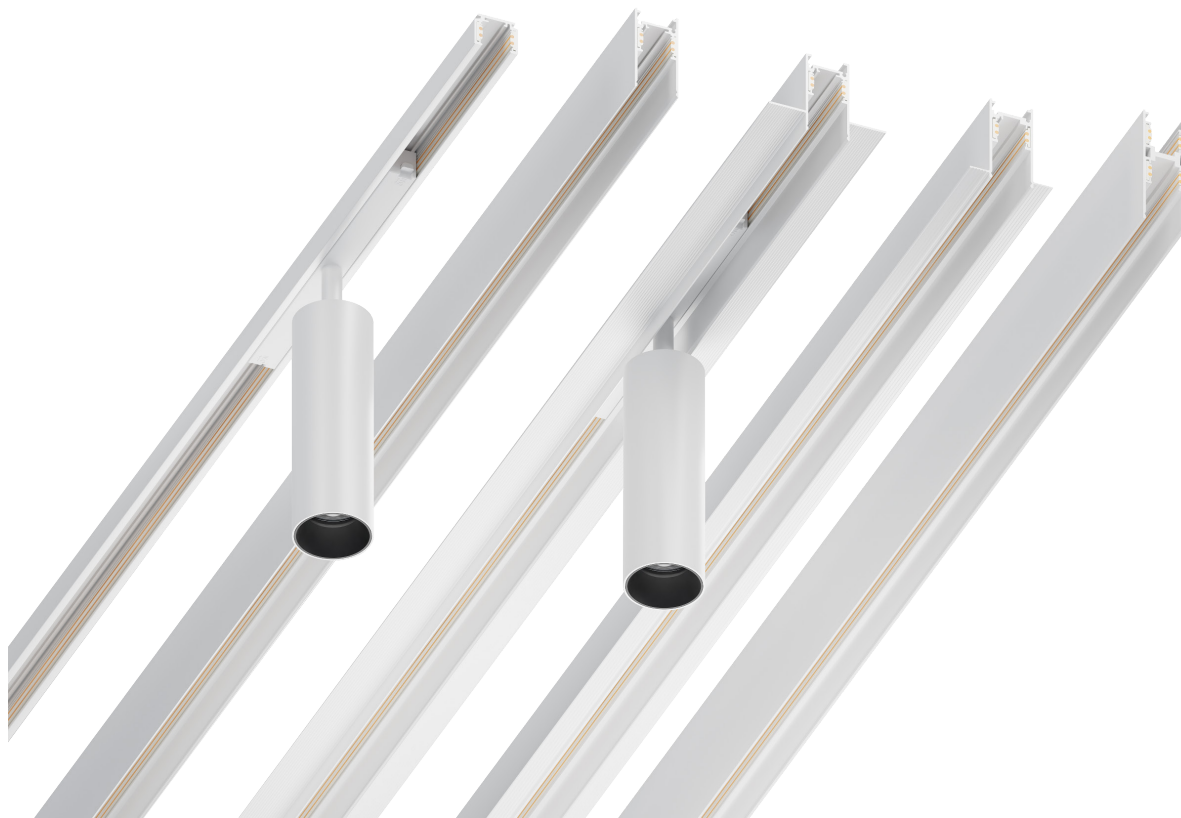

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Interchangeable Optic Beam reflectors and refractors for high lighting efficiency and uniform spread.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: 0-10v Dim, Dali Dim.


Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre

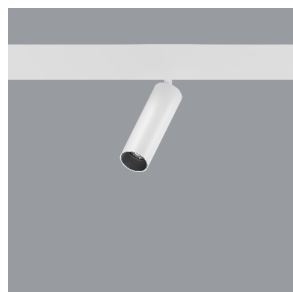


FOS 45
Low Voltage Track

62.04536

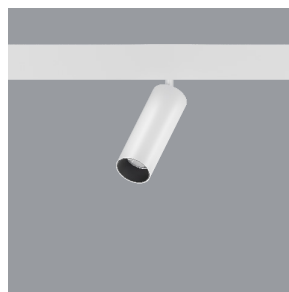

FOS 55
Low Voltage Track


62.05520



Code Ordering Example: 6 2 . 0 4 5 3 6 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Low Voltage Track	62.04536	CA COB LED	90	30 3000K	15W	1003 lm	19°/23°/36°/41°	D0 No Dim	10 ☐ WH
				40 4000k		1053 lm		DA Dali Dim	20 ☒ BK
FOS 55 Low Voltage Track	62.05520	CA COB LED	90	30 3000K	25W	2677 lm	20°/32°/41°/49°	DC 0-10V Dim	
				40 4000k		2810 lm			

EMMA LOW VOLTAGE TRACK LIGHT

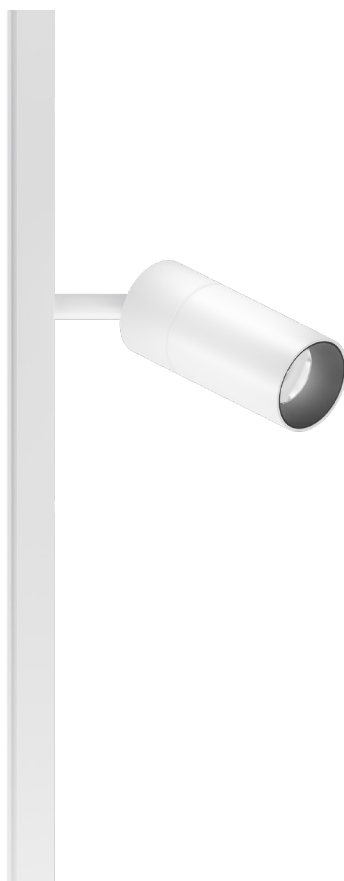

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 3 sizes and 3 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories




Linear Spread glass





Glass





Honeycomb louvre

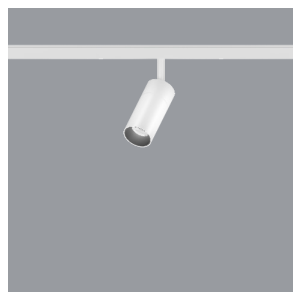


EMMA 45
Low Voltage Track

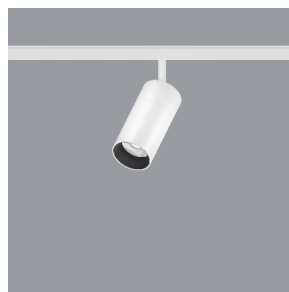

EMMA 62
Low Voltage Track

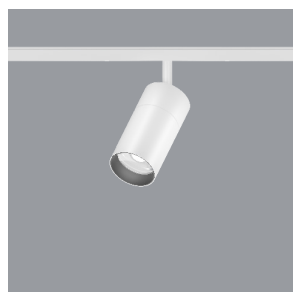

EMMA 73
Low Voltage Track



Code Ordering Example: 6 2 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Low Voltage Track	62.04512	CA COB LED	90	30 3000K	11W	935 lm	19°/29°/44°/56°	D0 No Dim	10 ☐ WH
				40 4000k		981 lm		DA Dali Dim	20 ☒ BK
EMMA 62 Low Voltage Track	62.06217	CA COB LED	90	30 3000K	14W	1627 lm	18°/27°/38°/54°	DC 0-10V Dim	
				40 4000k		1708 lm			
EMMA 73 Low Voltage Track	62.07312	CA COB LED	90	30 3000K	24W	2963 lm	14°/28°/40°/50°		
				40 4000k		3111 lm			

FEEL ZOOM LOW VOLTAGE TRACK LIGHT



Body

European-inspired fixture are designed with elongated shapes and unique materials in order to present a novel and artistic atmosphere.

With zoom optics, you can adjust it to the light spot you want, according to the needs of the usage environment.

The back cover of the luminaire is designed with a single dimming button, which is convenient for users to adjust the brightness of each luminaire according to the requirements of the usage environment, giving more flexible lighting control.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.


Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications



Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.

Suitable Accessories

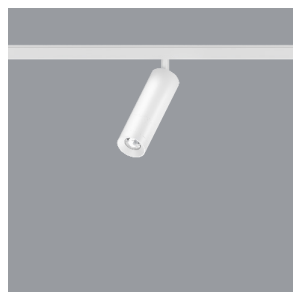


FEEL ZOOM 45
Low Voltage Track

62.04533

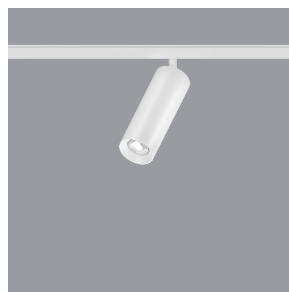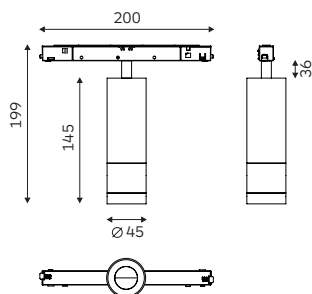

FEEL ZOOM 55
Low Voltage Track

62.05519

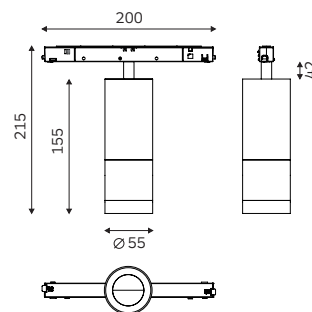

Code Ordering Example: 6 2 . 0 4 5 3 3 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FEEL ZOOM 45 Low Voltage Track	62.04533	CA COB LED	90	30 3000K	9W	356 lm	15°-52°	D0 No Dim	10 ☐ WH
				40 4000k		374 lm		DA Dali Dim	20 ☒ BK
FEEL ZOOM 55 Low Voltage Track	62.05519	CA COB LED	90	30 3000K	17W	888 lm	7.5°-55°	DC 0-10V Dim	
				40 4000k		932 lm			

ARTAX LOW VOLTAGE TRACK LIGHT



Body

A high quality track light, and the best choice to define your space.

Can free adjust the shape you requested by 4 pin at joints, can be zoom by rotate the Optics.

And the fixture is Museum style one, it has good heat dissipation effect by its solid aluminum housing.

Accessories

No.

Finish

Black.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Contour Optic.


Driver

Supplied with No-dimable intrack driver.
Diming Options: 0-10V Dim, Dali Dim.

Applications


Mainly for users who require high quality lighting, such as museums, art galleries, galleries, fashion, office spaces, hotels and clubs, car showrooms, etc.

Suitable Accessories

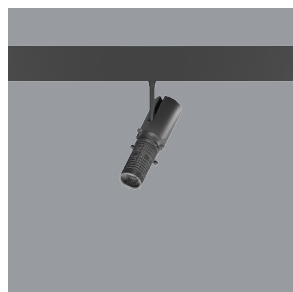

ARTAX 45
Low Voltage Track

62.04535

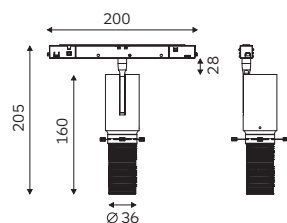

Code Ordering Example: 6 2 . 0 4 5 3 5 - 9 0 3 0 Z O D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ARTAX 45 Low Voltage Track	62.04535	CA COB LED	90	30 3000K	9W	--	20°-35°	D0 No Dim	10 ☐ WH
				40 4000k		--	25°-45°	DA Dali Dim	20 ☒ BK
								DC 0-10V Dim	

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Double insurance, safety first

Body

SPARK 20 Wall Washer with luminaire body in extruded aluminium.

End caps is made by Turn-milling combined CNC machine, precision sizes, can perfect with the body without any gap.

There are 2 types of wall washer optics, one is for single lamp use and one can be used for multiple lamps.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Wall Washer.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications



Magnetic wall washer linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.


Suitable Accessories

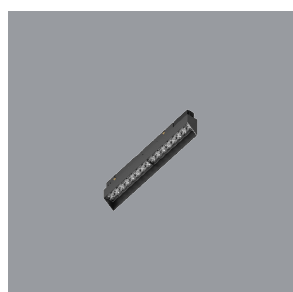



SPARK 20
Wall Washer 61.02319

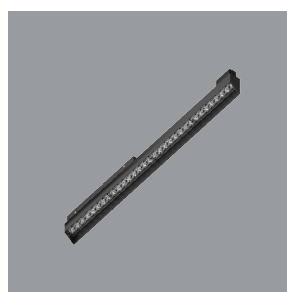


SPARK 20
Wall Washer 61.02320

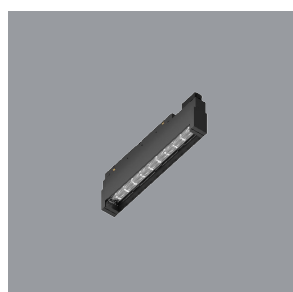

SPARK 20
Wall Washer 61.03003

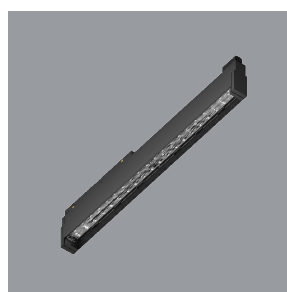

SPARK 20
Wall Washer 61.03002

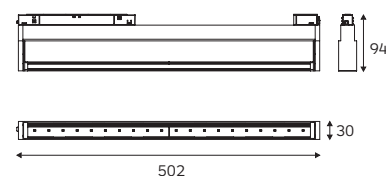

Code Ordering Example: 6 1 . 0 2 3 1 9 - 9 0 3 0 W W D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPARK 20 Low Voltage Track	61.02319	SA SMD LED	90	30 3000K	10W	600 lm	WW	D0 No Dim	10 ☐ WH
				40 4000k		630 lm		DA Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02320	SA SMD LED	90	30 3000K	15W	900 lm	WW	DC 0-10V Dim	
				40 4000k		950 lm			
SPARK 20 Low Voltage Track	61.03003	SA SMD LED	90	30 3000K	25W	1750 lm	WW		
				40 4000k		1837 lm			
SPARK 20 Low Voltage Track	61.03002	SA SMD LED	90	30 3000K	40W	2800 lm	WW		
				40 4000k		2940 lm			

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Body

SPARK 20 general lighting with luminaire body in extruded aluminium.

End caps is made by Turn-milling combined CNC machine, precision sizes, can perfect with the body without any gap.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Pc Cover.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications

Magnetic general linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories





SPARK 20
General Lighting

61.02346




SPARK 20
General Lighting

61.02347

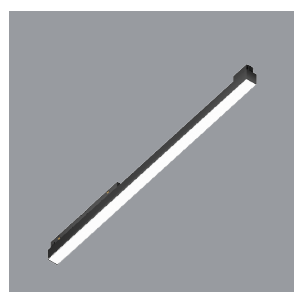

SPARK 20
General Lighting

61.02348



Code Ordering Example: 6 1 . 0 2 3 4 6 - 9 0 3 0 1 1 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPARK 20 Low Voltage Track	61.02346	SA SMD LED	90	30 3000K	10W	805 lm	113°	D0 No Dim	10 ☐ WH
				40 4000k		845 lm		DA Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02347	SA SMD LED	90	30 3000K	15W	1211 lm	105°	DC 0-10V Dim	
				40 4000k		1271 lm			
SPARK 20 Low Voltage Track	61.02348	SA SMD LED	90	30 3000K	20W	1750 lm	105°		
				40 4000k		1837 lm			

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Body

SPARK 20 accent lighting with luminaire body in extruded aluminium.

End caps in die casting aluminium, with black antiglare cover, have medium and wide beam angles.

Supplied with magnetic adaptor, available in different length, also have fixed and adjustable two versions for selected.

Accessories

Honeycomb louvre.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Reflector.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications


Magnetic accent linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories





Honeycomb louvre





SPARK 20
Accent Lighting

61.02303

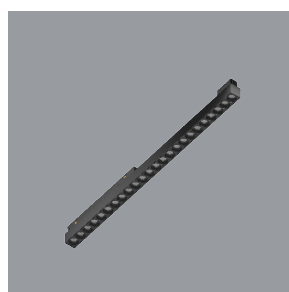


SPARK 20
Accent Lighting

61.02310



SPARK 20
Accent Lighting

61.02311



Code Ordering Example: 6 1 . 0 2 3 0 3 - 9 0 3 0 3 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPARK 20 Low Voltage Track	61.02303	SA SMD LED	90	30 3000K	10W	682 lm	33°/49°	D0 No Dim	10 ☐ WH
				40 4000k		716 lm		DA Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02310	SA SMD LED	90	30 3000K	13.4W	951 lm	31°/53°	DC 0-10V Dim	
				40 4000k		998 lm			
SPARK 20 Low Voltage Track	61.02311	SA SMD LED	90	30 3000K	20W	1384 lm	32°/46°		
				40 4000k		1453 lm			

SPARK 20 LOW VOLTAGE LINEAR LIGHT



Body

SPARK 20 accent lighting with luminaire body in extruded aluminium.

End caps in die casting aluminium, with black antiglare cover, have medium and wide beam angles.

Supplied with magnetic adaptor, available in different length, also have fixed and adjustable two versions for selected.

Accessories

Honeycomb louvre.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Reflector.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications


Magnetic accent linear lights have a lighting function and decorative effect and are suitable for a wide range of indoor places, able to create a flexible and comfortable lighting atmosphere for the space.

Application Areas: commercial spaces such as shops, exhibition halls, hotel lobbies; living rooms, bedrooms, restaurants; offices, meeting rooms and work areas, etc.

Suitable Accessories





Honeycomb louvre





SPARK 20
Accent Lighting

61.02301




SPARK 20
Accent Lighting

61.02315

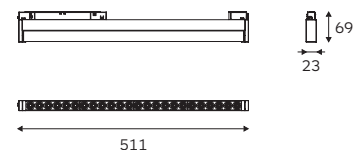

SPARK 20
Accent Lighting


61.02316




Code Ordering Example: 6 1 . 0 2 3 0 1 - 9 0 3 0 3 3 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPARK 20 Low Voltage Track	61.02301	SA SMD LED	90	30 3000K	10W	682 lm	33°/49°	D0 No Dim	10 ☐ WH
				40 4000k		716 lm		DA Dali Dim	20 ☒ BK
SPARK 20 Low Voltage Track	61.02315	SA SMD LED	90	30 3000K	13.4W	951 lm	31°/53°	DC 0-10V Dim	
				40 4000k		998 lm			
SPARK 20 Low Voltage Track	61.02316	SA SMD LED	90	30 3000K	20W	1384 lm	32°/46°		
				40 4000k		1453 lm			

LOW VOLTAGE TRACK & ACCESSORIES

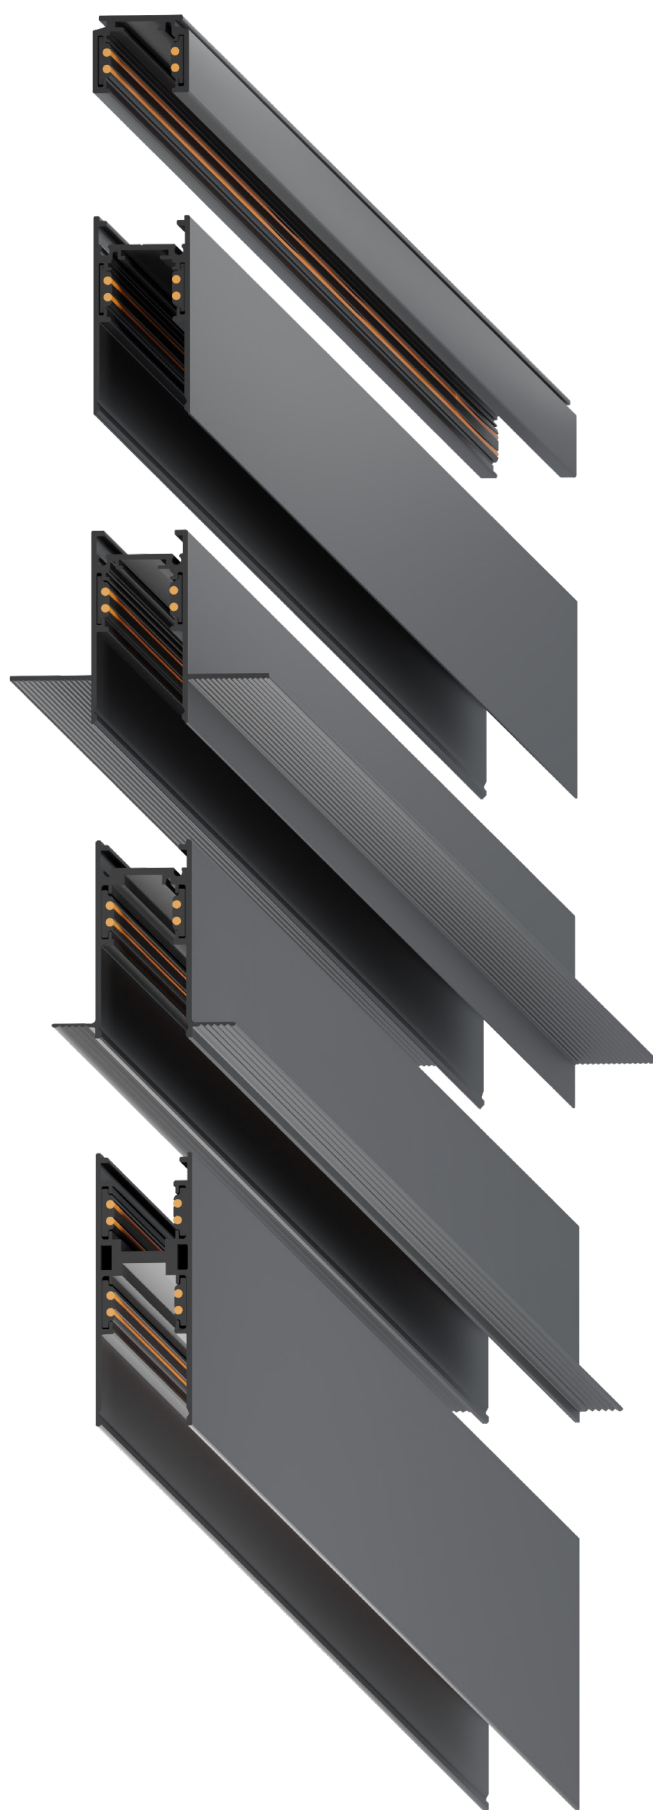


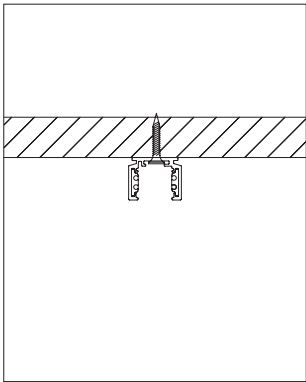


Ultra-thin Ceiling Mounted

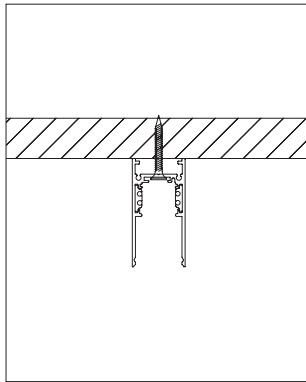


Deep Ceiling Mounted

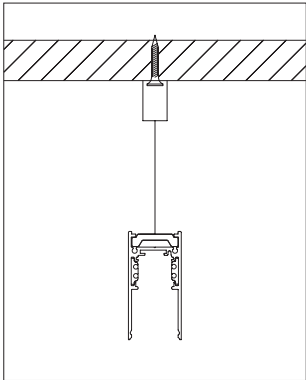


Pendant

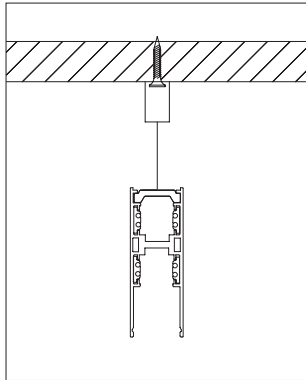

Up-Down Pendant

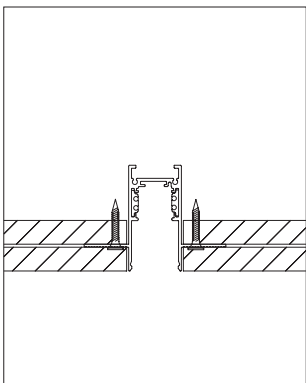


Two-Wood Recessed

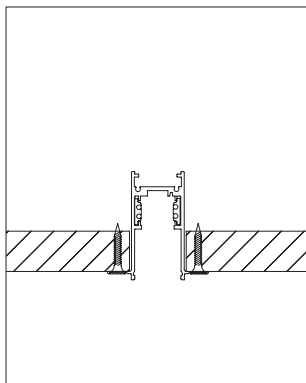


Trimless Recessed


LOW VOLTAGE TRACK & ACCESSORIES

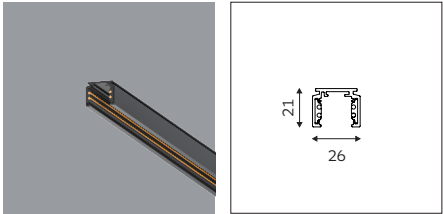


Low Voltage Magnetic Track
Ultra-Thin Ceiling Mounted
1M/1.5M/2M/3M

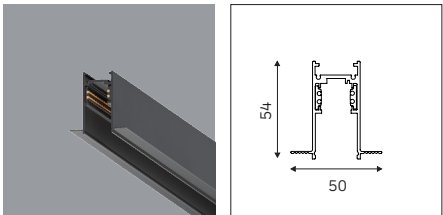


Low Voltage Magnetic Track
Recessed
1M/1.5M/2M/3M
Cut-out: 28mm

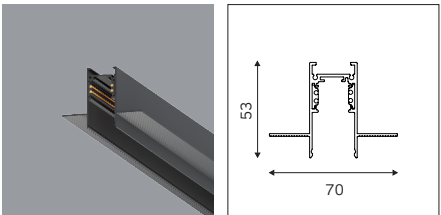


Low Voltage MagneticTrack
Recessed
1M/1.5M/2M/3M
Cut-out: 28mm

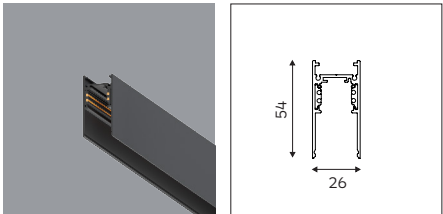


Low Voltage Magnetic Track
Ceiling Mounted and Pendant
1M/1.5M/2M/3M

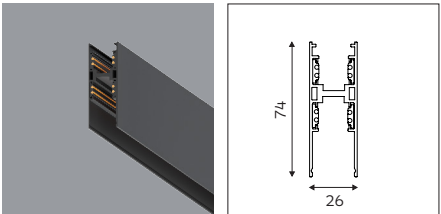


Low Voltage Magnetic Track
Pendant
1M/1.5M/2M/3M

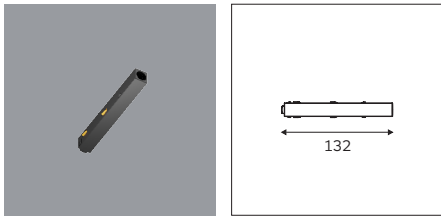


Low Voltage Magnetic Track Accessories
Live End

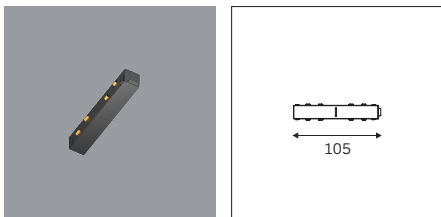


Low Voltage Magnetic Track Accessories
I Feed

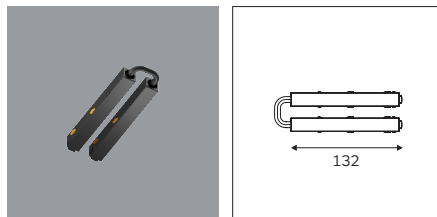

Low Voltage Magnetic Track Accessories
Flexible I Feed

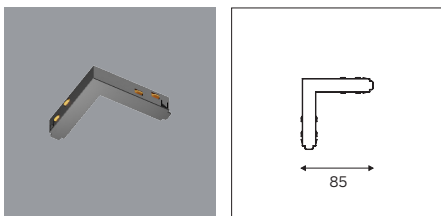




Low Voltage Magnetic Track Accessories
L Feed

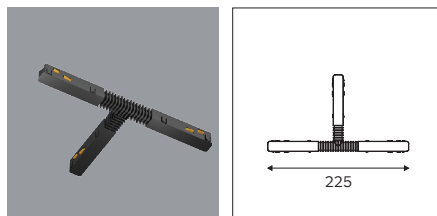



Low Voltage Magnetic Track Accessories
T Feed

LOW VOLTAGE TRACK & ACCESSORIES


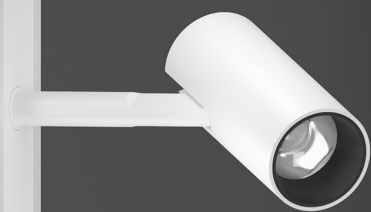






Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (External)




Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (Internal)





Low Voltage Magnetic Track
Recessed Track Accessories
L Feed (Vertical)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (External)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (Internal)





Low Voltage Magnetic Track
Ultra-thin Track Accessories
L Feed (Vertical)



Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (External)




Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (Internal)




Low Voltage Magnetic Track
Ceiling and Pendant Track Accessories
L Feed (Vertical)

TRACK AND TRACK ACCESSORIES


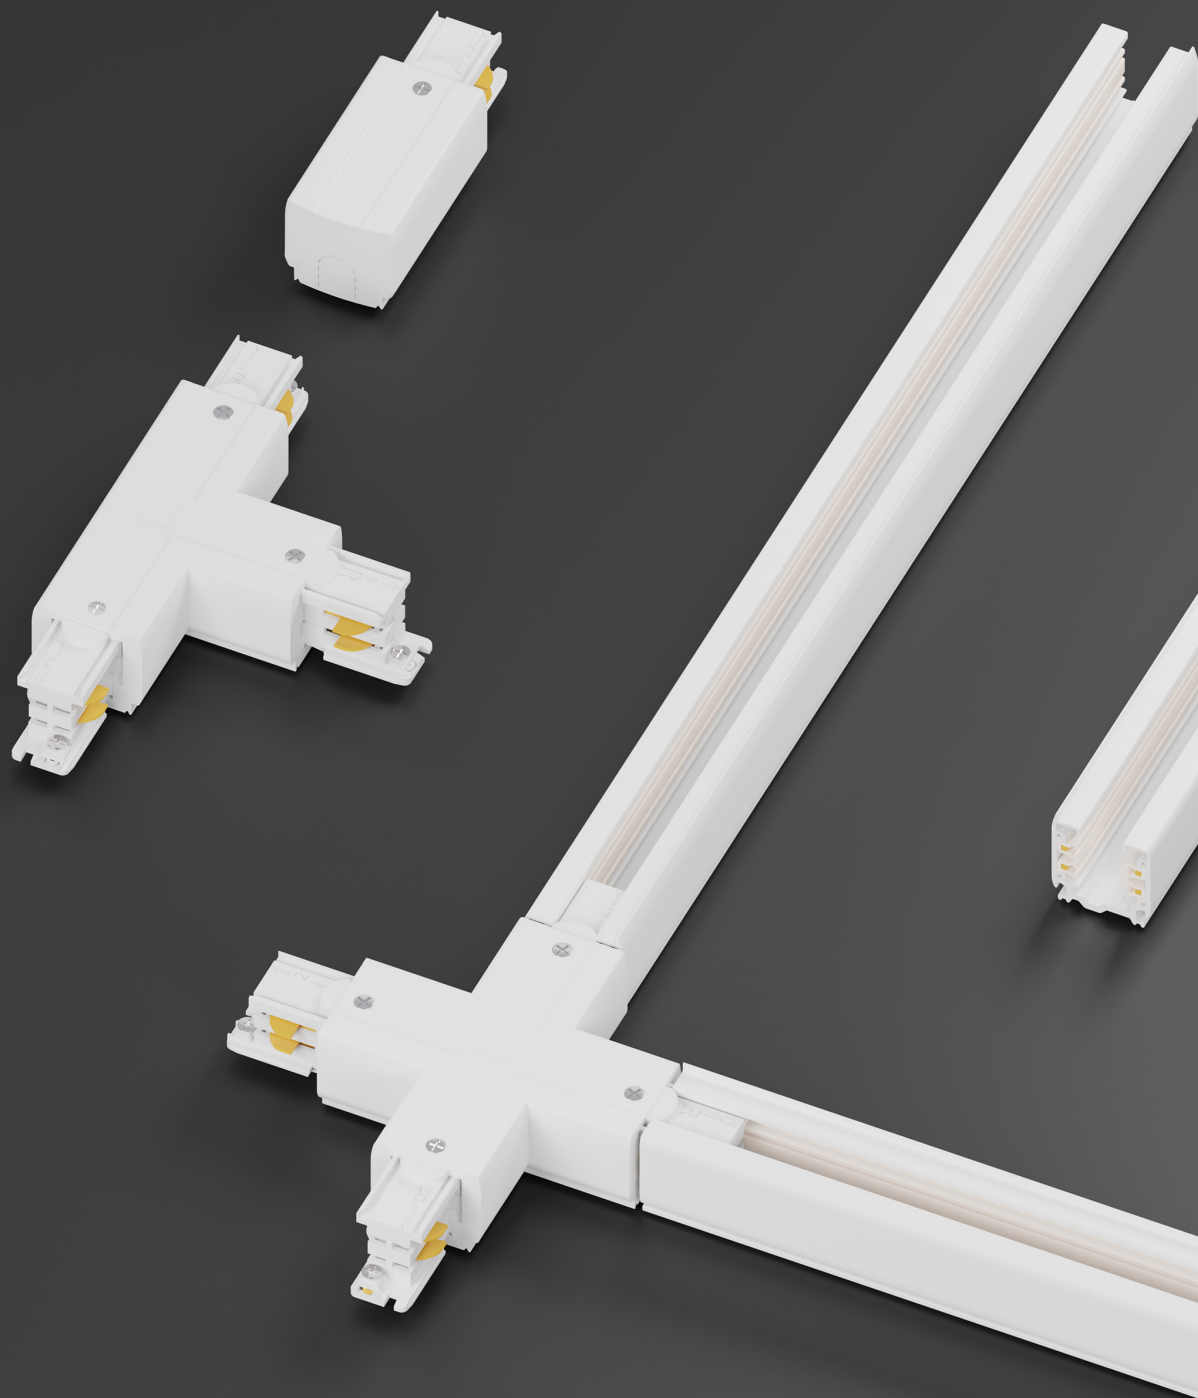





TRACK AND TRACK ACCESSORIES

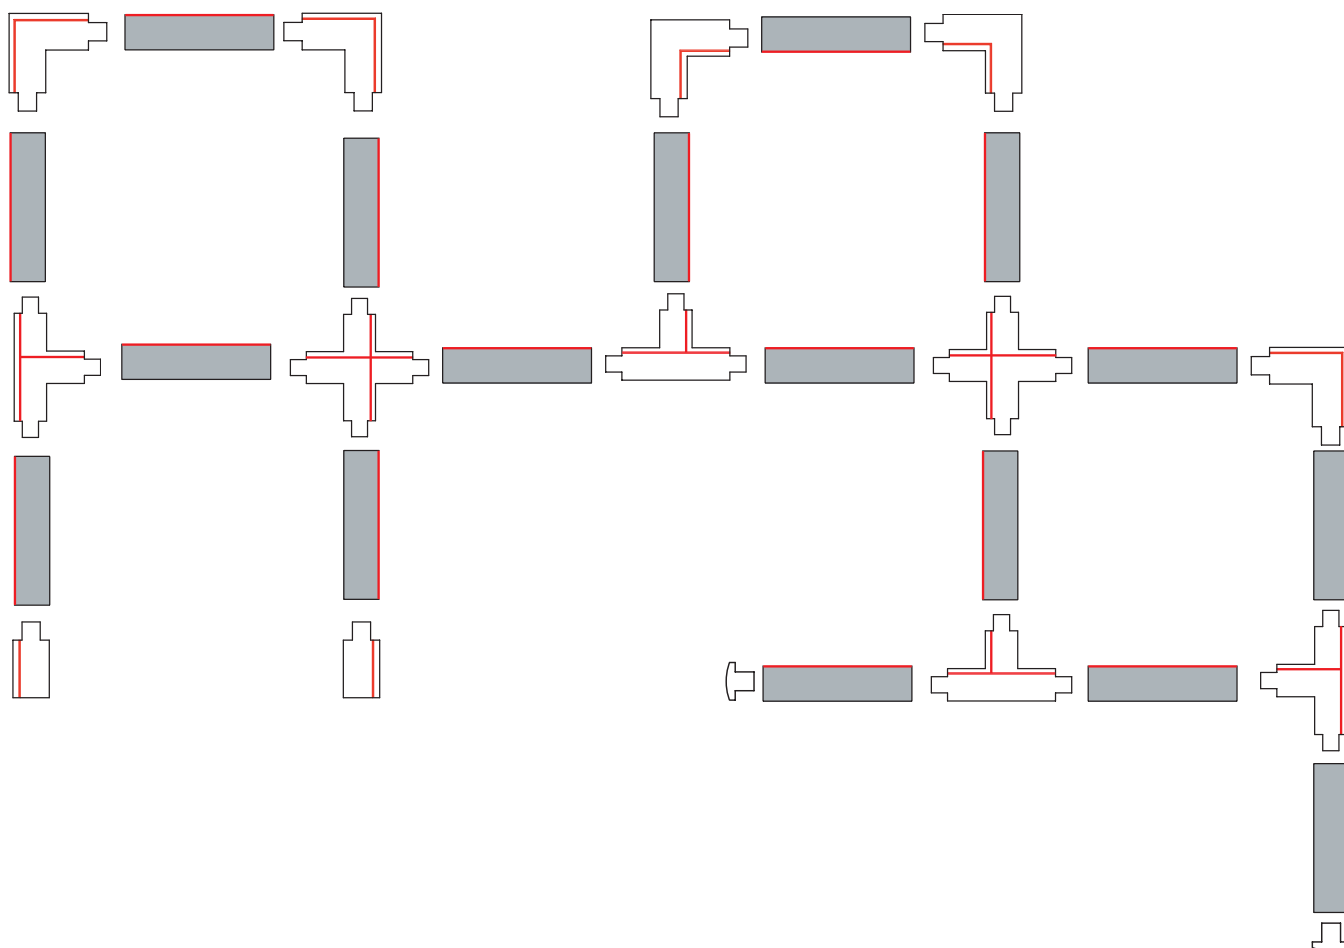


Schematic diagram of the inside of the track and the wiring

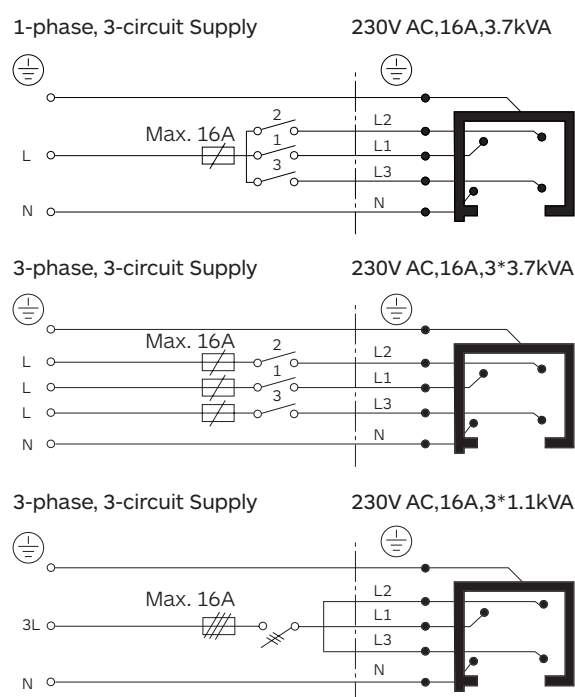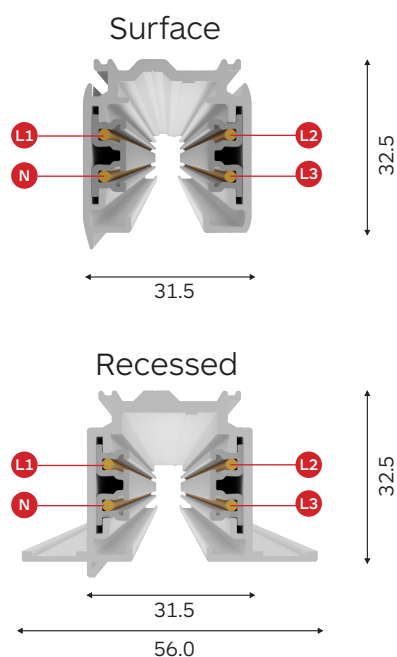


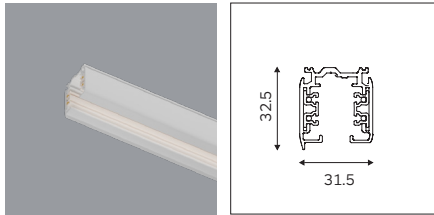


3 Circuit Track (Surface Mounted)
1M/1.5M/2M/3M Length


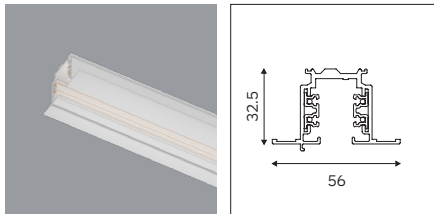


3 Circuit Track (Recessed)
1M/1.5M/2M/3M Length
Cut-out: 35mm



TRACK AND TRACK ACCESSORIES





3 Circuit Line End (L)





3 Circuit Line End (R)





3 Circuit 180 L Feed









3 Circuit I Feed (External)



3 Circuit I Feed (Internal)









3 Circuit Flexible Feed



3 Circuit L Feed (L)

3 Circuit L Feed (R)

3 Circuit + Feed




3 Circuit T Feed (L)





3 Circuit T Feed (R)


3 Circuit End Cap

TRACK AND TRACK ACCESSORIES

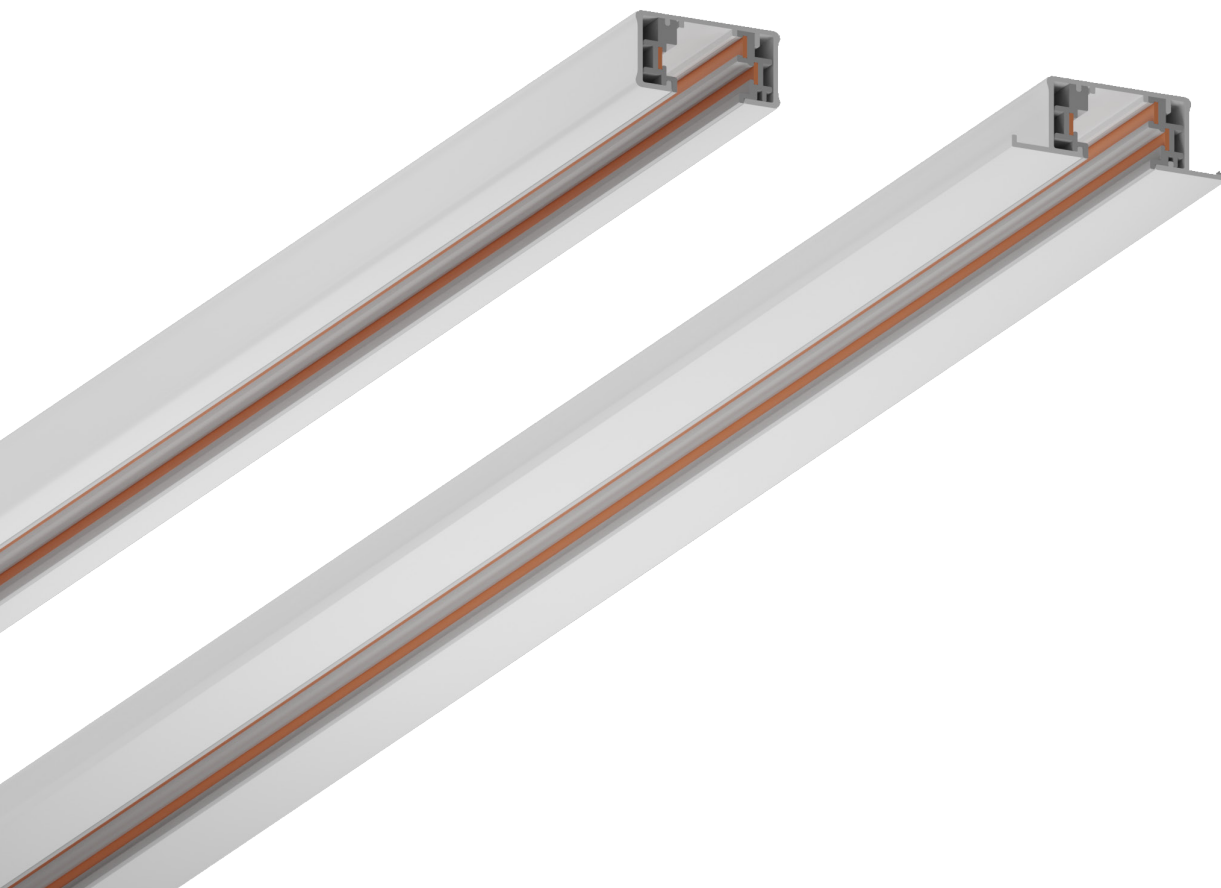


Schematic diagram of the inside of the track and the wiring

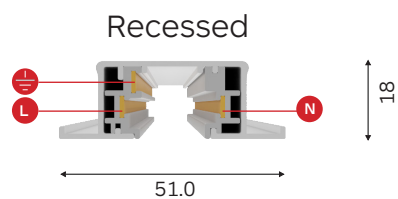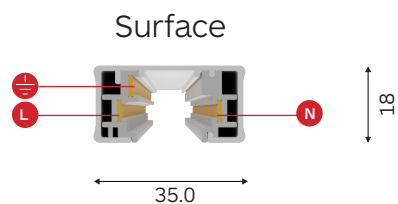


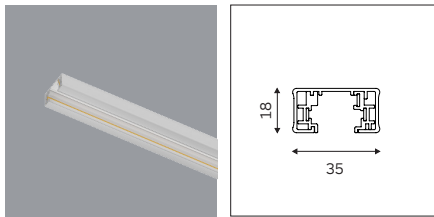


1 Circuit Track (Ceiling Mounted)
1M/1.5M/2M/3M Length


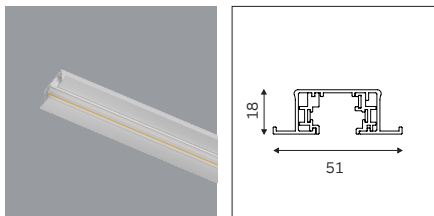


1 Circuit Track (Recessed)
1M/1.5M/2M/3M Length



TRACK AND TRACK ACCESSORIES





1 Circuit Line End





1 Circuit I Feed (Internal)





1 Circuit Flexible I Feed





1 Circuit + Feed





1 Circuit End Cap



1 Circuit I Feed (External)




1 Circuit L Feed







1 Circuit T Feed

PROFILE SYSTEMS

AURO TUBE 60
Profile Systems

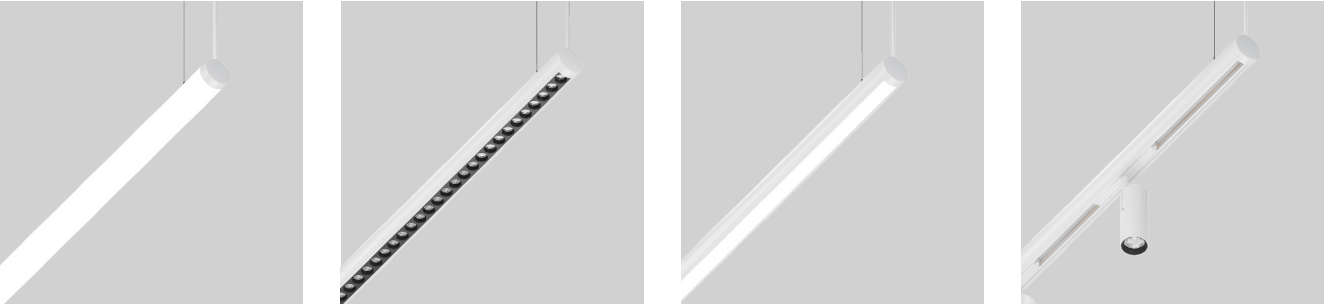

ENKO 20
Profile Systems






AURO TUBE 60

Profile Systems



AURO TUBE 60 Profile Systems

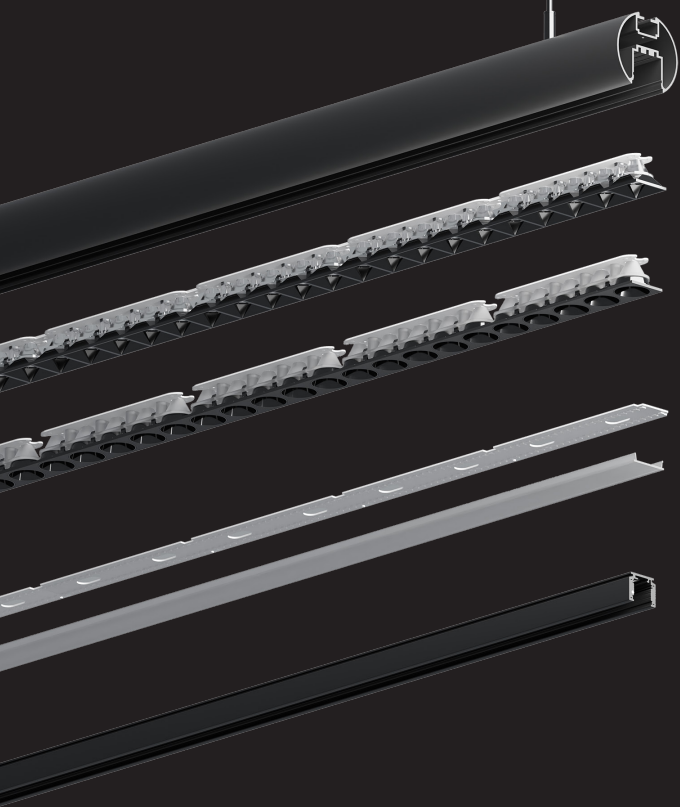



AURO TUBE 60 Profile









Square Accent Lighting

Round Accent Lighting

General Lighting


Magnetic Track Rail

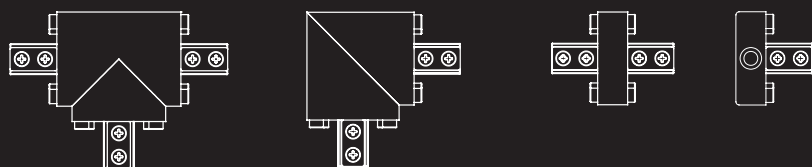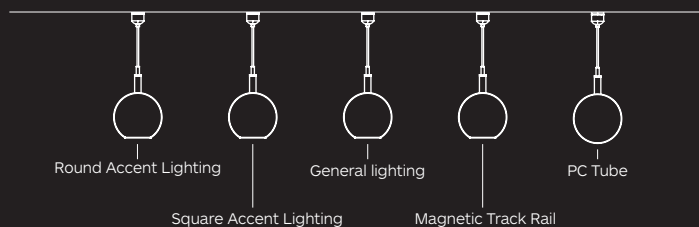

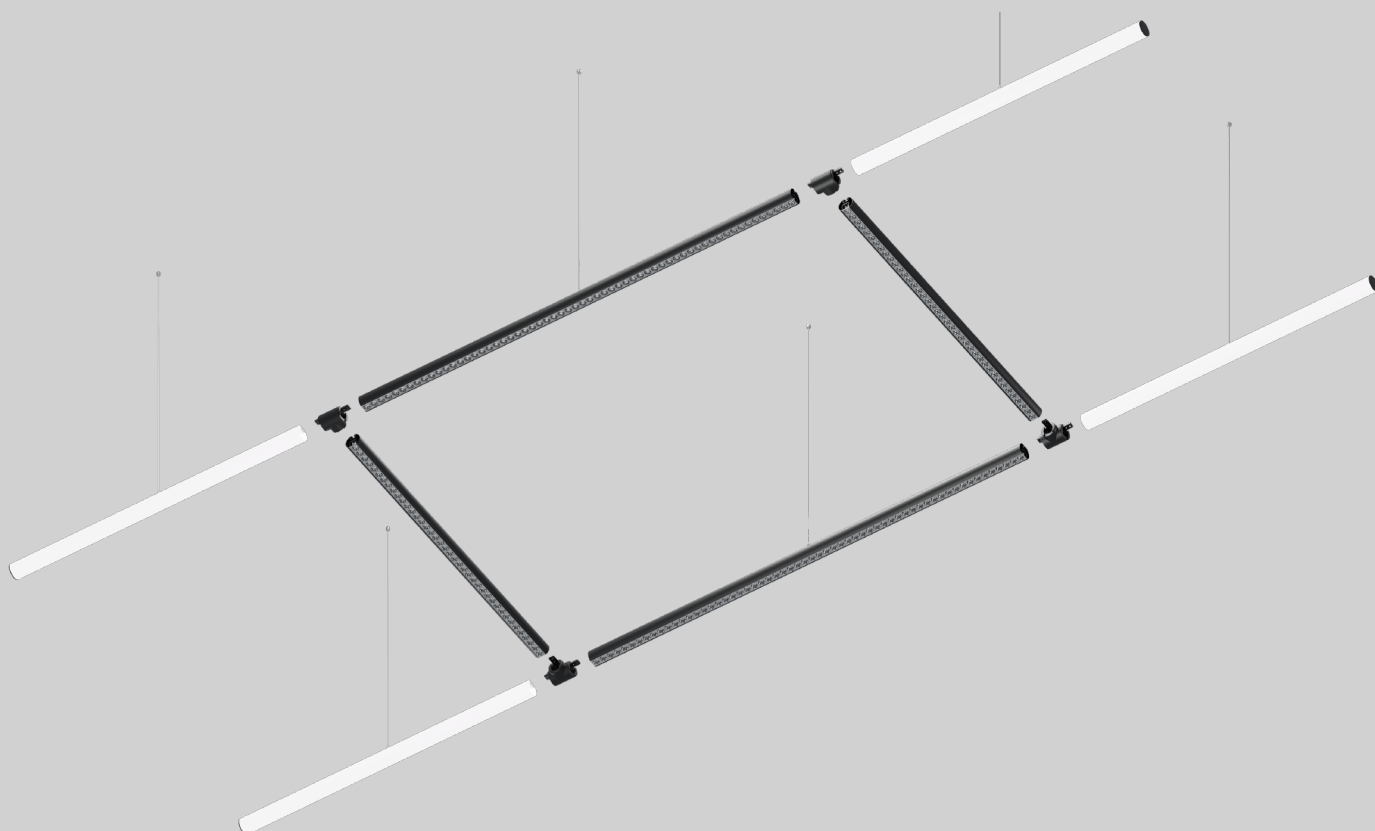

AURO TUBE 60


Profile Systems

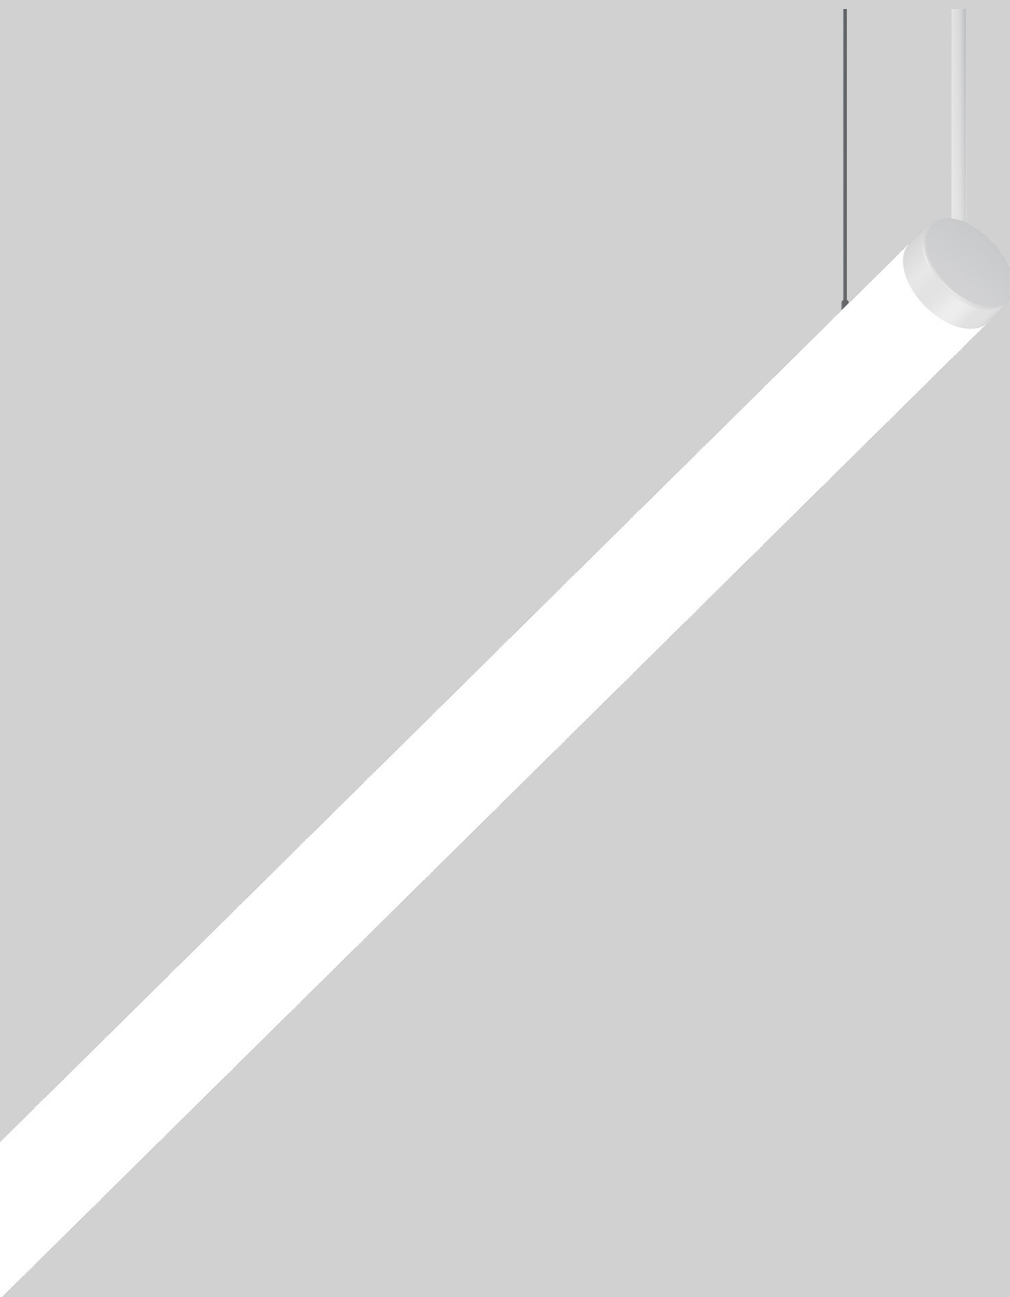

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
175°, 34W/m
Up to 118 lm/W
Up to 4012 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

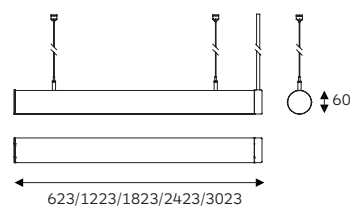

Product Code: 86.06011

Colours



WH BK

Light distribution




Opal

PC Tube



AURO TUBE 60


Profile Systems

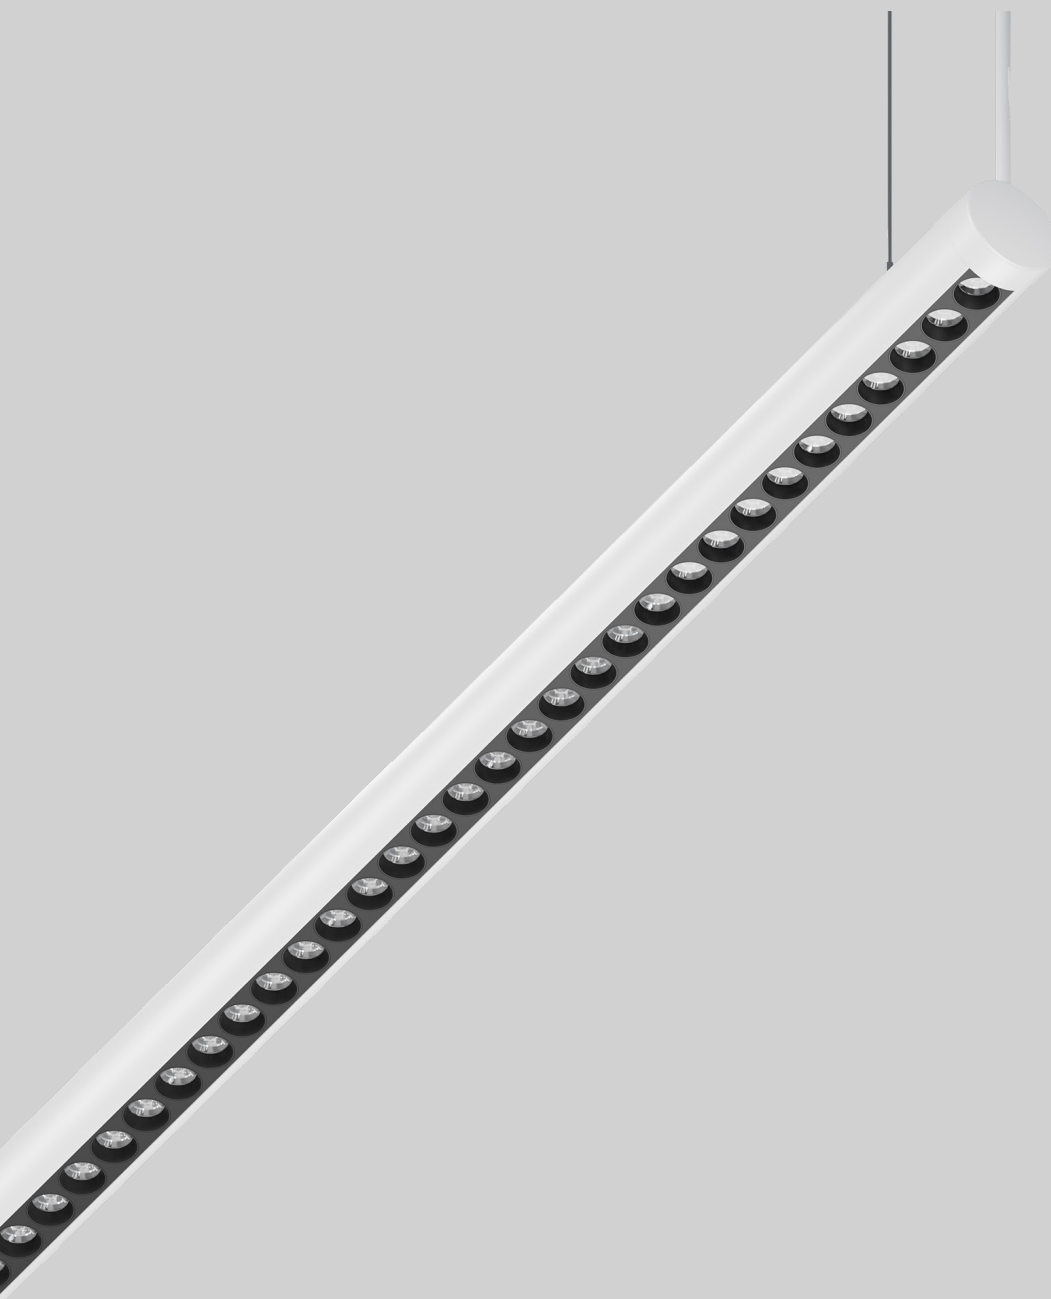

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
35°, 34W/m
Up to 92 lm/W
Up to 3128 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 86.06012

Colours

○ ●
WH BK

Light distribution



21°

35°


45°

Accent Lighting



AURO TUBE 60


Profile Systems

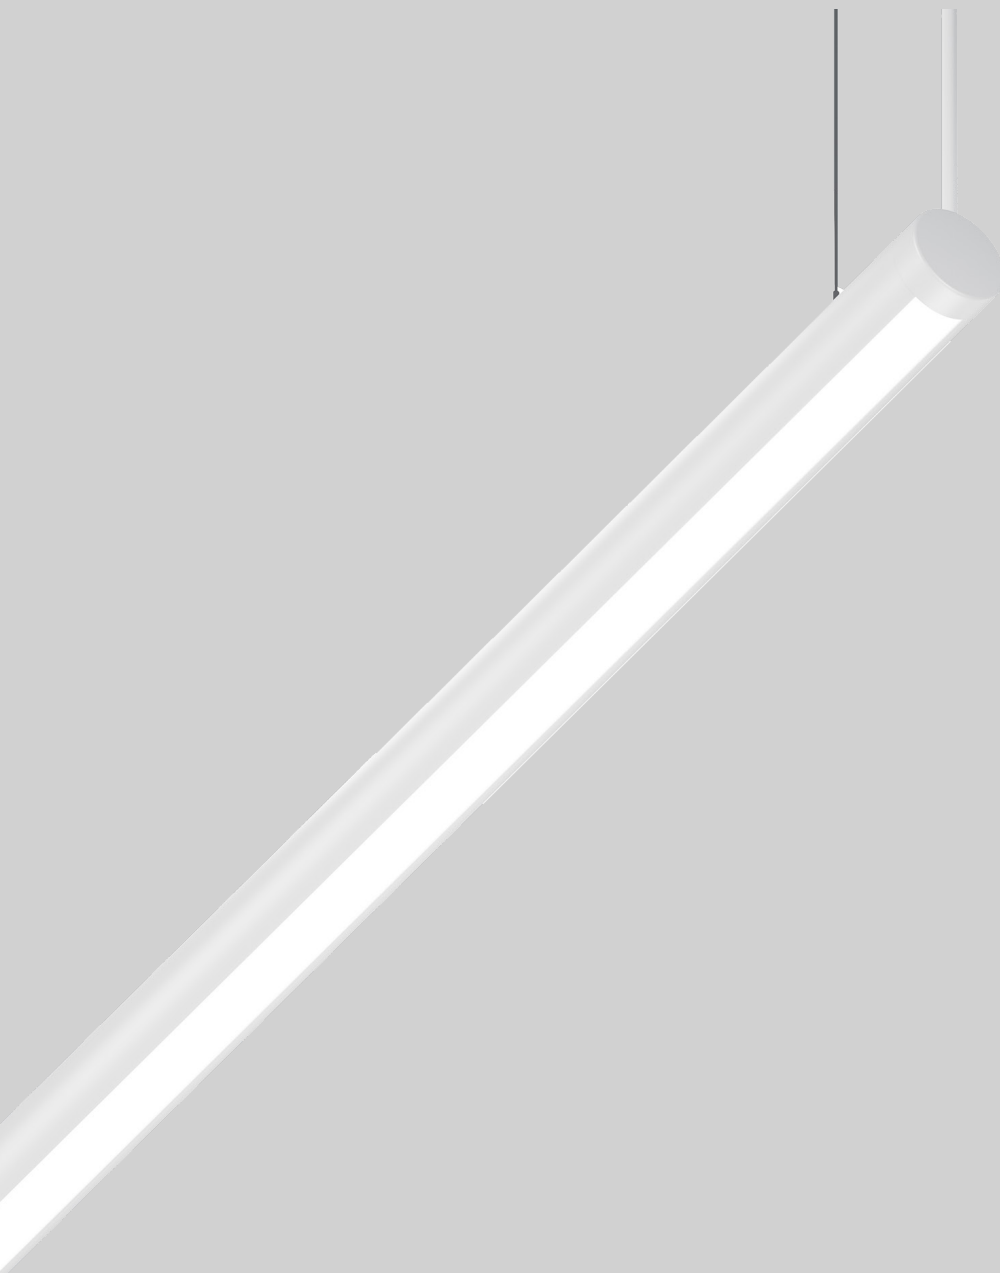

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
107°, 34W/m
Up to 78 lm/W
Up to 2652 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

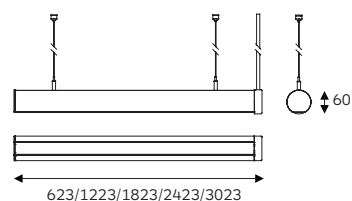

Product Code: 86.06013

Colours

○ ●
WH BK

Light distribution



Opal

General Lighting



AURO TUBE 60

Profile Systems




Quick Info

AURO TUBE 60 Profile with magnetic track Rail.

Please go back to low voltage track system to selected products

Types

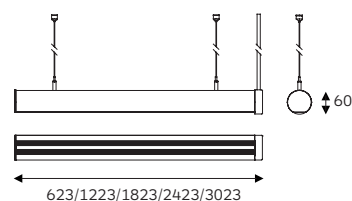

Product Code: 86.06015

Colours

○ ●
WH BK

Light distribution


Magnetic Track Rail




ENKO 20

Profile Systems


Surface Mounted Fixed




Surface Mounted Adjustable




Surface Mounted With Anti-glare Fixed




Surface Mounted With Anti-glare Adjustable




Surface Mounted With Wall Washer Adjustable




Surface Mounted With Wall Washer Fixed




Recessed Adjustable

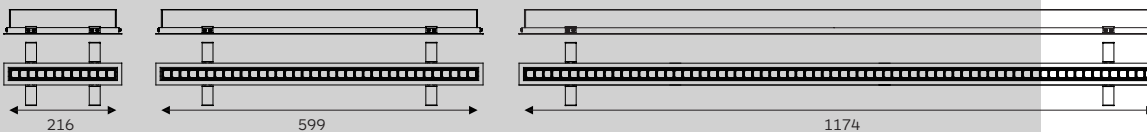

Recessed Fixed

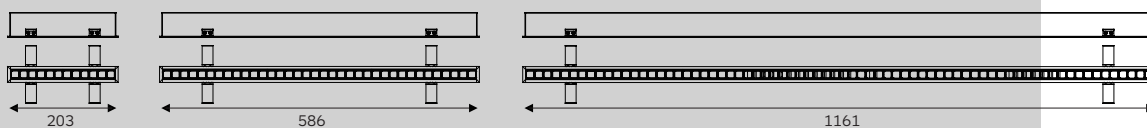

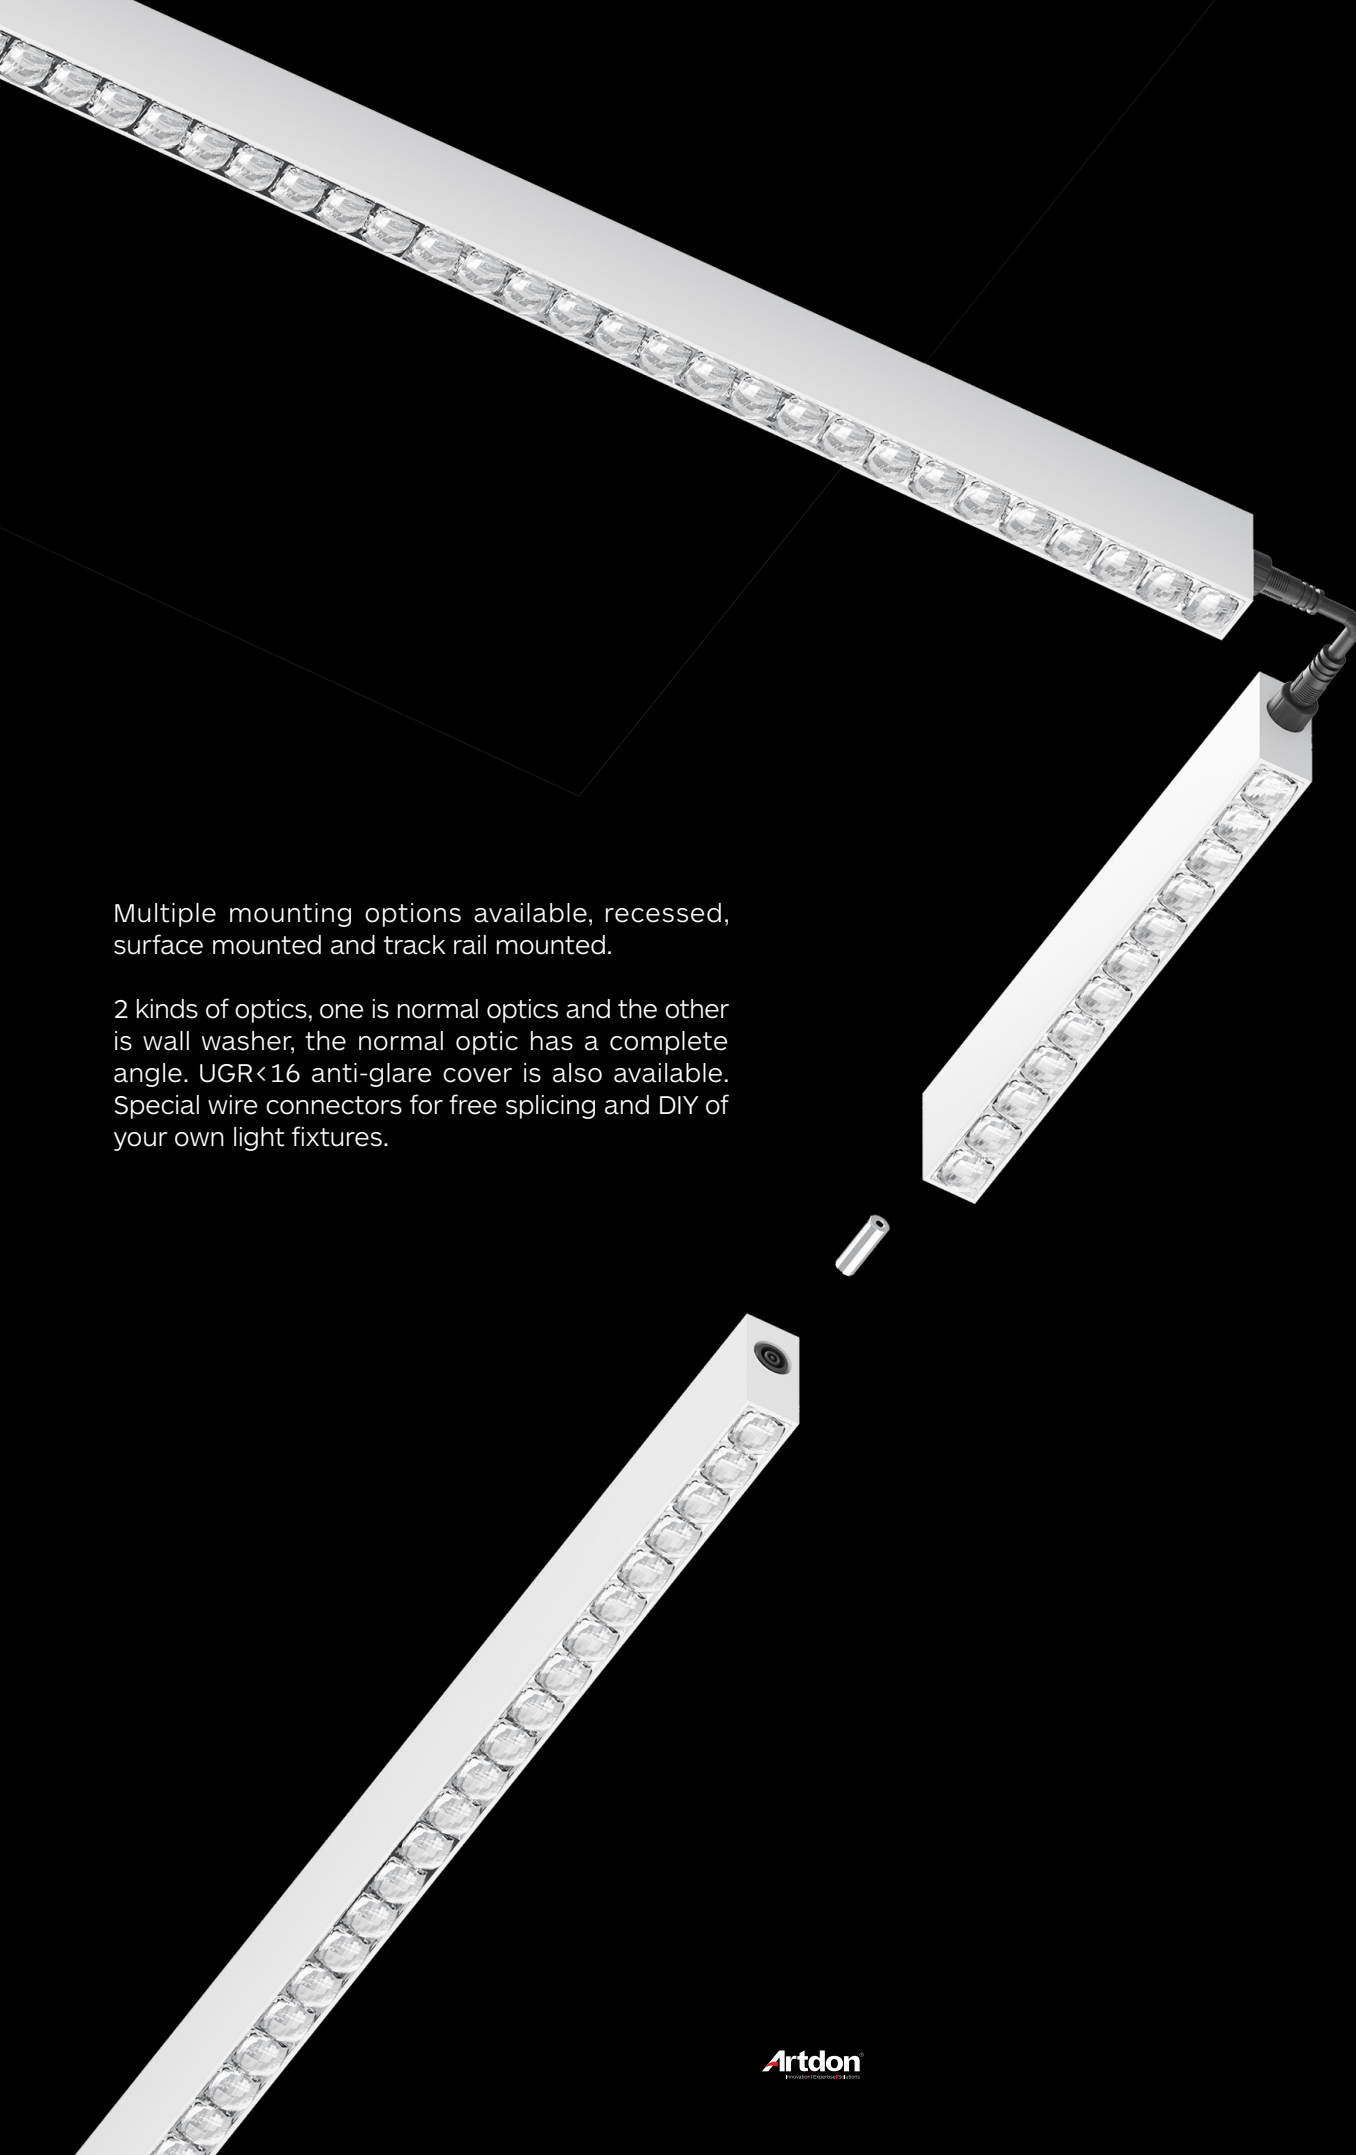


Multiple mounting options available, recessed, surface mounted and track rail mounted.

2 kinds of optics, one is normal optics and the other is wall washer, the normal optic has a complete angle. UGR<16 anti-glare cover is also available. Special wire connectors for free splicing and DIY of your own light fixtures.

ENKO 20


Profile Systems

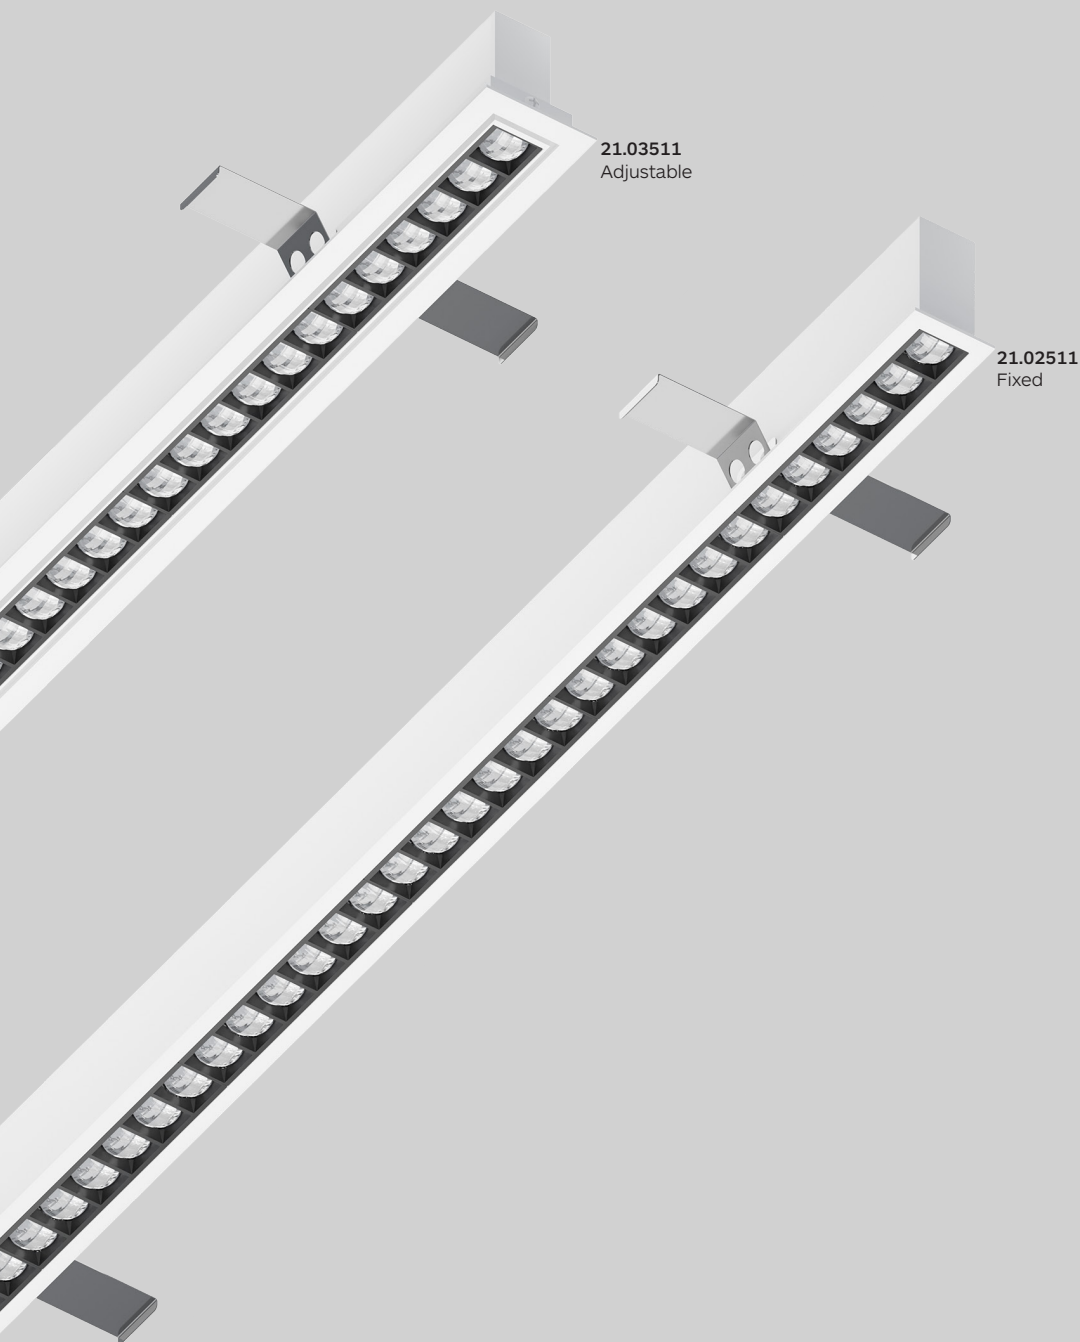

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
24°, 30W/m
Up to 84 lm/W
Up to 2520 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI


Types

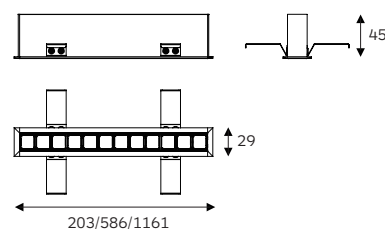

Product Code: 21.02511

Cut-out:

203: 196*24mm
586: 580*24mm
1161: 1154*24mm

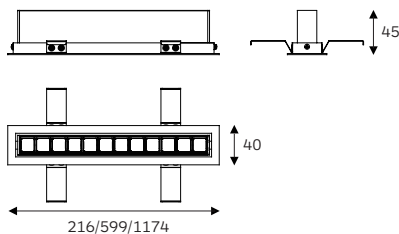

Product Code: 21.03511

Cut-out:

216: 210*34mm
599: 594*34mm
1174: 1168*34mm

Colours

○ ●
WH BK

Light distribution




Recessed Anti-glare



ENKO 20


Profile Systems

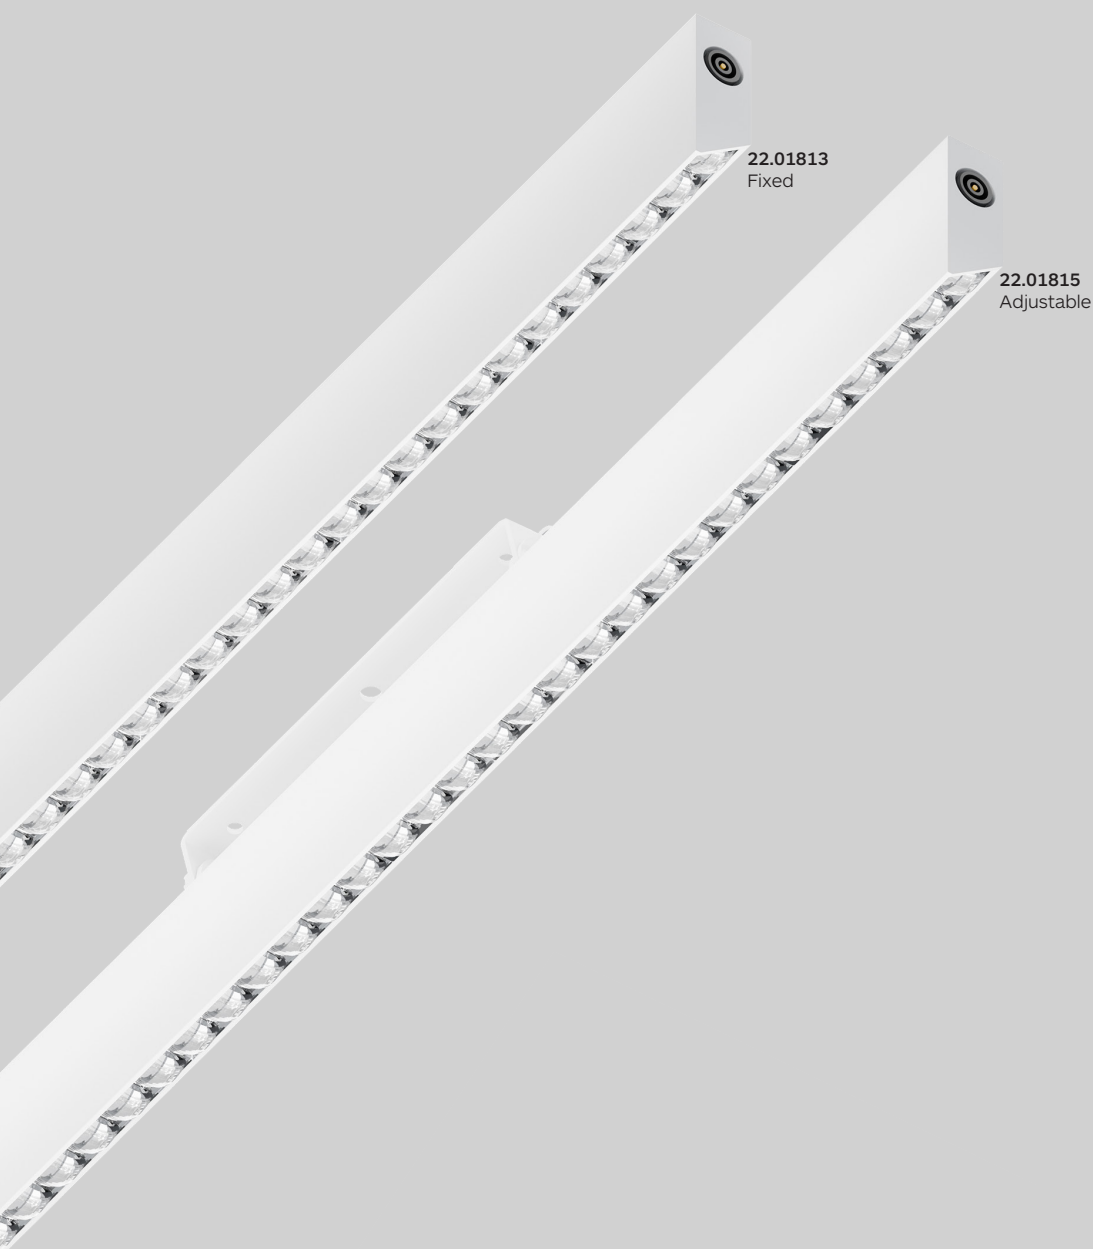


Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
Wall Washer, 30W/m
Up to 74 lm/W
Up to 2220 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 22.01813



Product Code: 22.01815

Colours



WH BK

Light distribution



Wall Washer

Surface Mounted Wall Washer



BONLOOK
FASHIONABLE EYEWEAR

COMING SOON
HIRING NOW

Manager, Ops/Plan, Stylist
(full time & part time)
tara.hajek@bonlook.com
BONLOOK.COM

BIRKS

BIRKS

ZARA

NINE WEST

50% OFF

to
mountain

VR ZONE


ENTER

Windows

HP

ENKO 20


Profile Systems

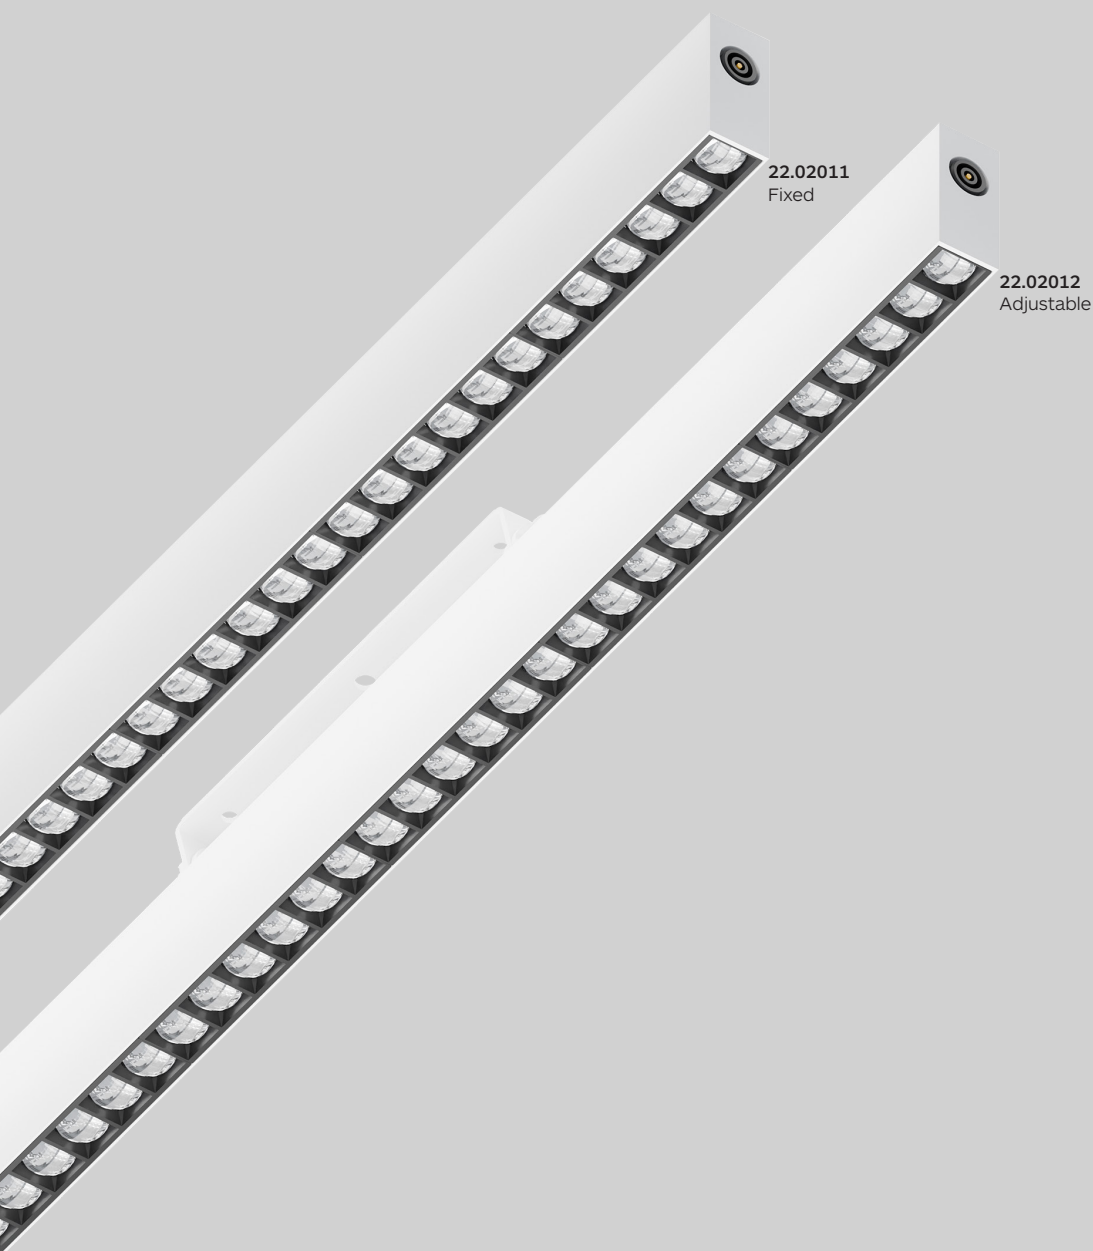


Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
24°, 30W/m
Up to 84 lm/W
Up to 2520 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 22.02011



Product Code: 22.02012

Colours



WH BK

Light distribution




Surface Mounted

Anti-glare



ENKO 20


Profile Systems

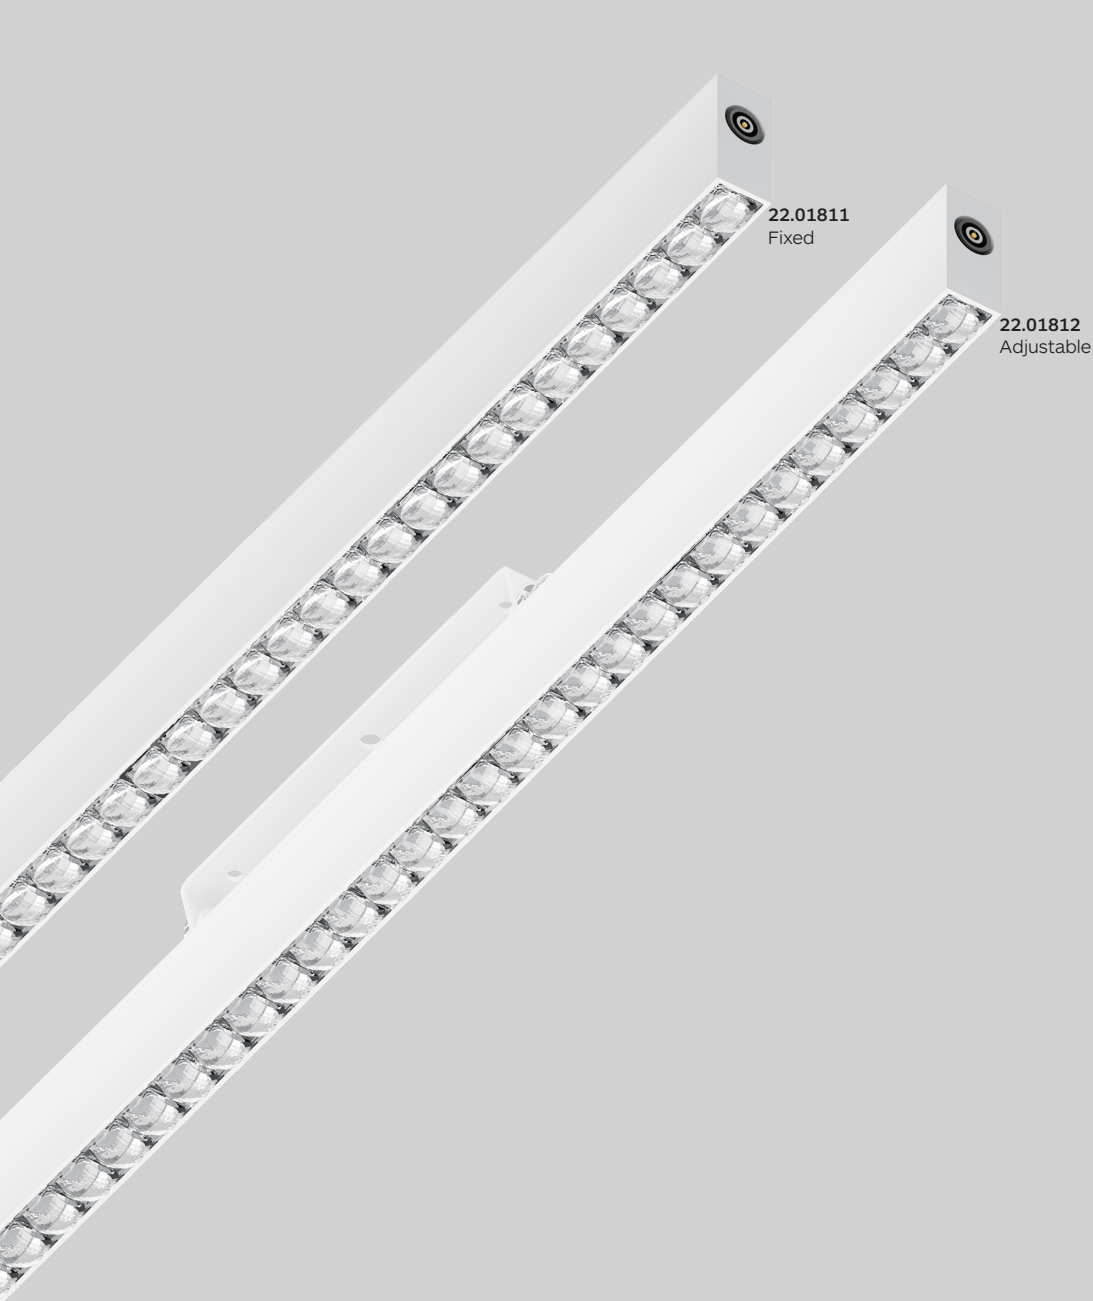


Quick Info

3000K, 3500K, 4000K
 CRI $\geq$ 90, SDCM $\leq$ 3
 25°, 30W/m
 Up to 98 lm/W
 Up to 2940 lm/m
 L90 @ 50 000 h
 On/Off / 0-10V / DALI

Types



Product Code: 22.01811



Product Code: 22.01812

Colours

○ ●
 WH BK

Light distribution





Surface Mounted



CANNEX 50

Profile Systems

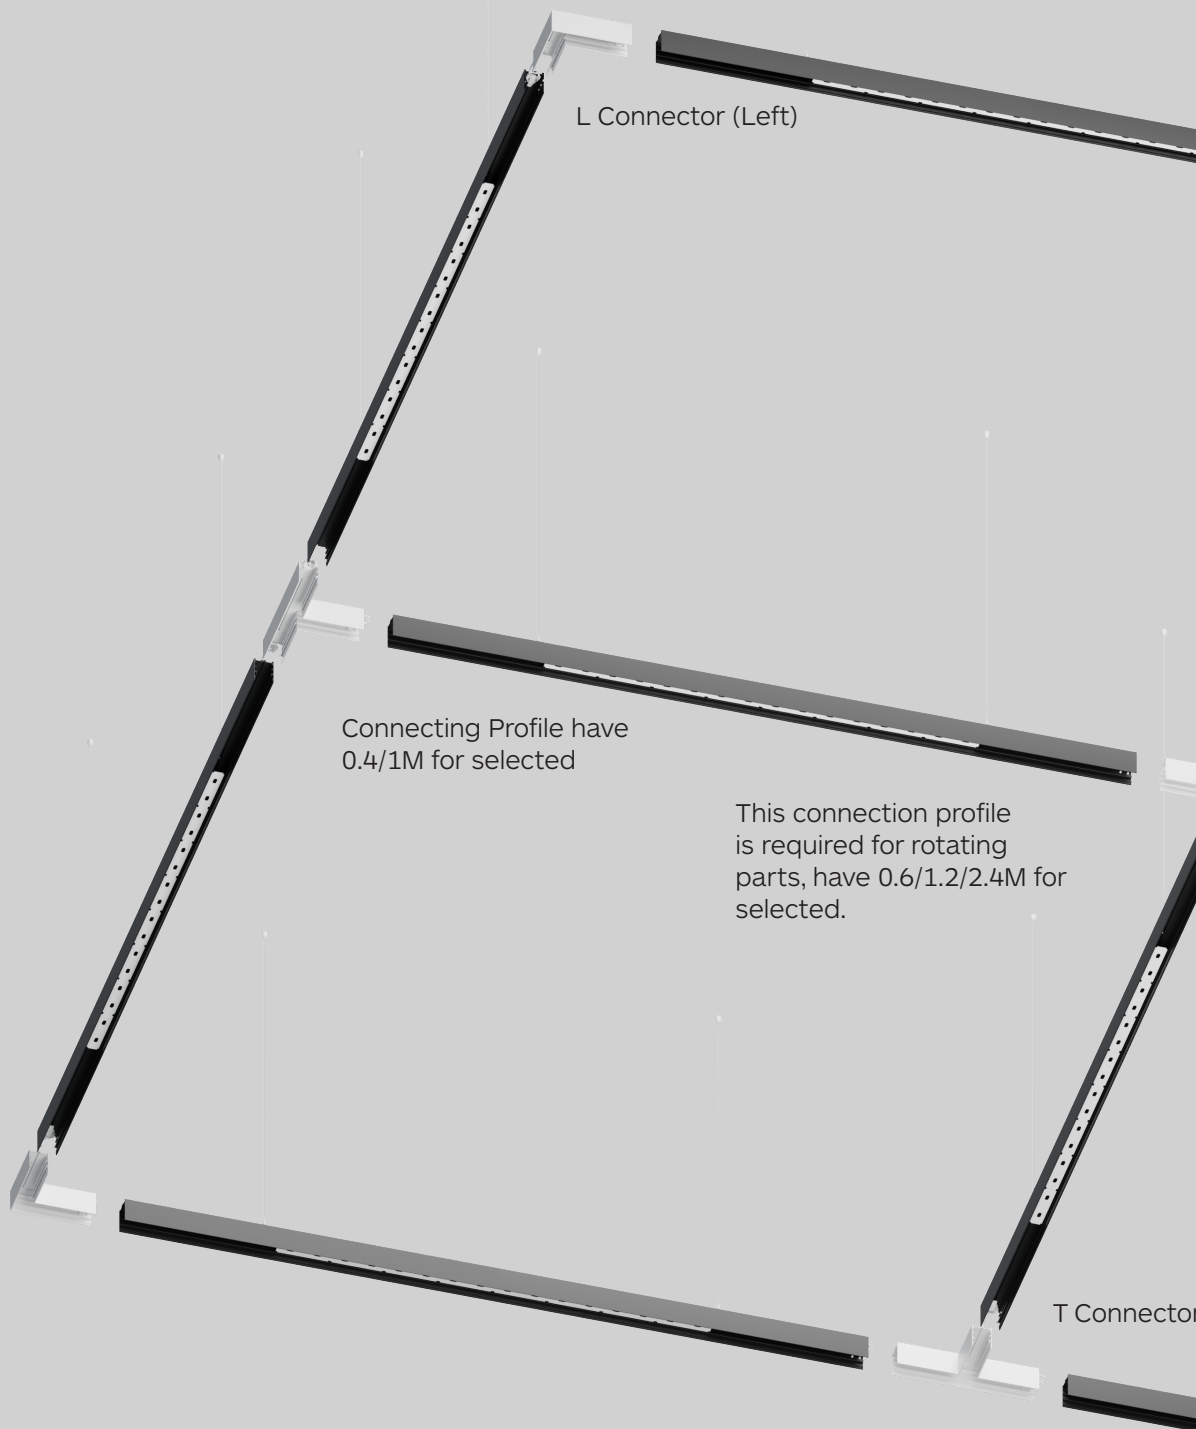

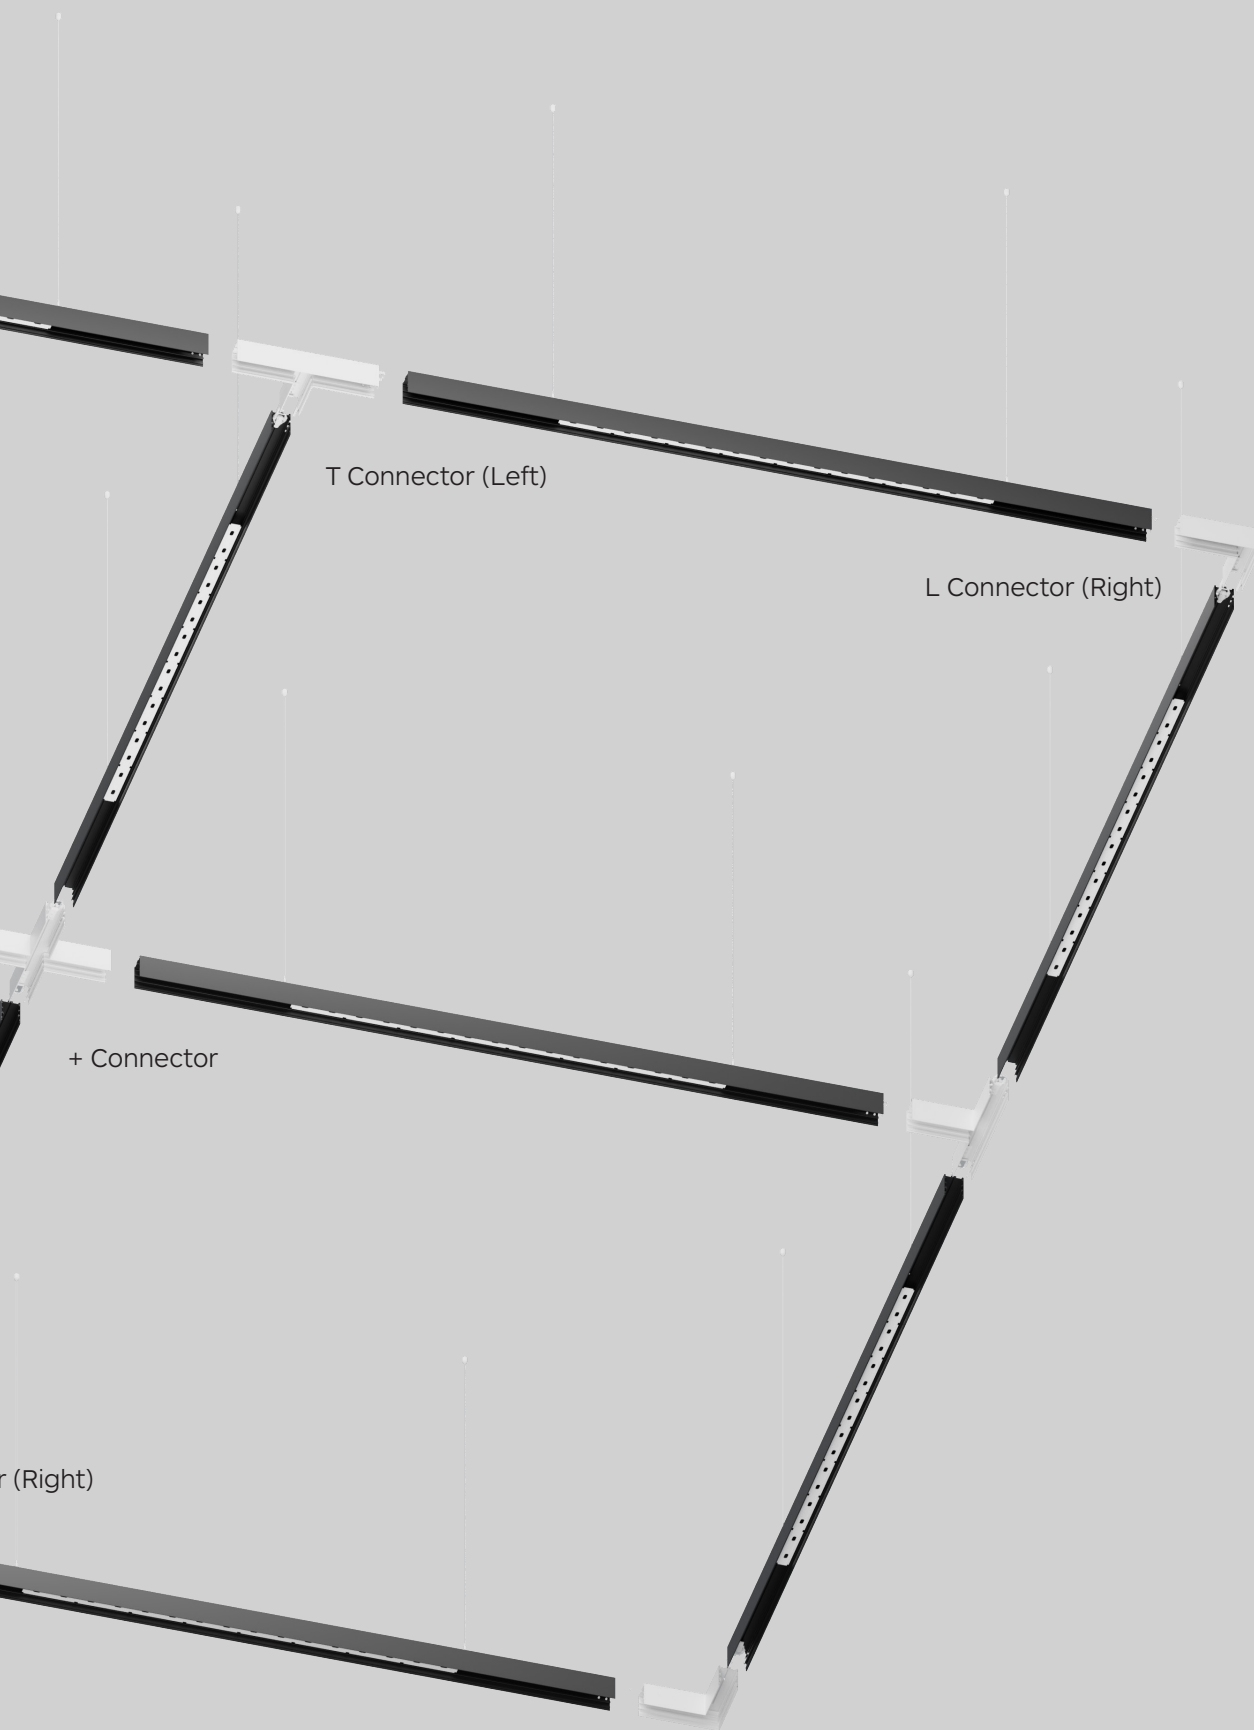

T Connector (Left)


L Connector (Right)

+ Connector

r (Right)

CANNEX 50



Profile Systems

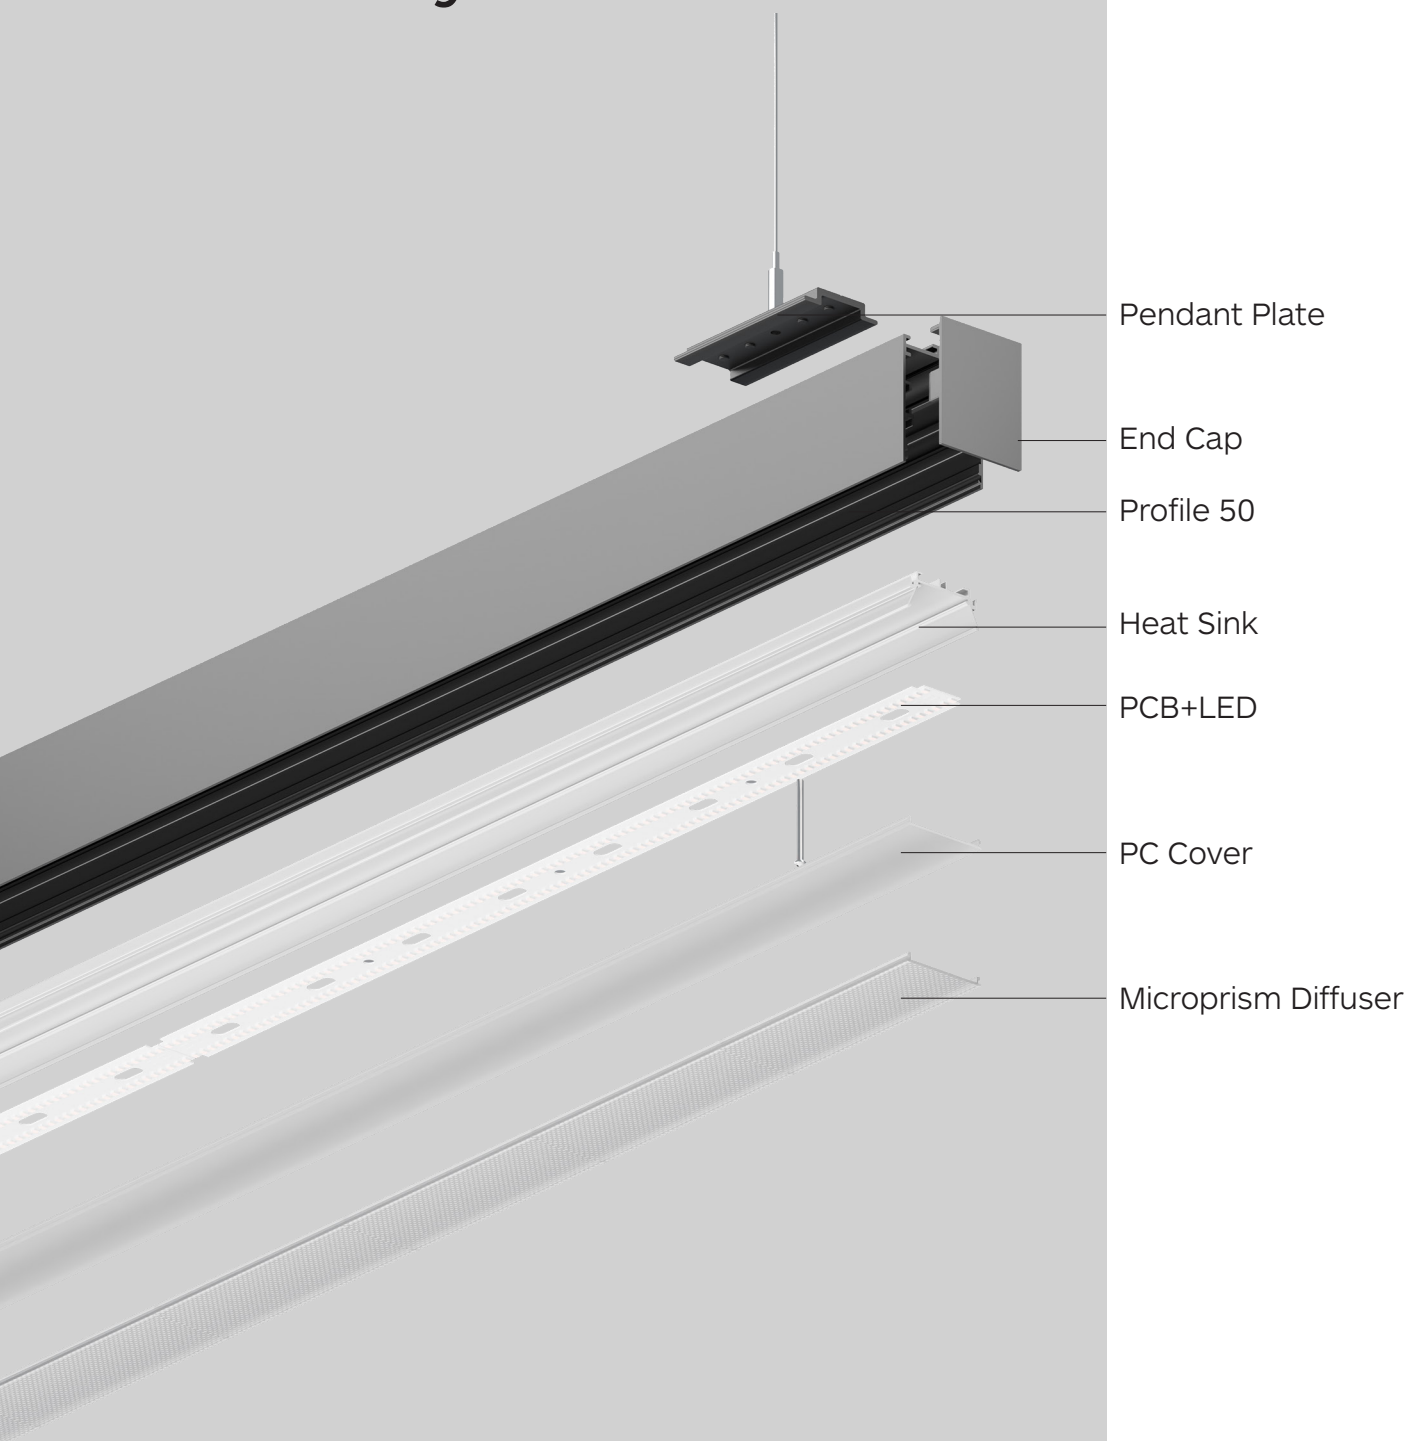



CANNEX 50

Profile Systems

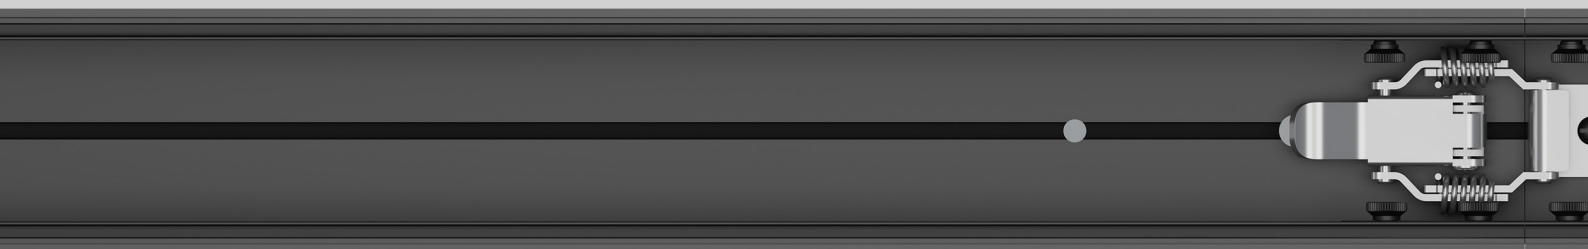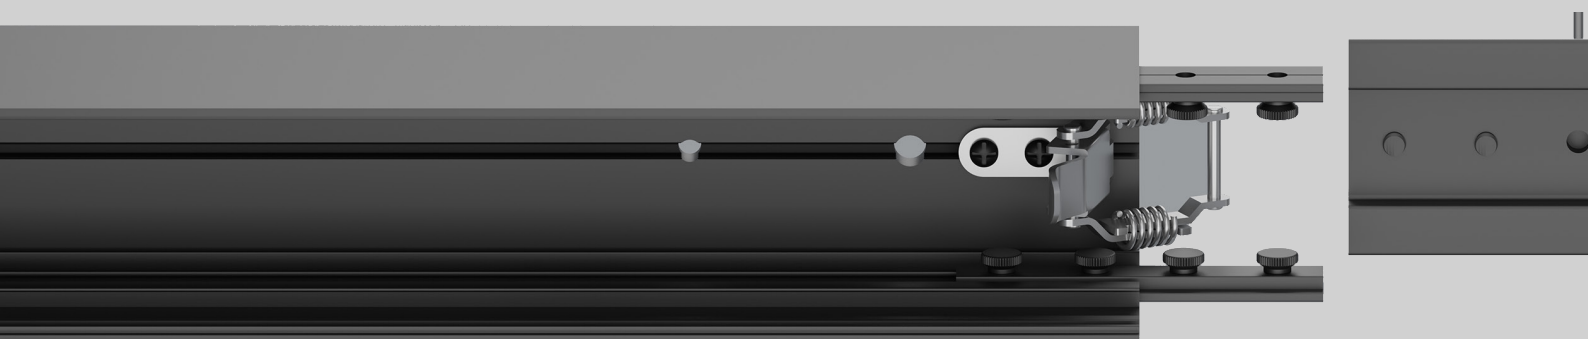


Easy Connecting

Two profiles are simply connected to each other through Locking snap and Straight Connected Small Aluminum Bars connected, then tightening screw by hand, without tooling





Step 1, Match the locking snap and lock.









Step 2, Used hand to tightening the screw, which make the linear profile more straight without gap.

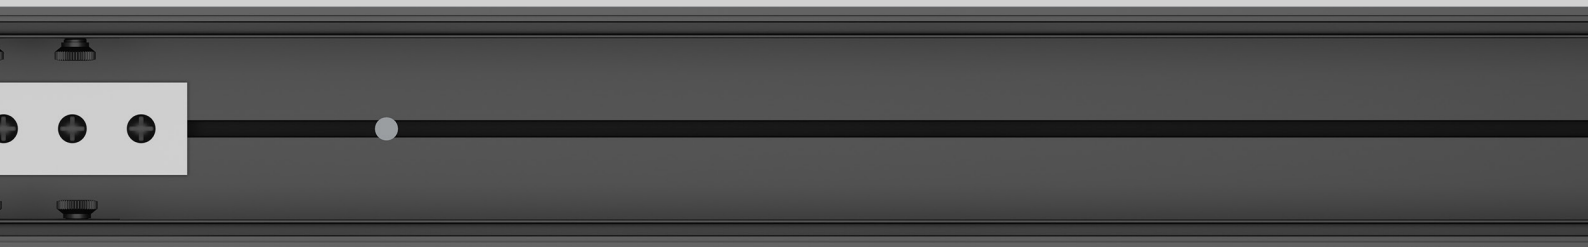

CANNEX 50


Profile Systems

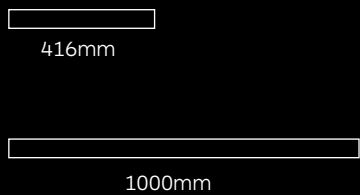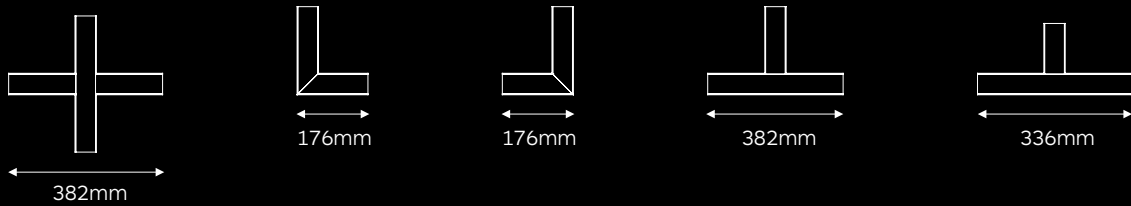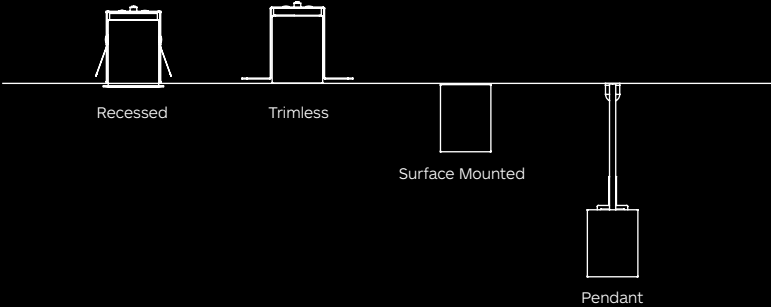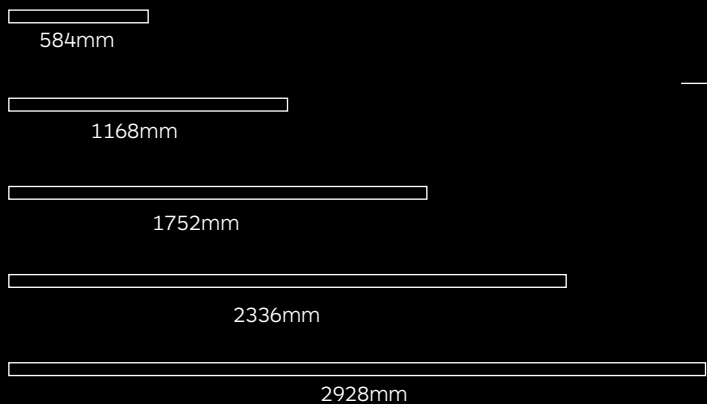



CANNEX 50


Profile Systems

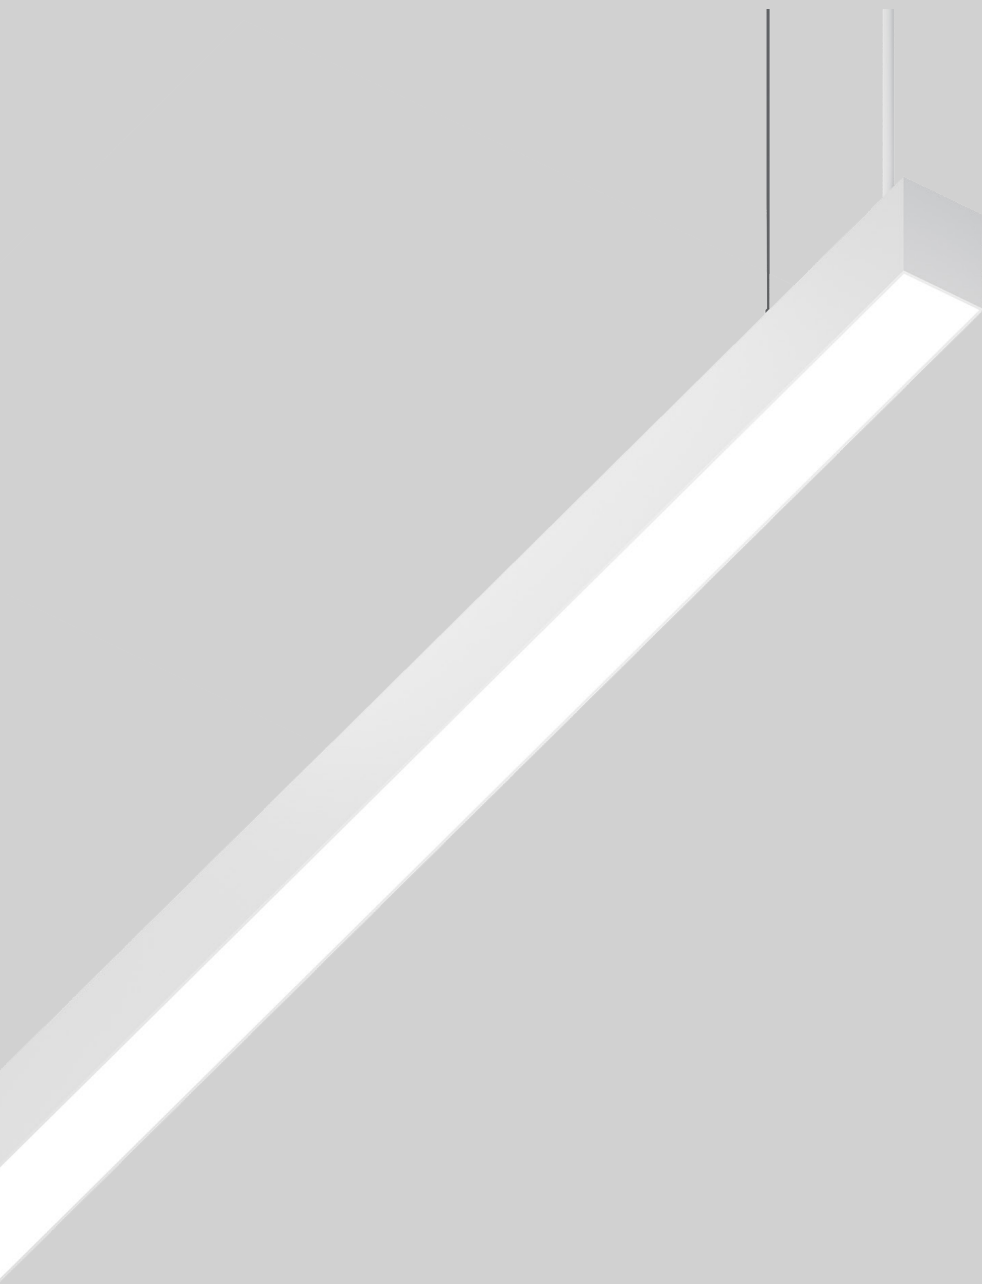

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

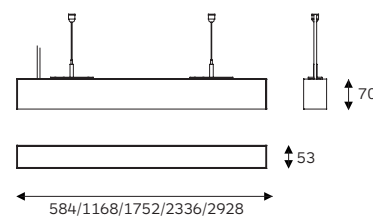

Product Code: 86.05311

Colours



WH BK

Light distribution




Opal

Pendant



CANNEX 50

Profile Systems

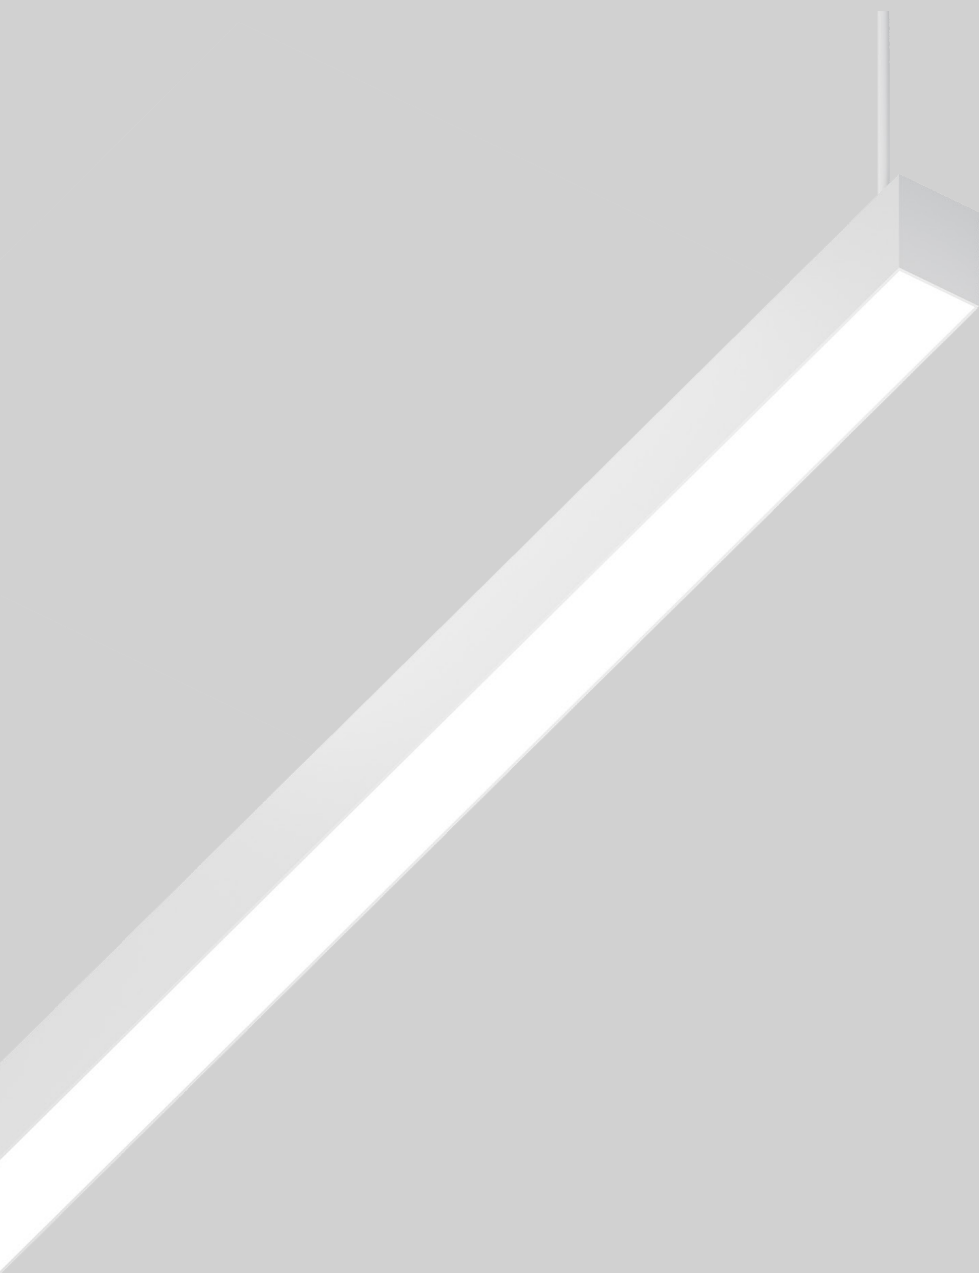


Surface Mounted

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

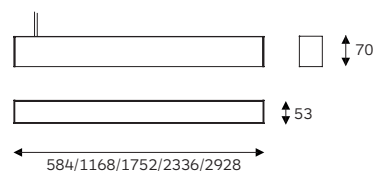

Product Code: 22.05312

Colours



Light distribution




Opal



CANNEX 50


Profile Systems

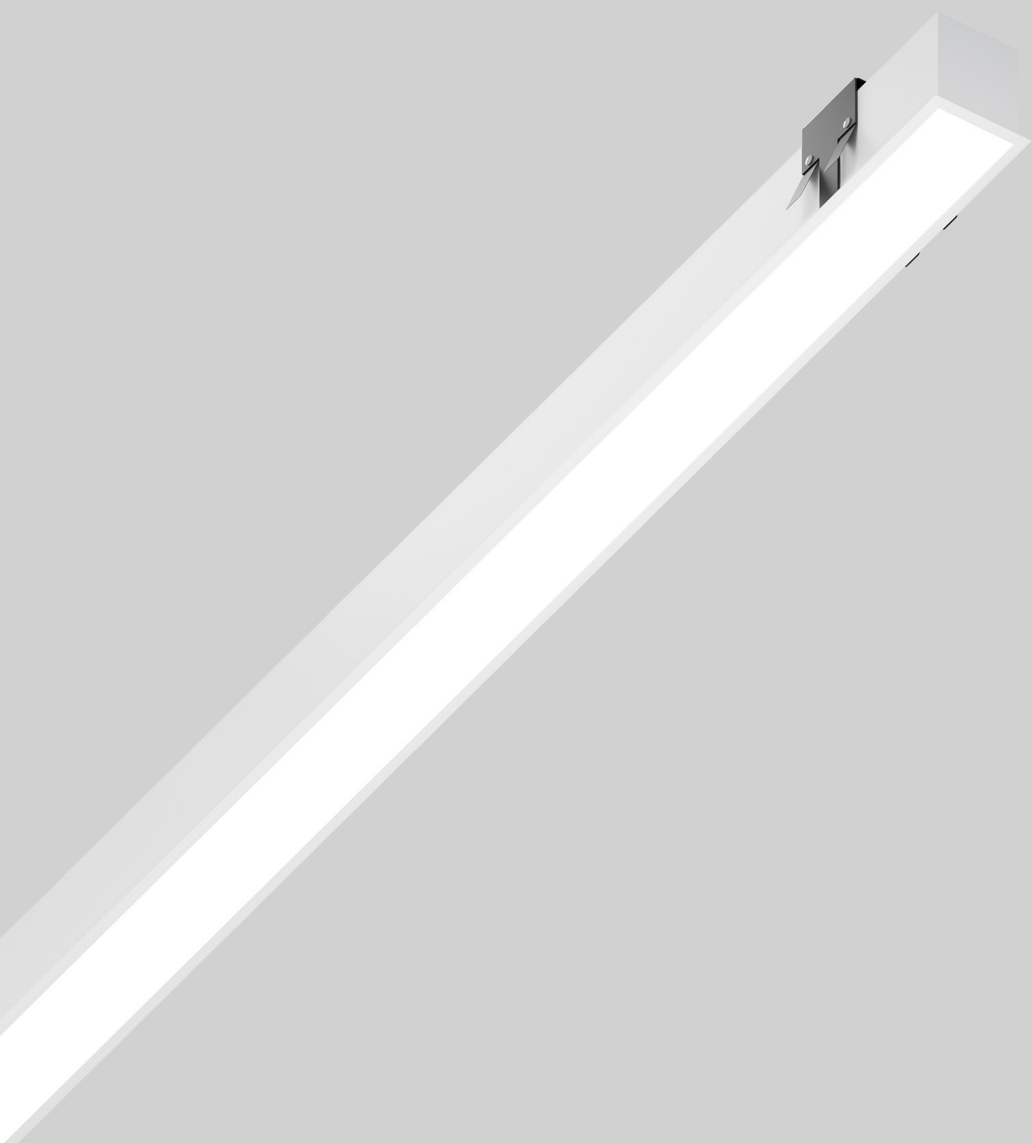

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

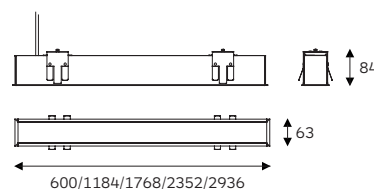

Product Code: 21.05811

Cut-out:

600: 595*58mm
1184: 1180*58mm
1768: 1760*58mm
2352: 2345*58mm
2936: 2930*58mm

Colours

○ ●
WH BK

Light distribution




Opal

Recessed



CANNEX 50


Profile Systems

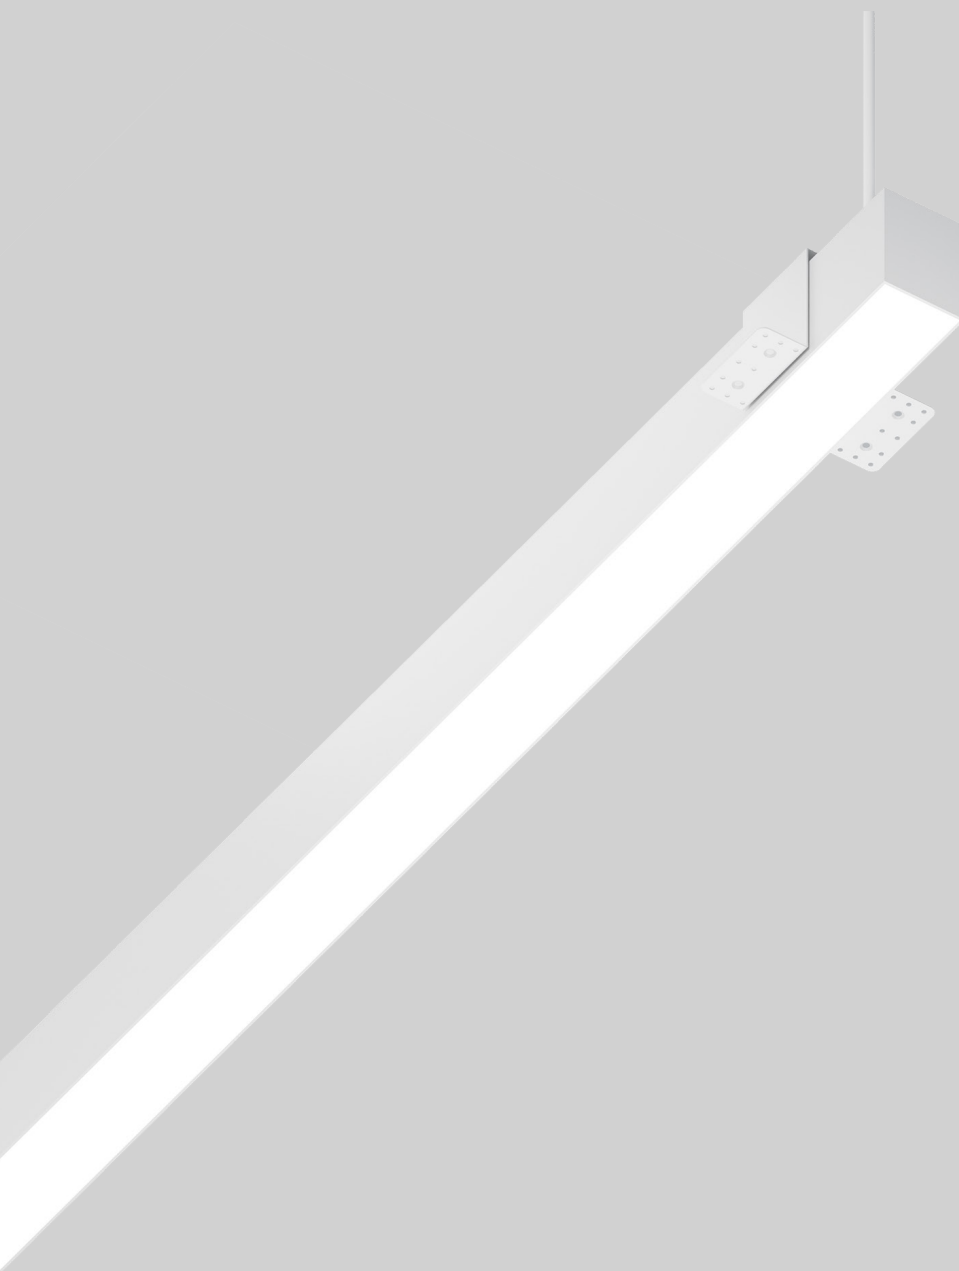

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

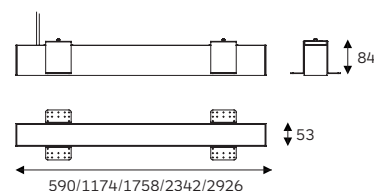

Product Code: 21.05812

Cut-out:

590: 595*58mm
1174: 1180*58mm
1758: 1765*58mm
2342: 2360*58mm
2926: 2940*58mm

Colours



WH BK

Light distribution



Opal

Trimless






RECO 35

Profile Systems



RECO 35


Profile Systems

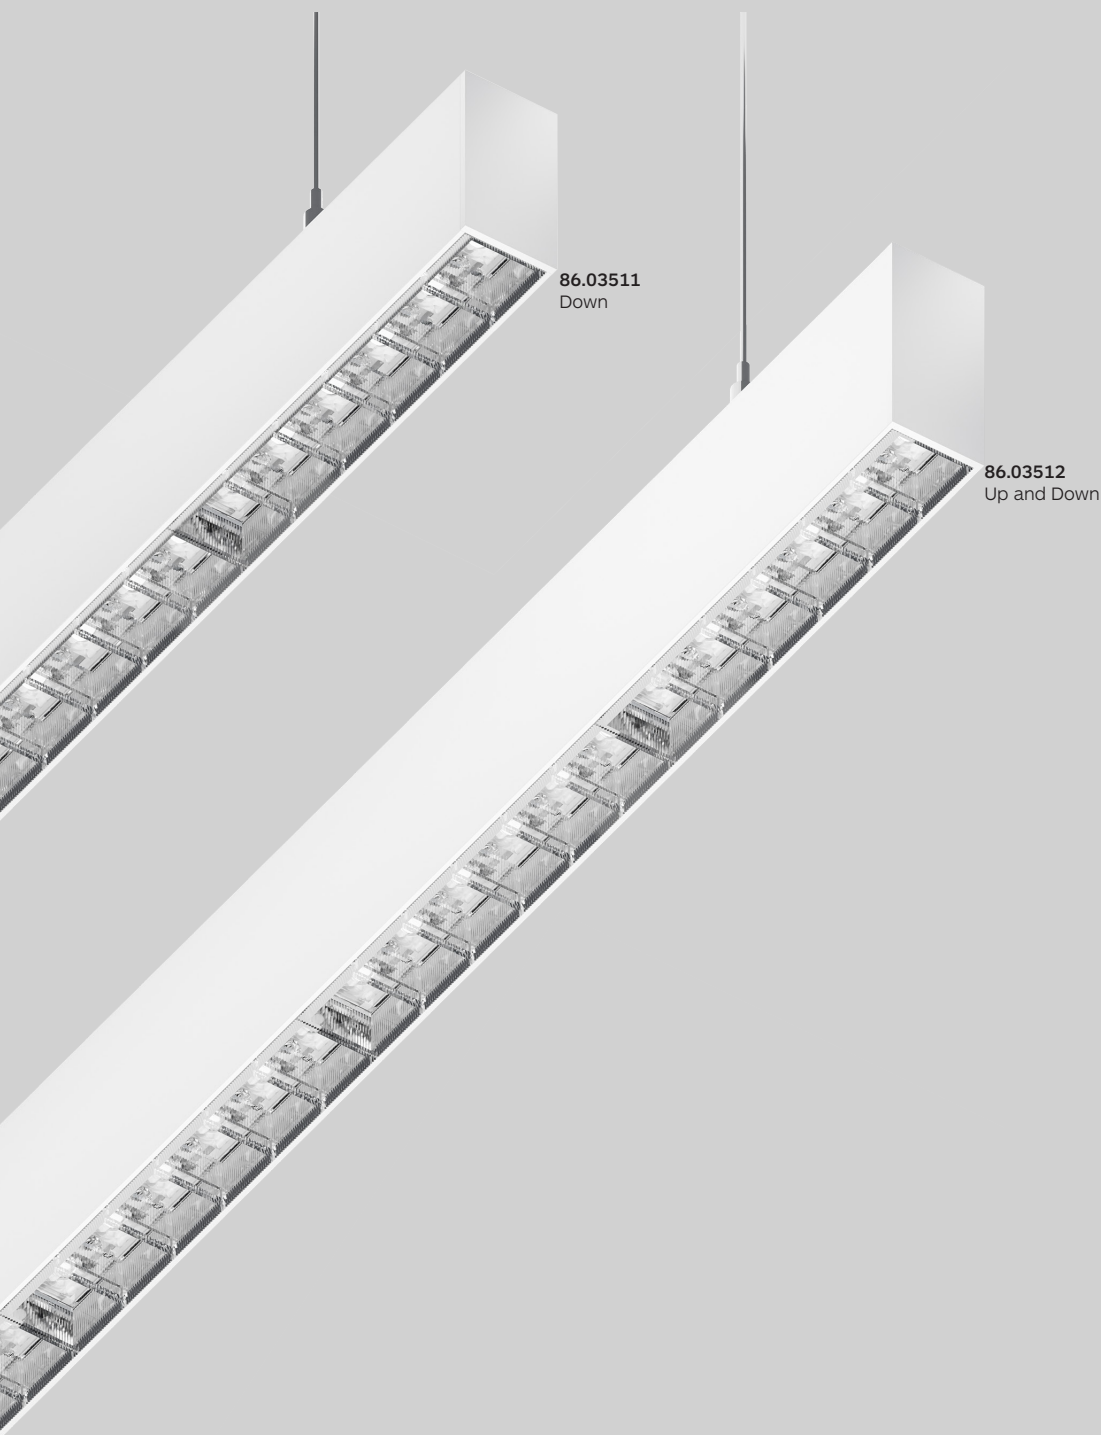


Quick Info

3000K, 3500K, 4000K
 CRI $\geq$ 90, SDCM $\leq$ 3
 Down 45°, 30W/m, 94lm/W
 Up 110°, 30W/m, 85lm/W
 L90 @ 50 000 h
 On/Off / 0-10V / DALI

Types

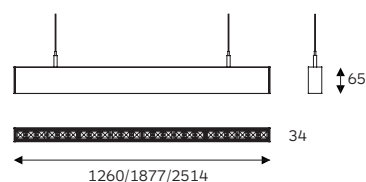

Product Code: 86.03511

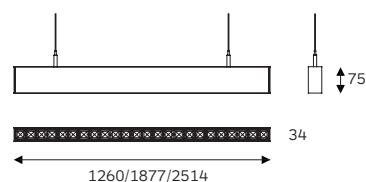


Product Code: 86.03512

Colours



Light distribution




Pendant



RECO 35

Profile Systems

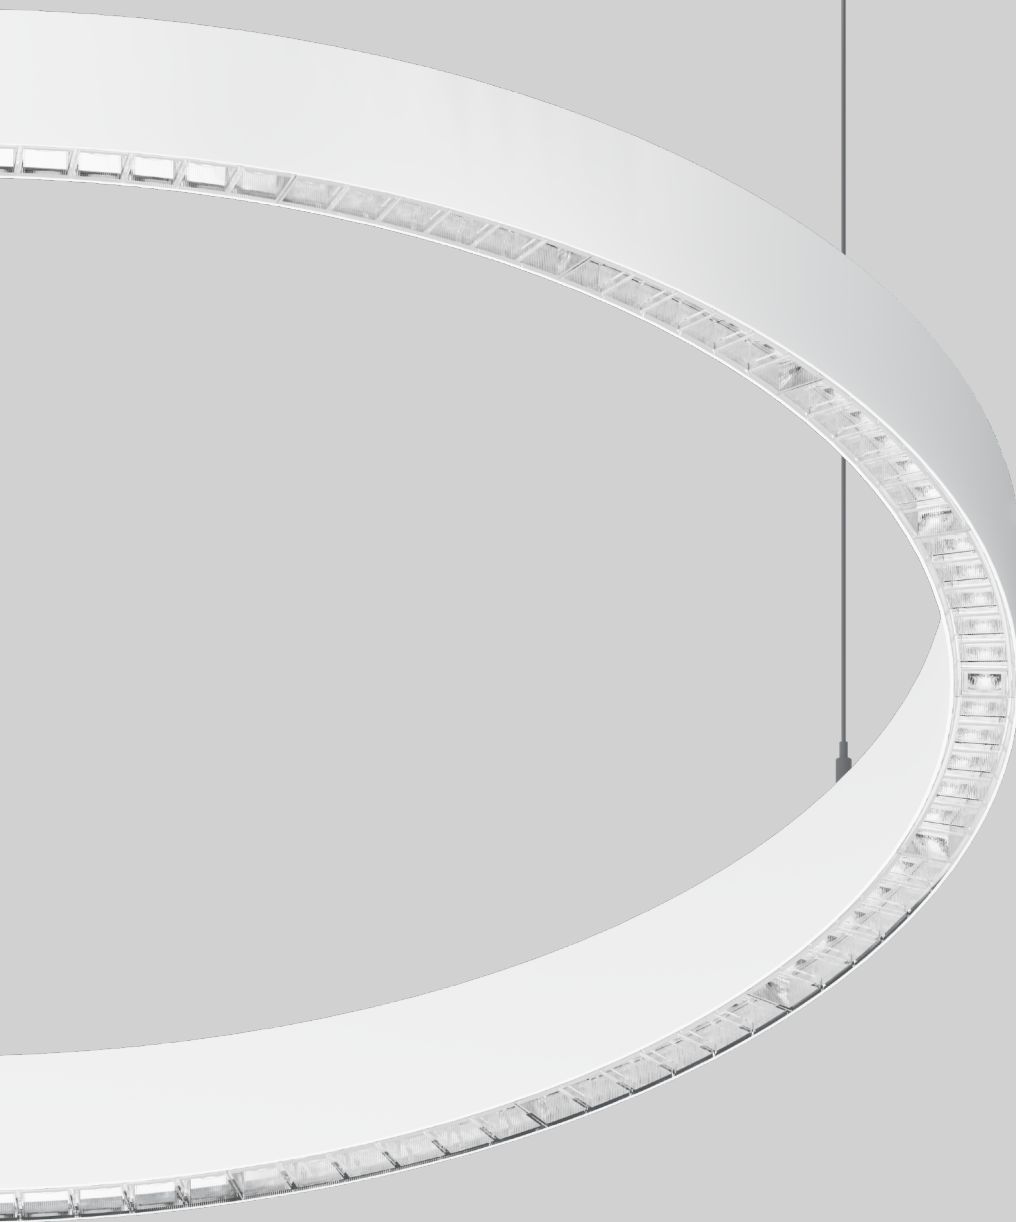


Round

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
Down 45°, 30W/m, 94lm/W
Up 110°, 30W/m, 85lm/W
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

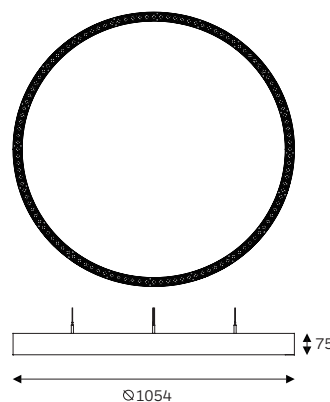

Product Code: 86.03513

Colours



WH BK

Light distribution



Down 45° Down+up 45° 110°




RECESSED DOWNLIGHT




EMMA

INTERO



MINI

REFLEX



NOVAL


SILO



LOTT

SLIM

INTERO RECESSED DOWNLIGHT

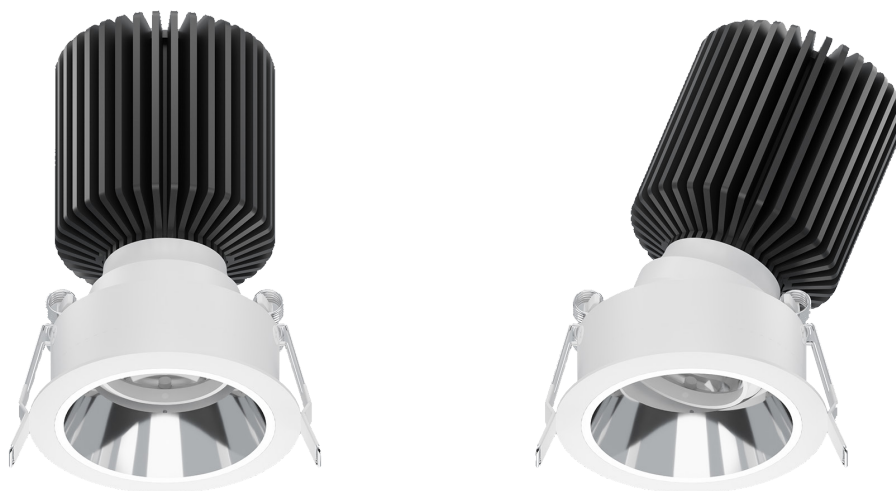

Body

High lumens with customized anti-glare reflector.

Small cut out, high wattage. One series to choose from to meet the requirements of different cut out and illumination levels in different spaces.

Classic appearance, simple, durable and practical, the best choice for commercial space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Widely used in star hotels, high-end clubs, homes, offices and stores, Large shopping malls, chain stores and so on.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




INTERO 55 52.05523

Ø55MM




INTERO 75 52.07523

Ø75MM



INTERO 95 52.09531

Ø95MM



Code Ordering Example: 5 2 . 0 5 5 2 3 - 9 0 3 0 2 7 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
INTERO 55 Recessed Downlight	52.05523	CA	COB LED	90	30 3000K	10W	1173 lm	27°/30°/43°/54°	D0 No Dim	10 ☐ WH
					40 4000k		1231 lm		DA Dali Dim	20 ☒ BK
INTERO 75 Recessed Downlight	52.07523	CA	COB LED	90	30 3000K	32W	3653 lm	32°/40°/48°/58°	DC 0-10V Dim	
					40 4000k		3835 lm		DT Triac Dim	
INTERO 95 Recessed Downlight	52.09531	CA	COB LED	90	30 3000K	42W	4755 lm	26°/31°/41°/49°		
					40 4000k		4992 lm			

SLIM RECESSED DOWNLIGHT



SLIM

RECESSED DOWNLIGHT



SLIM RECESSED DOWNLIGHT

51.05516




51.07518




51.07519




51.09511




SLIM 55
Watt: Max 15W
Cut out: 55MM
Beam Angle: 20°/25°/36°/47°
Optical Material: PC
Suitable Ceiling: 1-25MM



SLIM 75
Watt: Max 25W
Cut out: 75MM
Beam Angle: 21°/31°/40°/50°
Optical Material: PC
Suitable Ceiling: 1-25MM



SLIM 75-1
Watt: Max 32W
Cut out: 75MM
Beam Angle: 21°/31°/40°/50°
Optical Material: PC
Suitable Ceiling: 1-25MM



SLIM 95
Watt: Max 40W
Cut out: 95MM
Beam Angle: 26°/33°/42°/51°
Optical Material: PC
Suitable Ceiling: 1-25MM

52.06012




52.08012



52.08013




52.10022




SLIM 60

Watt: Max 15W
Cut out: 60MM
Beam Angle: 20°/25°/36°/47°
Optical Material: PC
Suitable Ceiling: 1-25MM




SLIM 80

Watt: Max 25W
Cut out: 80MM
Beam Angle: 21°/31°/40°/50°
Optical Material: PC
Suitable Ceiling: 1-25MM



SLIM 80-1

Watt: Max 32W
Cut out: 80MM
Beam Angle: 21°/31°/40°/50°
Optical Material: PC
Suitable Ceiling: 1-25MM



SLIM 100

Watt: Max 40W
Cut out: 100MM
Beam Angle: 26°/33°/42°/51°
Optical Material: PC
Suitable Ceiling: 1-25MM

SLIM RECESSED DOWNLIGHT






Aluminum Natural Color

Black Color





Different Beam Angle




Suitable Accessories

Fixture body can be purchase separately



Different Color Anti-glare Reflector

SLIM ADJUSTABLE RECESSED DOWNLIGHT

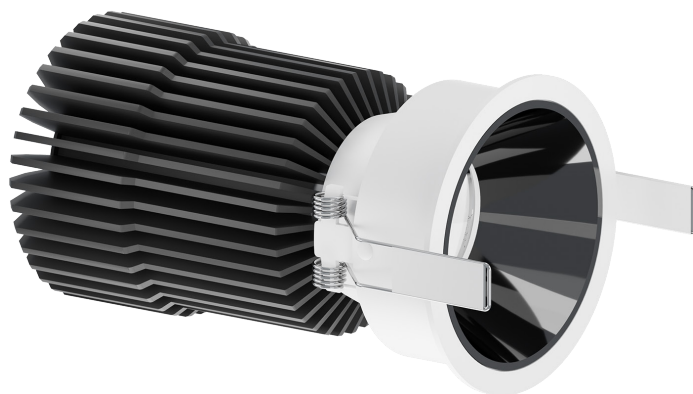

Body

Small sizes but can be high power.

Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, Can almost meet all the requirements.

With anti-glare reflector, Created a comfortable environment.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Retail, museums, hospitality,
residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre



SLIM 60

52.06012


Ø60MM



SLIM 80

52.08012


Ø80MM



SLIM 80-1

52.08013


Ø80MM



SLIM 100

52.10022

Ø100MM



Code Ordering Example: 5 2 . 0 6 0 1 2 - 9 0 3 0 2 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SLIM 60 Recessed Downlight	52.06012	CA COB LED	90	30 3000K 40 4000k	9W	1173 lm 1231 lm	27°/32°/46°/50°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
SLIM 80 Recessed Downlight	52.08012	CA COB LED	90	30 3000K 40 4000k	24W	2958 lm 3105 lm	30°/40°/46°/52°	DC 0-10V Dim DT Triac Dim	
SLIM 80-1 Recessed Downlight	52.08013	CA COB LED	90	30 3000K 40 4000k	32W	3530 lm 3706 lm	31°/40°/46°/51°		
SLIM 100 Recessed Downlight	52.10022	CA COB LED	90	30 3000K 40 4000k	40W	4374 lm 4592 lm	27°/32°/41°/51°		

SLIM FIXED RECESSED DOWNLIGHT



Body

Small sizes but can be high power.

Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, can almost meet all the requirements.

With anti-glare reflector, created a comfortable environment.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.

Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre




SLIM 55

51.05516




SLIM 75

51.07518




SLIM 75-1

51.07519



SLIM 95

51.09511



Code Ordering Example: 5 1 . 0 5 5 1 6 - 9 0 3 0 2 7 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SLIM 55 Recessed Downlight	51.05516	CA COB LED	90	30 3000K 40 4000k	9W	1173 lm 1231 lm	27°/32°/46°/50°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
SLIM 75 Recessed Downlight	51.07518	CA COB LED	90	30 3000K 40 4000k	24W	2958 lm 3105 lm	30°/40°/46°/52°	DC 0-10V Dim DT Triac Dim	
SLIM 75-1 Recessed Downlight	51.07519	CA COB LED	90	30 3000K 40 4000k	32W	3530 lm 3706 lm	31°/40°/46°/51°		
SLIM 95 Recessed Downlight	51.09511	CA COB LED	90	30 3000K 40 4000k	40W	4374 lm 4592 lm	27°/32°/41°/51°		

LOTT RECESSED DOWNLIGHT





LOTT RECESSED DOWNLIGHT

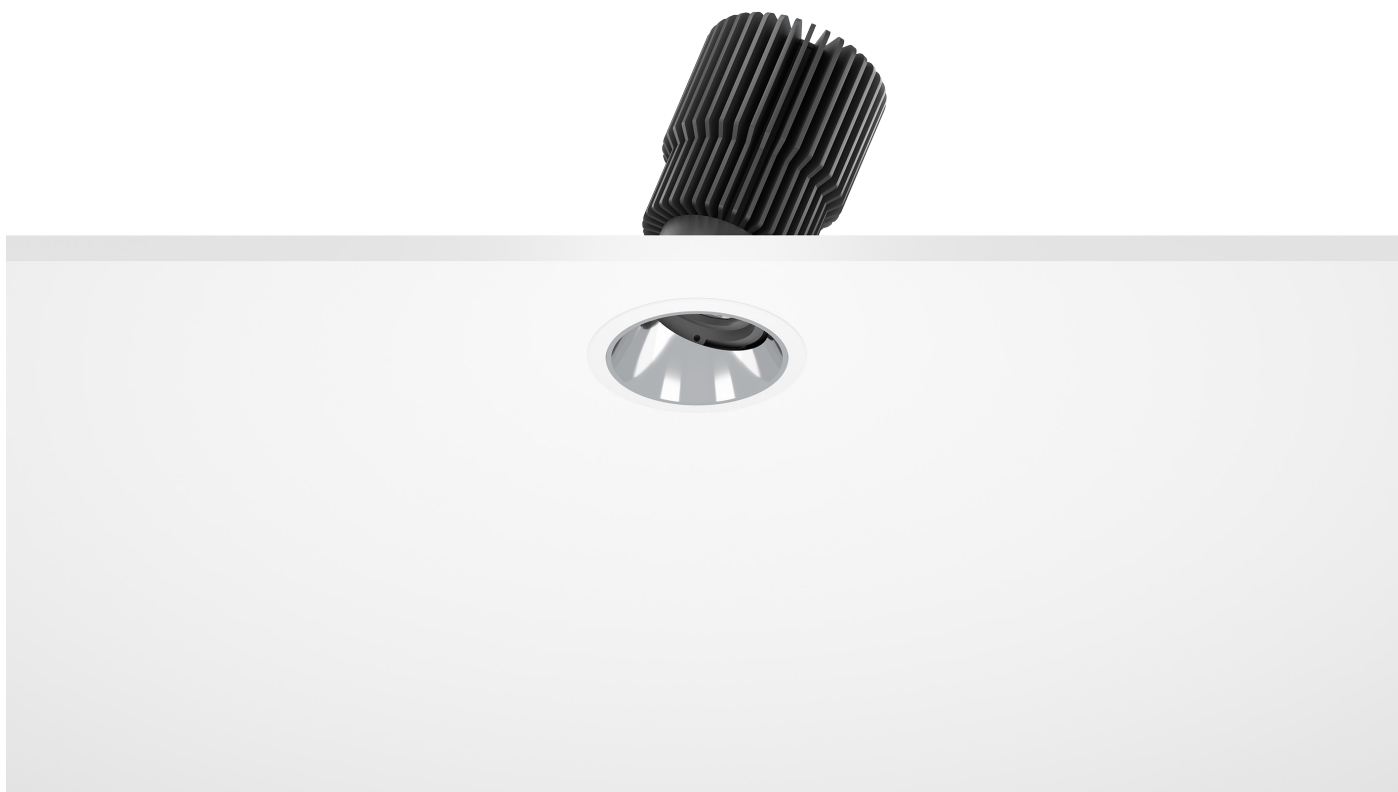

Body

Extremely small size does high wattage to meet the demand for small cut out and high lumens nowadays.

Deep anti-glare optical structure, let the space more comfortable.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass




Glass




Honeycomb louvre




LOTT 55 52.05522



LOTT 75 52.07522




LOTT 95 52.09530



Code Ordering Example: 5 2 . 0 5 5 2 2 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LOTT 55 Recessed Downlight	52.05522	CA	COB LED	90	30 3000K	14.9W	1078 lm	20°/25°/37°/50°	D0 No Dim	10 ☐ WH
					40 4000k		1131 lm		DA Dali Dim	20 ☒ BK
LOTT 75 Recessed Downlight	52.07522	CA	COB LED	90	30 3000K	27.2W	2995 lm	21°/32°/43°/53°	DC 0-10V Dim	
					40 4000k		3144 lm		DT Triac Dim	
LOTT 95 Recessed Downlight	52.09530	CA	COB LED	90	30 3000K	41.1 W	4705 lm	24°/32°/41°/52°		
					40 4000k		4940 lm			

LEKO RECESSED DOWNLIGHT

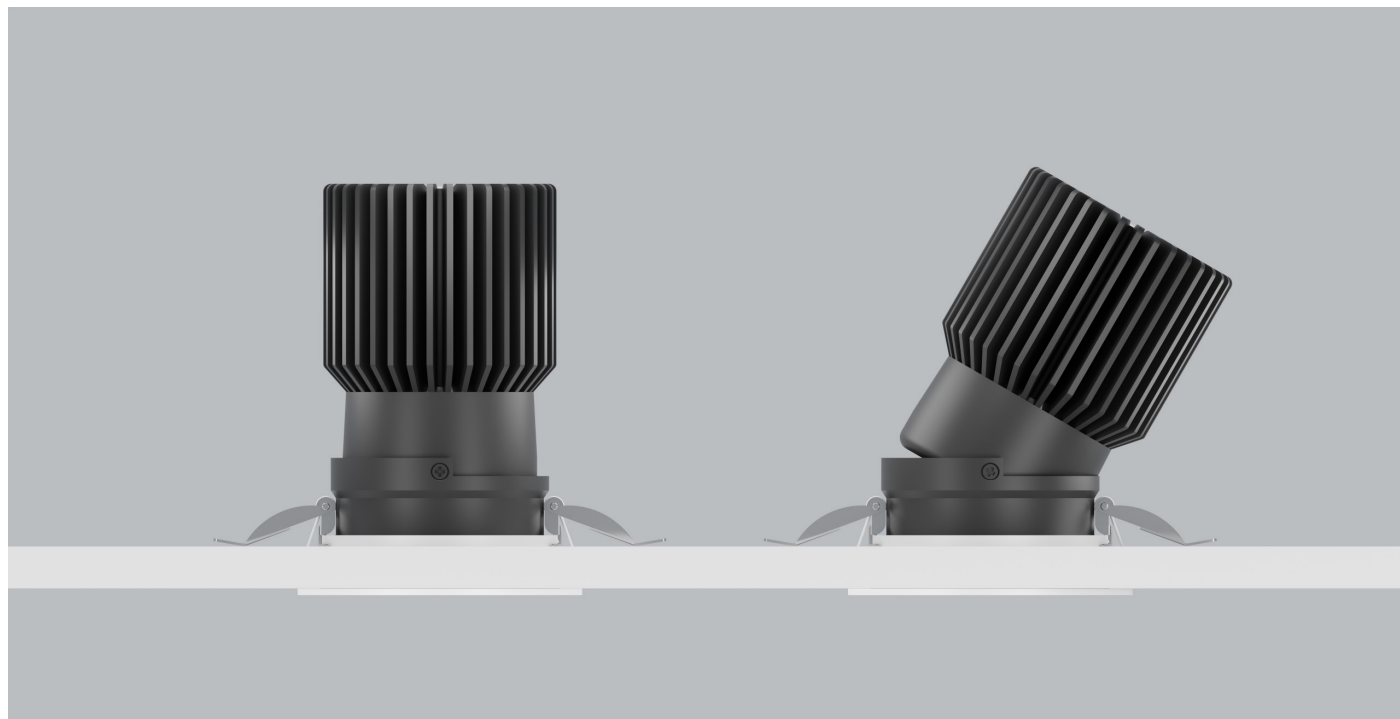

Body

Anti-glare reflectors are our tooling, so are unique in the market.

Can be rotated horizontally and adjusted 30 degrees on one side, can be well illuminated in all directions.

Anti-glare reflectors are available in multiple colors, white, black and chrome.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.


Suitable Accessories



Linear Spread glass



Glass





Honeycomb louvre





LEKO 60

52.06013





LEKO 85

52.08513



LEKO 100

52.10025



Code Ordering Example: 5 2 . 0 6 0 1 3 - 9 0 3 0 2 6 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LEKO 60 Recessed Downlight	52.06013	CA	COB LED	90	30 3000K	9.3W	1000 lm	26°/32°/46°/54°	D0 No Dim	10 ☐ WH
					40 4000k		1050 lm		DA Dali Dim	20 ☒ BK
LEKO 85 Recessed Downlight	52.08513	CA	COB LED	90	30 3000K	28.5W	3340 lm	25°/32°/43°/53°	DC 0-10V Dim	
					40 4000k		3507 lm		DT Triac Dim	
LEKO 100 Recessed Downlight	52.10025	CA	COB LED	90	30 3000K	32.6W	3802 lm	21°/28°/42°/51°		
					40 4000k		3992 lm			

REFLEX RECESSED DOWNLIGHT



Body

A series from cut out 45 to 100mm, power from 8W to 30W.

Adjustable wall washer recessed downlight, breaking the traditional wall washer because the distance from the lamp to the wall is not correct and can't achieve the effect.

Small size and high power.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Wall Washer.
Anti-glare reflector color: White, Black or Chrome.

Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Suitable Accessories




Applications

Application areas: Commercial spaces, malls, stores, retail projects, hotels, museums and gyms.




REFLEX 45

52.04521






REFLEX 60

52.06015






REFLEX 80

52.08016



REFLEX 100


52.10026



Code Ordering Example: 5 2 0 4 5 2 1 - 9 0 3 0 W W D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)Wall	Driver Options	Finish
REFLEX 45 Recessed Downlight	52.04521	CA COB LED	90	30 3000K	8W	117 lm	Wall Washer	D0 No Dim	10 ☐ WH
				40 4000k		122 lm		DA Dali Dim	20 ☒ BK
REFLEX 60 Recessed Downlight	52.06015	CA COB LED	90	30 3000K	15W	360 lm	Wall Washer	DC 0-10V Dim	
				40 4000k		378 lm		DT Triac Dim	
REFLEX 80 Recessed Downlight	52.08016	CA COB LED	90	30 3000K	24W	1219 lm	Wall Washer		
				40 4000k		1279 lm			
REFLEX 100 Recessed Downlight	52.10026	CA COB LED	90	30 3000K	30W	1145 lm	Wall Washer		
				40 4000k		1202 lm			

MINE RECESSED DOWNLIGHT

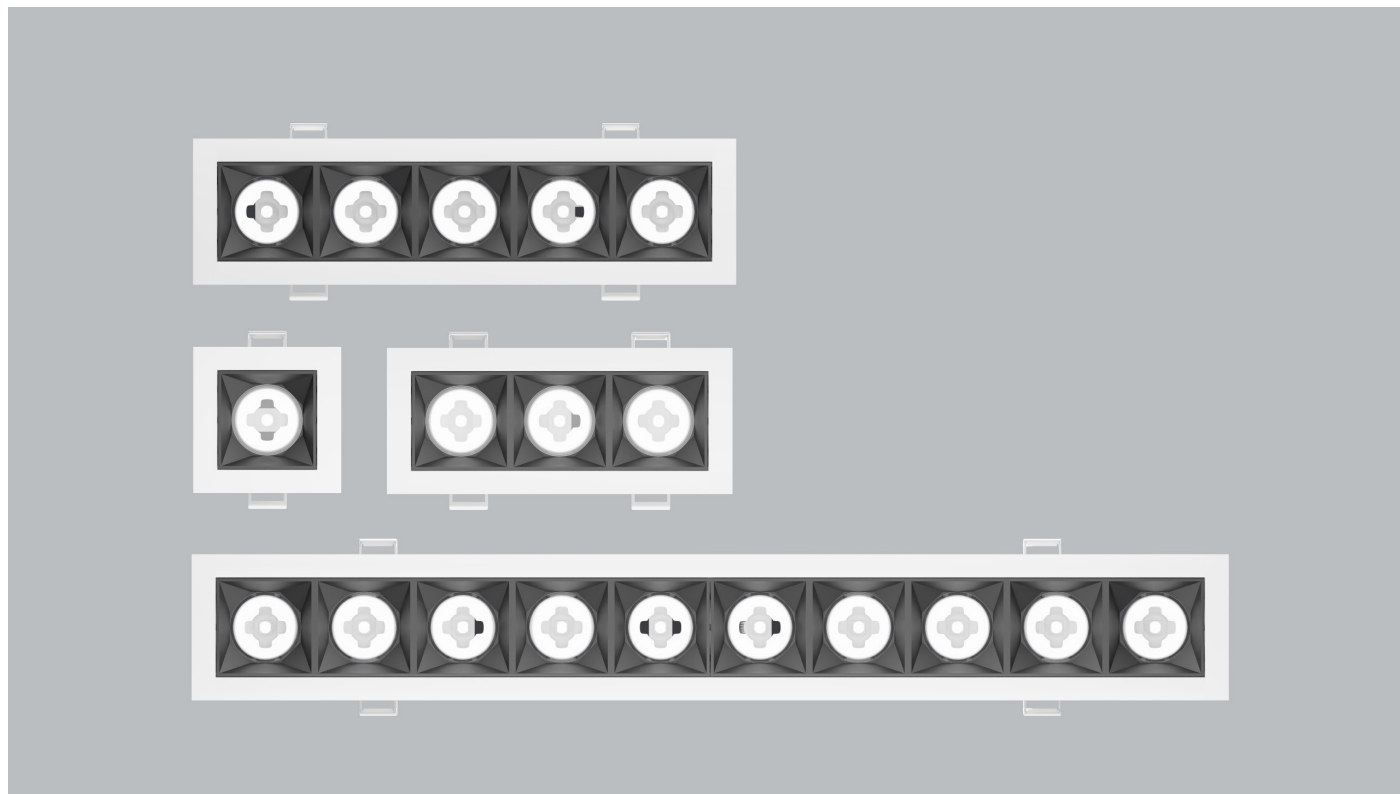

Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Suitable Accessories

Applications


A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.



MINE 40

55.05013




50X50MM



MINE 40

55.05015




125X50MM



MINE 40

55.05016


200X50MM



MINE 40

55.05017



390X50MM



Code Ordering Example: 5 5 . 0 5 0 1 3 - 9 0 3 0 2 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 40 Recessed Downlight	55.05013	SA SMD LED	90	30 3000K 40 4000k	5W	356 lm 373 lm	23°/46°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
MINE 40 Recessed Downlight	55.05015	SA SMD LED	90	30 3000K 40 4000k	12W	1049 lm 1101 lm	23°/50°	DC 0-10V Dim DT Triac Dim	
MINE 40 Recessed Downlight	55.05016	SA SMD LED	90	30 3000K 40 4000k	20W	1824 lm 1915 lm	23°/50°		
MINE 40 Recessed Downlight	55.05017	SA SMD LED	90	30 3000K 40 4000k	40W	3485 lm 3659 lm	23°/49°		

NIME RECESSED DOWNLIGHT

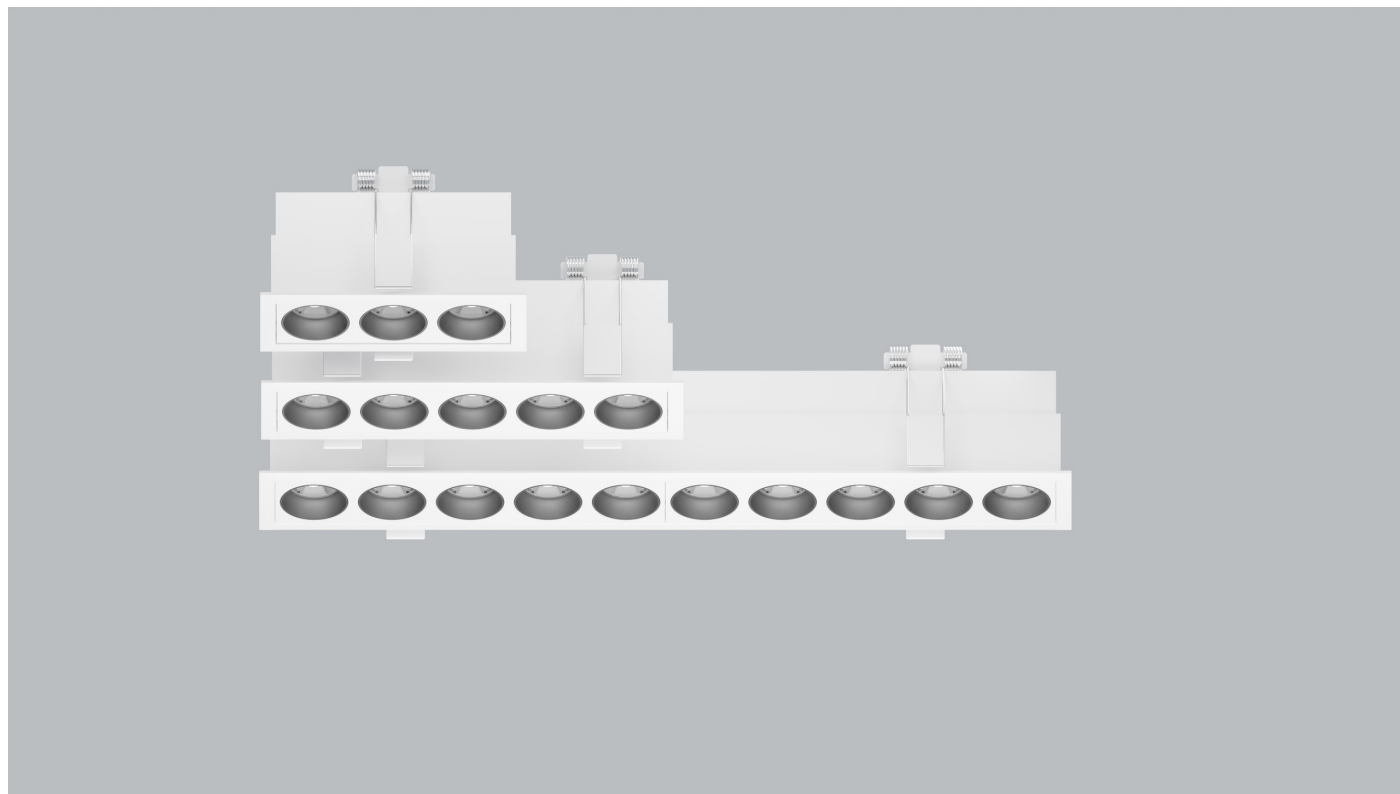

Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.
Anti-glare reflector color: White and Black.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Suitable Accessories


Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.





MINE 30 55.03520


95X35MM



MINE 30 55.03521


155X35MM



MINE 30 55.03522



305X35MM



Code Ordering Example: 5 5 . 0 3 5 2 0 - 9 0 3 0 1 9 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 30 Recessed Downlight	55.03520	SA SMD LED	90	30 3000K	8W	560 lm	19°/36°/49°	D0 No Dim	10 ☐ WH
				40 4000k		588 lm		DA Dali Dim	20 ☒ BK
MINE 30 Recessed Downlight	55.03521	SA SMD LED	90	30 3000K	13W	913 lm	17°/37°/50°	DC 0-10V Dim	
				40 4000k		958 lm		DT Triac Dim	
MINE 30 Recessed Downlight	55.03522	SA SMD LED	90	30 3000K	24W	1802 lm	18°/36°/50°		
				40 4000k		1892 lm			

SPECTRUM RECESSED DOWNLIGHT

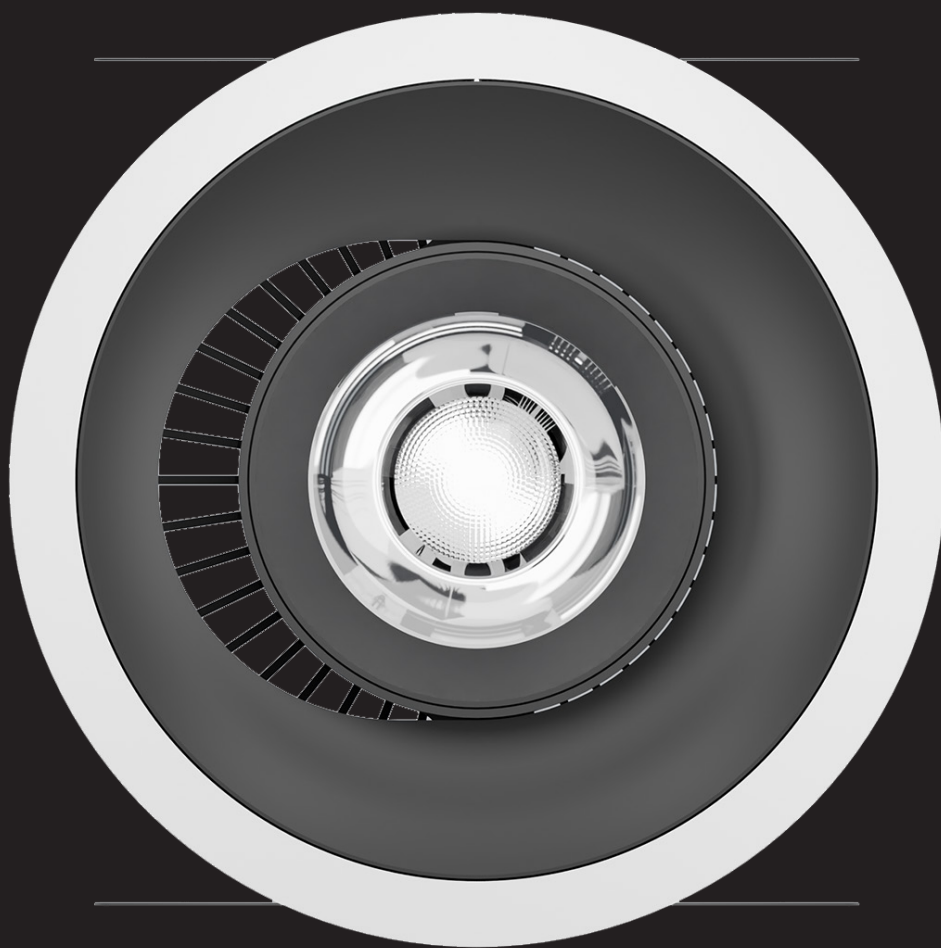

SPECTRUM

RECESSED DOWNLIGHT

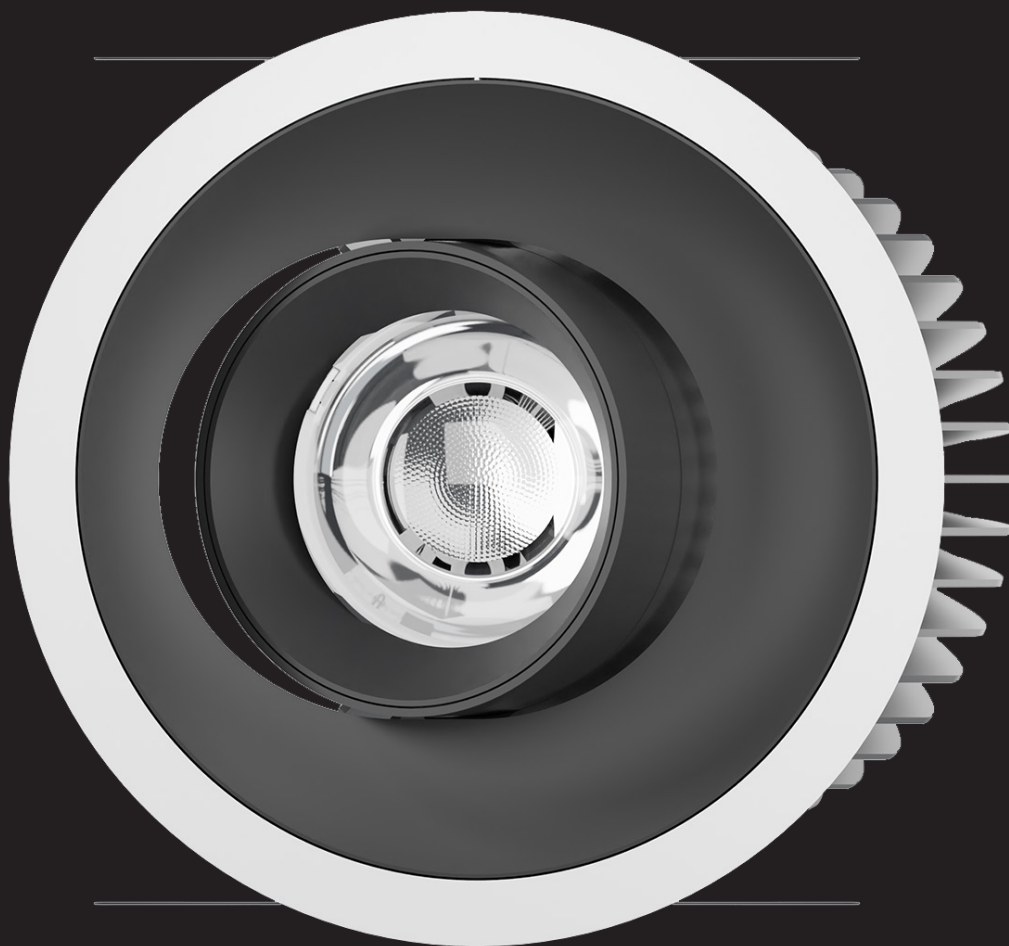

SPECTRUM RECESSED DOWNLIGHT



SPECTRUM 95
Cut-out: Ø95mm
Power: 14.3W
Optic: Lens




SPECTRUM 110
Cut-out: Ø110mm
Power: 24.3W
Optic: Lens



SPECTRUM 125
Cut-out: Ø125mm
Power: 28W
Optic: Lens

SPECTRUM RECESSED DOWNLIGHT






Zoom

Body Material: Aluminum/Iron

Color: Black

Optical Material: PC




" + " Anti-glare

Body Material: Aluminum/Iron

Color: Black

Optical Material: PC




Ultra-narrow Angle

Accessories

Body Material: Aluminum/Iron

Color: Black

Optical Material: PC



Deep Anti-glare (Cutoff Angle 30D)

Body Material: Aluminum/Iron

Color: Black

Optical Material: PC

SPECTRUM RECESSED DOWNLIGHT



Body

Greater angle adjustment (up to 30d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Share a variety of optical accessories, you can one body, free to change.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications


Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.

Application areas: High-end residential and retail projects, hotels, museums and galleries.


Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre




SPECTRUM 95

52.09528

Trim


 Ø95MM




SPECTRUM 110

52.11012

Trim


 Ø110MM




SPECTRUM 125

52.12516

Trim


 Ø125MM



Code Ordering Example: 5 2 . 0 9 5 2 8 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 95 Recessed Downlight	52.09528	CA COB LED	90	30 3000K	14.3W	1083 lm	20°/24°/36°/43°	D0 No Dim	10 ☐ WH
				40 4000k		1137 lm		DA Dali Dim	20 ☒ BK
SPECTRUM 110 Recessed Downlight	52.11012	CA COB LED	90	30 3000K	24.3W	2615 lm	20°/31°/43°/53°	DC 0-10V Dim	
				40 4000k		2746 lm		DT Triac Dim	
SPECTRUM 125 Recessed Downlight	52.12516	CA COB LED	90	30 3000K	28W	3055 lm	19°/24°/39°/52°		
				40 4000k		3208 lm			

SPECTRUM RECESSED DOWNLIGHT



Body

Greater angle adjustment (up to 30d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places.

Share a variety of optical accessories, you can one body, free to change.

Accessories

Honeycomb louvre, Linear Spread glass, glass. Wall Washer, Brandoor, Zoom, "+" Anti-glare, Deep Anti-glare (Cut-off Angle 30D), Ultra-narrow Angle accessories.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications


Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.

Application areas: High-end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre



SPECTRUM 95
Trimless

57.09517


Ø95MM



SPECTRUM 110
Trimless

57.11011


Ø110MM



SPECTRUM 125
Trimless

57.12511


Ø125MM



Code Ordering Example: 5 7 . 0 9 5 1 7 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 95 Recessed Downlight	57.09517	CA COB LED	90	30 3000K	14.3W	1083 lm	20°/24°/36°/43°	D0 No Dim	10 ☐ WH
				40 4000k		1137 lm		DA Dali Dim	20 ☒ BK
SPECTRUM 110 Recessed Downlight	57.11011	CA COB LED	90	30 3000K	24.3W	2615 lm	20°/31°/43°/53°	DC 0-10V Dim	
				40 4000k		2746 lm		DT Triac Dim	
SPECTRUM 125 Recessed Downlight	57.12511	CA COB LED	90	30 3000K	28W	3055 lm	19°/24°/39°/52°		
				40 4000k		3208 lm			

UTH RECESSED DOWNLIGHT

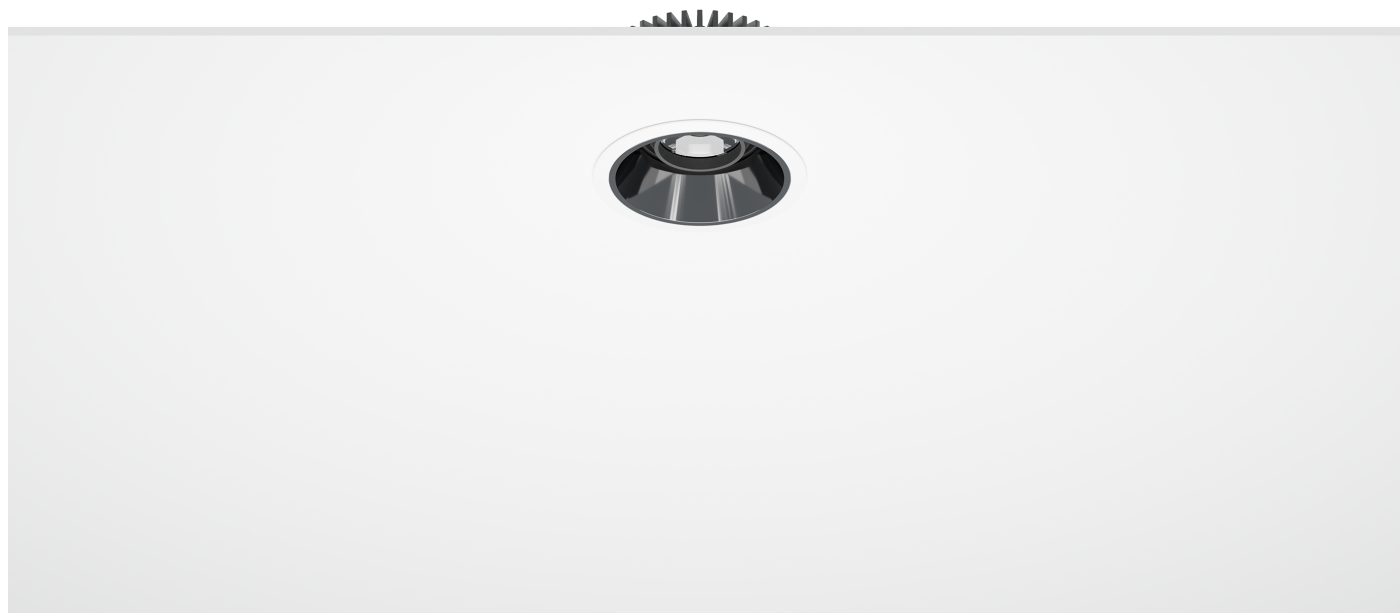

Body

Ultra-thin Anti-glare downlight, CNC machining, luminaire surface can support electroplating treatment.

With Anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre



UTH 55

52.05521



Ø55MM



UTH 75

52.07521


Ø75MM



UTH 95

52.09529


Ø95MM



Code Ordering Example: 5 2 . 0 5 5 2 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
UTH 55 Recessed Downlight	52.05521	CA COB LED	90	30 3000K 40 4000k	7W	452 lm 475 lm	16°/23°/35°/57°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
UTH 75 Recessed Downlight	52.07521	CA COB LED	90	30 3000K 40 4000k	8.6W	684 lm 718 lm	19°/24°/36°/49°	DC 0-10V Dim DT Triac Dim	
UTH 95 Recessed Downlight	52.09529	CA COB LED	90	30 3000K 40 4000k	14.3W	1677 lm 1760 lm	21°/31°/41°/51°		

SILO RECESSED DOWNLIGHT

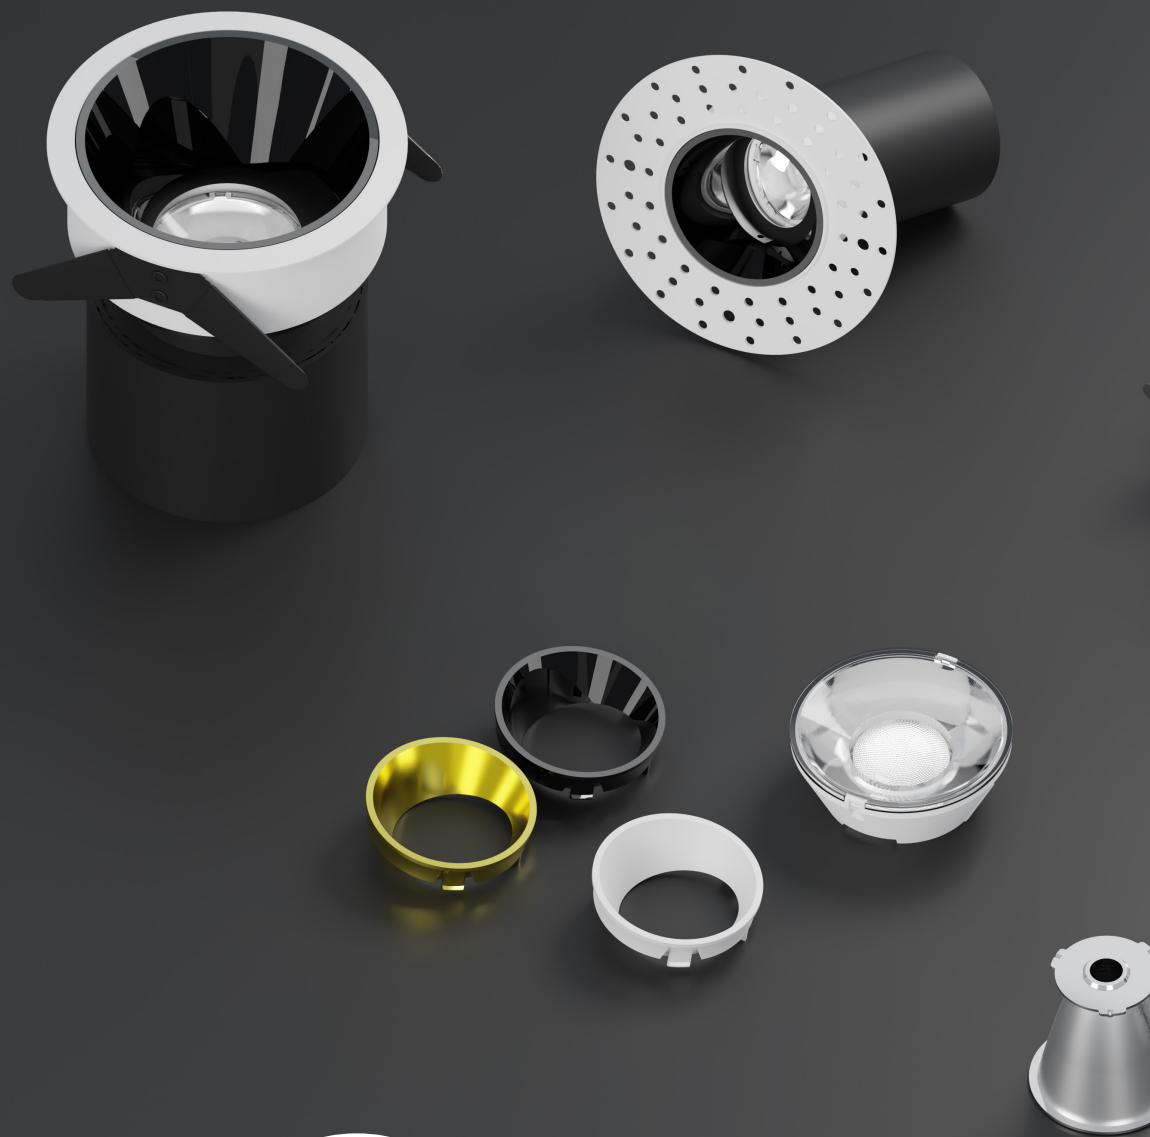

SILO

Recessed Downlight



SILO RECESSED DOWNLIGHT



1. Remove the bottom reflector




2. Take the pull ring out, as marking A, tilt angle horizontally with pull ring, which is more easily.








3. After adjusted, it can be folded back to the original position

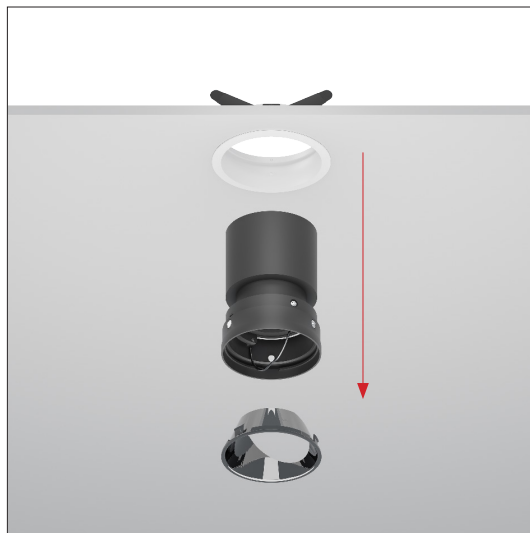

4. A pull ring allows the luminaire to be pulled down by hands without any tooling, providing great convenience for the maintenance of the luminaire

SILO RECESSED DOWNLIGHT

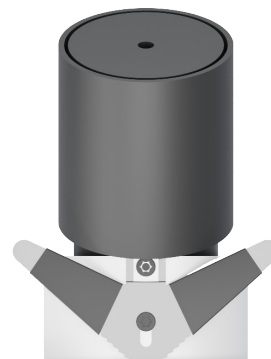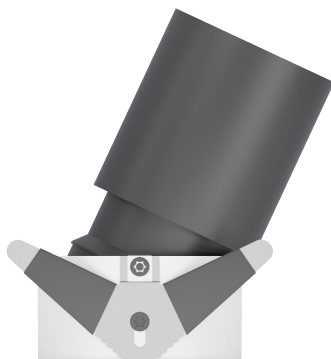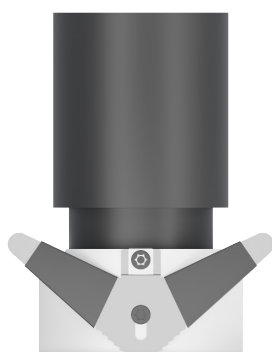

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass





Honeycomb louvre




SILO 55
Trim

52.05518




SILO 75
Trim

52.07517



SILO 95
Trim

52.09526



Code Ordering Example: 5 2 . 0 5 5 1 8 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Recessed Downlight	52.05518	CA COB LED	90	30 3000K	11W	734 lm	17°/20°/29°/40°	D0 No Dim	10 ☐ WH
				40 4000k		767 lm		DA Dali Dim	20 ☒ BK
SILO 75 Recessed Downlight	52.07517	CA COB LED	90	30 3000K	14W	1618 lm	18°/32°/42°/52°	DC 0-10V Dim	
				40 4000k		1699 lm		DT Triac Dim	
SILO 95 Recessed Downlight	52.09526	CA COB LED	90	30 3000K	28 W	2974 lm	19°/25°/39°/48°		
				40 4000k		3122 lm			
SILO 75-N Recessed Downlight	52.07517	CA COB LED	90	30 3000K	14.8W	813 lm	6.4°		
				40 4000k		854 lm			

SILO RECESSED DOWNLIGHT



Stainless steel marble structure + steel wire insurance line, double protection

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




SILO 55
Trimless

57.05511




SILO 75
Trimless

57.07502



SILO 95
Trimless

57.09516



Code Ordering Example: 5 7 . 0 5 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Recessed Downlight	57.05511	CA COB LED	90	30 3000K 40 4000k	11W	734 lm 767 lm	17°/20°/29°/40°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
SILO 75 Recessed Downlight	57.07502	CA COB LED	90	30 3000K 40 4000k	14W	1618 lm 1699 lm	18°/32°/42°/52°	DC 0-10V Dim DT Triac Dim	
SILO 95 Recessed Downlight	57.09516	CA COB LED	90	30 3000K 40 4000k	28 W	2974 lm 3122 lm	19°/25°/39°/48°		
SILO 75-N Recessed Downlight	57.07502	CA COB LED	90	30 3000K 40 4000k	14.8W	813 lm 854 lm	6.4°		

ECO RECESSED DOWNLIGHT



Body

The ECO series is all about affordability and quality fixture at an affordable price.

The combination of rotate and adjustable, high lumens make it a great choice for projects with a limited budget.

Classic style, front and rear convection, good heat dissipation, to ensure the life of the fixture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




ECO 80

52.08011



ECO 100


52.10019



Code Ordering Example: 5 2 . 0 8 0 1 1 - 9 0 3 0 1 6 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ECO 80 Recessed Downlight	52.08011	CA COB LED	90	30 3000K	19.8W	2185 lm	16°/25°/37°/58°	D0 No Dim	10 ☐ WH
				40 4000k		2294 lm		DA Dali Dim	20 ☒ BK
ECO 100 Recessed Downlight	52.10019	CA COB LED	90	30 3000K	28W	3839 lm	18°/24°/33°/55°	DC 0-10V Dim	
				40 4000k		4031 lm		DT Triac Dim	

LANKY RECESSED DOWNLIGHT

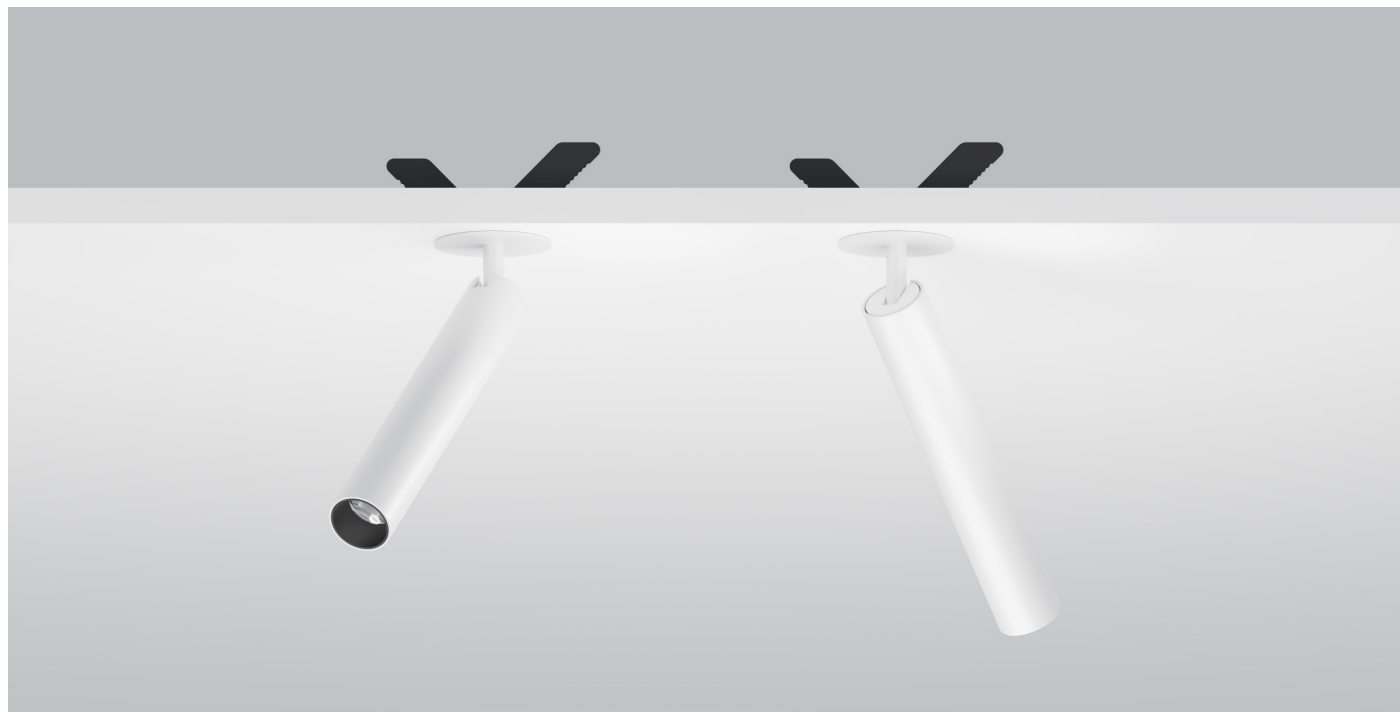

Body

Long and thin, blends in well with the space.

Small diameter, high wattage.

Unique structure and appearance of the back cover, 200 times adjustment still the same tightness.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED

CRI: 90 | CCT: 3000K, 4000K

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.

Driver


Supplied with intrack adaptor.

Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.


Applications

Application areas: clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, professional windows, and other high-end commercial places.


Suitable Accessories




Linear Spread glass



Glass






Honeycomb louvre





LANKY 25

56.03519





LANKY 35

56.03520



LANKY 45


56.04520



Code Ordering Example: 5 6 . 0 3 5 1 9 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LANKY 25 Recessed Downlight	56.03519	CA COB LED	90	30 3000K	9W	510 lm	20°/25°/35°/55°	D0 No Dim	10 ☐ WH
				40 4000k		535 lm		DA Dali Dim	20 ☒ BK
LANKY 35 Recessed Downlight	56.03520	CA COB LED	90	30 3000K	12W	1036 lm	26°/35°/46°/57°	DC 0-10V Dim	
				40 4000k		1087 lm		DT Triac Dim	
LANKY 45 Recessed Downlight	56.04520	CA COB LED	90	30 3000K	20W	1926 lm	28°/34°/48°/58°		
				40 4000k		2022 lm			

EMMA RECESSED DOWNLIGHT

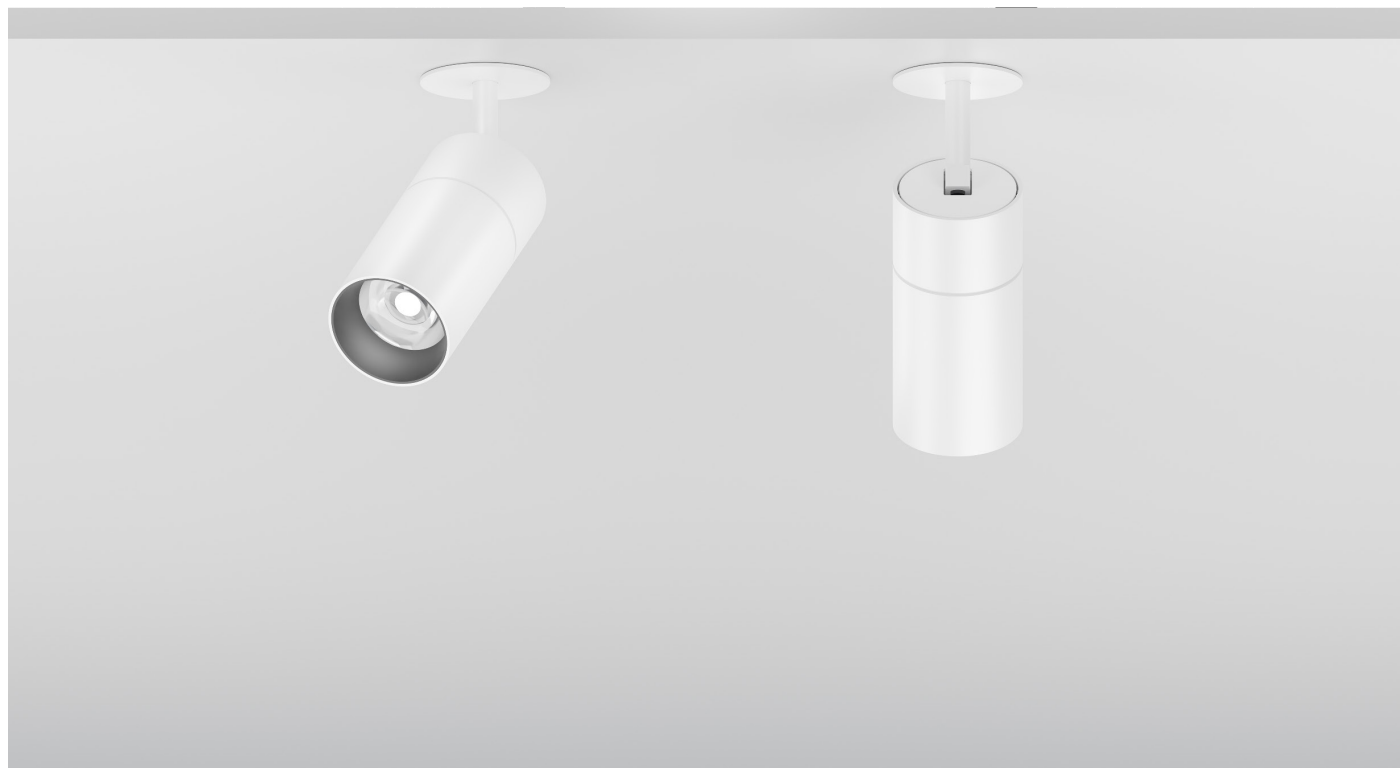

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable external driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre



EMMA 45

56.04011


Ø40MM



EMMA 62

56.05518


Ø55MM



EMMA 73

56.06511


Ø65MM



EMMA 90

56.08011


Ø80MM



Code Ordering Example: 5 6 . 0 4 0 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Recessed Downlight	56.04011	CA COB LED	90	30 3000K	11W	935 lm	19°/29°/44°/56°	D0 No Dim	10 ☐ WH
				40 4000k		981 lm		DA Dali Dim	20 ☒ BK
EMMA 62 Recessed Downlight	56.05518	CA COB LED	90	30 3000K	14W	1627 lm	18°/27°/38°/54°	DC 0-10V Dim	
				40 4000k		1708 lm		DT Triac Dim	
EMMA 73 Recessed Downlight	56.06511	CA COB LED	90	30 3000K	24W	2963 lm	14°/28°/40°/50°		
				40 4000k		3111 lm			
EMMA 90 Recessed Downlight	56.08011	CA COB LED	90	30 3000K	36W	4509 lm	16°/20°/30°/45°		
				40 4000k		4734 lm			

FOS RECESSED DOWNLIGHT

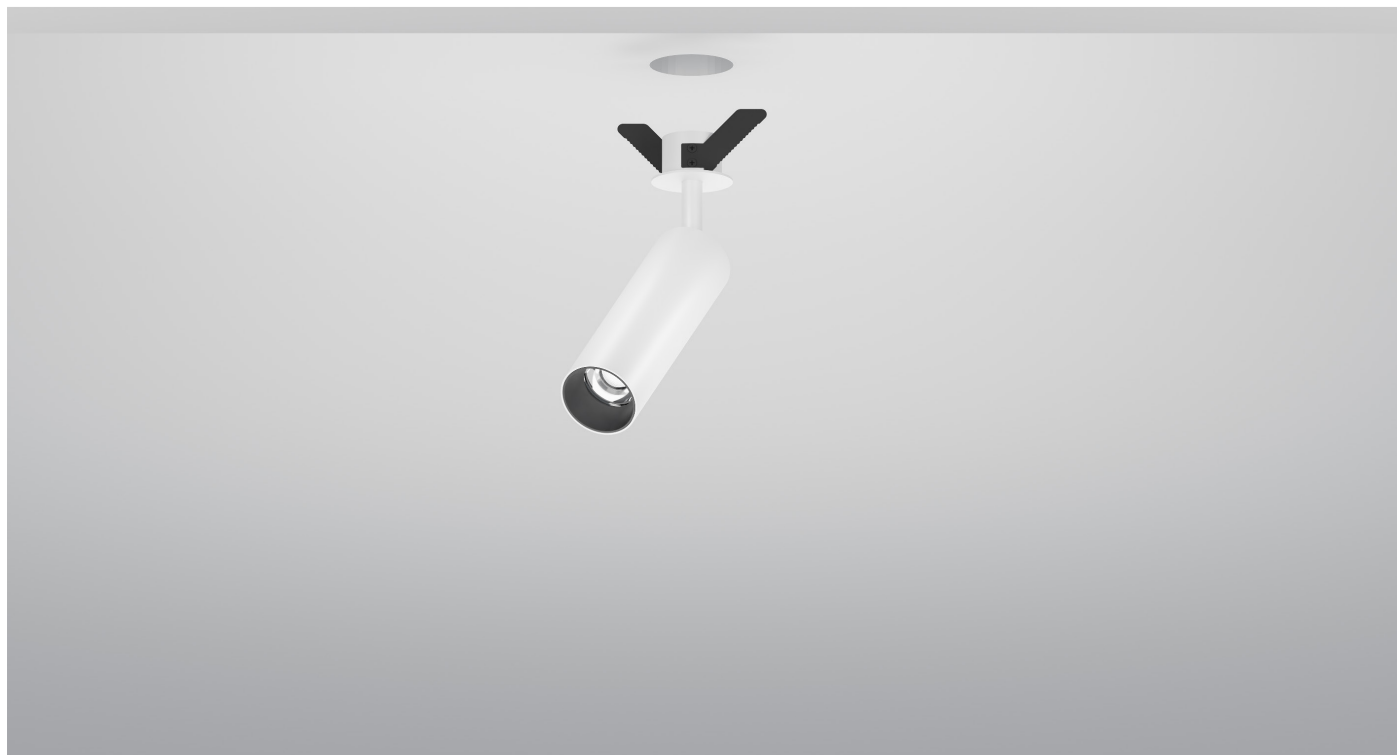

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Long and thin, blends in well with the space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass





Glass




Honeycomb louvre




FOS 45 56.03518



FOS 55 56.04519



FOS 65 56.05525

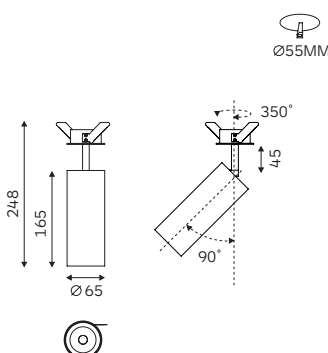

Code Ordering Example: 5 6 . 0 3 5 1 8 - 9 0 3 0 1 9 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Recessed Downlight	56.03518	CA COB LED	90	30 3000K	11W	808 lm	19°/23°/36°/41°	D0 No Dim	10 ☐ WH
				40 4000k		848 lm		DA Dali Dim	20 ☒ BK
FOS 55 Recessed Downlight	56.04519	CA COB LED	90	30 3000K	16W	1871 lm	20°/32°/41°/49°	DC 0-10V Dim	
				40 4000k		1965 lm		DT Triac Dim	
FOS 65 Recessed Downlight	56.05525	CA COB LED	90	30 3000K	24W	2678 lm	17°/27°/36°/51°		
				40 4000k		2812 lm			

NOVAL RECESSED DOWNLIGHT





NOVAL RECESSED DOWNLIGHT

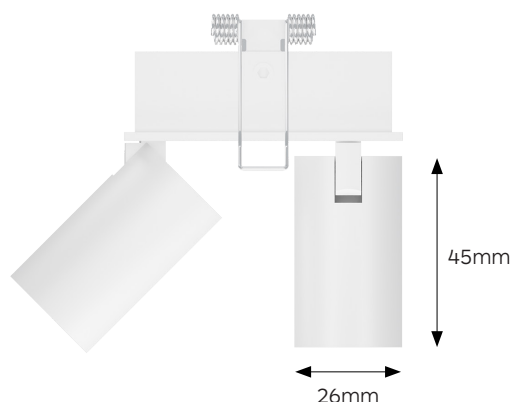

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.


Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories




Linear Spread glass



Glass



Honeycomb louvre




NOVAL 26

56.02311



 Ø23MM





NOVAL 26

56.02312



 23X23MM




NOVAL 26

56.02313




 62X23MM



Code Ordering Example: 5 6 . 0 2 3 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NOVAL 26 Recessed Downlight	56.02311	CA COB LED	90	30 3000K	4W	197 lm	17°/26°/31°/53°	D0 No Dim	10 ☐ WH
				40 4000k		207 lm		DA Dali Dim	20 ☒ BK
NOVAL 26 Recessed Downlight	56.02312	CA COB LED	90	30 3000K	4W	197 lm	17°/26°/31°/53°	DC 0-10V Dim	
				40 4000k		207 lm		DT Triac Dim	
NOVAL 26 Recessed Downlight	56.02313	CA COB LED	90	30 3000K	2*4W	2*197 lm	17°/26°/31°/53°		
				40 4000k		2*207 lm			

NOVAL RECESSED DOWNLIGHT

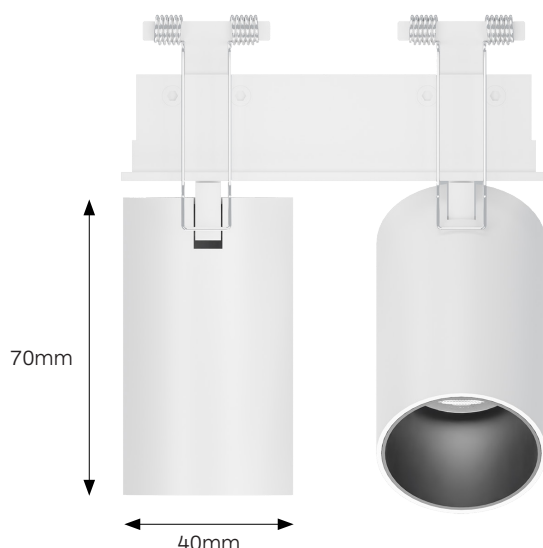

Body

Semi-recessed down light with round, square 1H and 2H, also have 2 kinds of power to meet different illumination requirements.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

The luminaire is small and simple, can be integrated into almost any room architecture.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre




NOVAL 40

56.03711



 Ø37MM




NOVAL 40

56.03712



 37X37MM




NOVAL 40

56.03713




 96X37MM

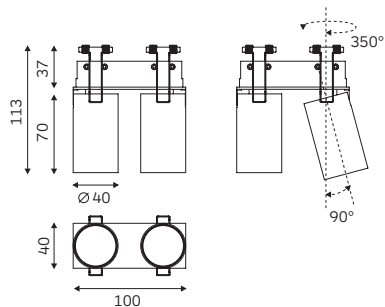

Code Ordering Example: 5 6 . 0 3 7 1 1 - 9 0 3 0 1 8 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
NOVAL 40 Recessed Downlight	56.03711	CA COB LED	90	30 3000K	6.2W	478 lm	18°/23°/33°/42°	D0 No Dim	10 ☐ WH
				40 4000k		502 lm		DA Dali Dim	20 ☒ BK
NOVAL 40 Recessed Downlight	56.03712	CA COB LED	90	30 3000K	6.2W	478 lm	18°/23°/33°/42°	DC 0-10V Dim	
				40 4000k		502 lm		DT Traic Dim	
NOVAL 40 Recessed Downlight	56.03713	CA COB LED	90	30 3000K	2*6.2W	2*478 lm	18°/23°/33°/42°		
				40 4000k		2*502 lm			

EURO RECESSED DOWNLIGHT

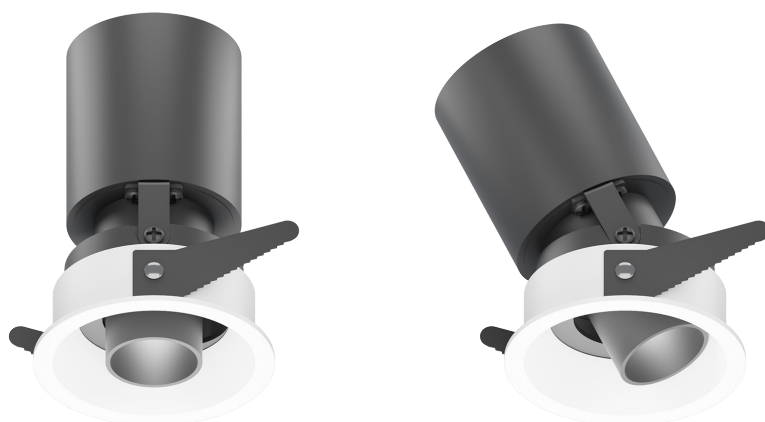

Body

Break the structure of the traditional fixture, for some painting area, or other special requirements of the place and the design of the fixture.

The luminaire is simple, can be integrated into almost any room architectural.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre



EURO 55

52.05525


Ø55MM



EURO 75

52.07526

Ø75MM



Code Ordering Example: 5 2 . 0 5 5 2 5 - 9 0 3 0 1 5 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EURO 55 Recessed Downlight	52.05525	CA COB LED	90	30 3000K	7.7W	430 lm	15°/22°/33°/47°	D0 No Dim	10 ☐ WH
				40 4000k		451 lm		DA Dali Dim	20 ☒ BK
EURO 75 Recessed Downlight	52.07526	CA COB LED	90	30 3000K	13W	1005 lm	20°/27°/39°/48°	DC 0-10V Dim	
				40 4000k		1055 lm		DT Triac Dim	

MINI RECESSED DOWNLIGHT



Body

Minimum sizes aluminium body is integrated in ceiling, the ceiling will be kept clean with small which is suitable for all spaces.

Have fixed and adjustable for selected. Small sizes can me 6W, and high efficiency.

The most classic and practical lamps, super versatile.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimmable external driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

All commercial spaces can be used, breaking through the traditional lighting methods and effects, more integrated into the modern environment, to achieve the effect of only see the light does not see the light.


Suitable Accessories




Linear Spread glass



Glass





Honeycomb louvre





MINI 45

52.04512





MINI 45

51.04511




MINI 40

52.04013



MINI 40


51.04011



Code Ordering Example: 5 2 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 45 Recessed Downlight	52.04512	CA	COB LED	90	30 3000K	6.3W	368 lm	19°/22°/31°/46°	D0 No Dim	10 ☐ WH
					40 4000k		386 lm		DA Dali Dim	20 ☒ BK
MINI 45 Recessed Downlight	51.04511	CA	COB LED	90	30 3000K	6.3W	368 lm	19°/22°/31°/46°	DC 0-10V Dim	
					40 4000k		386 lm		DT Triac Dim	
MINI 40 Recessed Downlight	52.04013	CA	COB LED	90	30 3000K	8.7W	471 lm	17°/23°/35°/46°		
					40 4000k		494 lm			
MINI 40 Recessed Downlight	51.04011	CA	COB LED	90	30 3000K	8.7W	471 lm	17°/23°/35°/46°		
					40 4000k		494 lm			

MINI RECESSED DOWNLIGHT

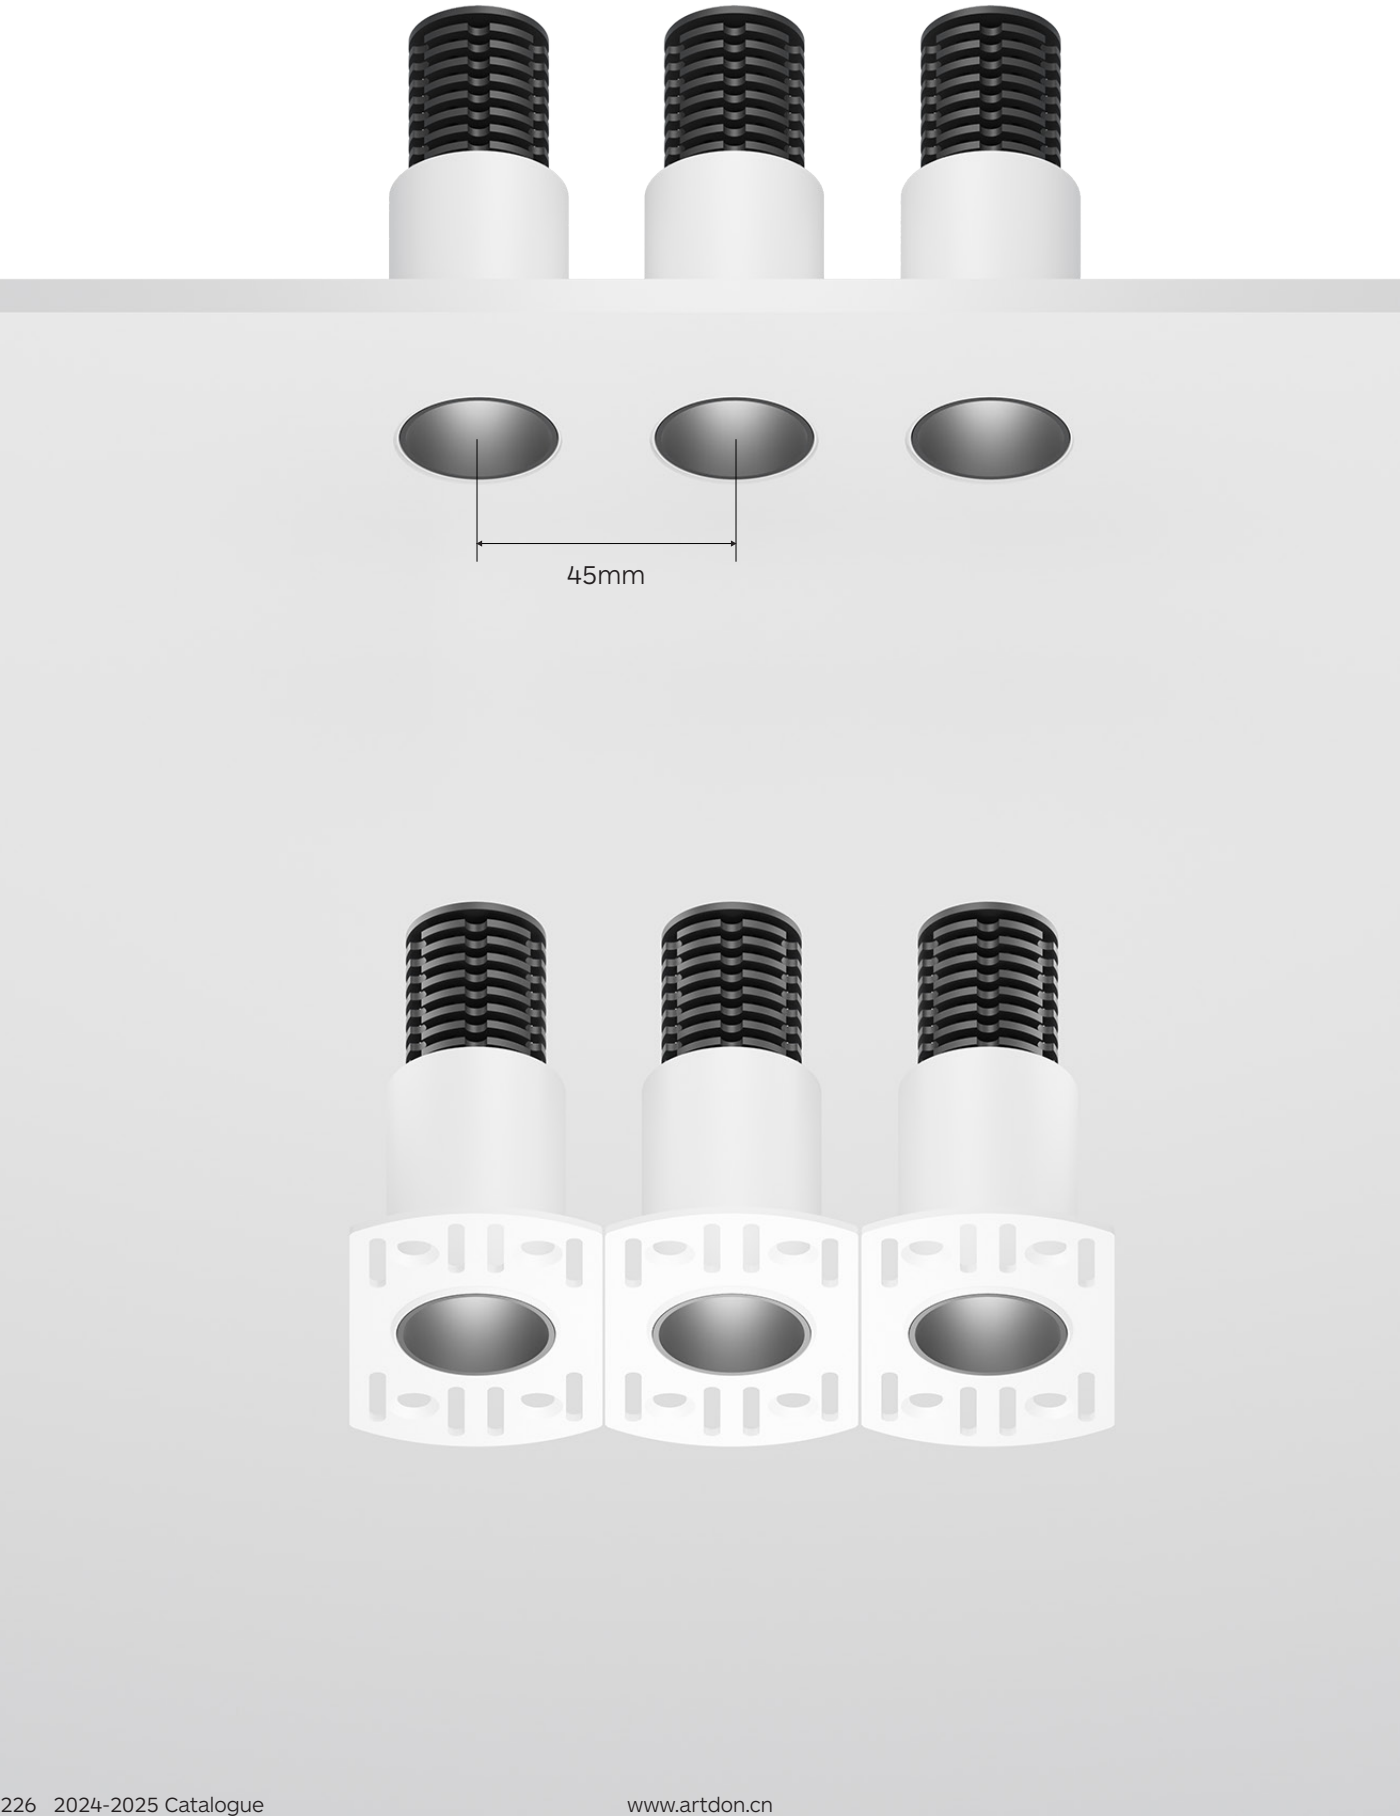


NEW MINI

There are two choices, trim and trimless, and 3W and 6W.

Trim version can be used single, also can be used for multiple fixture, trimless fixture we do the frame, can be used for multiple heads, after dusting between the lights do not see the lights, the effect is very good.

Heat sink with trim and trimless shared, greatly reduce the inventory.



MINI RECESSED DOWNLIGHT



Body

Minimum sizes aluminium body is integrated in ceiling, the ceiling will be kept clean with small which is suitable for all spaces.

Trim and Trimless heatsinks are shared and interchangeable, which can greatly reduce inventory.

Can be used continuously with multiple lights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimmable external driver.

Applications

High-end residential, retail projects, hotels, museums and galleries. Can be a variety of combinations, put together different shapes, to achieve the effect of only see the light does not see the light.


Suitable Accessories




Linear Spread glass



Glass






Honeycomb louvre






MINI 30 51.03022






MINI 30 51.03023



MINI 40 60.04011




MINI 40 60.04012




Code Ordering Example: 5 1 . 0 3 0 2 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 30 Recessed Downlight	51.03022	CA	COB LED	90	30 3000K	3.6W	232 lm	19°/24°/35°/53°	D0 No Dim	10 ☐ WH
					40 4000k		242 lm		DA Dali Dim	20 ☐ BK
MINI 30 Recessed Downlight	51.03023	CA	COB LED	90	30 3000K	3.6W	232 lm	19°/24°/35°/53°	DC 0-10V Dim	
					40 4000k		242 lm		DT Triac Dim	
MINI 40 Recessed Downlight	60.04011	CA	COB LED	90	30 3000K	7.5W	444 lm	17°/24°/36°/54°		
					40 4000k		466 lm			
MINI 40 Recessed Downlight	60.04012	CA	COB LED	90	30 3000K	7.5W	444 lm	17°/24°/36°/54°		
					40 4000k		466 lm			

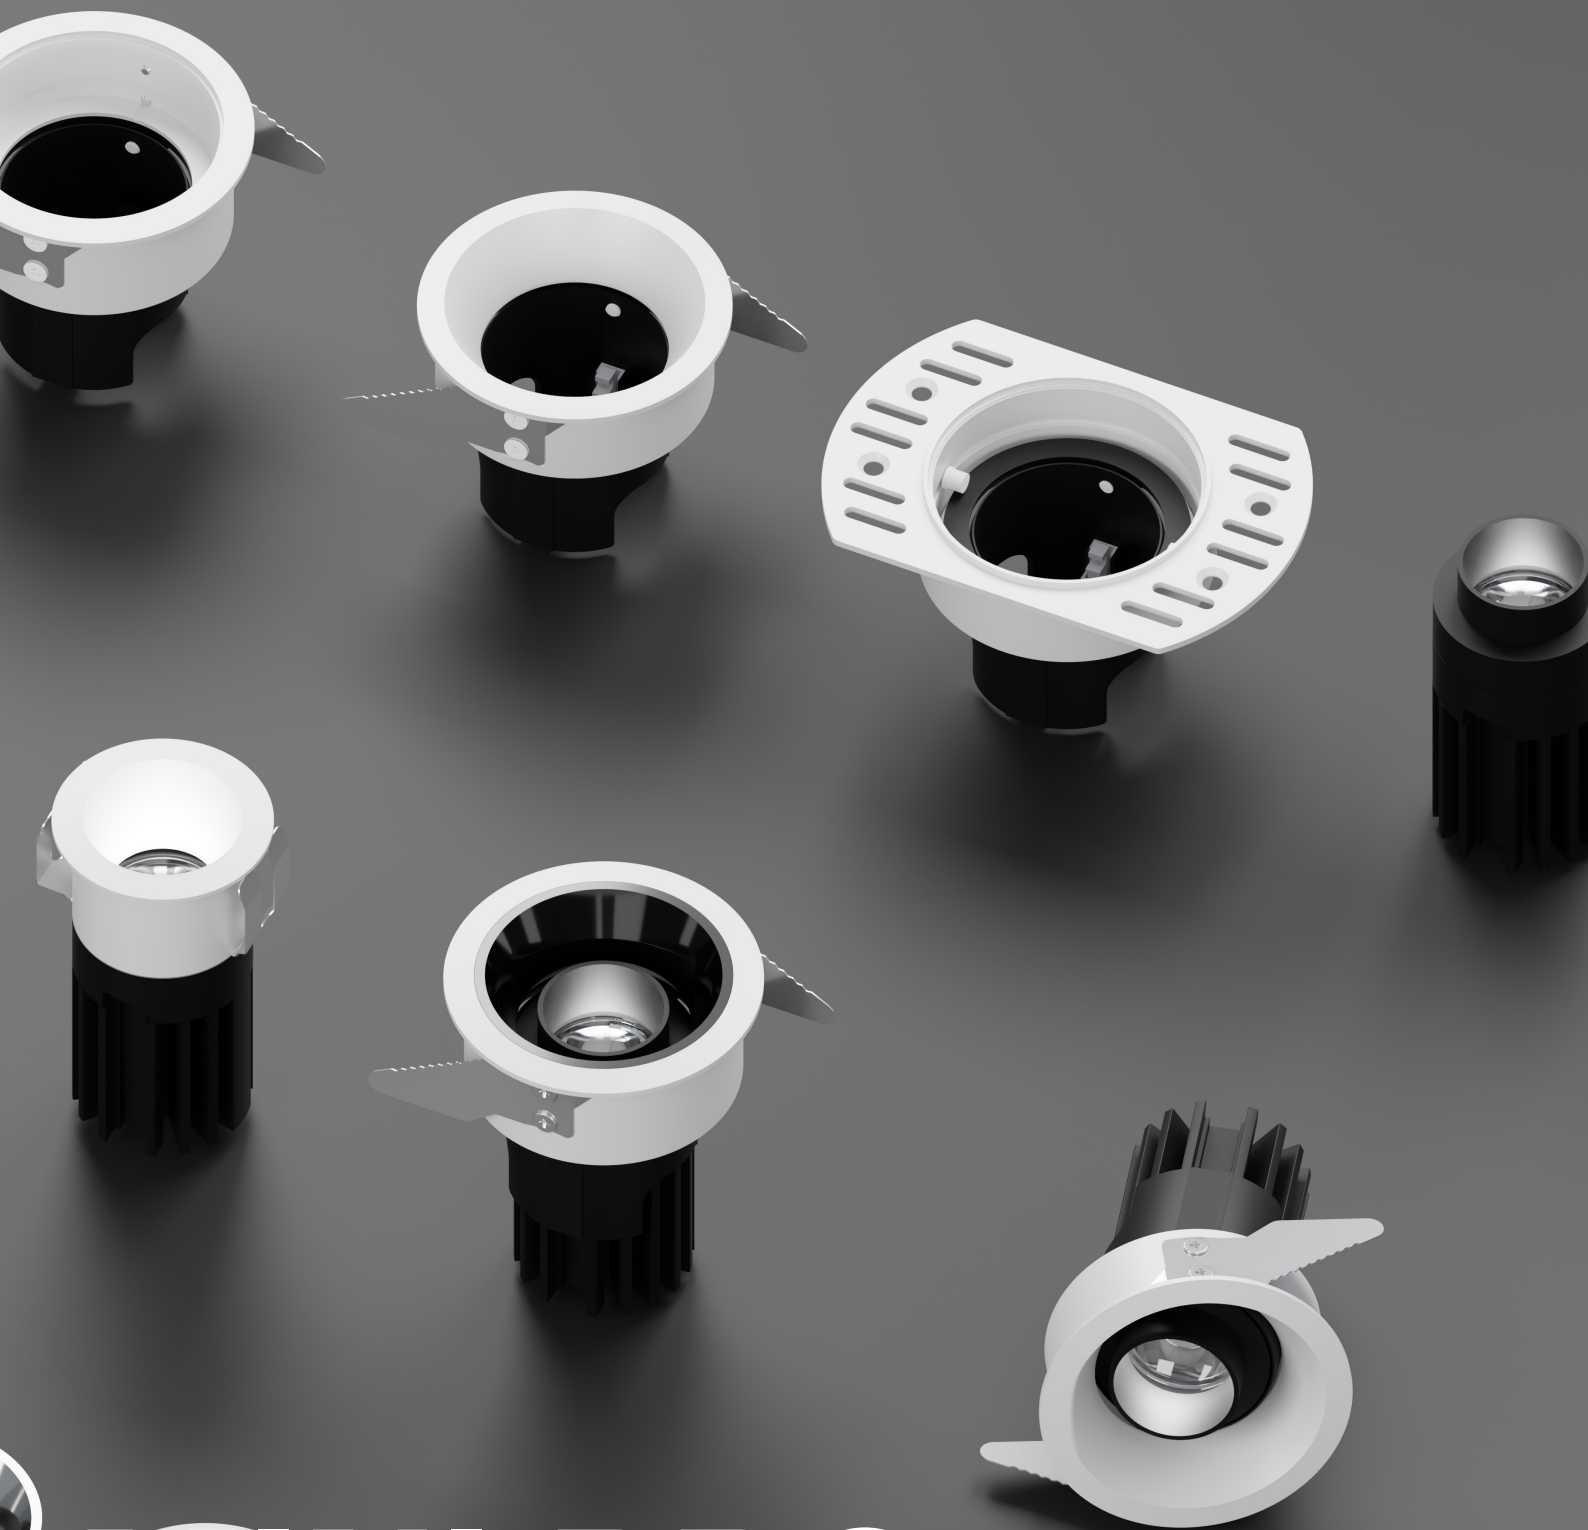

MINI PRO

RECESSED DOWNLIGHT

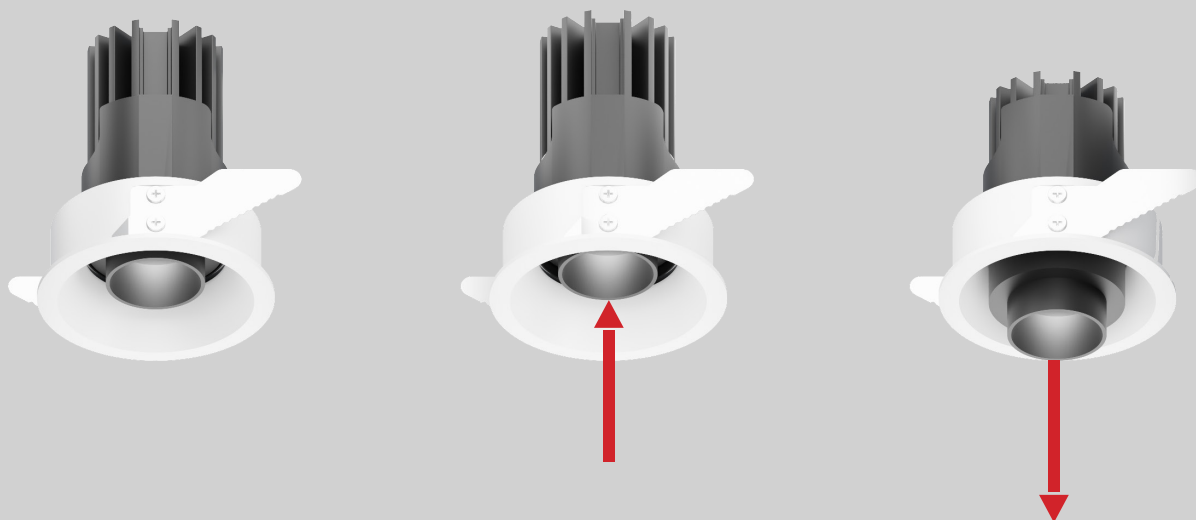

MINI PRO RECESSED DOWNLIGHT



Body

Minimum sizes aluminium body is integrated in ceiling, the ceiling will be kept clean with small which is suitable for all spaces.

Trim and Trimless heatsinks are shared and interchangeable, which can greatly reduce inventory.

Press type structure, convenient for later maintenance, can also be used continuously with multiple lights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre



MINI PRO 55

52.05526


Ø55MM



MINI PRO 60

57.06013


Ø60MM



MINI PRO 55

52.05527


Ø55MM



MINI PRO 38

51.03822


Ø38MM



Code Ordering Example: 5 2 . 0 5 5 2 6 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI PRO 55 Recessed Downlight	52.05526	CA COB LED	90	30 3000K 40 4000k	7.6W	481 lm 505 lm	19°/25°/38°/57°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
MINI PRO 60 Recessed Downlight	57.06013	CA COB LED	90	30 3000K 40 4000k	7.6W	481 lm 505 lm	19°/25°/38°/57°	DC 0-10V Dim DT Traic Dim	
MINI PRO 55 Recessed Downlight	52.05527	CA COB LED	90	30 3000K 40 4000k	7.6W	481 lm 505 lm	19°/25°/38°/57°		
MINI PRO 38 Recessed Downlight	51.03822	CA COB LED	90	30 3000K 40 4000k	7.6W	470 lm 493 lm	20°/27°/35°/43°		

MINI RECESSED DOWNLIGHT

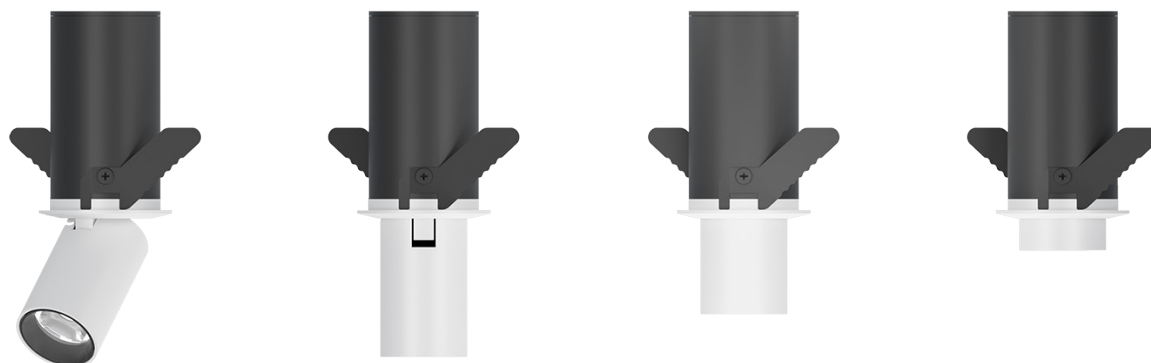

Body

The body head can be up and down and rotated by 350°.

Can be integrated into almost any room architecture. The round light heads are available in two different diameters and can be inserted into a round recessed. Housing.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable external driver.
Diming Options: 0-10V Dim, Dali Dim, Triac Dim.


Applications

Offers a variable and professional lighting. solution for illuminating accents in retail areas. and exhibition rooms where goods have to be presented in a particularly realistic way.


Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre




MINI 35

56.03511



MINI 55


56.05511




Code Ordering Example: 5 6 . 0 3 5 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINI 35 Recessed Downlight	56.03511	CA COB LED	90	30 3000K	3.8W	200 lm	17°/26°/31°/53°	D0 No Dim	10 ☐ WH
				40 4000k		210 lm		DA Dali Dim	20 ☒ BK
MINI 55 Recessed Downlight	56.05511	CA COB LED	90	30 3000K	8.8W	670 lm	20°/25°/38°/51°	DC 0-10V Dim	
				40 4000k		703 lm		DT Traic Dim	

SURFACE MOUNTED LIGHT

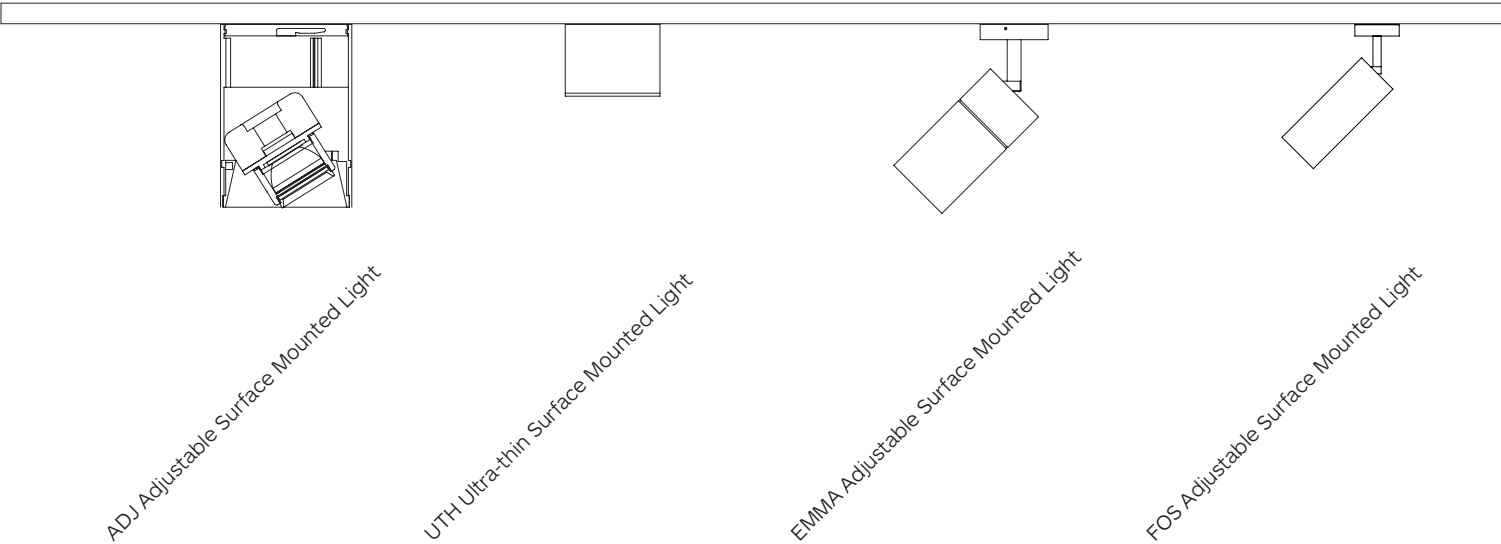

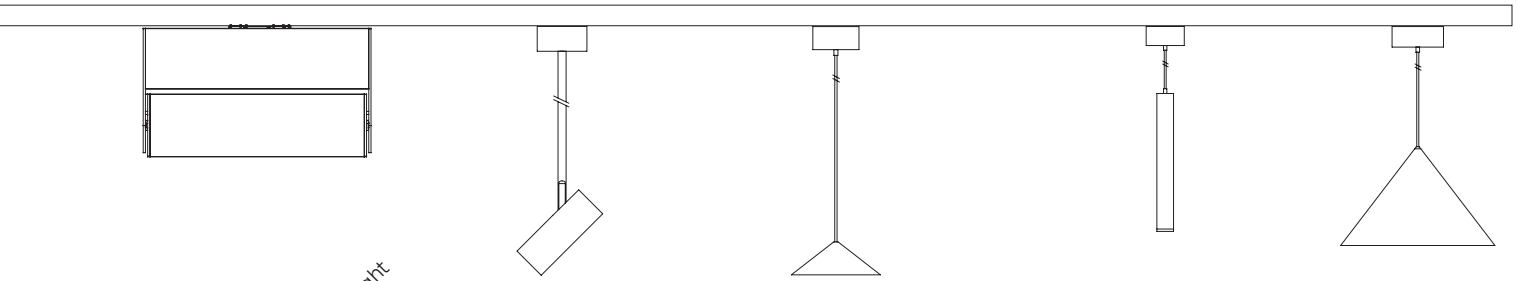

MINE Adjustable Surface Mounted Light

SPECTRUM Rod Suspension Lighting

DELTA Zoom Pendant Lighting

SWING Zoom Pendant Lighting

DELTA Pendant Lighting



MINE 40

Surface Mounted



MINE SURFACE MOUNTED LIGHT



Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.


Driver

Supplied with Built-in driver.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.



Suitable Accessories

Applications



A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.




MINE 40 95.04511



MINE 40 95.04512




MINE 40 95.04513




Code Ordering Example: 9 5 . 0 4 5 1 1 - 9 0 3 0 2 3 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 40 Surface Mounted Light	95.04511	SA SMD LED	90	30 3000K	12W	1049 lm	23°/50°	D0 No Dim	10 ☐ WH
				40 4000k		1101 lm		DA Dali Dim	20 ☒ BK
MINE 40 Surface Mounted Light	95.04512	SA SMD LED	90	30 3000K	20W	1824 lm	23°/50°	DC 0-10V Dim	
				40 4000k		1915 lm		DT Triac Dim	
MINE 40 Surface Mounted Light	95.04513	SA SMD LED	90	30 3000K	40W	3485 lm	23°/49°		
				40 4000k		3659 lm			

1, Press it.

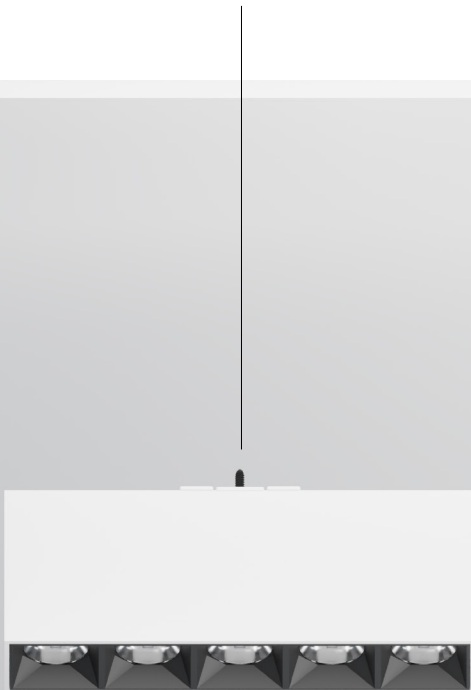

2, Take out the carabiner.


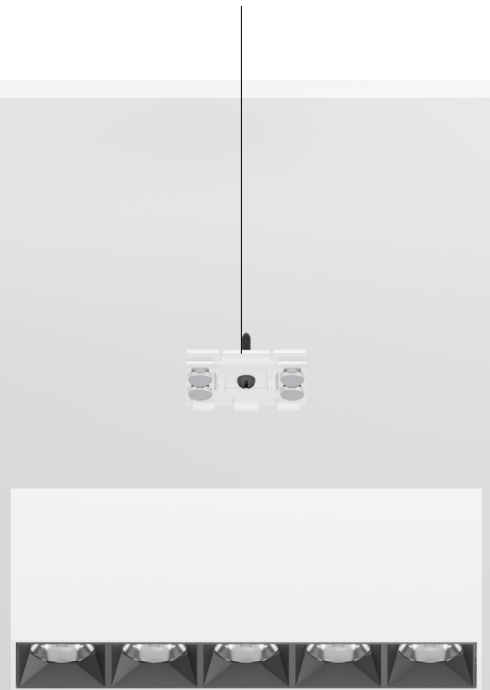


MINE 40

Surface Mounted

4, Press again to install the fixture to the ceiling.

3, Used screw fixed the carabiner in the ceiling.

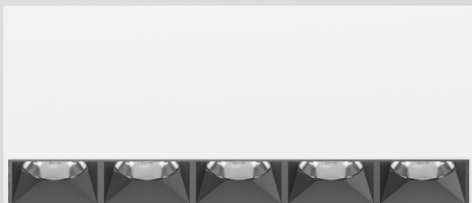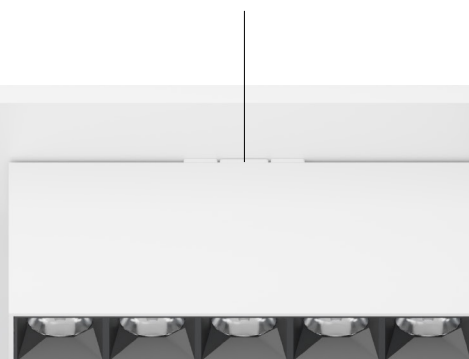

MINE SURFACE MOUNTED LIGHT



Body

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: SMD LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.


Driver

Supplied with Built-in driver.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.



Suitable Accessories

Applications



A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.
Application areas: retail, museums, hospitality, residential, offices and lobbies.





MINE 40 95.04515




MINE 40 95.04517



MINE 40 95.04519



MINE 40 95.04520



Code Ordering Example: 9 5 . 0 4 5 1 5 - 9 0 3 0 2 3 D 0 1 0


	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
MINE 40 Surface Mounted Light	95.04515	SA SMD LED	90	30 3000K	5W	356 lm	23°/46°	D0 No Dim	10 ☐ WH
				40 4000k		373 lm		DA Dali Dim	20 ☒ BK
MINE 40 Surface Mounted Light	95.04517	SA SMD LED	90	30 3000K	12W	1049 lm	23°/50°	DC 0-10V Dim	
				40 4000k		1101 lm		DT Triac Dim	
MINE 40 Surface Mounted Light	95.04519	SA SMD LED	90	30 3000K	20W	1824 lm	23°/50°		
				40 4000k		1915 lm			
MINE 40 Surface Mounted Light	95.04520	SA SMD LED	90	30 3000K	40W	3485 lm	23°/49°		
				40 4000k		3659 lm			

TLA SURFACE MOUNTED LIGHT





TLA SURFACE MOUNTED LIGHT

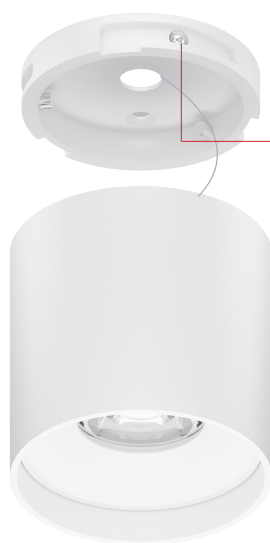

Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Blends seamlessly into various environments with practical styles.

Available in different wattages and sizes to meet diverse needs.

Classic appearance, simple, durable and practical, the best choice for commercial space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options are available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.


Suitable Accessories




Linear Spread glass





Glass




Honeycomb louvre




TLA 62 91.06215



TLA 84 91.08412




TLA 105 91.10511



Code Ordering Example: 9 1 . 0 6 2 1 5 - 9 0 3 0 1 8 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
TLA 62 Surface Mounted Light	91.06215	CA COB LED	90	30 3000K	6W	617 lm	18°/24°/36°/62°	D0 No Dim	10 ☐ WH
				40 4000k		647 lm		DA Dali Dim	20 ☒ BK
TLA 84 Surface Mounted Light	91.08412	CA COB LED	90	30 3000K	9W	1092 lm	21°/23°/35°/60°	DC 0-10V Dim	
				40 4000k		1146 lm		DT Triac Dim	
TLA 105 Surface Mounted Light	91.10511	CA COB LED	90	30 3000K	13.5W	1484 lm	17°/26°/34°/58°		
				40 4000k		1558 lm			

CLA SURFACE MOUNTED LIGHT

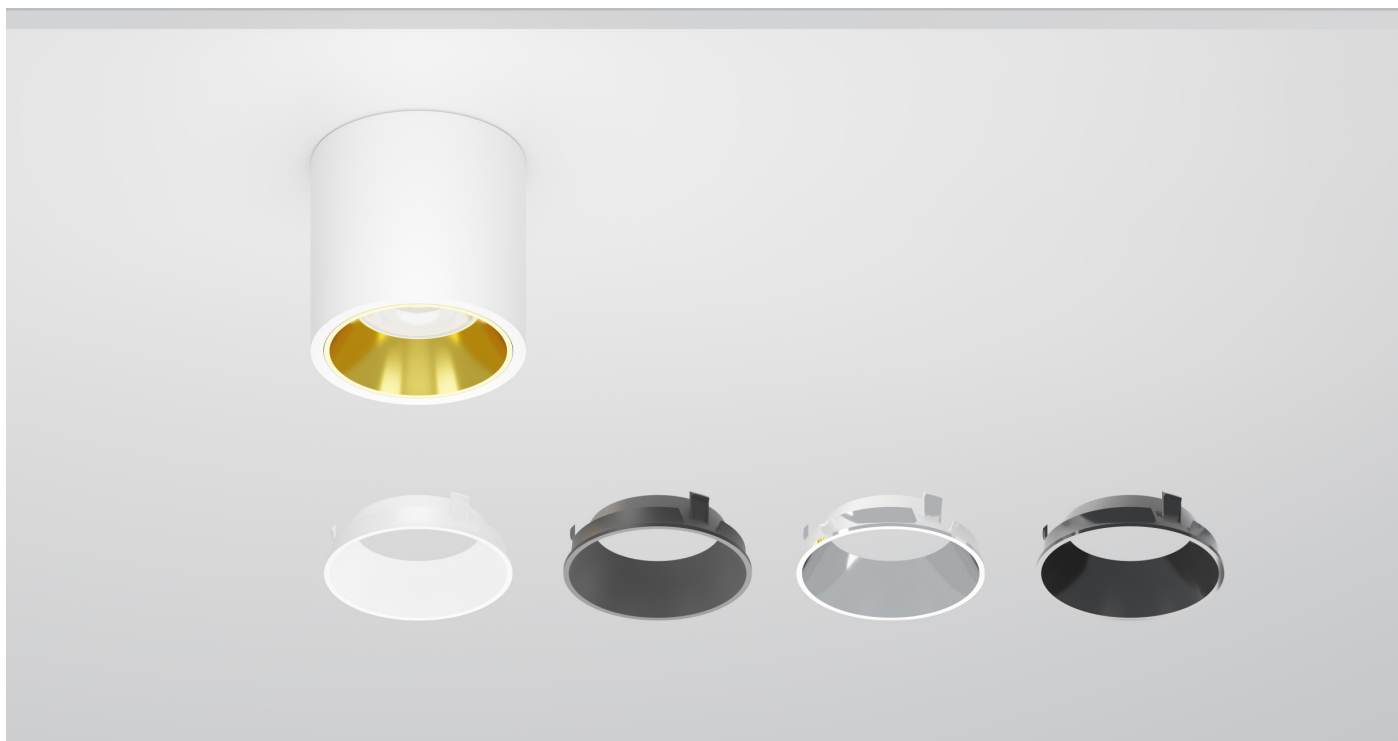

Body

Blends seamlessly into various environments with practical styles.

Available in different wattages and sizes to meet diverse needs.

Excellent anti-glare performance with color options for anti-glare reflector.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options are available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.
Anti-glare reflector color: White, Black or Chrome.


Driver

Supplied with Built-in driver.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.


Suitable Accessories




Linear Spread glass




Glass




Honeycomb louvre




CLA 60 91.06012



CLA 80 91.08013



CLA 100 91.10012



Code Ordering Example: 9 1 . 0 6 0 1 2 - 9 0 3 0 2 1 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
CLA 60 Surface Mounted Light	91.06012	CA	COB LED	90	30 3000K	6W	635 lm	21°/24°/35°/53°	D0 No Dim	10 ☐ WH
					40 4000k		666 lm		DA Dali Dim	20 ☒ BK
CLA 80 Surface Mounted Light	91.08013	CA	COB LED	90	30 3000K	10W	1063 lm	17°/23°/32°/55°	DC 0-10V Dim	
					40 4000k		1116 lm		DT Triac Dim	
CLA 100 Surface Mounted Light	91.10012	CA	COB LED	90	30 3000K	13W	1407 lm	18°/26°/37°/54°		
					40 4000k		1477 lm			


ADJ SURFACE MOUNTED LIGHT






ADJ SURFACE MOUNTED LIGHT



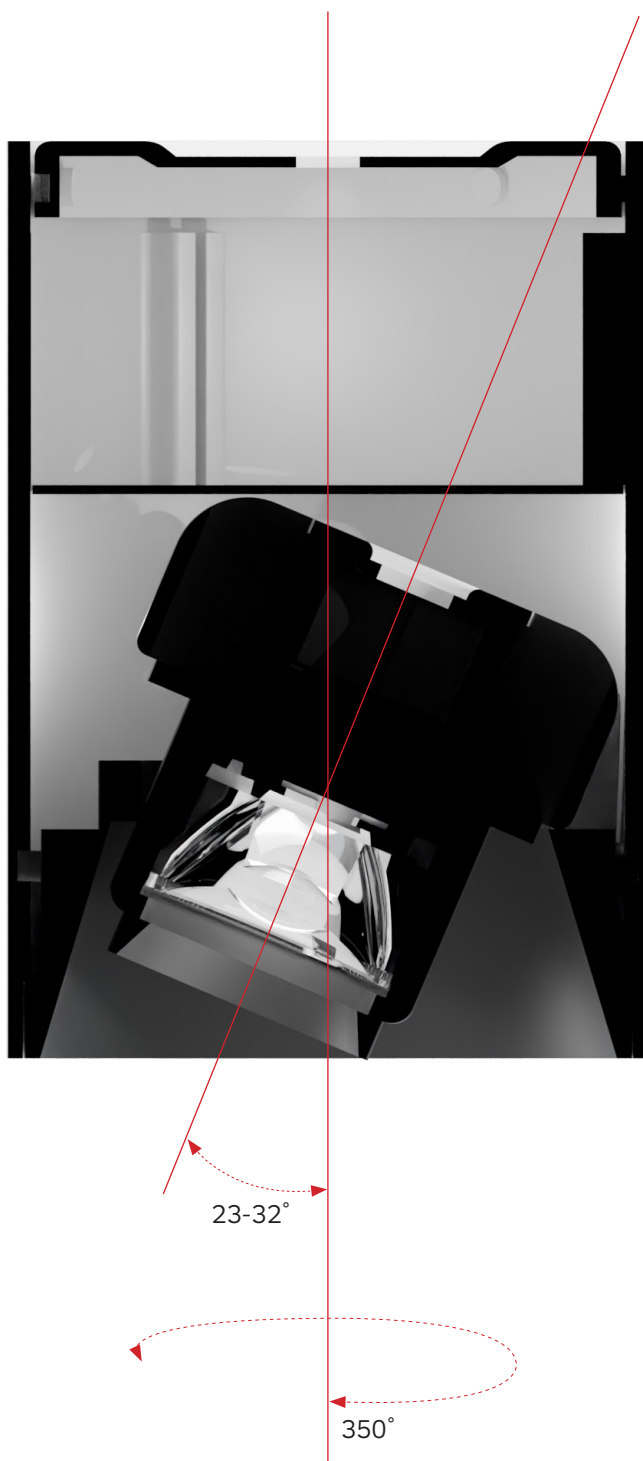

ADJ SURFACE MOUNTED LIGHT

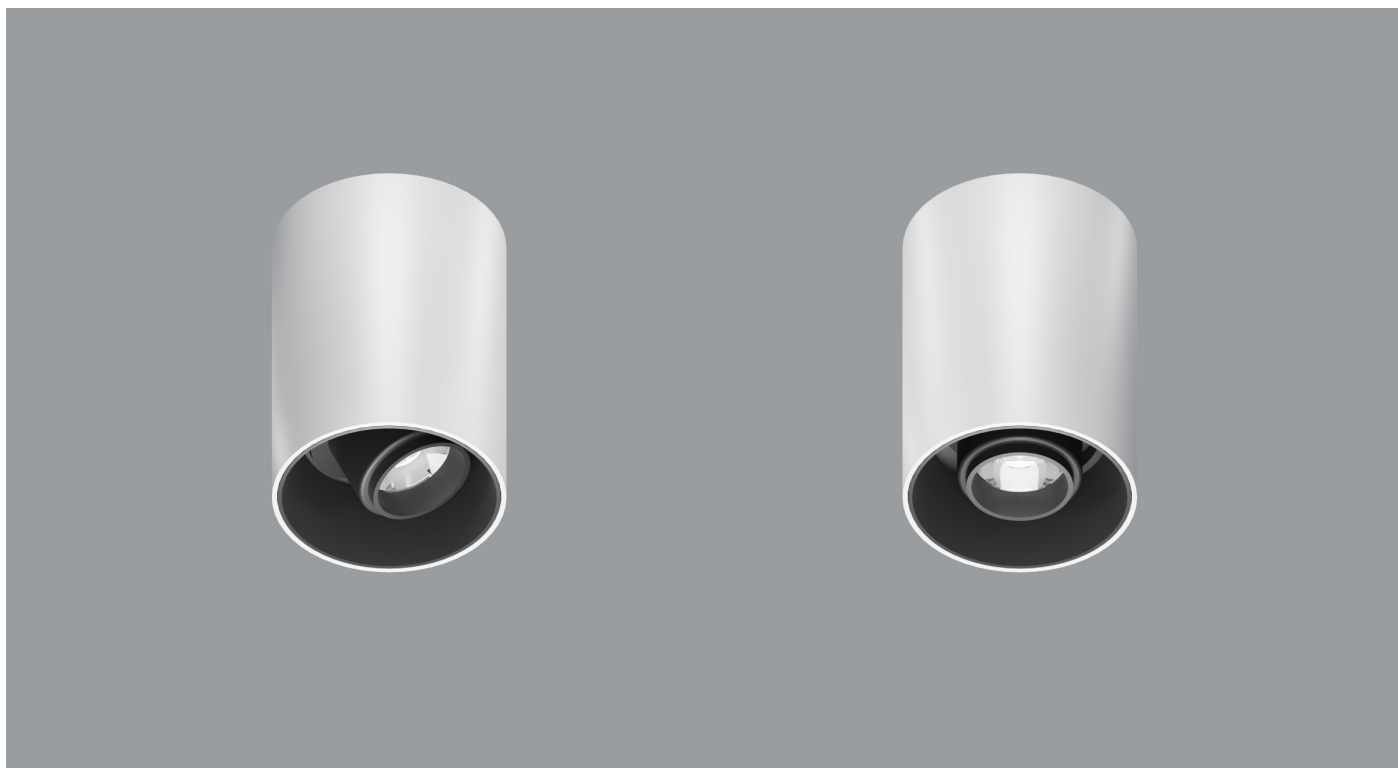

Body

A wide optional range of appearance, the whole series is included small, medium and large sizes.

The vertically adjustable angle is 25 degrees and can be rotated 350 degrees to precise adjustment of the illuminated object.

IP54 by adding protective glass.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

ADJ 62: Supplied with No-dimmable Built-in Driver.
ADJ 84/116: Supplied with No-dimmable Built-in Driver. Dimming can be 0-10v Dim, Dali Dim, Triac Dim.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories




Linear Spread glass



Glass




Honeycomb louvre




ADJ 62

93.06211




ADJ 84

93.08411



ADJ 116


93.11611

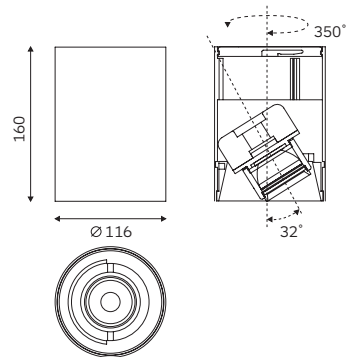

Code Ordering Example: 9 3 . 0 6 2 1 1 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
ADJ 62 Surface Mounted Light	93.06211	CA COB LED	90	30 3000K	6W	445 lm	20°/25°/38°/57°	D0 No Dim	10 ☐ WH
				40 4000k		467 lm		DA Dali Dim	20 ☒ BK
ADJ 84 Surface Mounted Light	93.08411	CA COB LED	90	30 3000K	14W	1243 lm	24°/30°/44°/53°	DC 0-10V Dim	
				40 4000k		1305 lm		DT Triac Dim	
ADJ 116 Surface Mounted Light	93.11611	CA COB LED	90	30 3000K	20W	2190 lm	19°/25°/41°/53°		
				40 4000k		2299 lm			

UTH SURFACE MOUNTED LIGHT

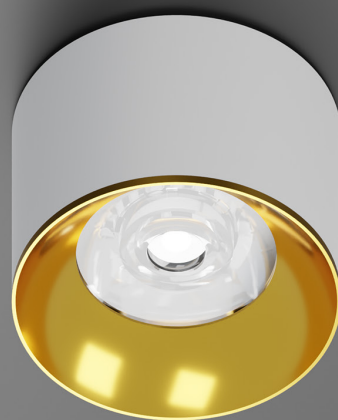



UTH SURFACE MOUNTED LIGHT



Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Ultra-thin round surface mounted light, CNC machining, luminaire surface can support electroplating treatment. With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.

Applications

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories




Linear Spread glass




Glass




Honeycomb louvre




UTH 65 91.06511



UTH 80 91.08011




UTH 95 91.09511



Code Ordering Example: 9 1 . 0 6 5 1 1 - 9 0 3 0 2 1 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
UTH 65 Surface Mounted Light	91.06511	CA	COB LED	90	30 3000K	6W	562 lm	21°/27°/35°/60°	D0 No Dim	10 ☐ WH
					40 4000k		590 lm			20 ☒ BK
UTH 80 Surface Mounted Light	91.08011	CA	COB LED	90	30 3000K	10W	1226 lm	17°/25°/34°/60°		
					40 4000k		1287 lm			
UTH 95 Surface Mounted Light	91.09511	CA	COB LED	90	30 3000K	14.5W	1694 lm	14°/25°/35°/58°		
					40 4000k		1778 lm			

SRA SURFACE MOUNTED LIGHT





SRA SURFACE MOUNTED LIGHT



Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Anti-glare adjustable surface mounted light, breaks the conventional fixed model, internally able to adjustable.

Have round and square 2 shapes for selected, can meet different groups people requirement.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Non-dimmable Built-in driver.

Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.


Suitable Accessories



Linear Spread glass





Glass




Honeycomb louvre



SRA 80 93.08012




SRA 80 94.08011

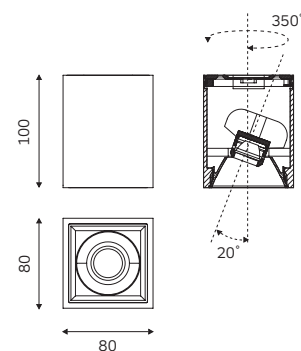

Code Ordering Example: 9 3 . 0 8 0 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code		>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SRA 80 Surface Mounted Light	93.08012	CA	COB LED	90	30 3000K	8.5W	657 lm	19°/24°/35°/48°	D0 No Dim	10 ☐ WH
					40 4000k		690 lm			20 ☒ BK
SRA 80 Surface Mounted Light	94.08011	CA	COB LED	90	30 3000K	8.5W	657 lm	19°/24°/35°/48°		
					40 4000k		690 lm			

EMMA SURFACE MOUNTED LIGHT

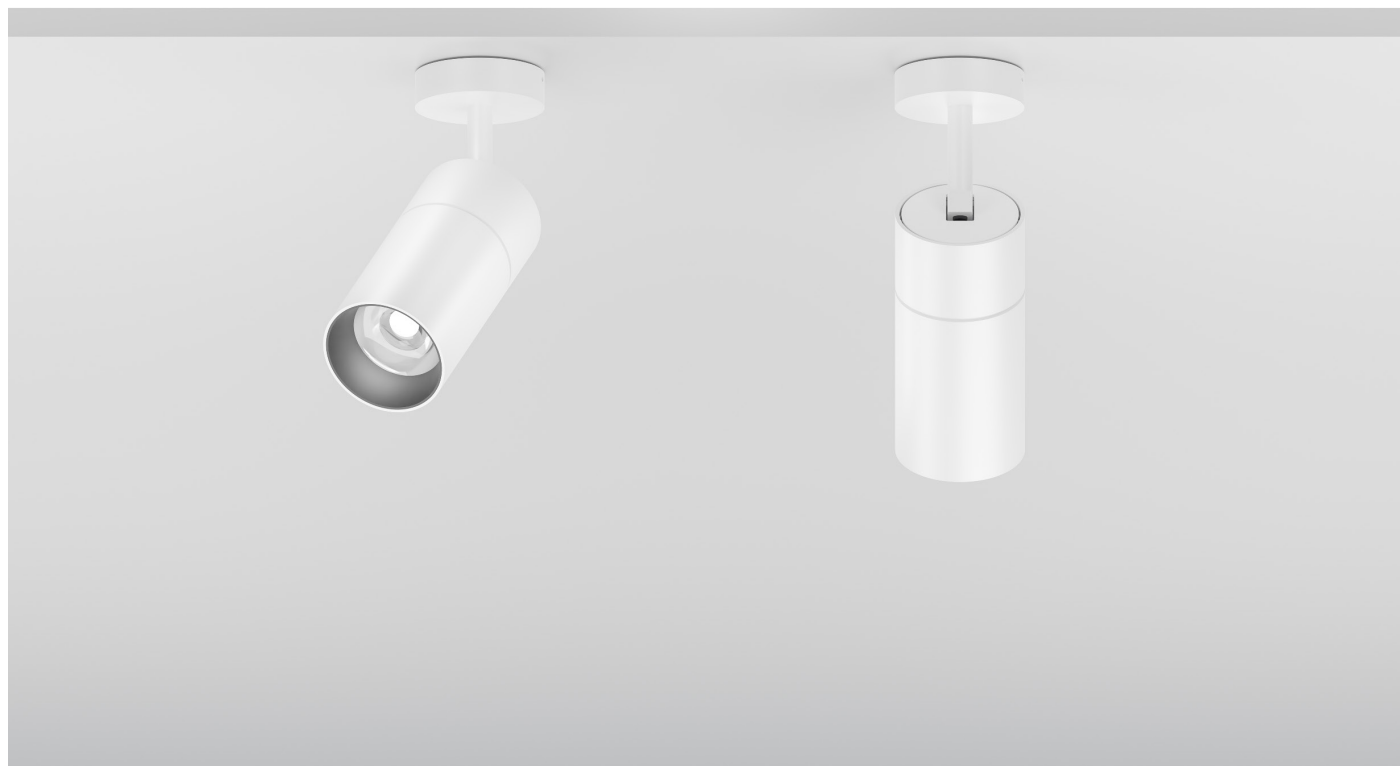

Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 4 sizes and 4 wattages, which can well meet the needs of different places.

There is a waist line in the middle of the luminaire, which makes the luminaire look more artistic.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.

Applications

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology.

Application areas: retail, museums, hospitality, residential, offices and lobbies.


Suitable Accessories




Linear Spread glass





Glass




Honeycomb louvre




EMMA 45 93.04513




EMMA 62 93.06213



EMMA 73 93.07311



EMMA 90 93.09011



Code Ordering Example: 9 3 . 0 4 5 1 3 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
EMMA 45 Surface Mounted Light	93.04513	CA COB LED	90	30 3000K 40 4000k	11W	935 lm 981 lm	19°/29°/44°/56°	D0 No Dim	10 ☐ WH 20 ☒ BK
EMMA 62 Surface Mounted Light	93.06213	CA COB LED	90	30 3000K 40 4000k	14W	1627 lm 1708 lm	18°/27°/38°/54°		
EMMA 73 Surface Mounted Light	93.07311	CA COB LED	90	30 3000K 40 4000k	24W	2963 lm 3111 lm	14°/28°/40°/50°		
EMMA 90 Surface Mounted Light	93.09011	CA COB LED	90	30 3000K 40 4000k	36W	4509 lm 4734 lm	16°/20°/30°/45°		

FOS SURFACE MOUNTED LIGHT



Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs. Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

Long and thin, blends in well with the space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with No-dimable built-in driver.


Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).


Suitable Accessories




Linear Spread glass





Glass




Honeycomb louvre




FOS 45 93.04512



FOS 55 93.05512



FOS 65 93.06511



Code Ordering Example: 9 3 . 0 4 5 1 2 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
FOS 45 Surface Mounted Light	93.04512	CA COB LED	90	30 3000K 40 4000k	11W	808 lm 848 lm	19°/23°/36°/41°	D0 No Dim	10 ☐ WH 20 ☒ BK
FOS 55 Surface Mounted Light	93.05512	CA COB LED	90	30 3000K 40 4000k	16W	1871 lm 1965 lm	20°/32°/41°/49°		
FOS 65 Surface Mounted Light	93.06511	CA COB LED	90	30 3000K 40 4000k	24W	2678 lm 2812 lm	17°/27°/36°/51°		

PENDANT LIGHTING





SPECTRUM ROD SUSPENSION LIGHTING





SPECTRUM ROD SUSPENSION LIGHTING



Body

Decorative suspended Luminaire in aluminum, breaking away from traditional installations.

Good glare reduction due to recessed light point out, have different beam angle for selected.

Can be 350° rotatable and 90° tiltable, can meet different area lighting requirements.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A pendant luminaire featuring a clean aesthetic, ideal also for high ceiling spaces and for local 'task' lighting when placed over counters and tables.

Application areas: restaurants, hotels, lobbies, residential, retail.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




SPECTRUM 45

93.04520



SPECTRUM 55


93.05517



Code Ordering Example: 9 3 . 0 4 5 2 0 - 9 0 3 0 2 0 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SPECTRUM 45 Rod Suspension Lighting	93.04520	CA COB LED	90	30 3000K	14.3W	1083 lm	20°/24°/36°/43°	D0 No Dim	10 ☐ WH
				40 4000k		1137 lm		DA Dali Dim	20 ☒ BK
SPECTRUM 55 Rod Suspension Lighting	93.05517	CA COB LED	90	30 3000K	24.2W	2615 lm	20°/31°/43°/52°	DC 0-10V Dim	
				40 4000k		2745 lm		DT Triac Dim	

SWING PENDANT LIGHTING





SWING PENDANT LIGHTING



Body

Pendant track mounted luminaire with the cylindrical light.

Body in extruded aluminum. Light Body is available in three diameters (26mm, 35mm and 45mm) .

Supplied with magnetic track and suspension installed, with pendant cable.

Accessories

Swing 25: Honeycomb louvre, Linear Spread glass, glass.
Swing 35/45: No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Swing 25: Lens, with narrow, medium, and wide beam angle.
Swing 35/45: with zoom optics.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim.

Applications


A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative, with its numerous accessories.

Application areas, residential, hotels, restaurants, retails and corridors.


Suitable Accessories




SWING 26



SWING 35




SWING 45



Code Ordering Example: 6 3 . 0 2 6 1 1 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SWING 26 Pendant Lighting Low Voltage Track	63.02611	CA COB LED	90	30 3000K 40 4000k	3W	197 lm 207 lm	17°/26°/31°/53°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
SWING 35 Pendant Lighting Low Voltage Track	63.03511	CA COB LED	90	30 3000K 40 4000k	9.4W	238 lm 250 lm	8-38°	DC 0-10V Dim	
SWING 45 Pendant Lighting Low Voltage Track	63.04511	CA COB LED	90	30 3000K 40 4000k	15.4W	455 lm 478 lm	13-44°		
SWING 26 Pendant Lighting	81.02611	CA COB LED	90	30 3000K 40 4000k	3W	197 lm 207 lm	17°/26°/31°/53°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
SWING 35 Pendant Lighting	81.03511	CA COB LED	90	30 3000K 40 4000k	9.4W	238 lm 250 lm	8-38°	DC 0-10V Dim	
SWING 45 Pendant Lighting	81.04515	CA COB LED	90	30 3000K 40 4000k	15.4W	455 lm 478 lm	13-44°		


DELTA PENDANT LIGHTING

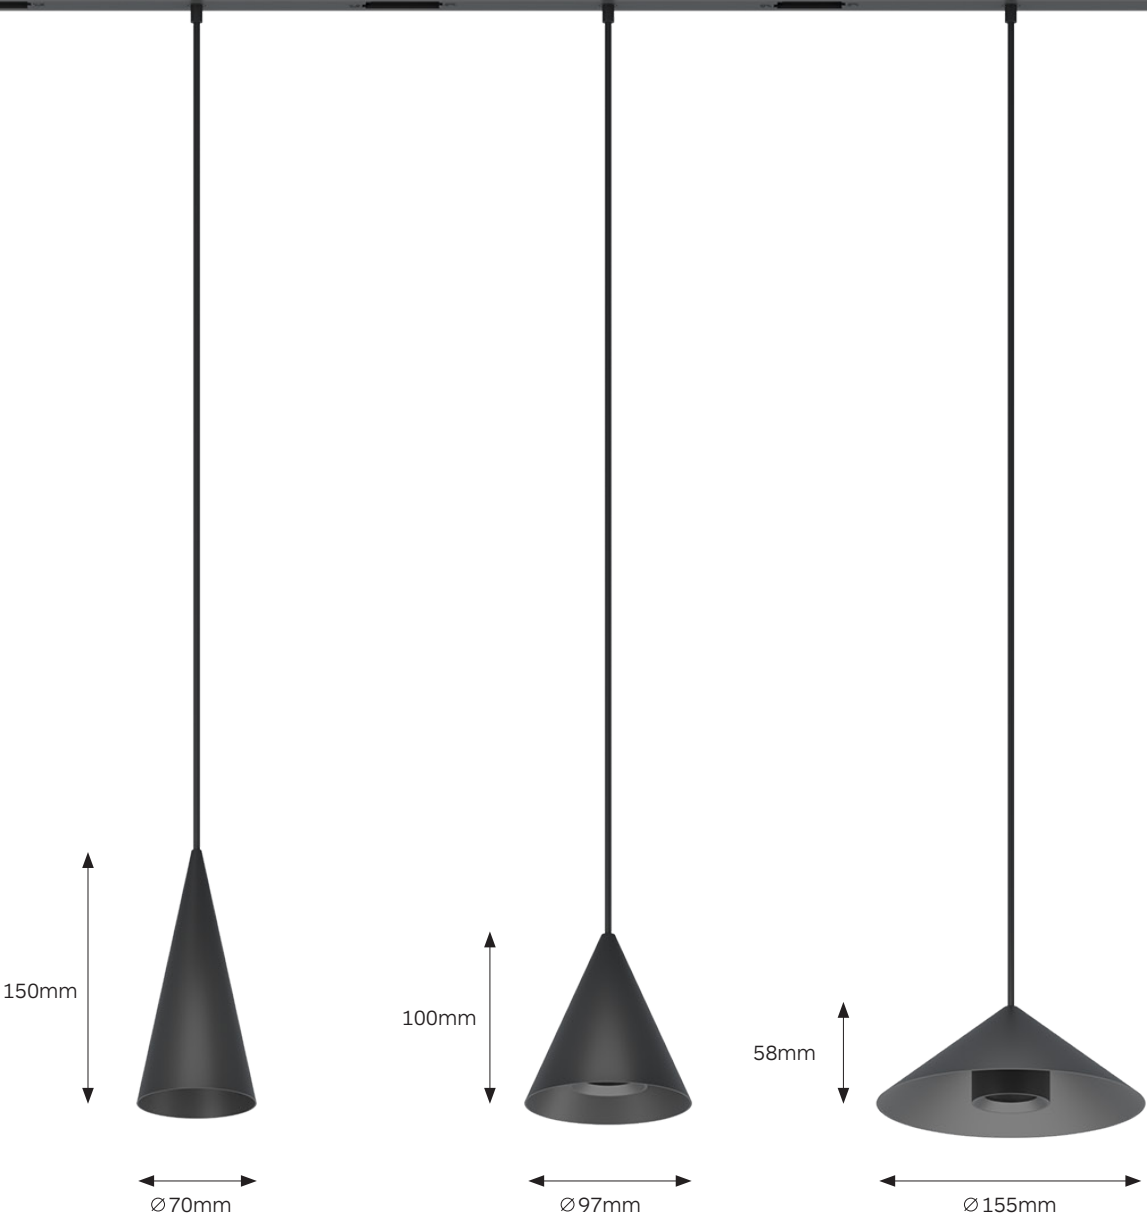


DELTA 70
Watt: 15.4W
Beam Angle: 13°-44°

DELTA 97
Watt: 15.4W
Beam Angle: 13°-44°

DELTA 155
Watt: 15.4W
Beam Angle: 13°-44°

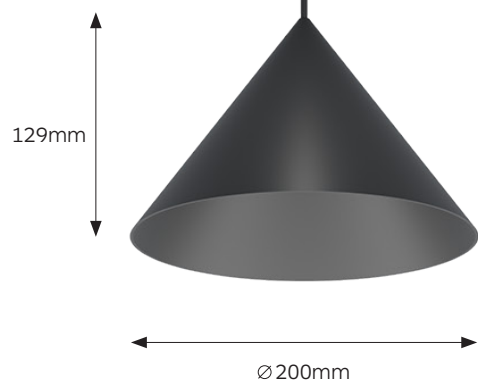

DELTA 200
Watt: 14W
Lumen: 1789lm

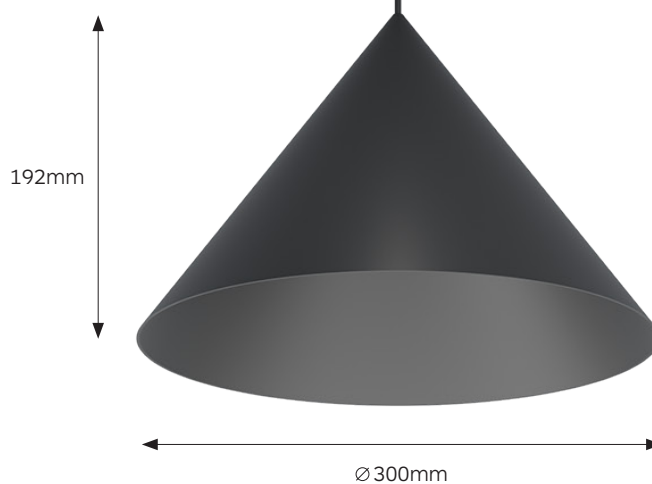

DELTA 300
Watt: 24W
Lumen: 3175lm

DELTA PENDANT LIGHTING



Body

The elegant DELTA represent a re-invention of our lighting classic.

Lighting designer gave the much-loved luminaire a transformative aesthetic with updated Lighting technology.

Used zoom optics, which can be well combined with use of the environment to adjust the beam angle you want.

Accessories

No.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Zoom Optic.

Driver

Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications


A multi-faceted lighting system, that offers a play between forms and elegant lighting effects.

Application areas, residential, hotels, restaurants, retails and corridors.


Suitable Accessories




DELTA 97



DELTA 155




DELTA 70



Code Ordering Example: 63.09711-9030ZOD010

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
DELTA 97 Pendant Lighting Low Voltage Track	63.09711	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°	D0 No Dim	10 ☐ WH
				40 4000k		478 lm		DA Dali Dim	20 ☒ BK
DELTA 155 Pendant Lighting Low Voltage Track	63.15511	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°	DC 0-10V Dim	
				40 4000k		478 lm			
DELTA 70 Pendant Lighting Low Voltage Track	63.07011	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°		
				40 4000k		478 lm			
DELTA 97 Pendant Lighting	81.09711	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°		
				40 4000k		478 lm			
DELTA 155 Pendant Lighting	81.15511	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°		
				40 4000k		478 lm			
DELTA 70 Pendant Lighting	81.07011	CA COB LED	90	30 3000K	15.4W	455 lm	13°-44°		
				40 4000k		478 lm			

DELTA PENDANT LIGHTING

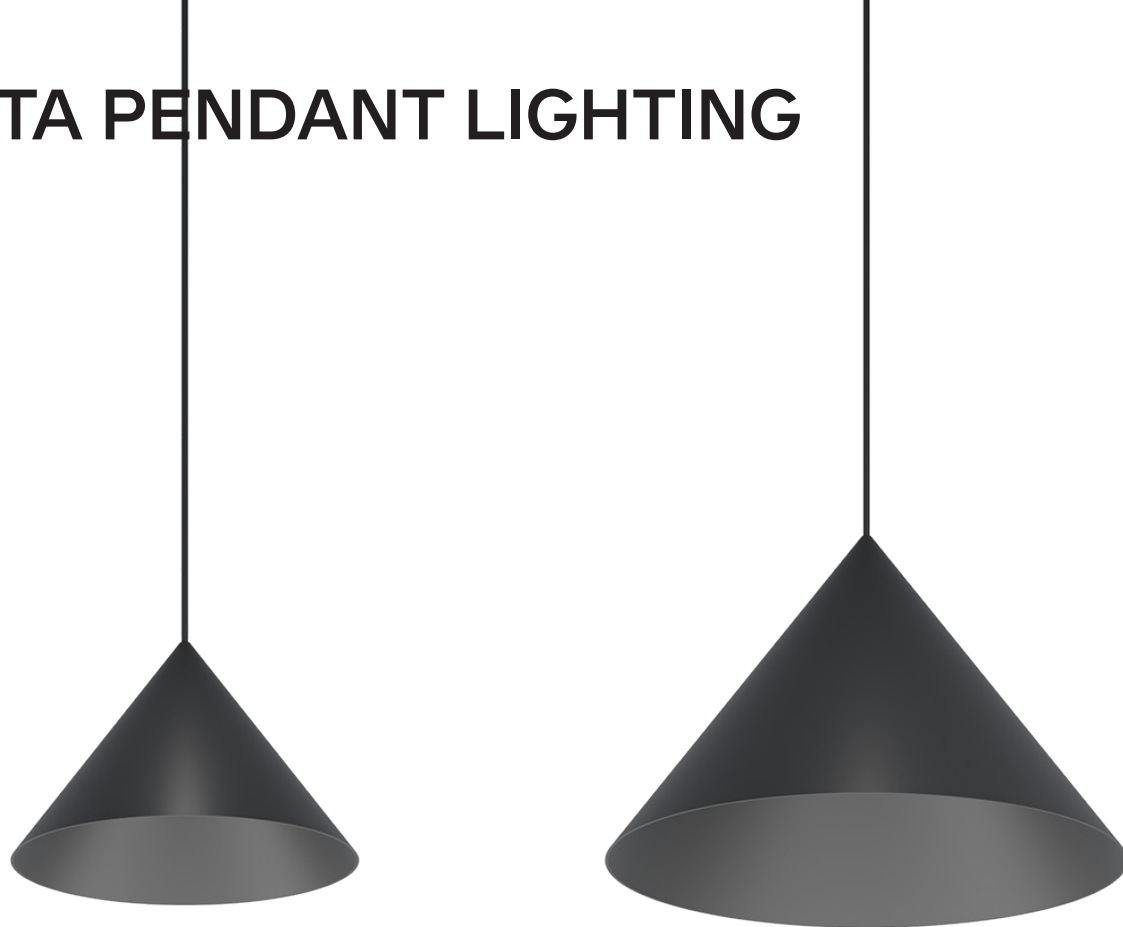

Body

The elegant DELTA represent a re-invention of our lighting classic.

Lighting designer gave the much-loved luminaire a transformative aesthetic with updated Lighting technology.

It is available in series and two mounting options including suspension and magnetic track.

Accessories

Honeycomb louvre, linear spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.

Driver


Supplied with No-dimable built-in driver.
Dimming Options: 0-10V Dim, Dali Dim, Triac Dim.

Applications

A multi-faceted lighting system, that offers a play between forms and elegant lighting effects.

Application areas, residential, hotels, restaurants, retails and corridors.


Suitable Accessories



Linear Spread glass




Glass



Honeycomb louvre



DELTA 200




63.20011

81.20012



DELTA 300



63.30011

81.30013

Code Ordering Example: 6 3 . 2 0 0 1 1 - 9 0 3 0 1 4 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
DELTA 200 Pendant Lighting Low Voltage Track	63.20011	CA COB LED	90	30 3000K 40 4000k	14W	1704 lm 1789 lm	14°/22°/36°/61°	D0 No Dim DA Dali Dim	10 ☐ WH 20 ☒ BK
DELTA 300 Pendant Lighting Low Voltage Track	63.30011	CA COB LED	90	30 3000K 40 4000k	24W	3024lm 3175 lm	15°/25°/33°/60°	DC 0-10V Dim	
DELTA 200 Pendant Lighting	81.20012	CA COB LED	90	30 3000K 40 4000k	14W	1704 lm 1789 lm	14°/22°/36°/61°		
DELTA 300 Pendant Lighting	81.30013	CA COB LED	90	30 3000K 40 4000k	24W	3024 lm 3175 lm	15°/25°/33°/65°		

Artdon Lighting Limited

Tel: 86-760-22211886

Fax: 86-760-22211890

sales@artdon.cn

www.artdon.cn

No. 15, Zhihe 3rd Street,

Yumin Community, Xiaolan Town,

Zhongshan City, Guangdong Province, China

