




AURO TUBE 60

Profile Systems



AURO TUBE 60 Profile Systems

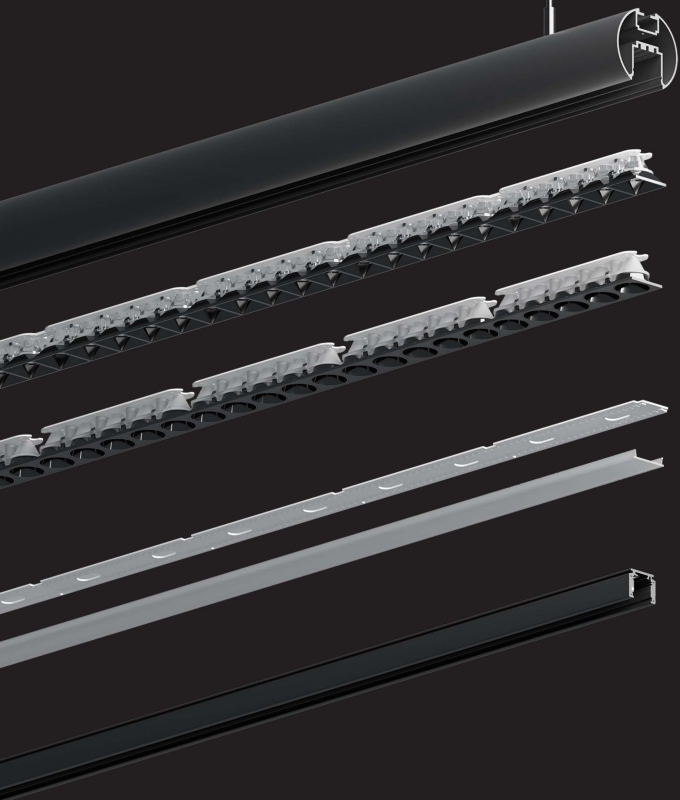




AURO TUBE 60 Profile






Square Accent Lighting

Round Accent Lighting

General Lighting


Magnetic Track Rail

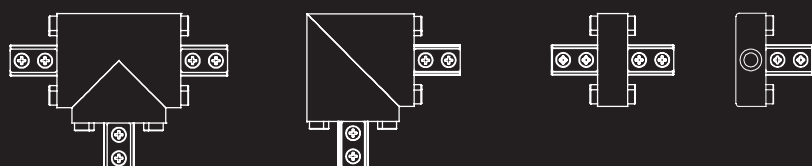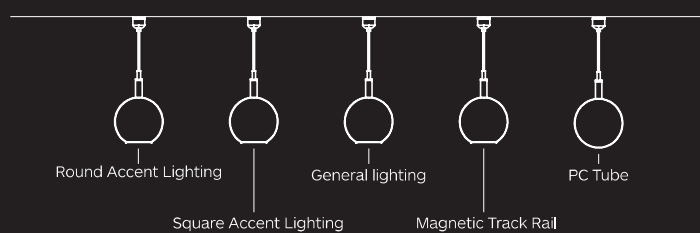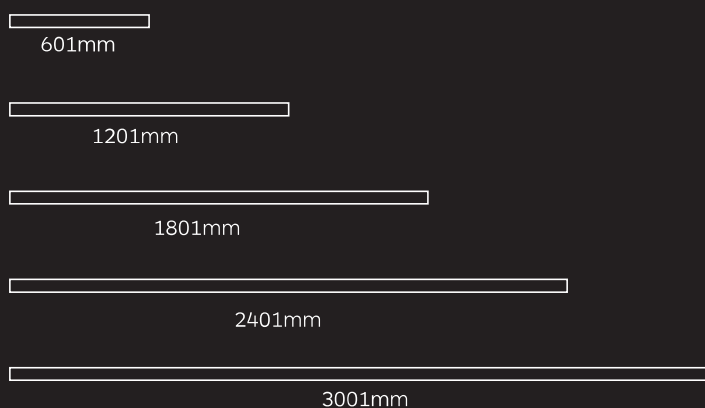

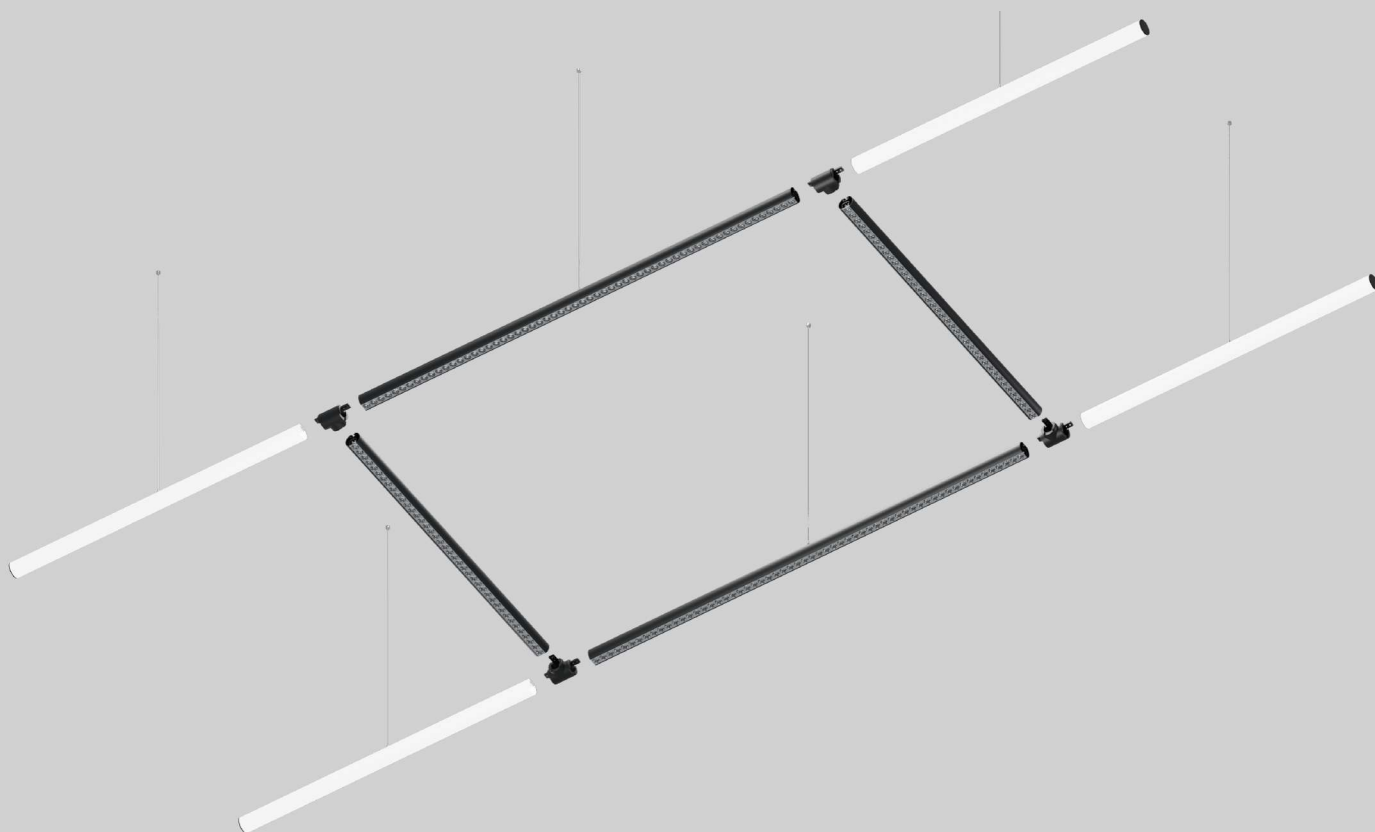

AURO TUBE 60


Profile Systems

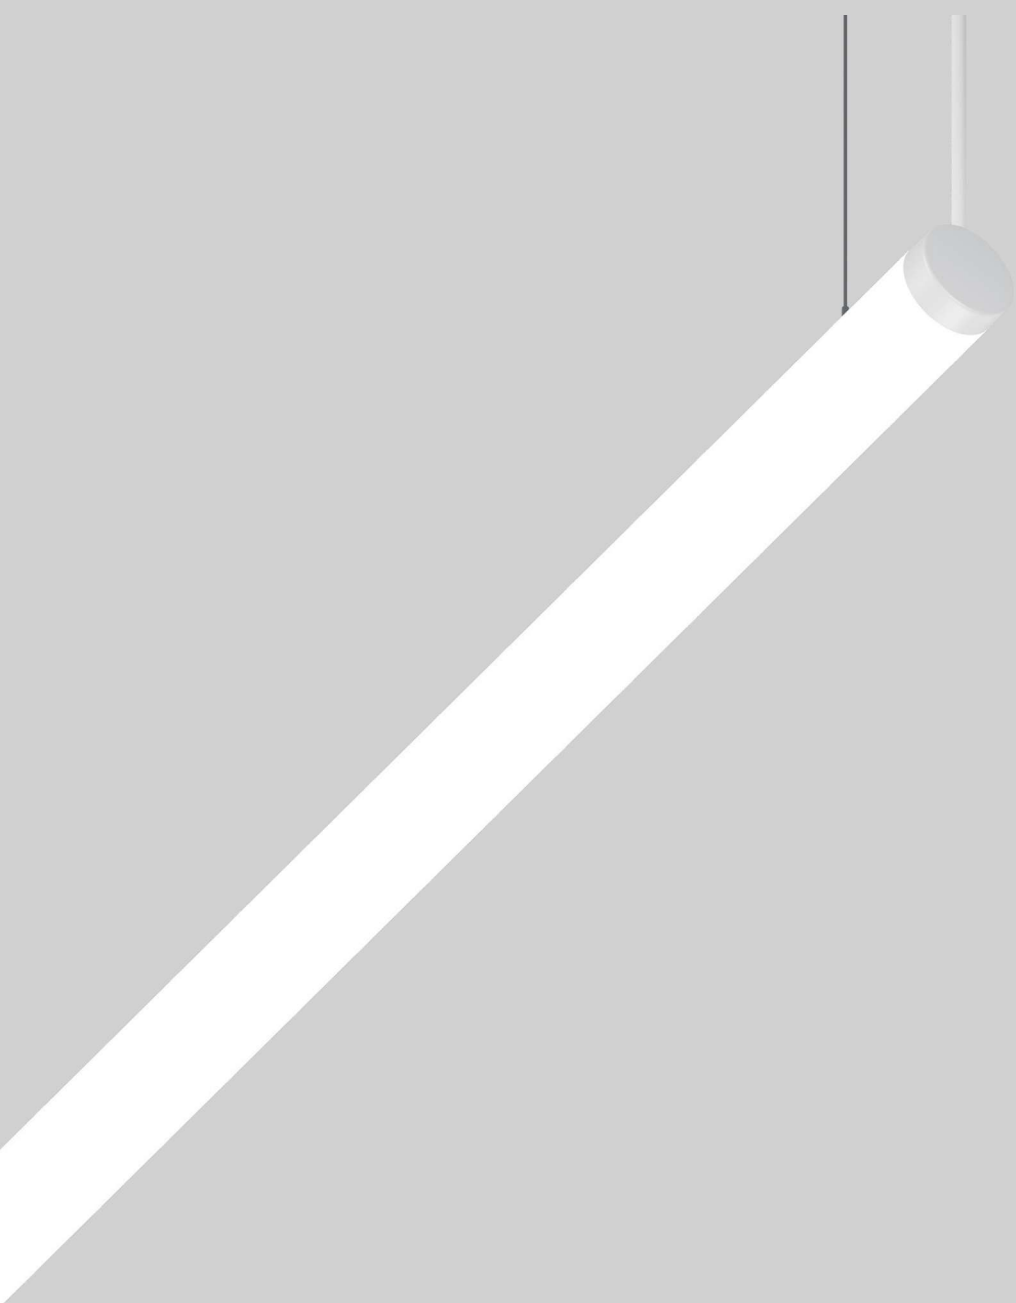

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
175°, 34W/m
Up to 118 lm/W
Up to 4012 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

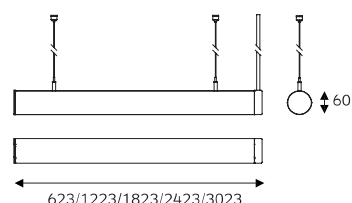

Product Code: 86.06011

Colours



WH BK

Light distribution




Opal

PC Tube



AURO TUBE 60


Profile Systems

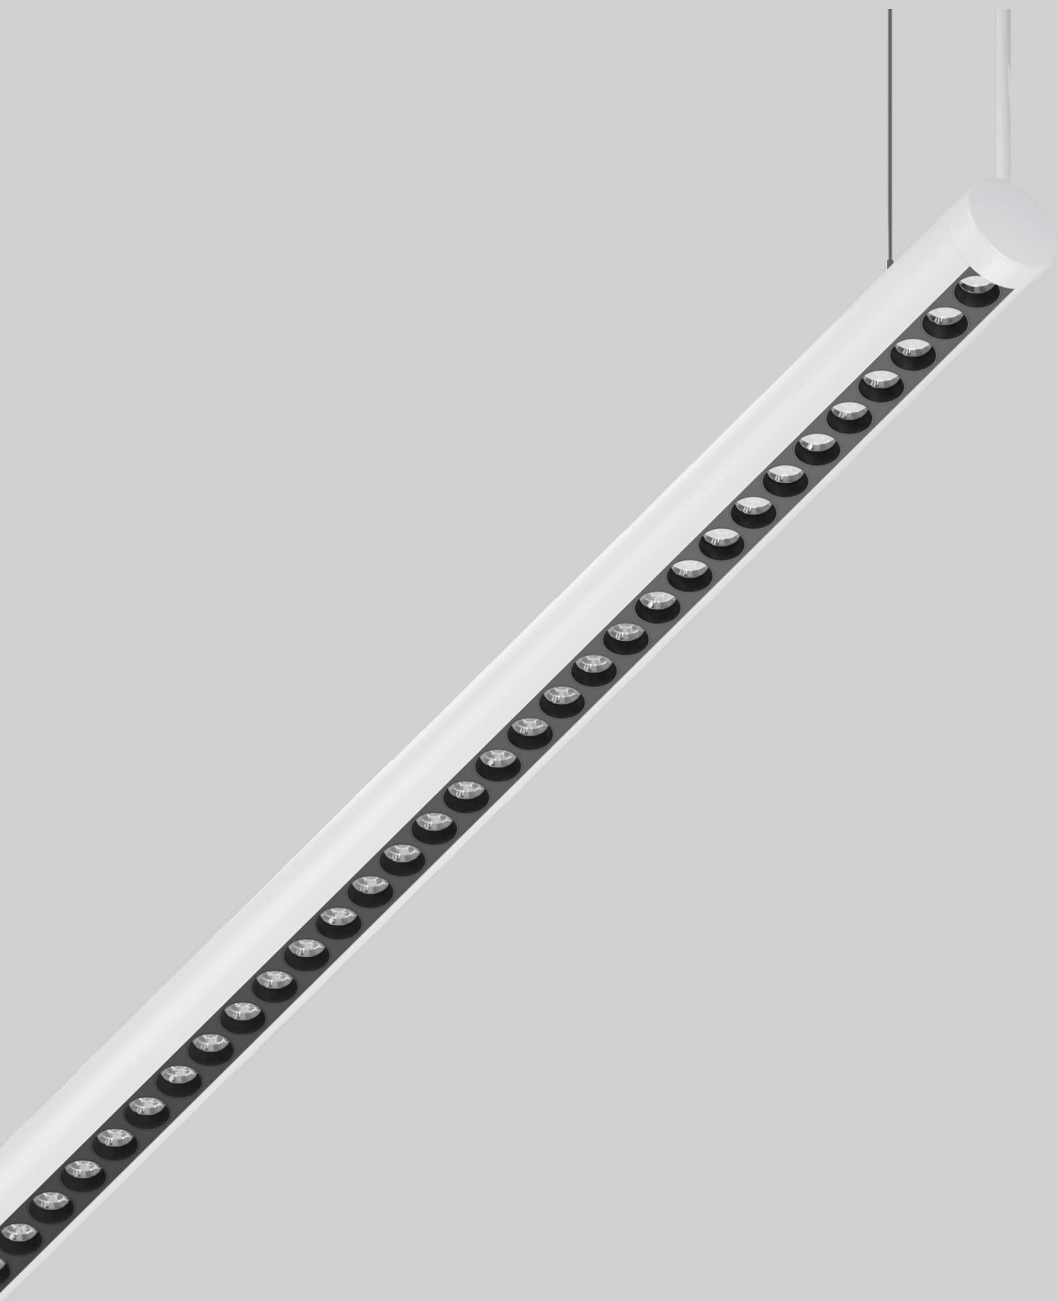

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
35°, 34W/m
Up to 92 lm/W
Up to 3128 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

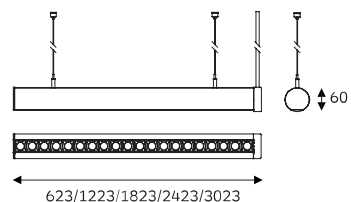

Product Code: 86.06012

Colours



WH BK

Light distribution



21°

35°


45°

Accent Lighting



AURO TUBE 60


Profile Systems

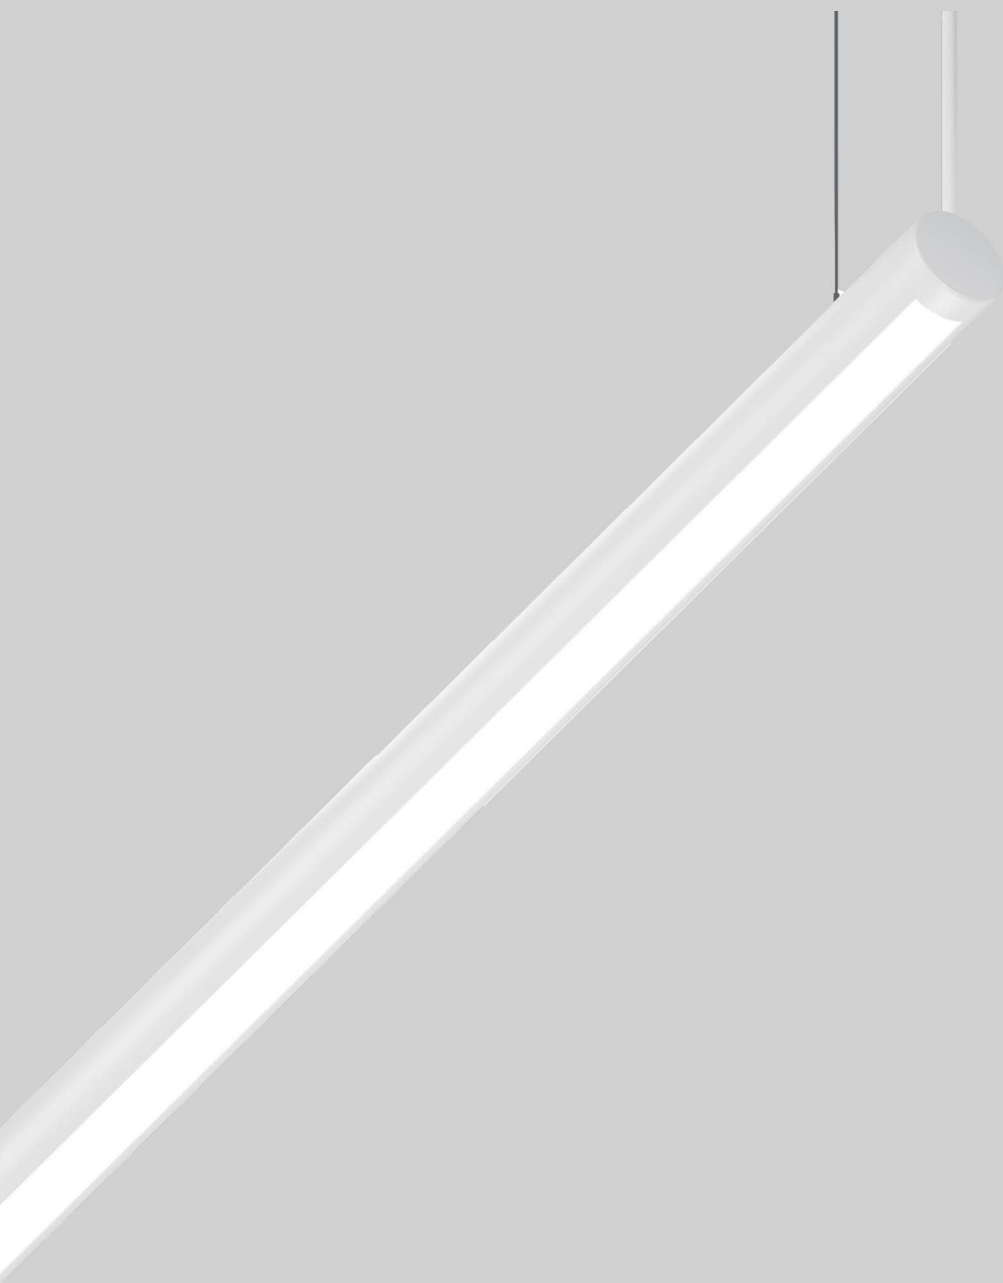

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
107°, 34W/m
Up to 78 lm/W
Up to 2652 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

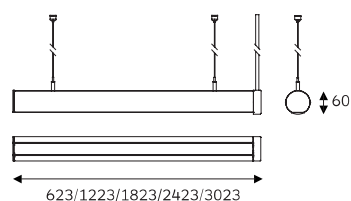

Product Code: 86.06013

Colours



WH BK

Light distribution



Opal

General Lighting



AURO TUBE 60

Profile Systems




Quick Info

AURO TUBE 60 Profile with magnetic track Rail.

Please go back to low voltage track system to selected products

Types

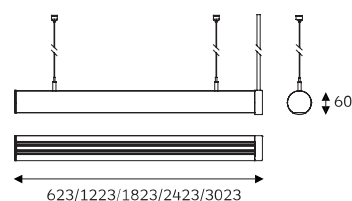

Product Code: 86.06015

Colours

○ ●
WH BK

Light distribution


Magnetic Track Rail




ENKO 20

Profile Systems

Surface Mounted Fixed




Surface Mounted Adjustable




Surface Mounted With Anti-glare Fixed




Surface Mounted With Anti-glare Adjustable




Surface Mounted With Wall Washer Adjustable




Surface Mounted With Wall Washer Fixed




Recessed Adjustable

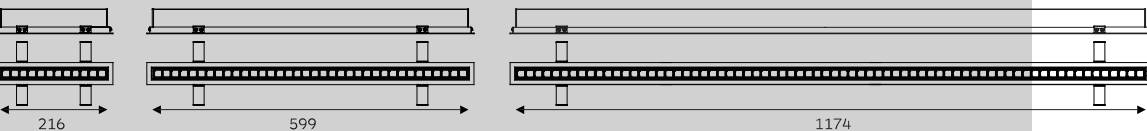

Recessed Fixed

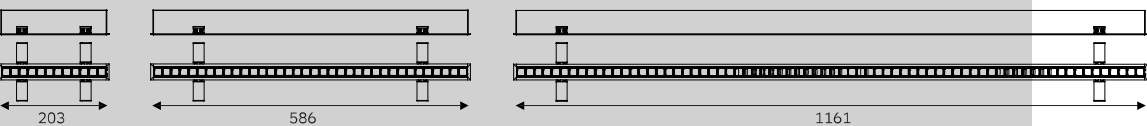

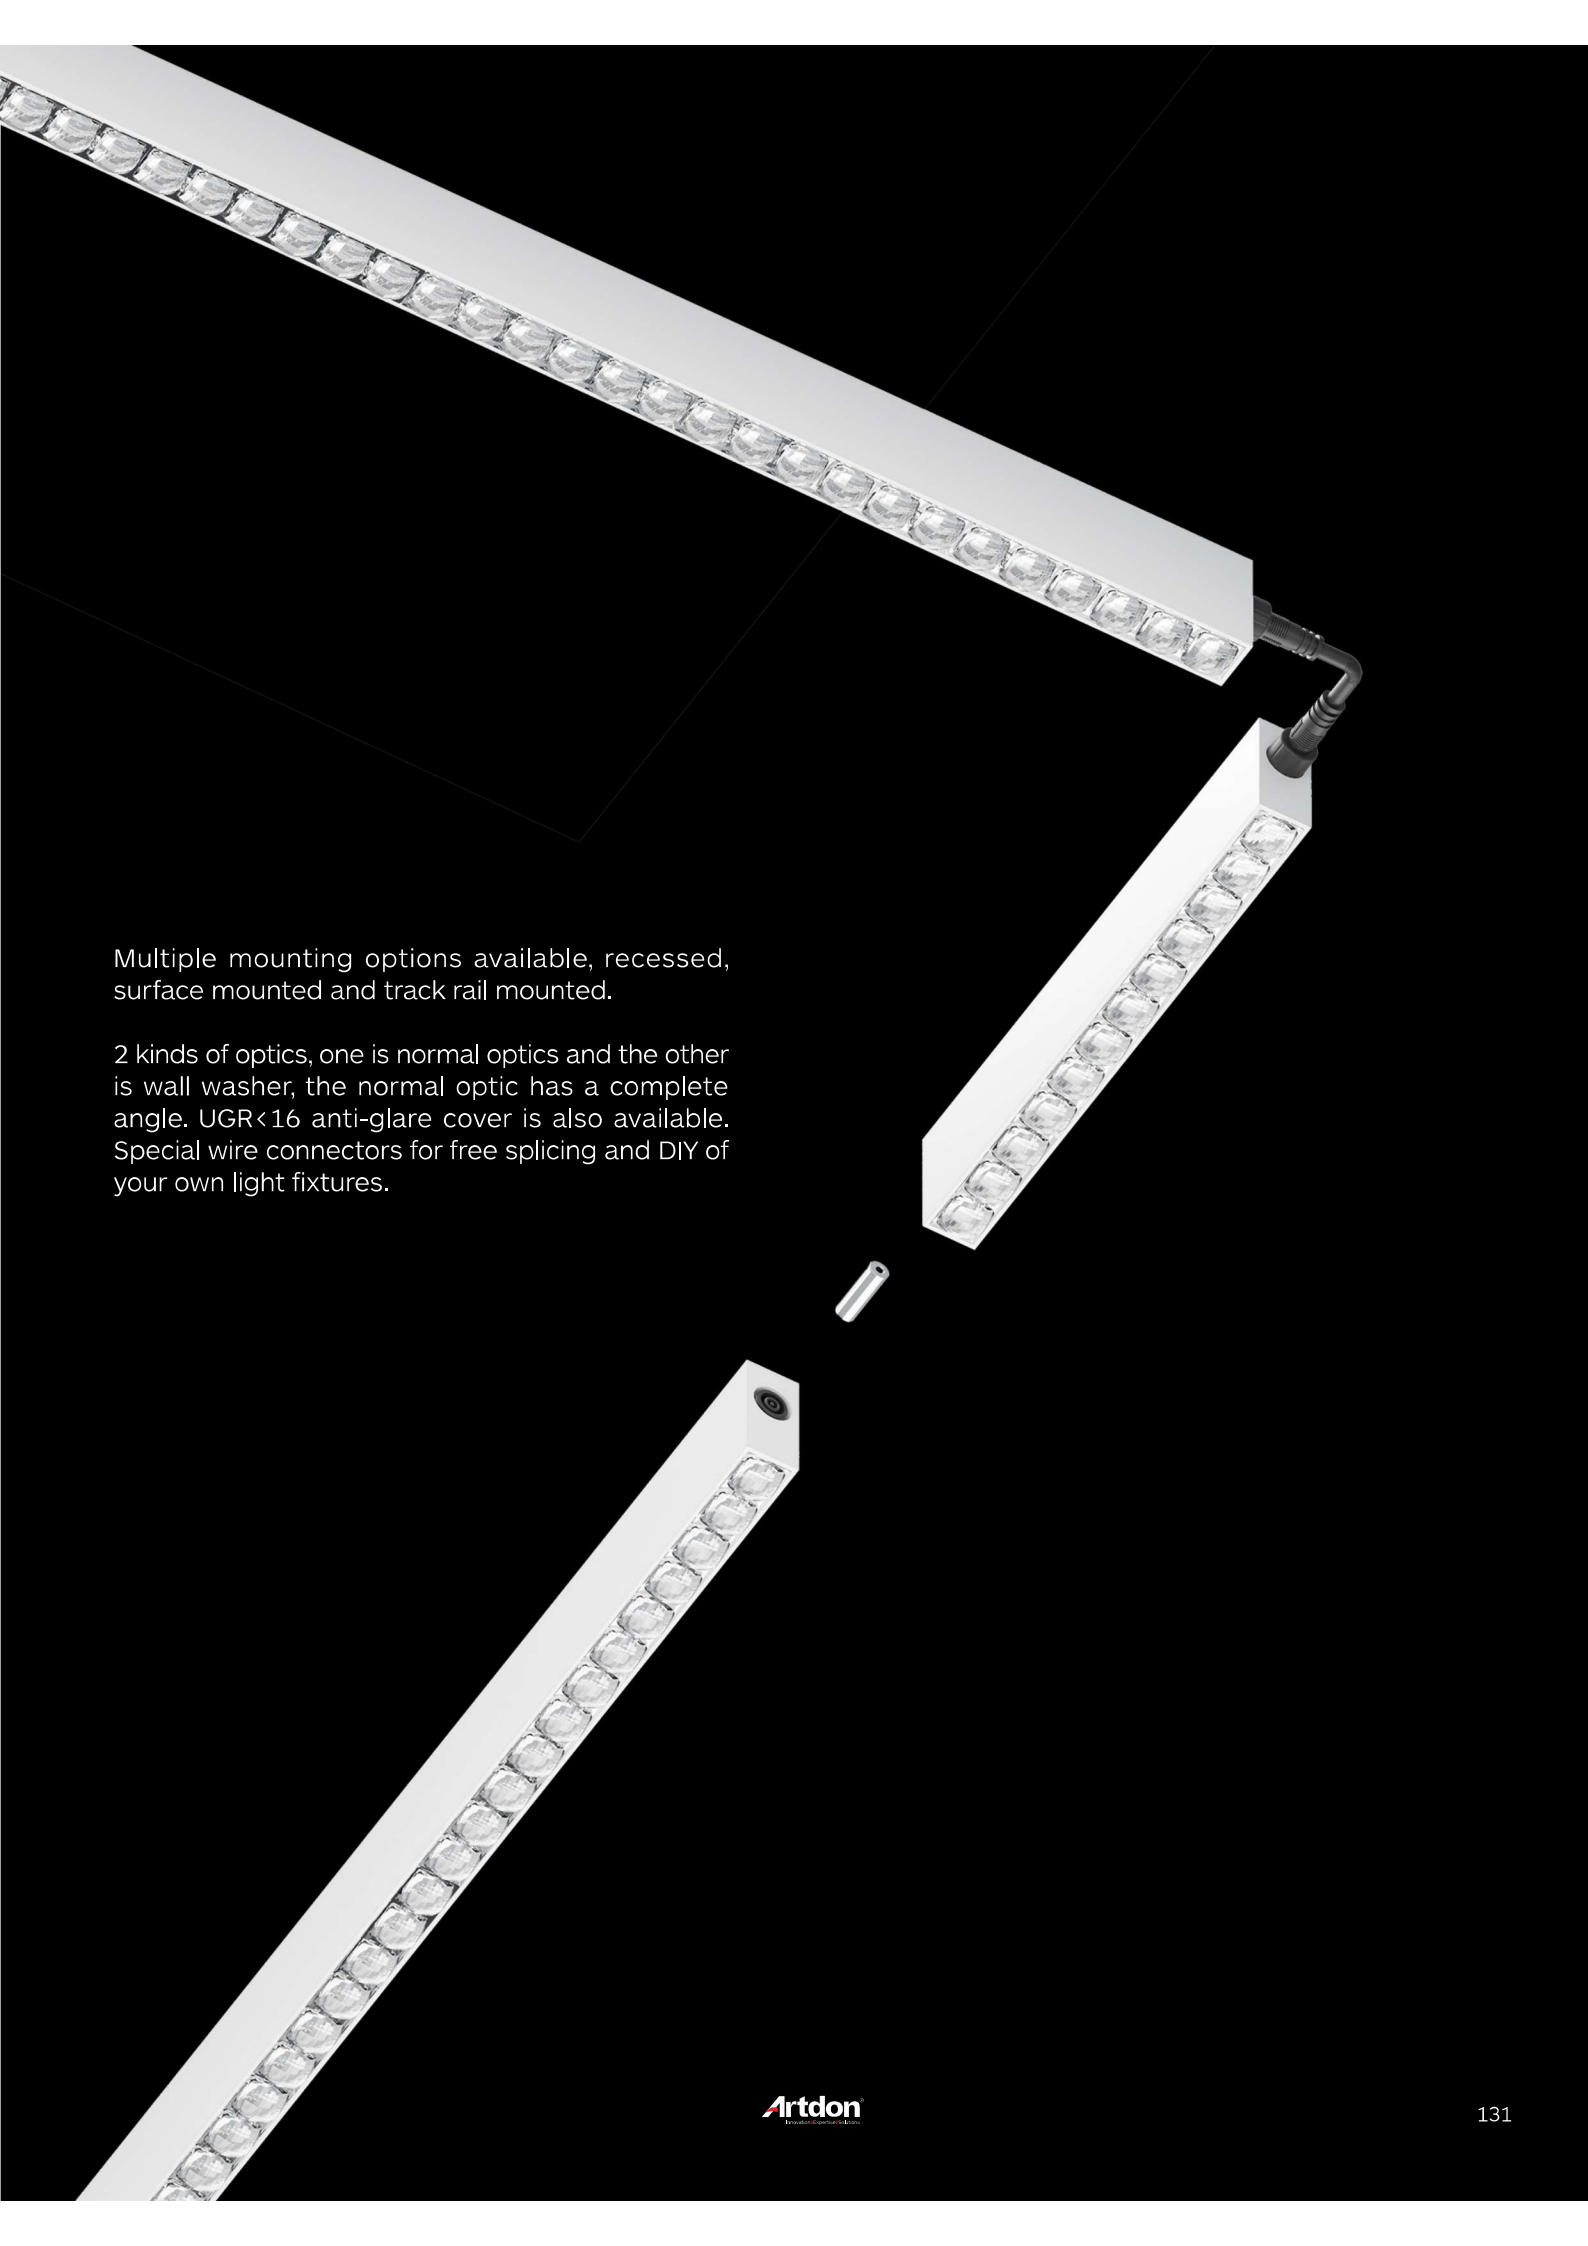


Multiple mounting options available, recessed, surface mounted and track rail mounted.

2 kinds of optics, one is normal optics and the other is wall washer, the normal optic has a complete angle. UGR<16 anti-glare cover is also available. Special wire connectors for free splicing and DIY of your own light fixtures.

ENKO 20


Profile Systems

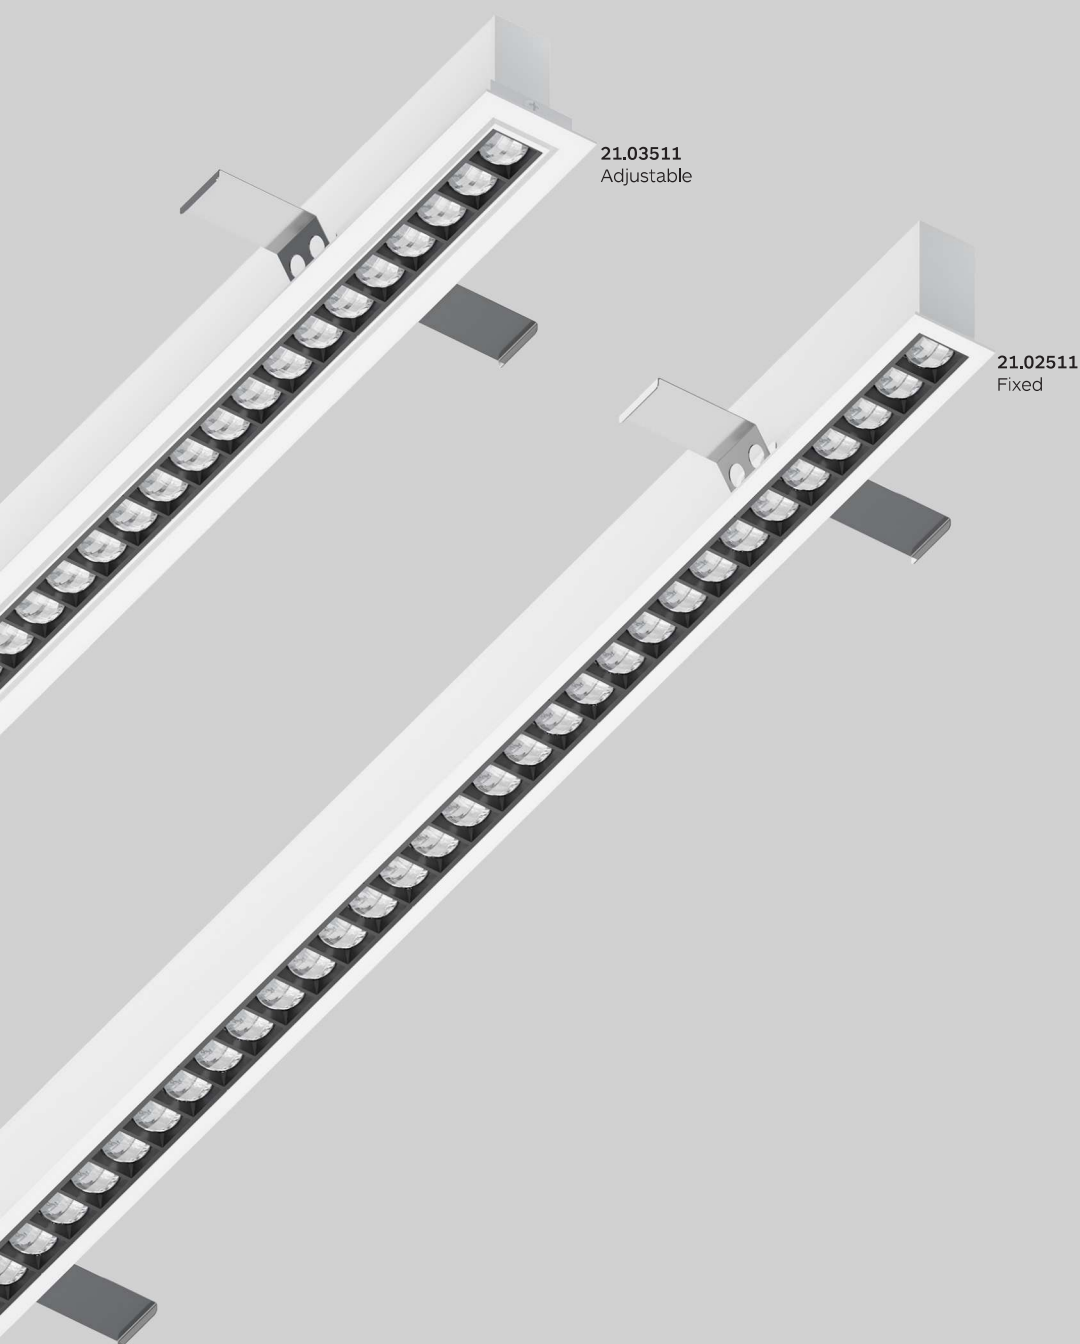

Quick Info

3000K, 3500K, 4000K
 CRI $\geq$ 90, SDCM $\leq$ 3
 24°, 30W/m
 Up to 84 lm/W
 Up to 2520 lm/m
 L90 @ 50 000 h
 On/Off / 0-10V / DALI


Types

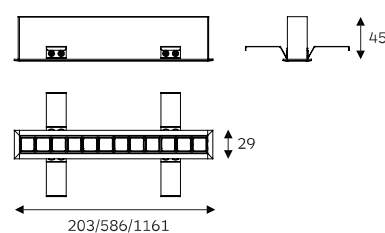

Product Code: 21.02511

Cut-out:

203: 196*24mm
 586: 580*24mm
 1161: 1154*24mm

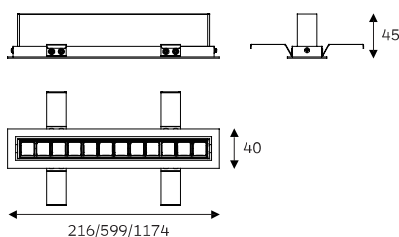

Product Code: 21.03511


Cut-out:

216: 210*34mm
 599: 594*34mm
 1174: 1168*34mm

Colours

○ ●
 WH BK

Light distribution




Recessed Anti-glare



ENKO 20


Profile Systems

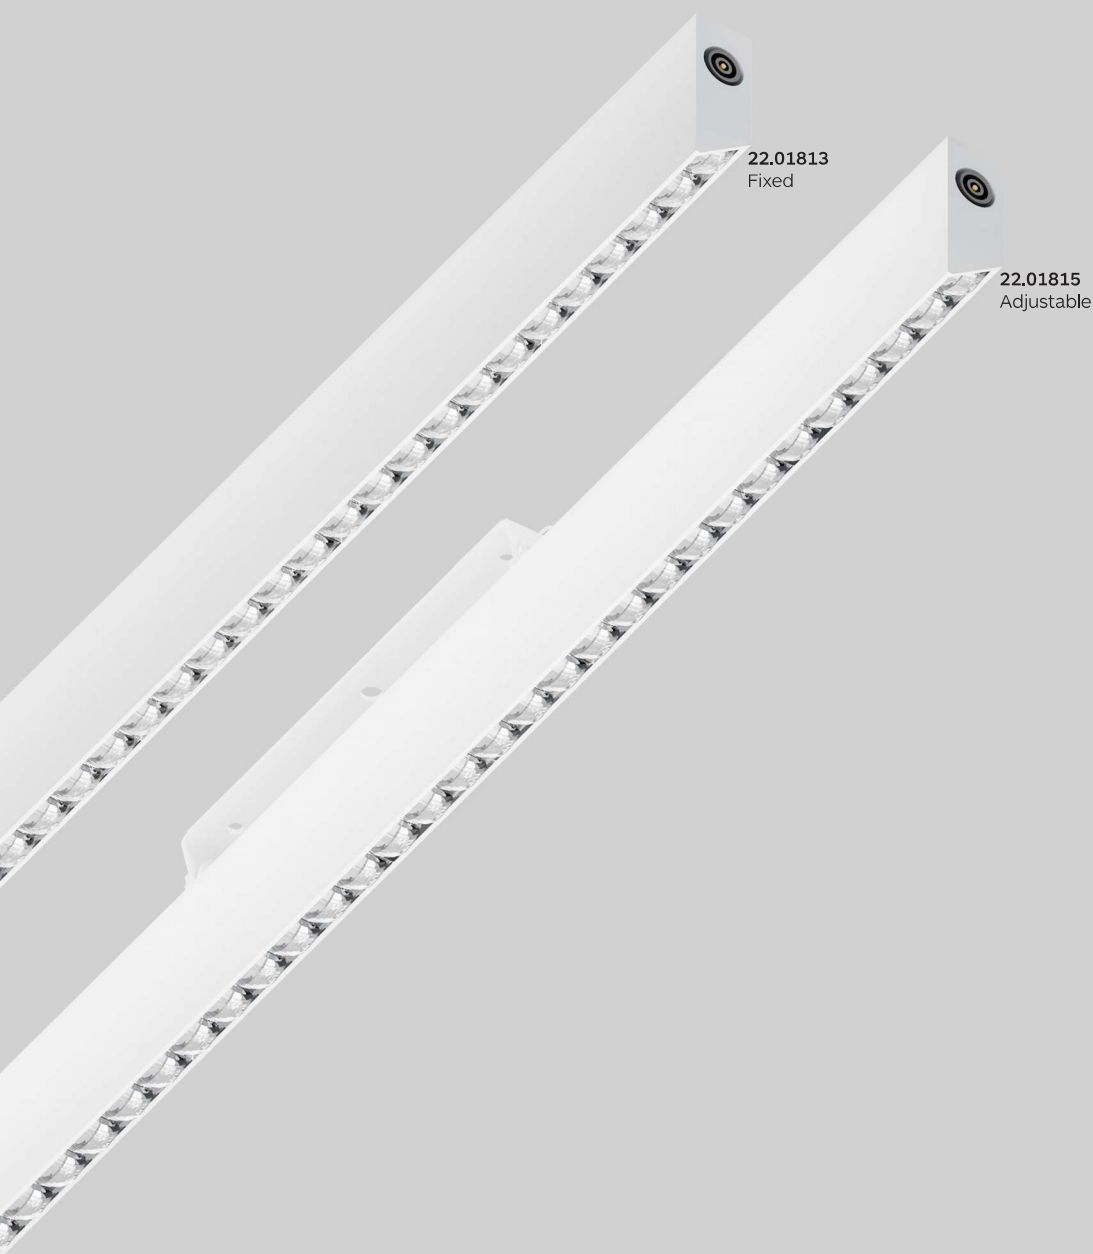


Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
Wall Washer, 30W/m
Up to 74 lm/W
Up to 2220 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 22.01813



Product Code: 22.01815

Colours

○ ●
WH BK

Light distribution




Wall Washer

Surface Mounted Wall Washer



ENKO 20


Profile Systems

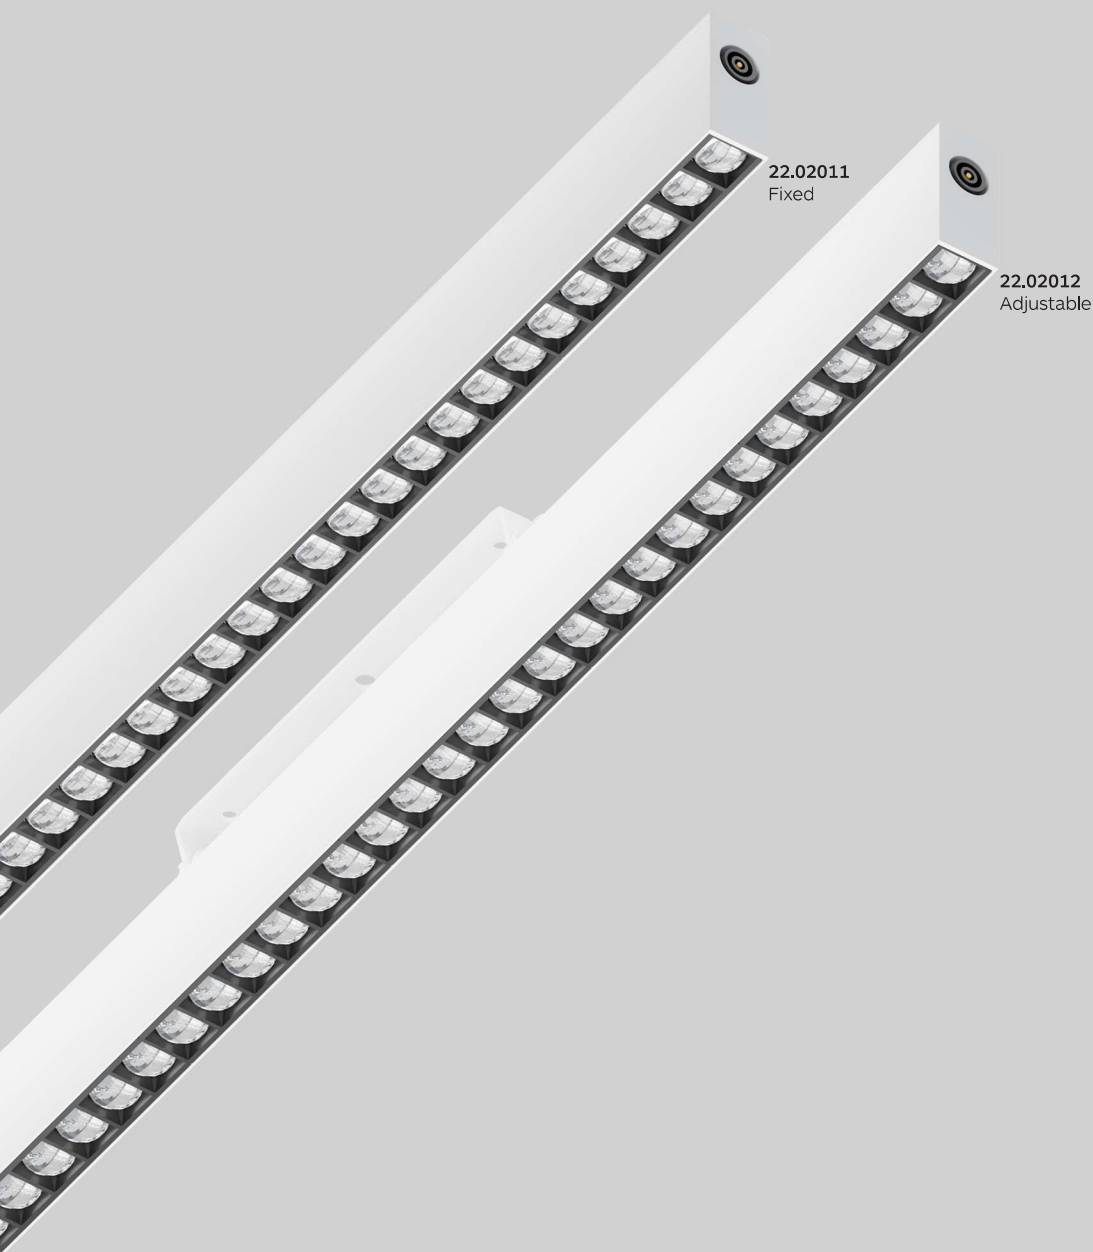


Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
24°, 30W/m
Up to 84 lm/W
Up to 2520 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 22.02011




Product Code: 22.02012

Colours



WH BK

Light distribution




Surface Mounted

Anti-glare



ENKO 20


Profile Systems

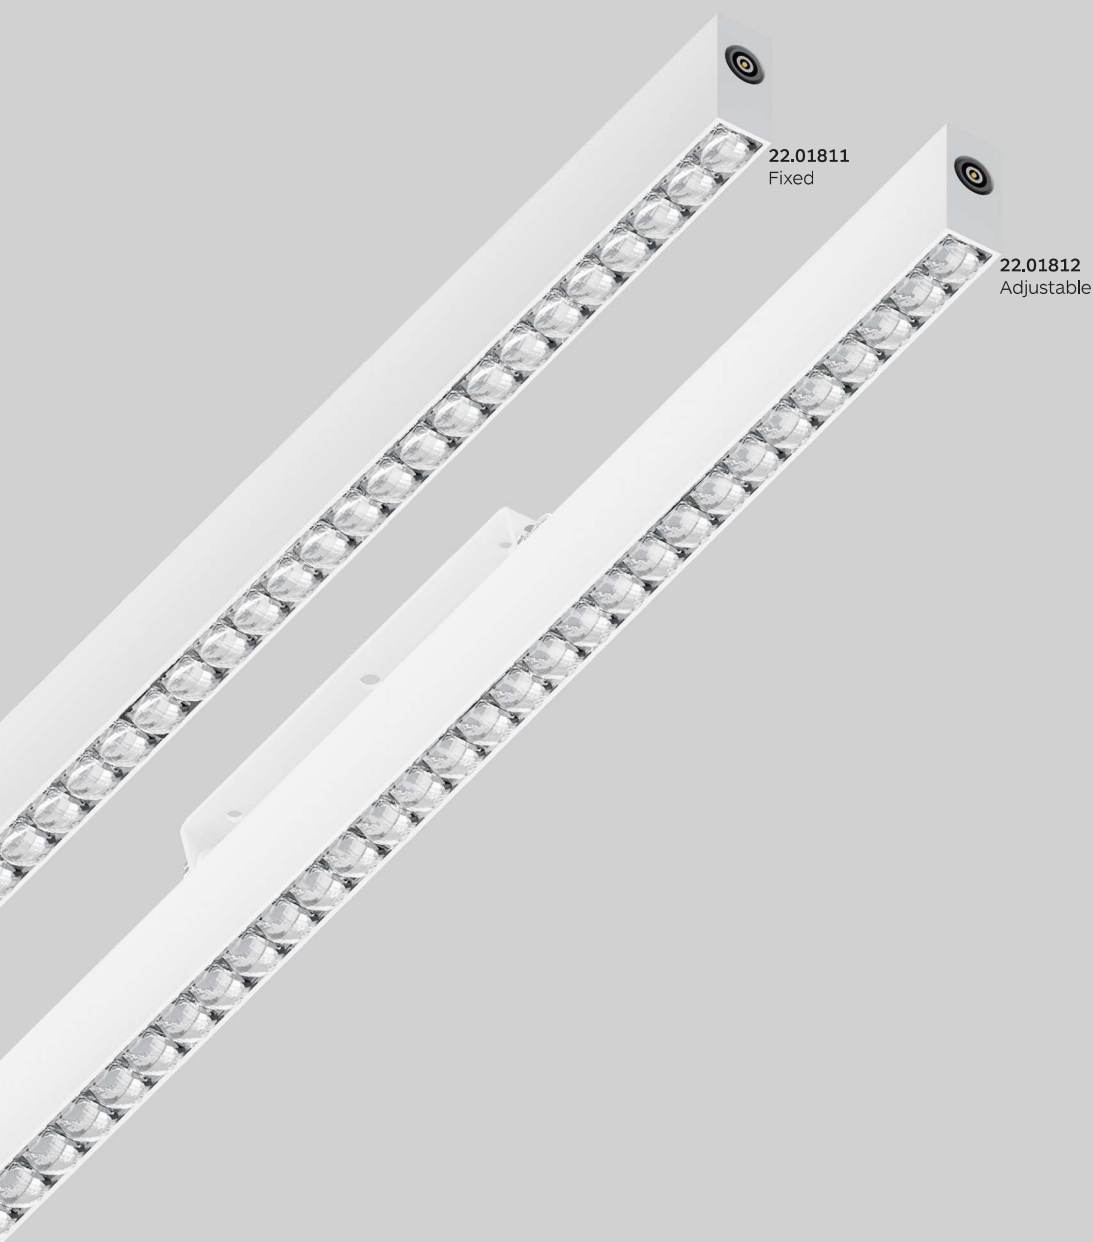


Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
25°, 30W/m
Up to 98 lm/W
Up to 2940 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types



Product Code: 22.01811




Product Code: 22.01812

Colours

○ ●
WH BK

Light distribution





Surface Mounted



CANNEX 50


Profile Systems

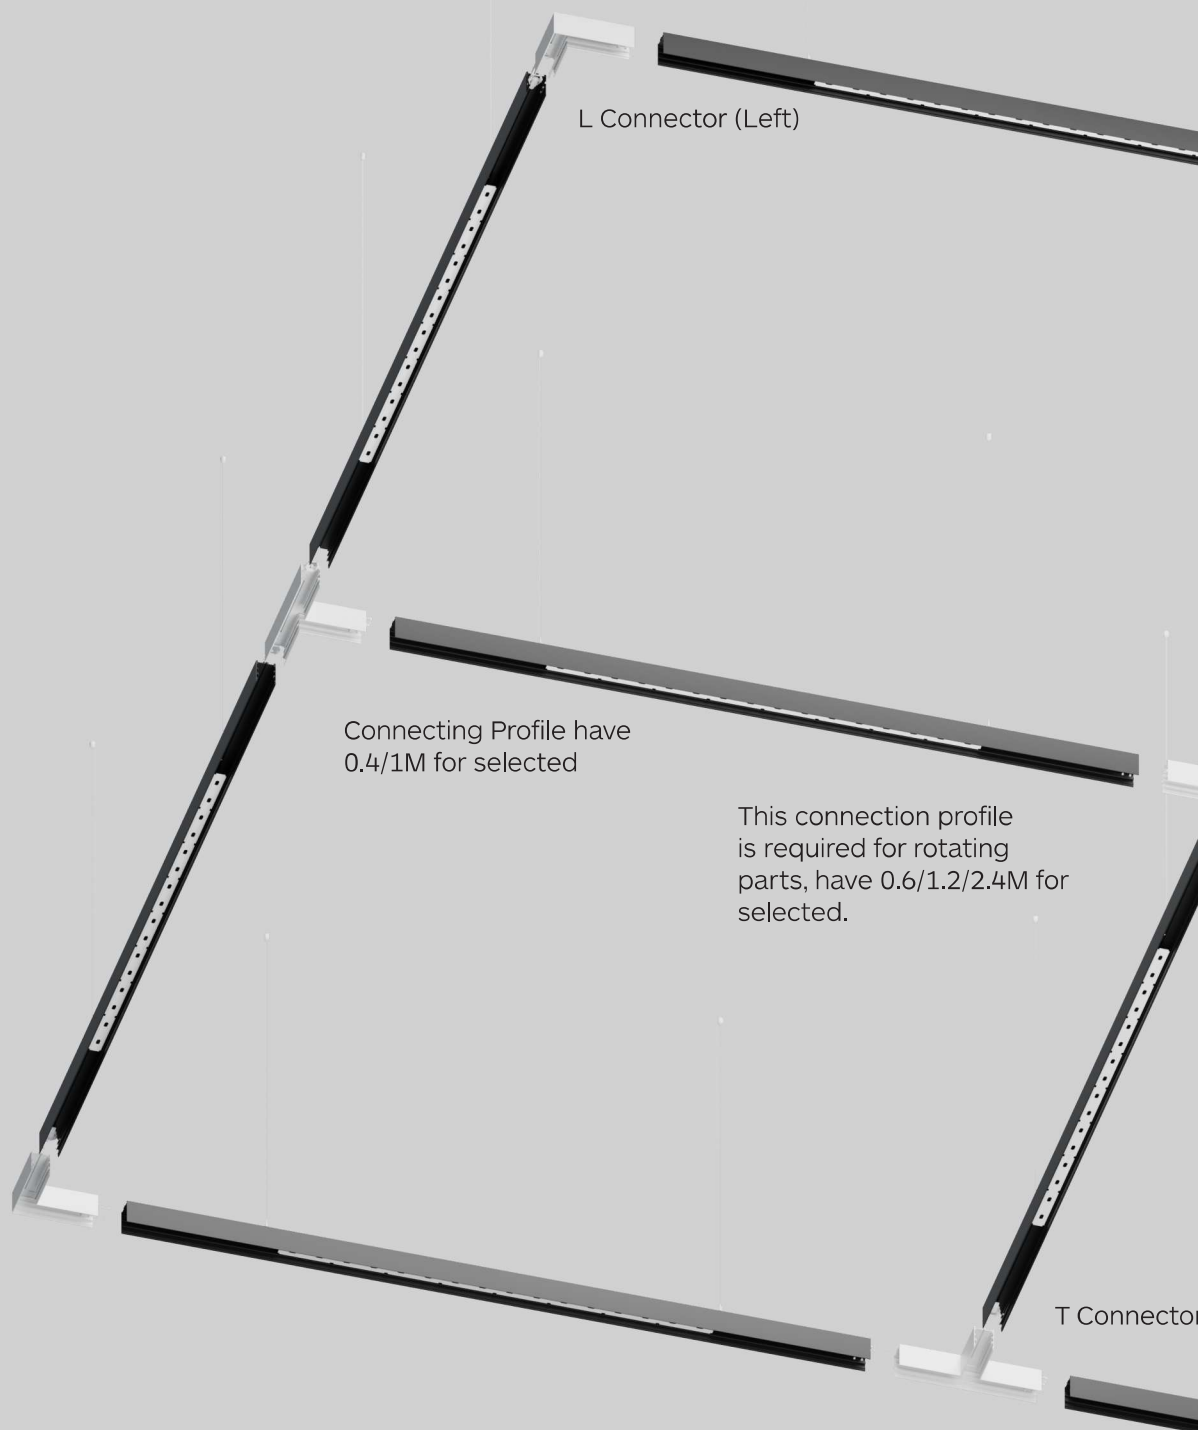

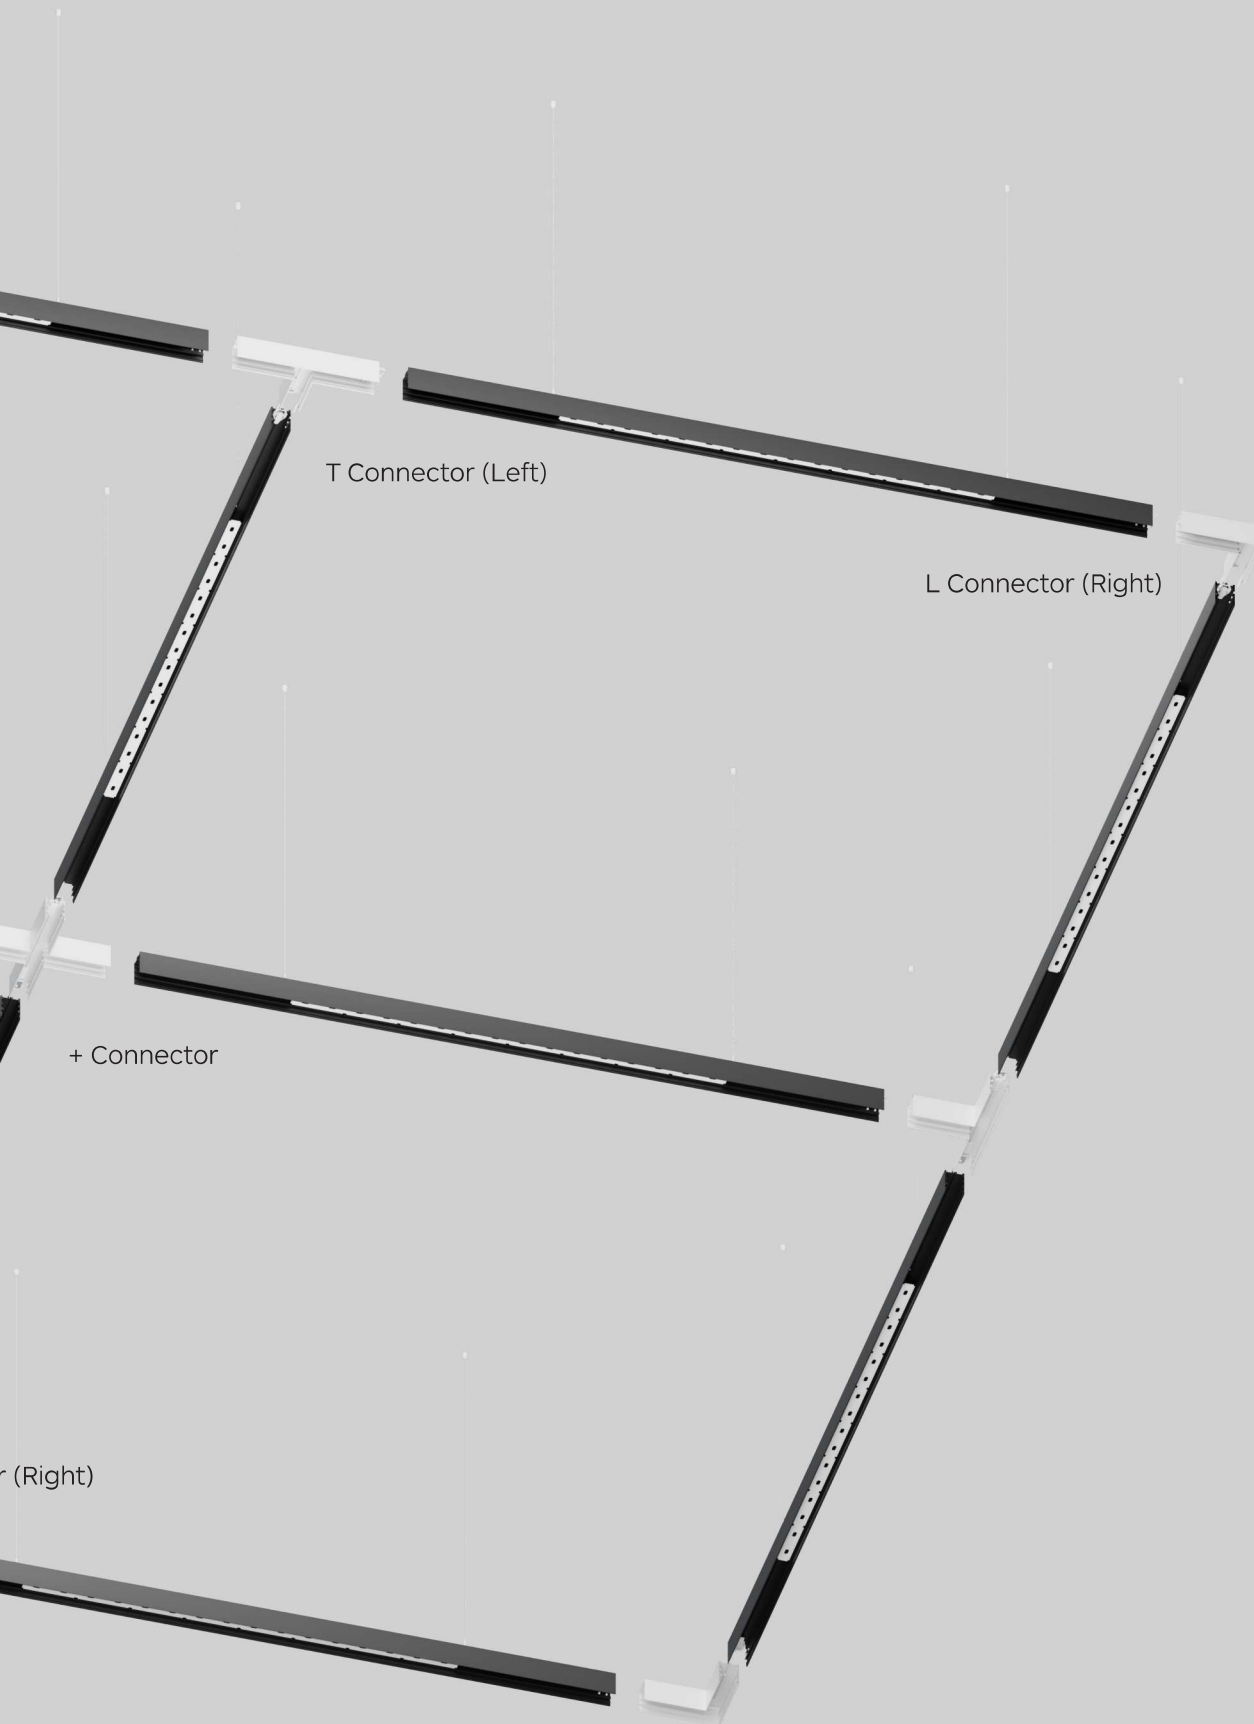

CANNEX 50



Profile Systems

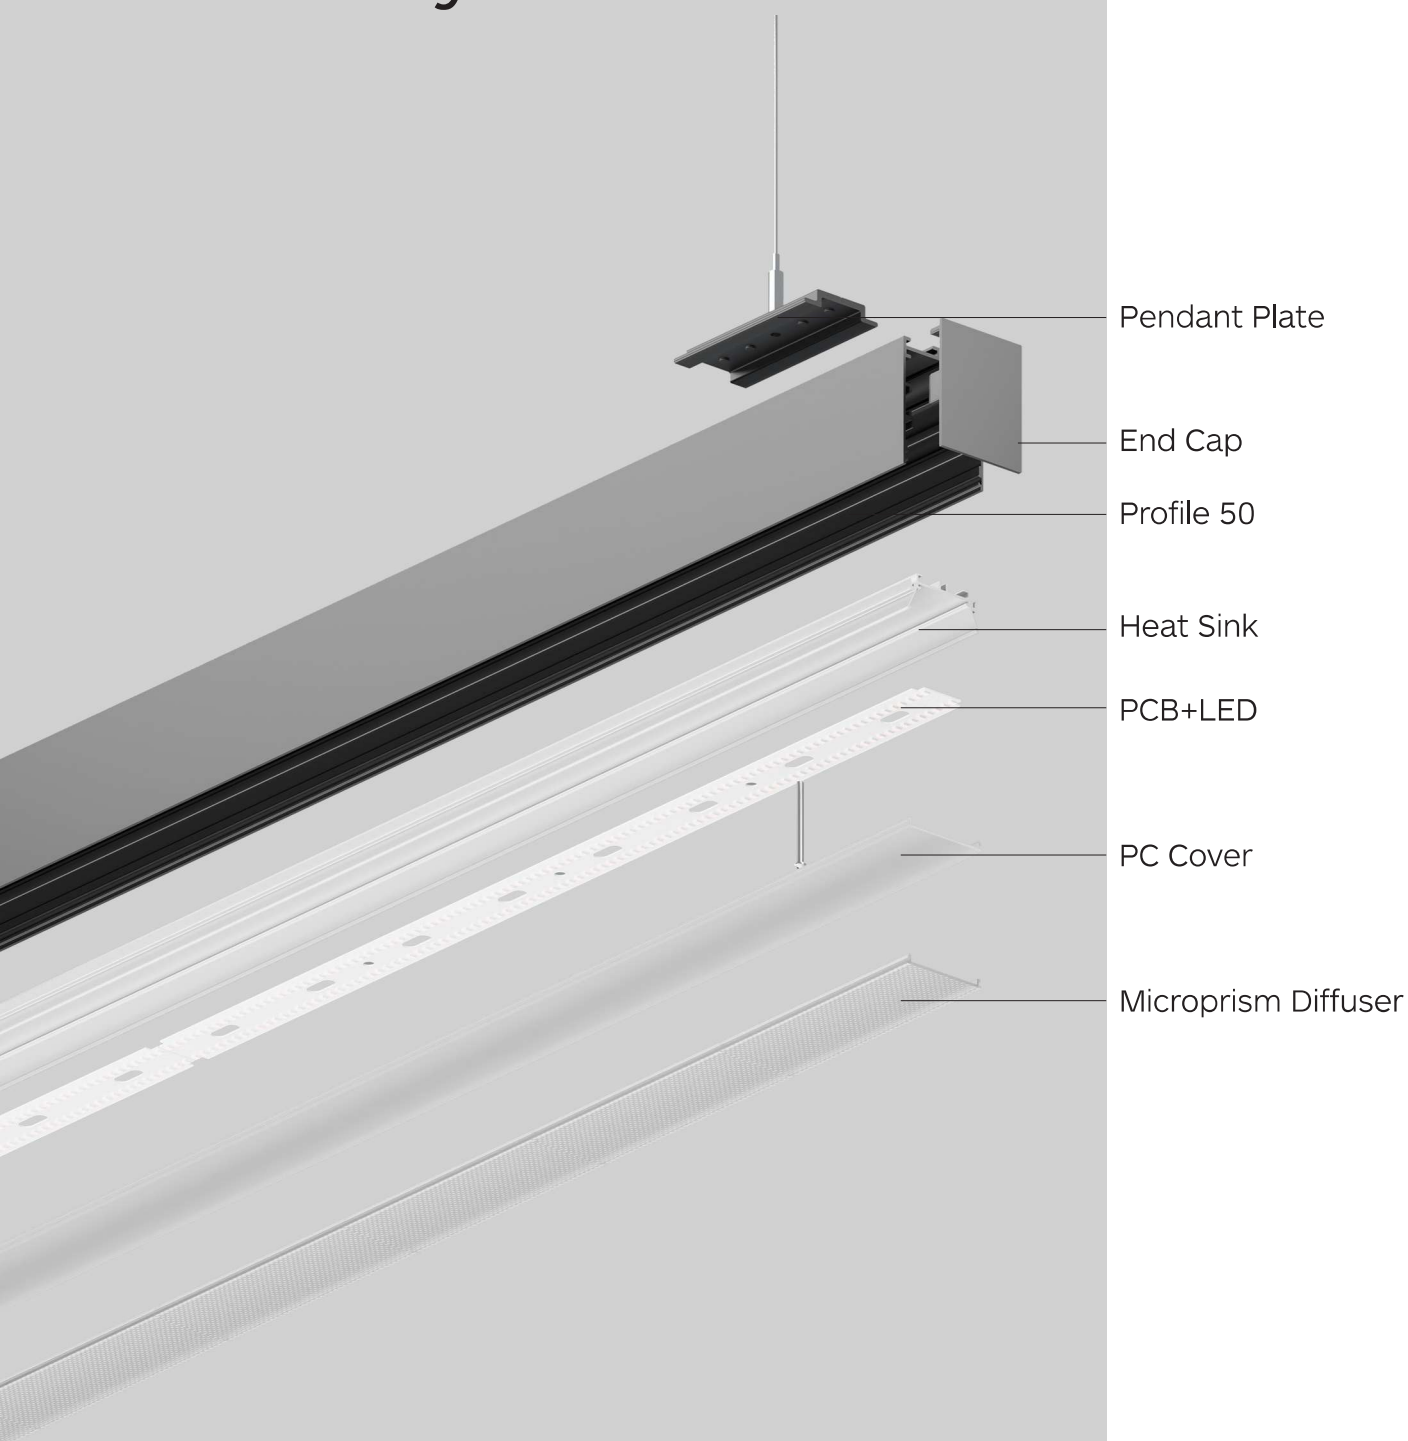



CANNEX 50

Profile Systems

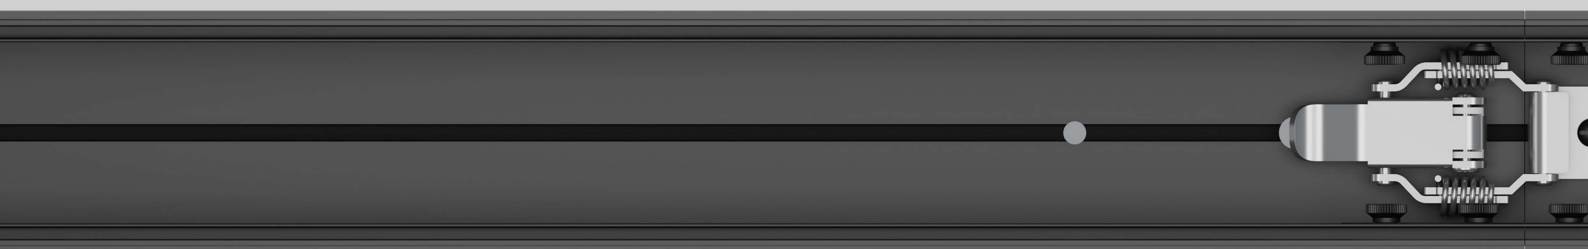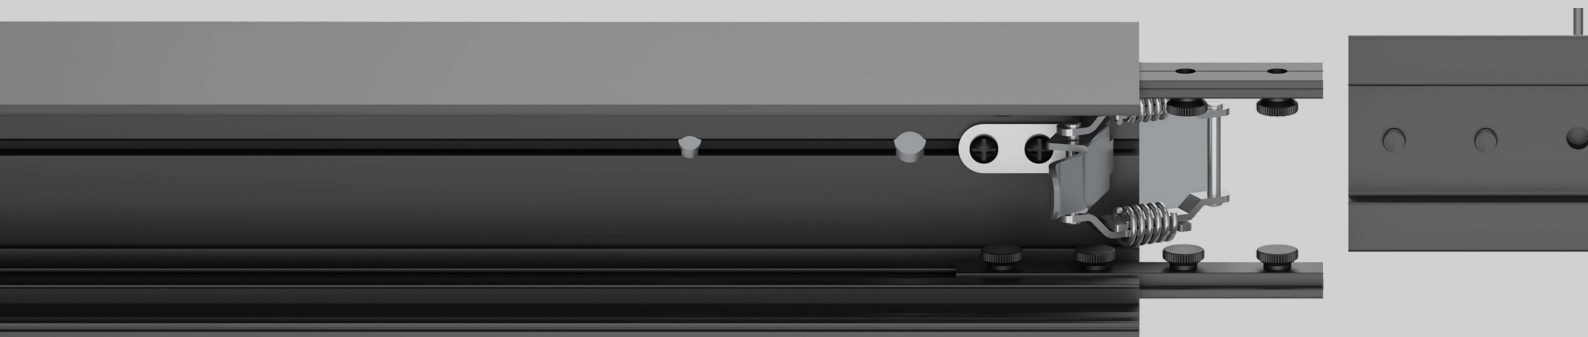


Easy Connecting

Two profiles are simply connected to each other through Locking snap and Straight Connected Small Aluminum Bars connected, then tightening screw by hand, without tooling





Step 1, Match the locking snap and lock.








Step 2, Used hand to tightening the screw, which make the linear profile more straight without gap.

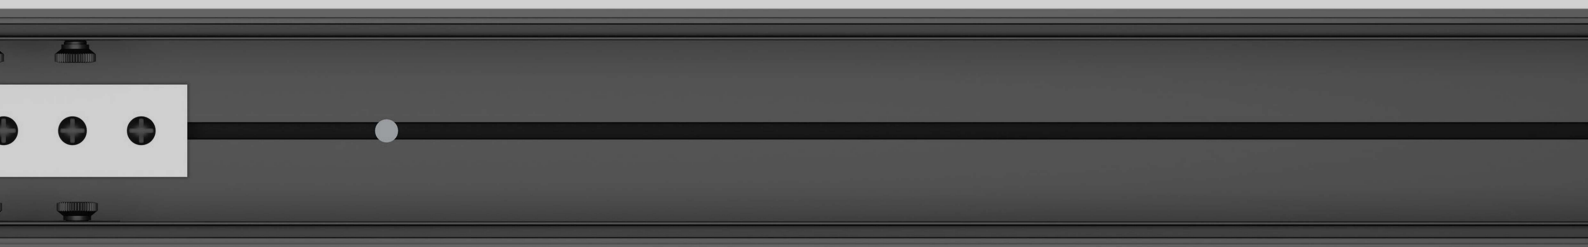

CANNEX 50


Profile Systems

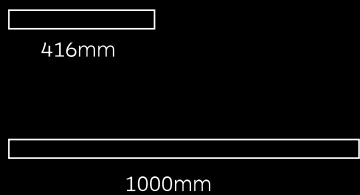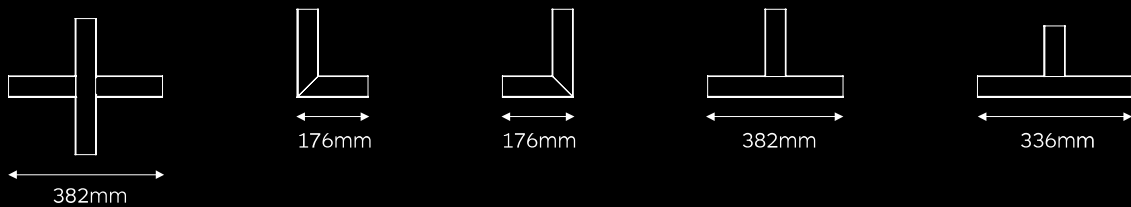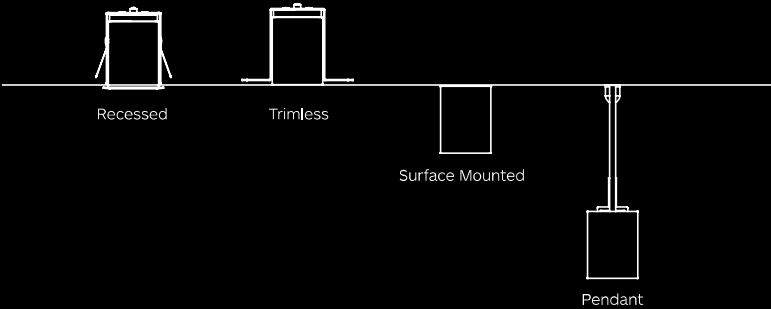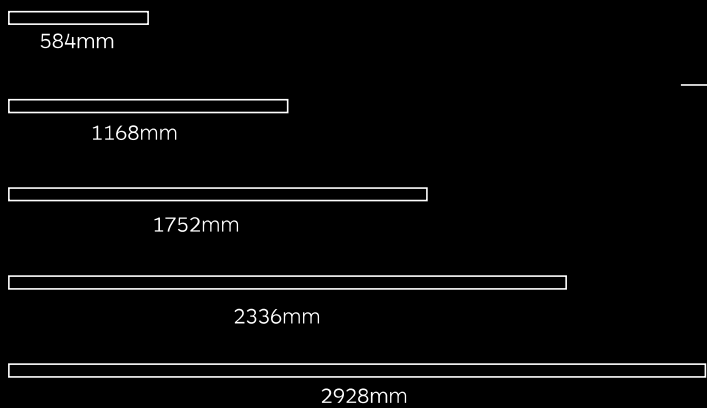



CANNEX 50


Profile Systems

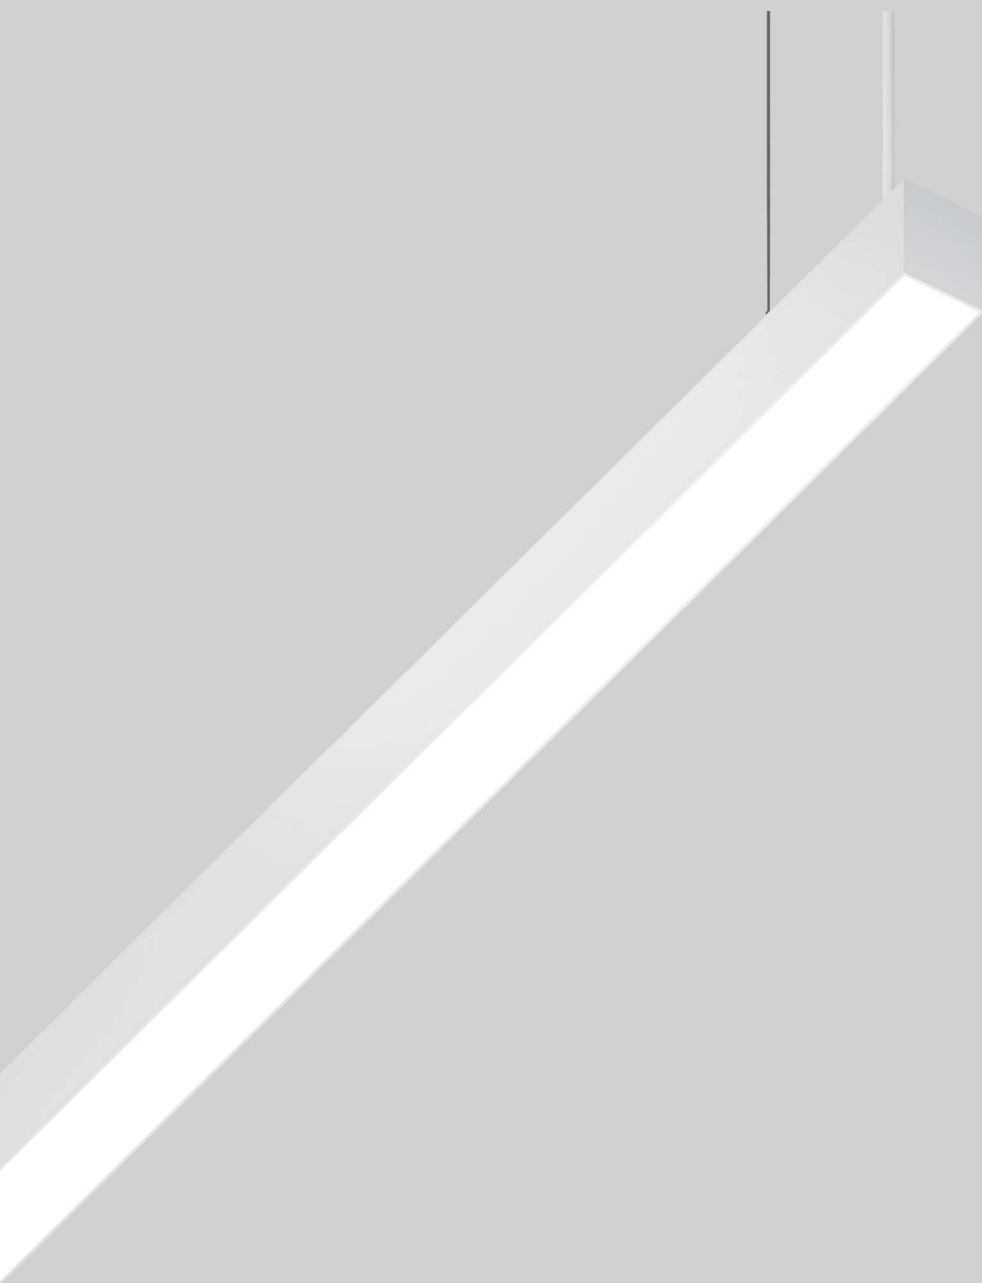

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

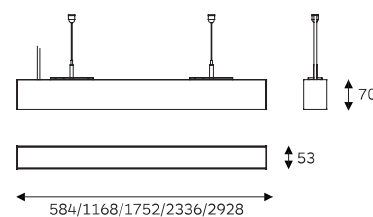

Product Code: 86.05311

Colours



WH BK

Light distribution




Opal

Pendant



CANNEX 50


Profile Systems

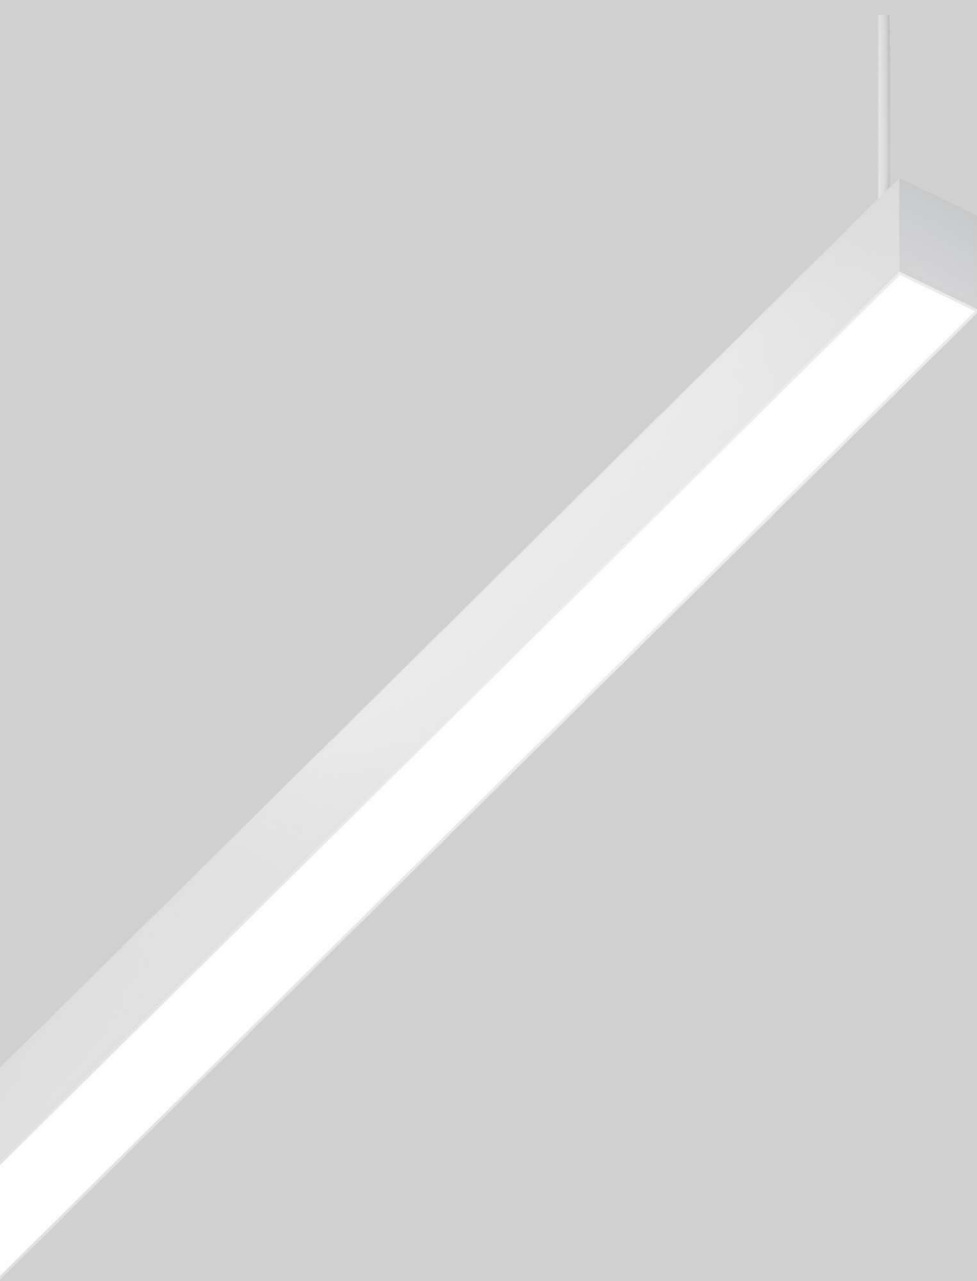

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

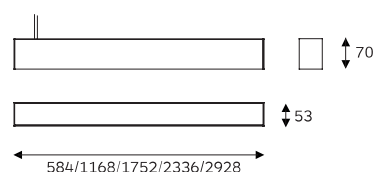

Product Code: 22.05312

Colours



Light distribution




Opal

Surface Mounted



CANNEX 50


Profile Systems

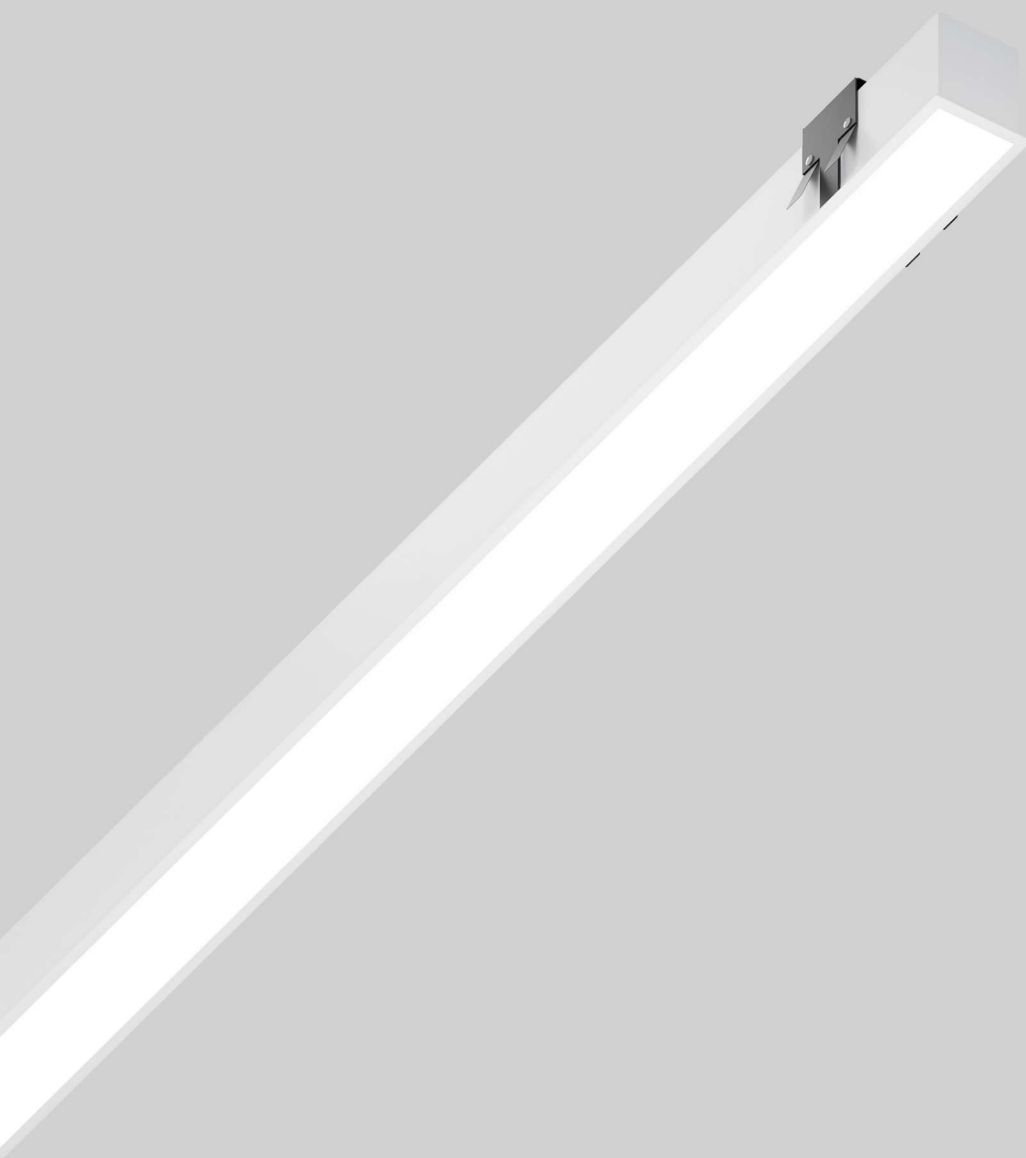

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

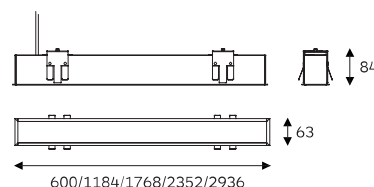

Product Code: 21.05811

Cut-out:

600: 595*58mm
1184: 1180*58mm
1768: 1760*58mm
2352: 2345*58mm
2936: 2930*58mm

Colours



WH BK

Light distribution




Opal

Recessed



CANNEX 50


Profile Systems

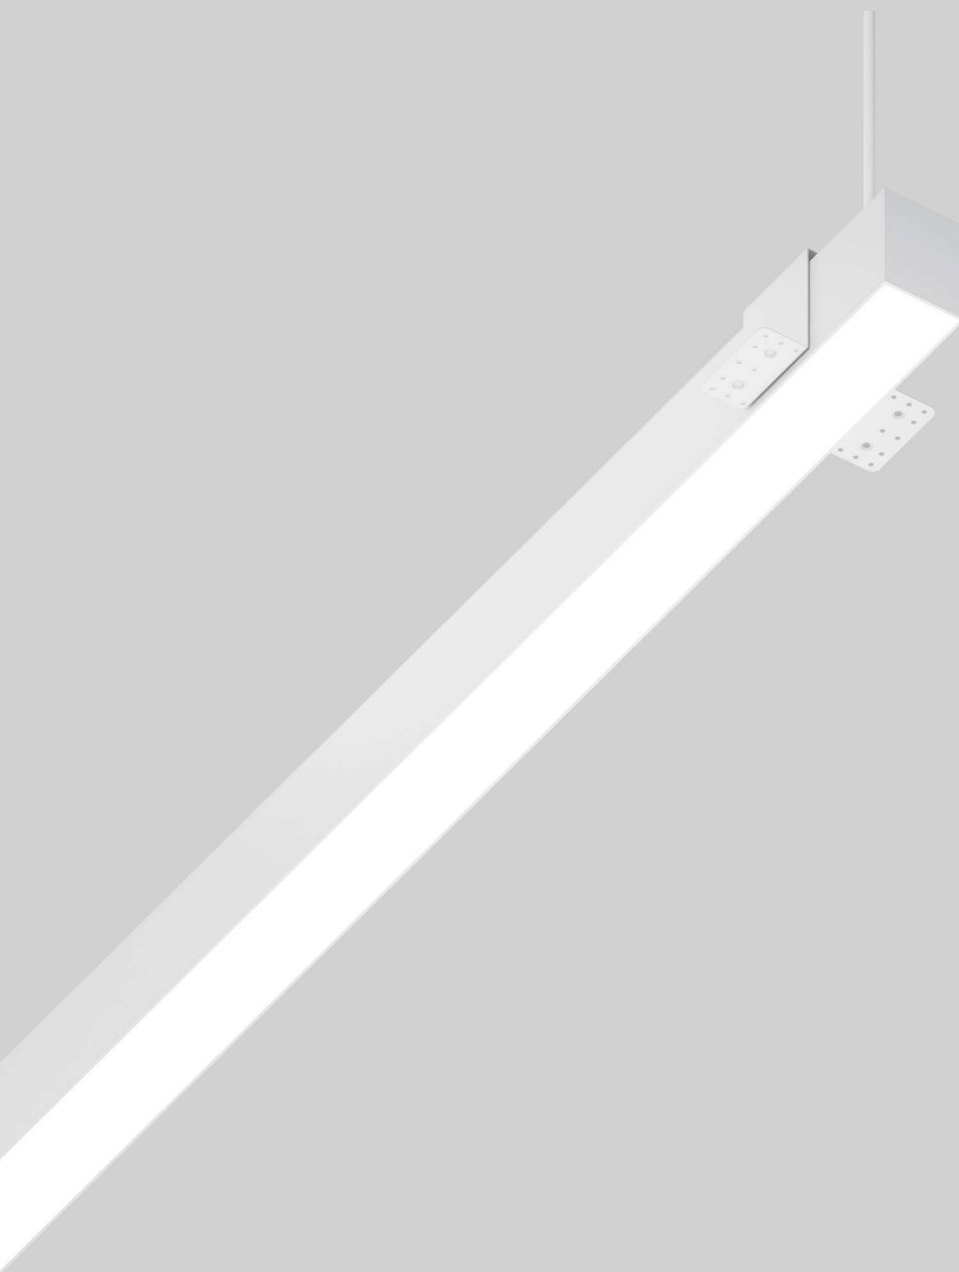

Quick Info

3000K, 3500K, 4000K
CRI $\geq$ 90, SDCM $\leq$ 3
110°, 27W/m
Up to 110 lm/W
Up to 2970 lm/m
L90 @ 50 000 h
On/Off / 0-10V / DALI

Types

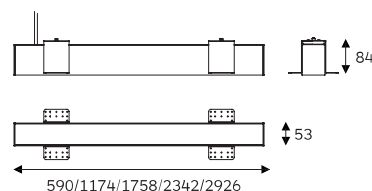

Product Code: 21.05812

Cut-out:

590: 595*58mm
1174: 1180*58mm
1758: 1765*58mm
2342: 2360*58mm
2926: 2940*58mm

Colours



WH BK

Light distribution



Opal

Trimless






RECO 35

Profile Systems



RECO 35


Profile Systems

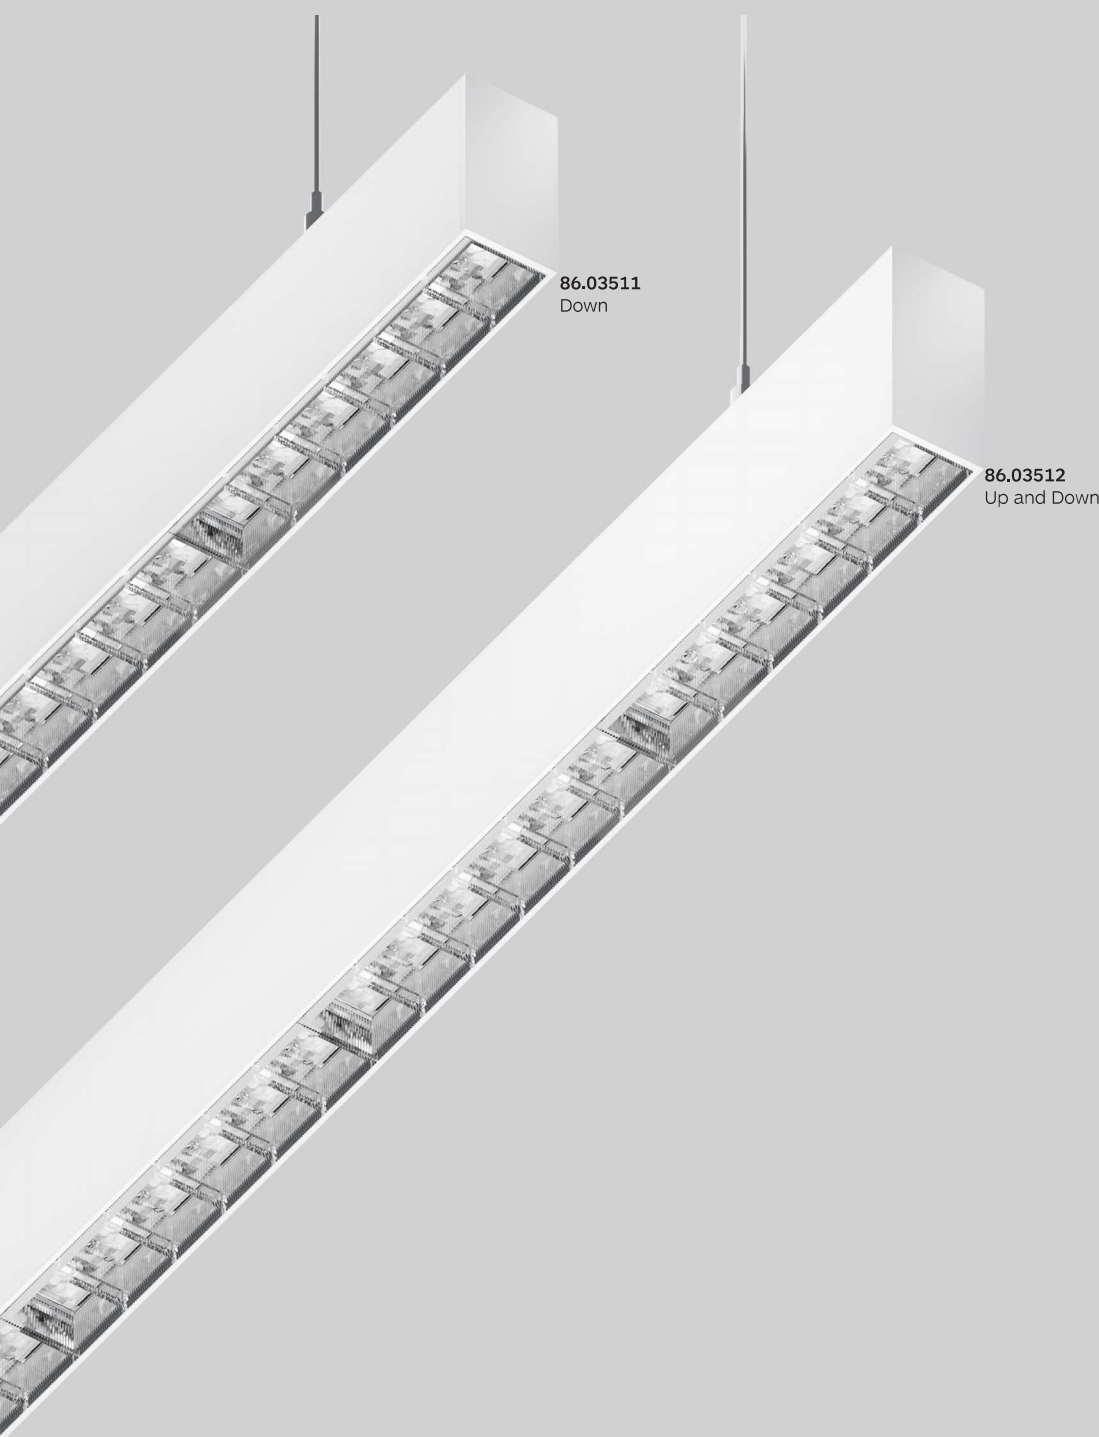


Quick Info

3000K, 3500K, 4000K
 CRI $\geq$ 90, SDCM $\leq$ 3
 Down 45°, 30W/m, 94lm/W
 Up 110°, 30W/m, 85lm/W
 L90 @ 50 000 h
 On/Off / 0-10V / DALI

Types

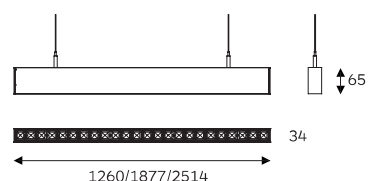

Product Code: 86.03511

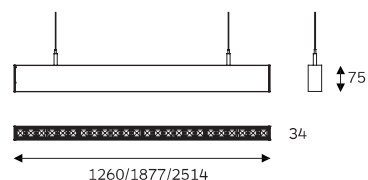


Product Code: 86.03512

Colours

○ ●
 WH BK

Light distribution



Pendant

