





Four size options

Grille surface-mounted light

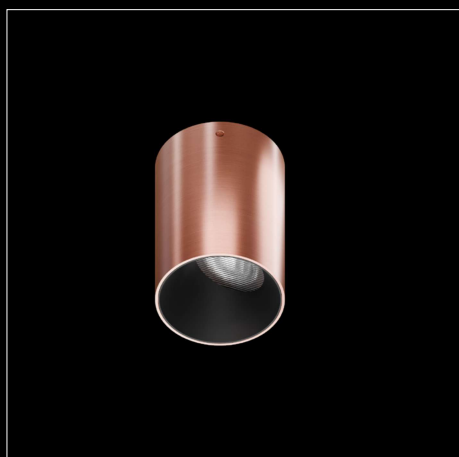

Surface-mounted wall-washing luminaire

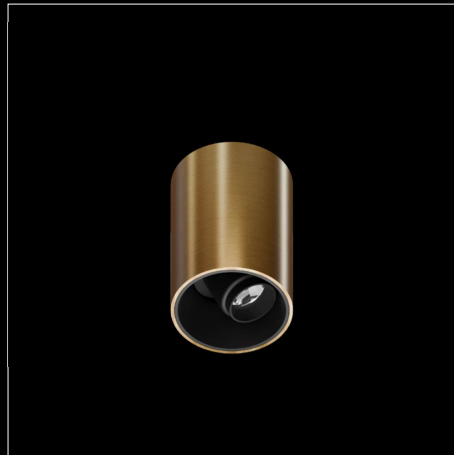


Supports up to 27-degree
angle adjustment

Adjustable rod suspension
light



200mm and 300mm

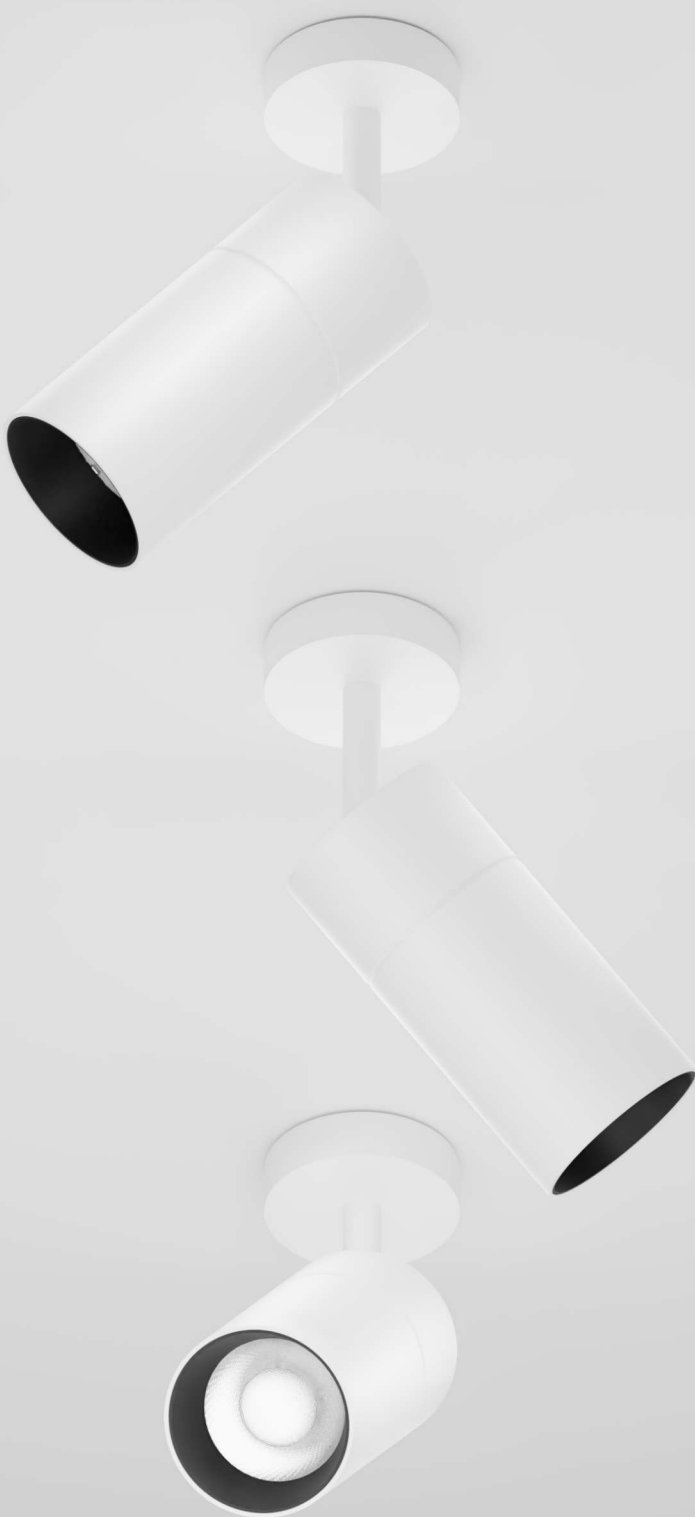**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

EMMA

SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE EMMA 45

spot 19°

medium 29°

flood 44°

wide flood 56°

BEAM ANGLE EMMA 62

spot 18°

medium 27°

flood 38°

wide flood 54°

BEAM ANGLE EMMA 73

spot 14°

medium 28°

flood 40°

wide flood 50°

BEAM ANGLE EMMA 90

spot 16°

medium 20°

flood 30°

wide flood 45°



EMMA 45




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
11W 36V 250MA	3000K	935lm	93.04513
	4000K	981lm	



EMMA 62




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1627lm	93.06213
	4000K	1708lm	



EMMA 73




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
24W 36V 600MA	3000K	2963lm	93.07311
	4000K	3111lm	



EMMA 90




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT


SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
36W 36V 800MA	3000K	4509lm	93.09011
	4000K	4734lm	



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

COVIA

SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE COVIA 93 L1

spot 17°

medium 23°

flood 39°

wide flood 52°

BEAM ANGLE COVIA 184 L2

spot 17°

medium 23°

flood 39°

wide flood 52°

BEAM ANGLE COVIA 118 L1

spot 18°

medium 24°

flood 38°

wide flood 47°

BEAM ANGLE COVIA 238 L2

spot 18°

medium 24°

flood 38°

wide flood 47°



COVIA 93 L1




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1719lm	94.09311
	4000K	1804lm	



COVIA 184 L2




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14WX2 36V 350MA	3000K	2X1719lm	94.09312
	4000K	2X1804lm	



COVIA 118 L1




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
23W 36V 600MA	3000K	2876lm	94.11811
	4000K	3019lm	



COVIA 238 L2




CRI
>90

COB



IP20

DALI



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
23WX2 36V 600MA	3000K	2X2876lm	94.11812
	4000K	2X3019lm	

**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

UTH

SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE
2700K
3000K
4000K

FINISH COLOUR
sandy white
sandy black

BEAM ANGLE UTH 65
spot 21°
medium 27°
flood 35°
wide flood 60°

BEAM ANGLE UTH 80
spot 17°
medium 25°
flood 34°
wide flood 60°

BEAM ANGLE UTH 95
spot 14°
medium 25°
flood 35°
wide flood 58°



UTH 65



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
6W 36V 150MA	3000K	562lm	91.06511
	4000K	590lm	




UTH 80



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	1126lm	91.08011
	4000K	1287lm	




UTH 95



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1694lm	91.09511
	4000K	1778lm	

**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

CLA

SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE CLA 60

spot 21°

medium 24°

flood 35°

wide flood 53°

BEAM ANGLE CLA 80

spot 17°

medium 23°

flood 32°

wide flood 55°

BEAM ANGLE CLA 100

spot 18°

medium 26°

flood 37°

wide flood 54°



CLA 60

CRI >90

COB

IP20



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
6W 36V 150MA	3000K	635lm	91.06012
	4000K	666lm	




CLA 80

CRI >90

COB

IP20



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	1063lm	91.08013
	4000K	1116lm	




CLA 100

CRI >90

COB

IP20



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
13W 36V 300MA	3000K	1407lm	91.10012
	4000K	1477lm	



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



WW

WASHO

WALL WASHER SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE WASHO 55

ww Tilted 20° Beam 48°

BEAM ANGLE WASHO 73

ww Tilted 20° Beam 72°

BEAM ANGLE WASHO 90

ww Tilted 22° Beam 52°




WASHO 55

CRI >90

COB

IP20



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
9W 36V 200MA	3000K	400lm	91.05513
	4000K	420lm	



WASHO 73

CRI >90

COB

IP20

DALI



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1123lm	91.07313
	4000K	1179lm	




WASHO 90

CRI >90

COB

IP20

DALI



SURFACE MOUNTED LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
28W 36V 700MA	3000K	1754lm	91.09015
	4000K	1842lm	



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

ADJ

SURFACE MOUNTED LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE ADJ 62

spot 20°

medium 25°

flood 38°

wide flood 57°

BEAM ANGLE ADJ 84

spot 24°

medium 30°

flood 44°

wide flood 53°

BEAM ANGLE ADJ 116

spot 19°

medium 25°

flood 41°

wide flood 53°

ADJ 62



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
6W 36V 150MA	3000K	445lm	93.06211
	4000K	467lm	




ADJ 84



SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1243lm	93.08411
	4000K	1305lm	




ADJ 116




SURFACE MOUNTED LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	2190lm	93.11611
	4000K	2299lm	





PENDANT LIGHT

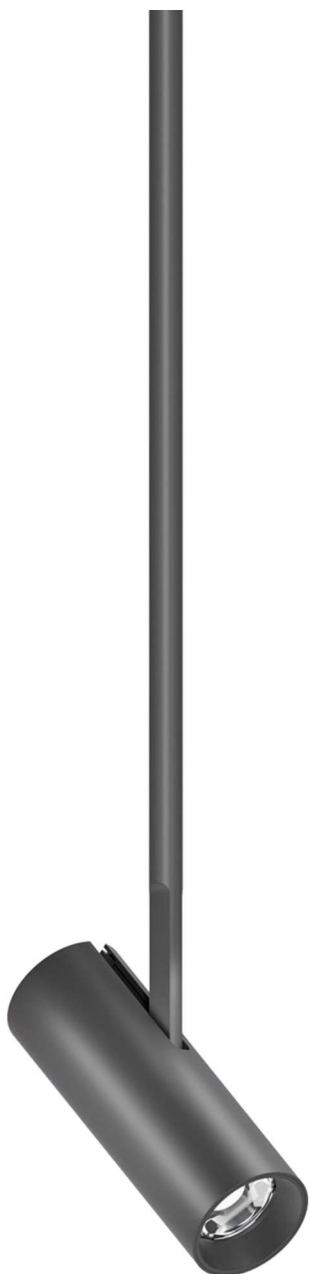


218

SPECTRUM

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

SPECTRUM

ROD SUSPENSION LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE SPECTRUM 45

spot 20°

medium 24°

flood 36°

wide flood 43°


BEAM ANGLE SPECTRUM 55

spot 20°

medium 31°

flood 43°

wide flood 52°



SPECTRUM 45

CRI >90


COB

IP20

DALI

ROD SUSPENSION LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1083lm	93.04520
	4000K	1137lm	



SPECTRUM 55

CRI >90

COB

IP20

DALI

ROD SUSPENSION LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
24W 36V 600MA	3000K	2615lm	93.05517
	4000K	2745lm	

220


DELTA



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

DELTA
PENDANT LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE DELTA 70


13° - 44°

BEAM ANGLE DELTA 97

13° - 44°

BEAM ANGLE DELTA 155

13° - 44°



DELTA 70

CRI >90


COB

IP20

DALI

PENDANT LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	455lm	81.07011
	4000K	478lm	



DELTA 97

CRI >90


COB

IP20

DALI

PENDANT LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	455lm	81.09711
	4000K	478lm	



DELTA 155

CRI >90

COB

IP20

DALI

PENDANT LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	455lm	81.15511
	4000K	478lm	