





ARCWASH


WALL WASHER TRACK LIGHT

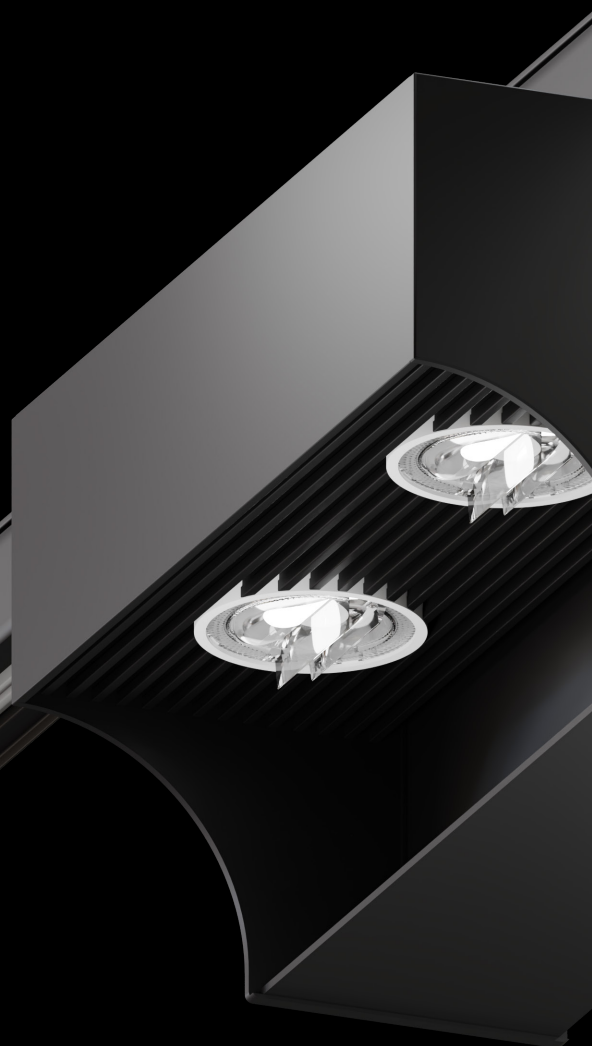




ARCWASH

WALL WASHER TRACK LIGHT




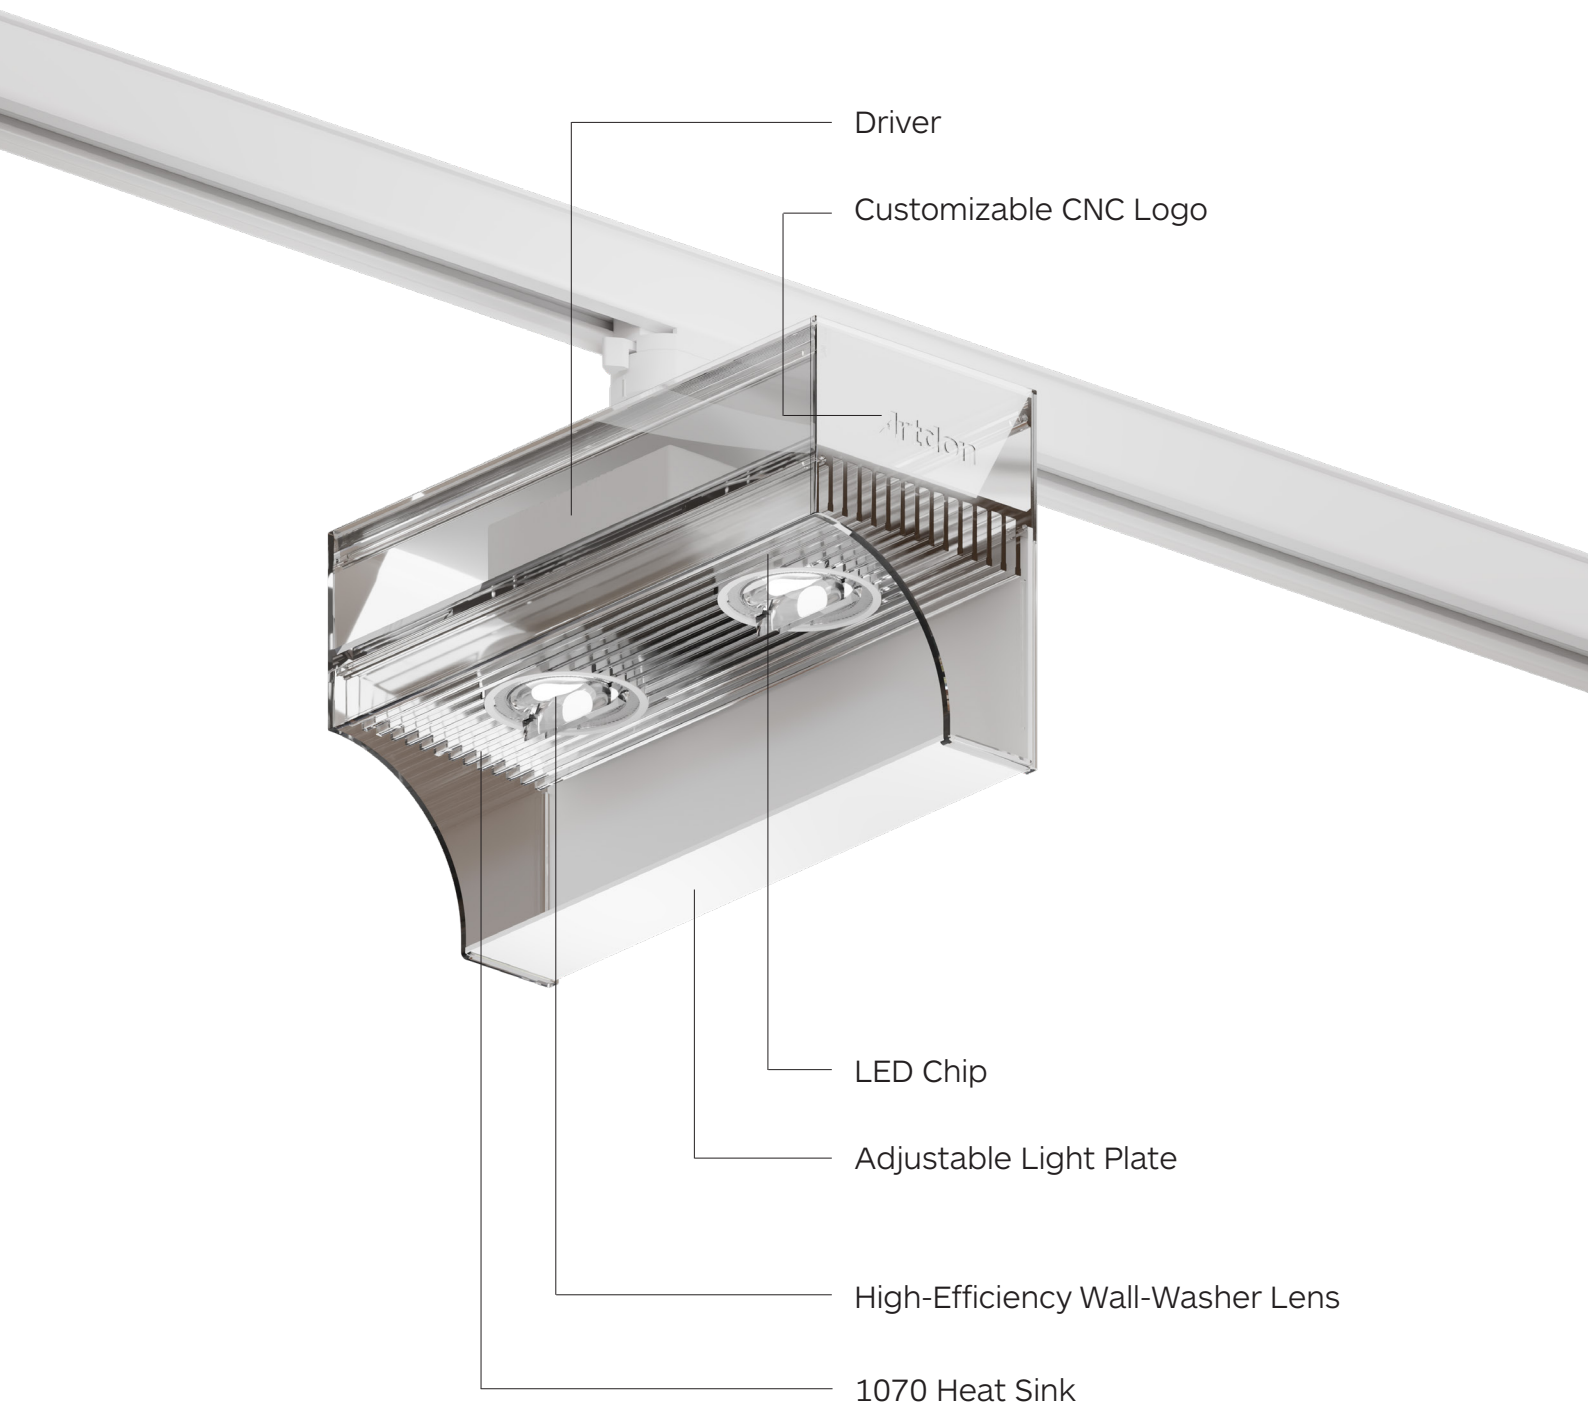

ARCWASH

WALL WASHER TRACK LIGHT

ARCWASH wall floor washer, 1x5 lamps, 49W, 3000K

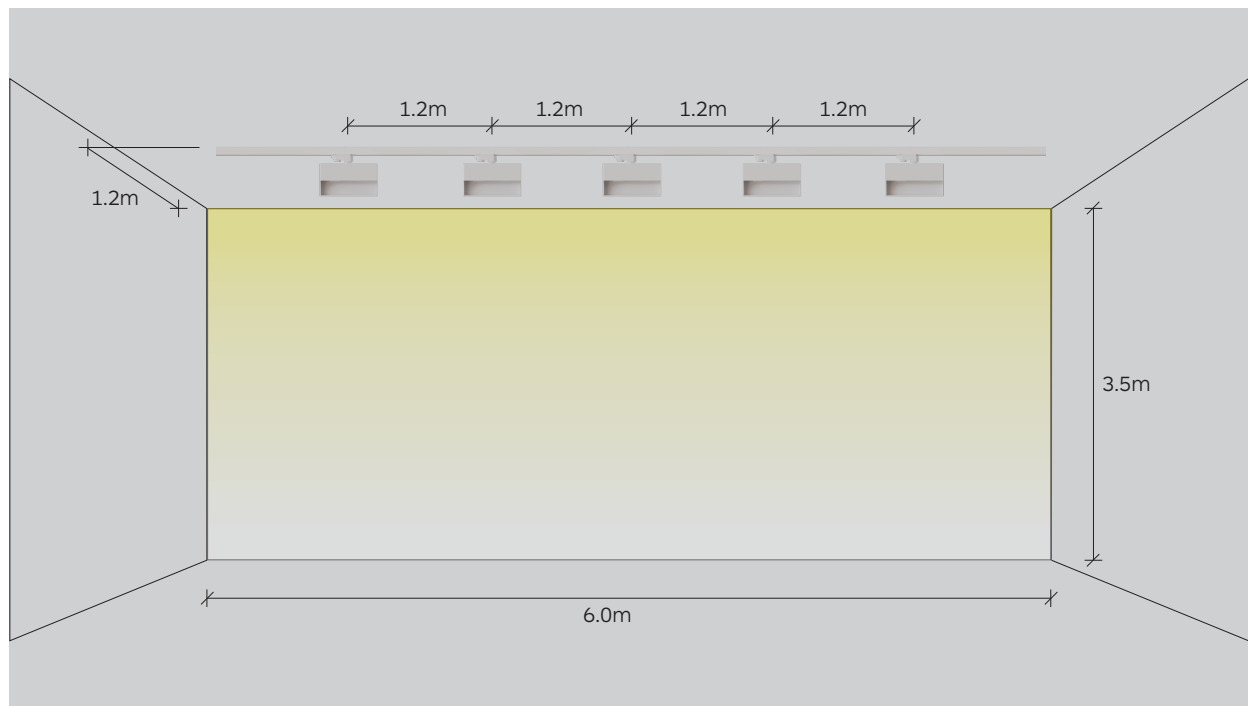

ROOM VALUES

Wall dimensions	H=3.5m W= 6.0m
Distance to wall	B=1.2m
Aisle width	2.4m
Average illuminance	980lux
Tilted Angle	20°
Beam Angle	55°X55°
Lumen	4275lm
C0r0 Intensity	2360cd




ARCWASH

WALL WASHER TRACK LIGHT

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



WW

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white


sandy black

BEAM ANGLE ARCWASH 100

ww Tilted 20° Beam 55°x55°

BEAM ANGLE ARCWASH 200

ww Tilted 20° Beam 55°x55°



ARCWASH 100




CRI
>90

COB



IP20

DALI



WALL WASHER TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
50W 36V 1250MA	3000K	4275lm	33.10011
	4000K	4488lm	



ARCWASH 200




CRI
>90

COB




IP20

DALI



WALL WASHER TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
100W 36V 1250MA	3000K	2x4275lm	33.20011
36V 1250MA	4000K	2x4488lm	

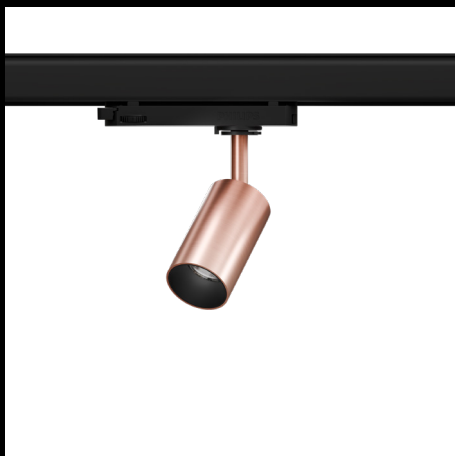

Brushed Rose Gold Plating



Brushed Gold Plating



Chrome Plating

30-degree cut-off angle




Integrated heat sink extrusion aluminum




Shared



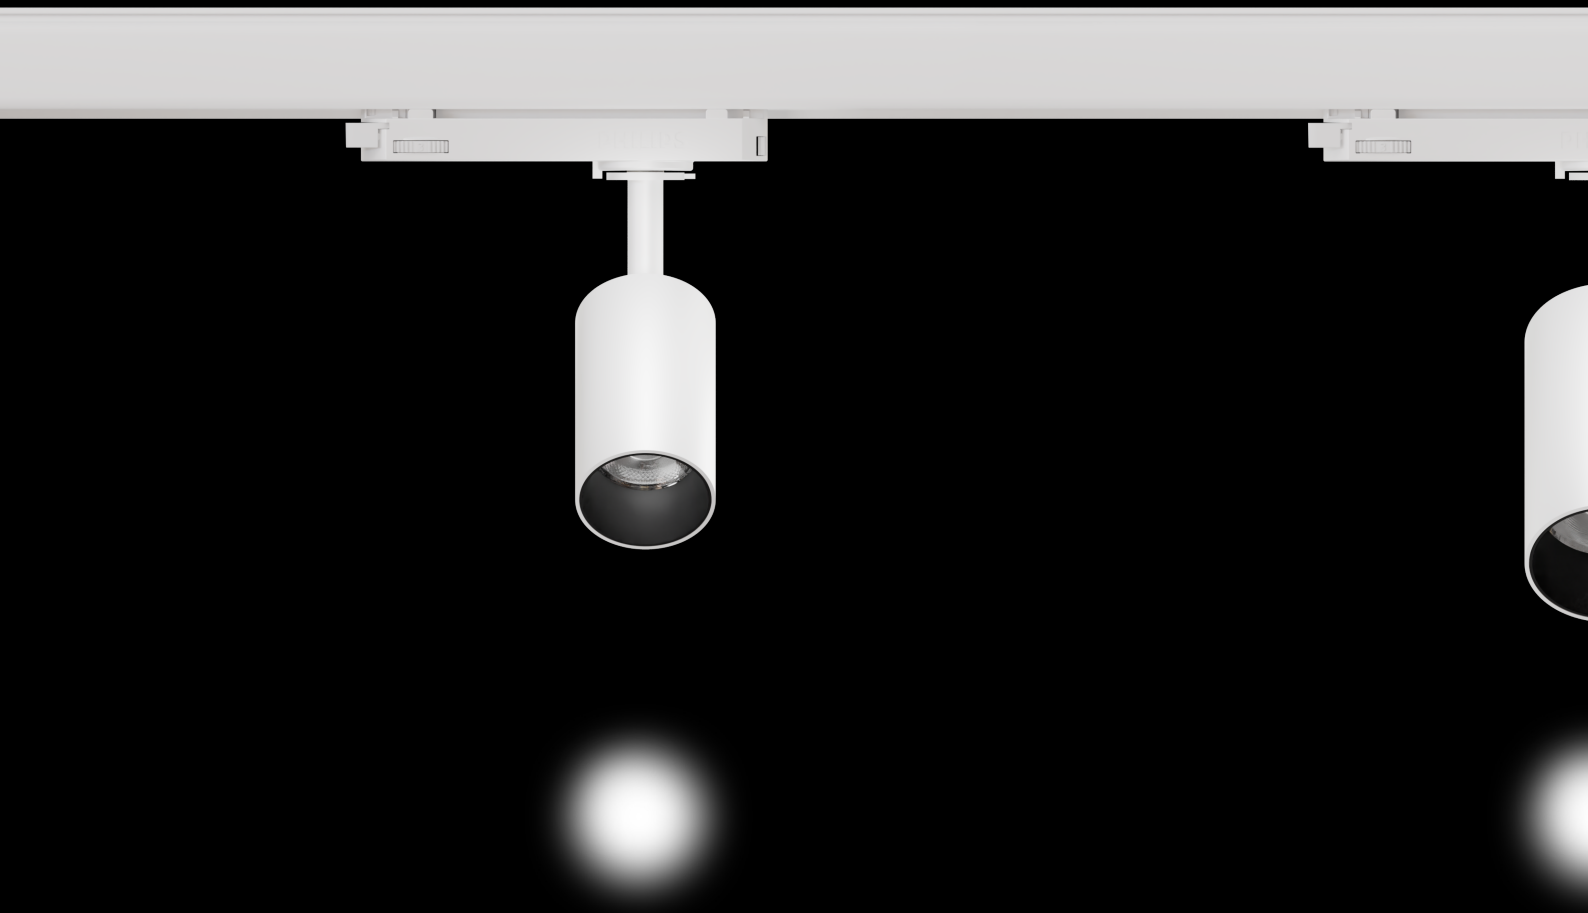

Narrow 11°
Watt 10w
Diameter 45mm

Narrow
Watt
Diameter

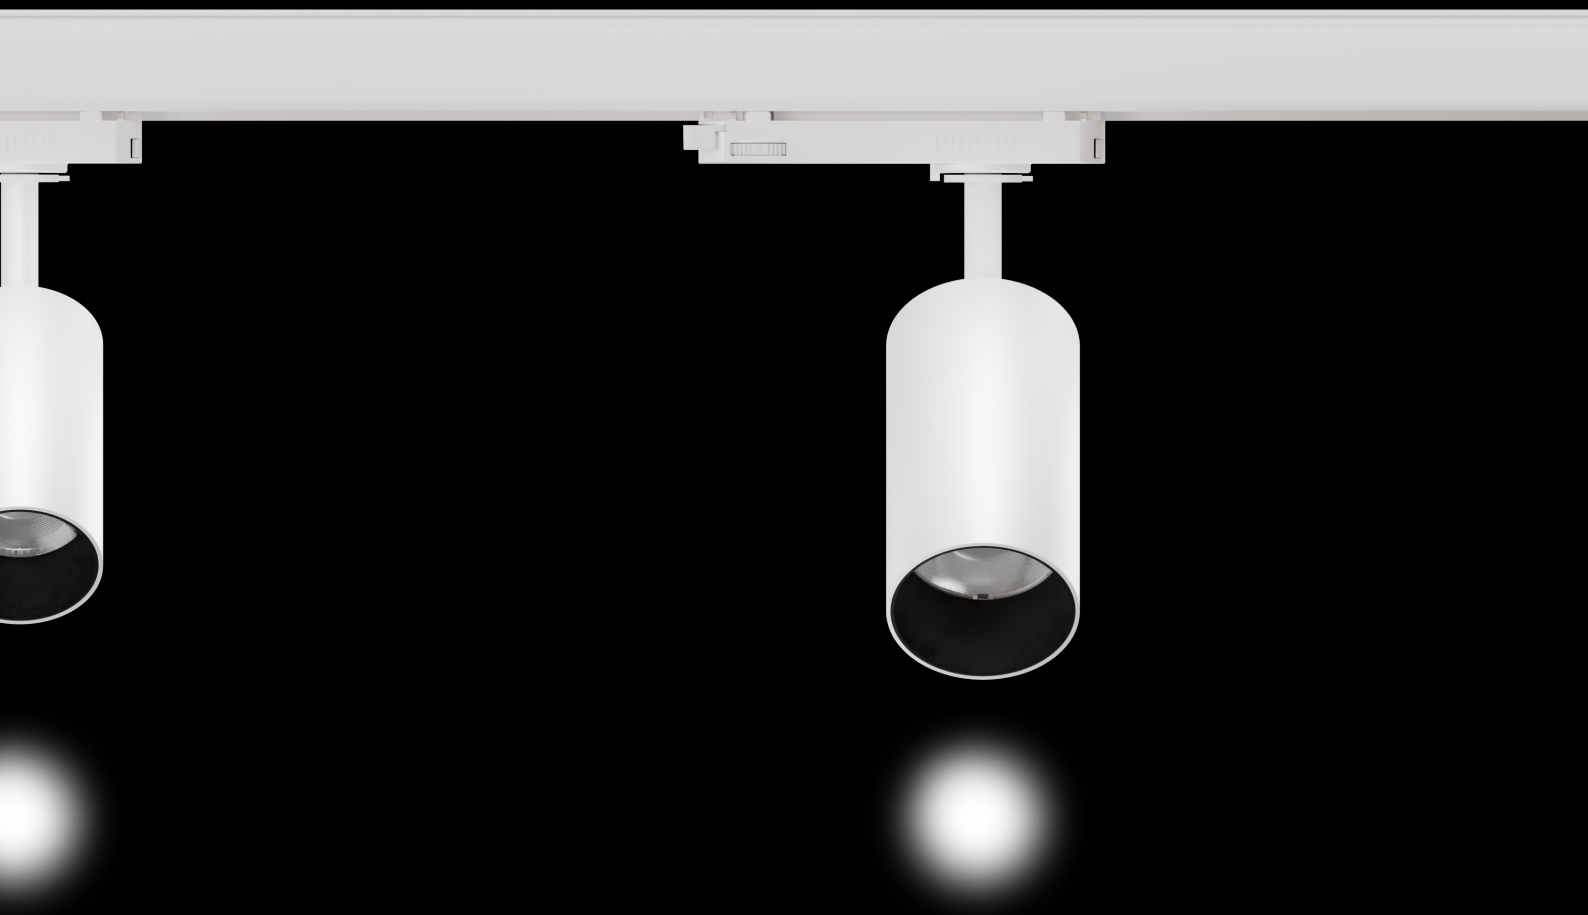


Narrow 8°
Watt 15w
Diameter 53mm

Narrow 8°
Watt 20w
Diameter 62mm

**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

BEAMX
TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE BEAMX 45

narrow 11°

spot 20°

medium 27°

flood 40°

wide flood 55°

BEAM ANGLE BEAMX 53

narrow 8°

spot 18°

medium 31°

flood 41°

wide flood 53°

BEAM ANGLE BEAMX 62

narrow 8°

spot 17°


medium 27°

flood 37°

wide flood 51°



BEAMX 45




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	903lm	32.04536
	4000K	948lm	



BEAMX 53




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1396lm	32.05315
	4000K	1465lm	



BEAMX 62



TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	1958lm	32.06229
	4000K	2055lm	




WASHO

WALL WASHER TRACK LIGHT



**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

WW

WASHO

WALL WASHER TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE WASHO 55

ww Tilted 20° Beam 48°

BEAM ANGLE WASHO 73

ww Tilted 20° Beam 72°

BEAM ANGLE WASHO 90

ww Tilted 22° Beam 52°



WASHO 55




CRI
>90

COB



IP20

DALI



TRACK LIGHT

SYSTEM POWER

9W 36V 200MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

400lm

420lm

ORDER CODE

32.05529



WASHO 73




CRI
>90

COB



IP20

DALI



TRACK LIGHT

SYSTEM POWER

15W 36V 350MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

1123lm

1179lm

ORDER CODE

32.07330



WASHO 90




CRI
>90

COB



IP20

DALI



TRACK LIGHT

SYSTEM POWER

28W 36V 700MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

1754lm


1842lm

ORDER CODE

32.09020





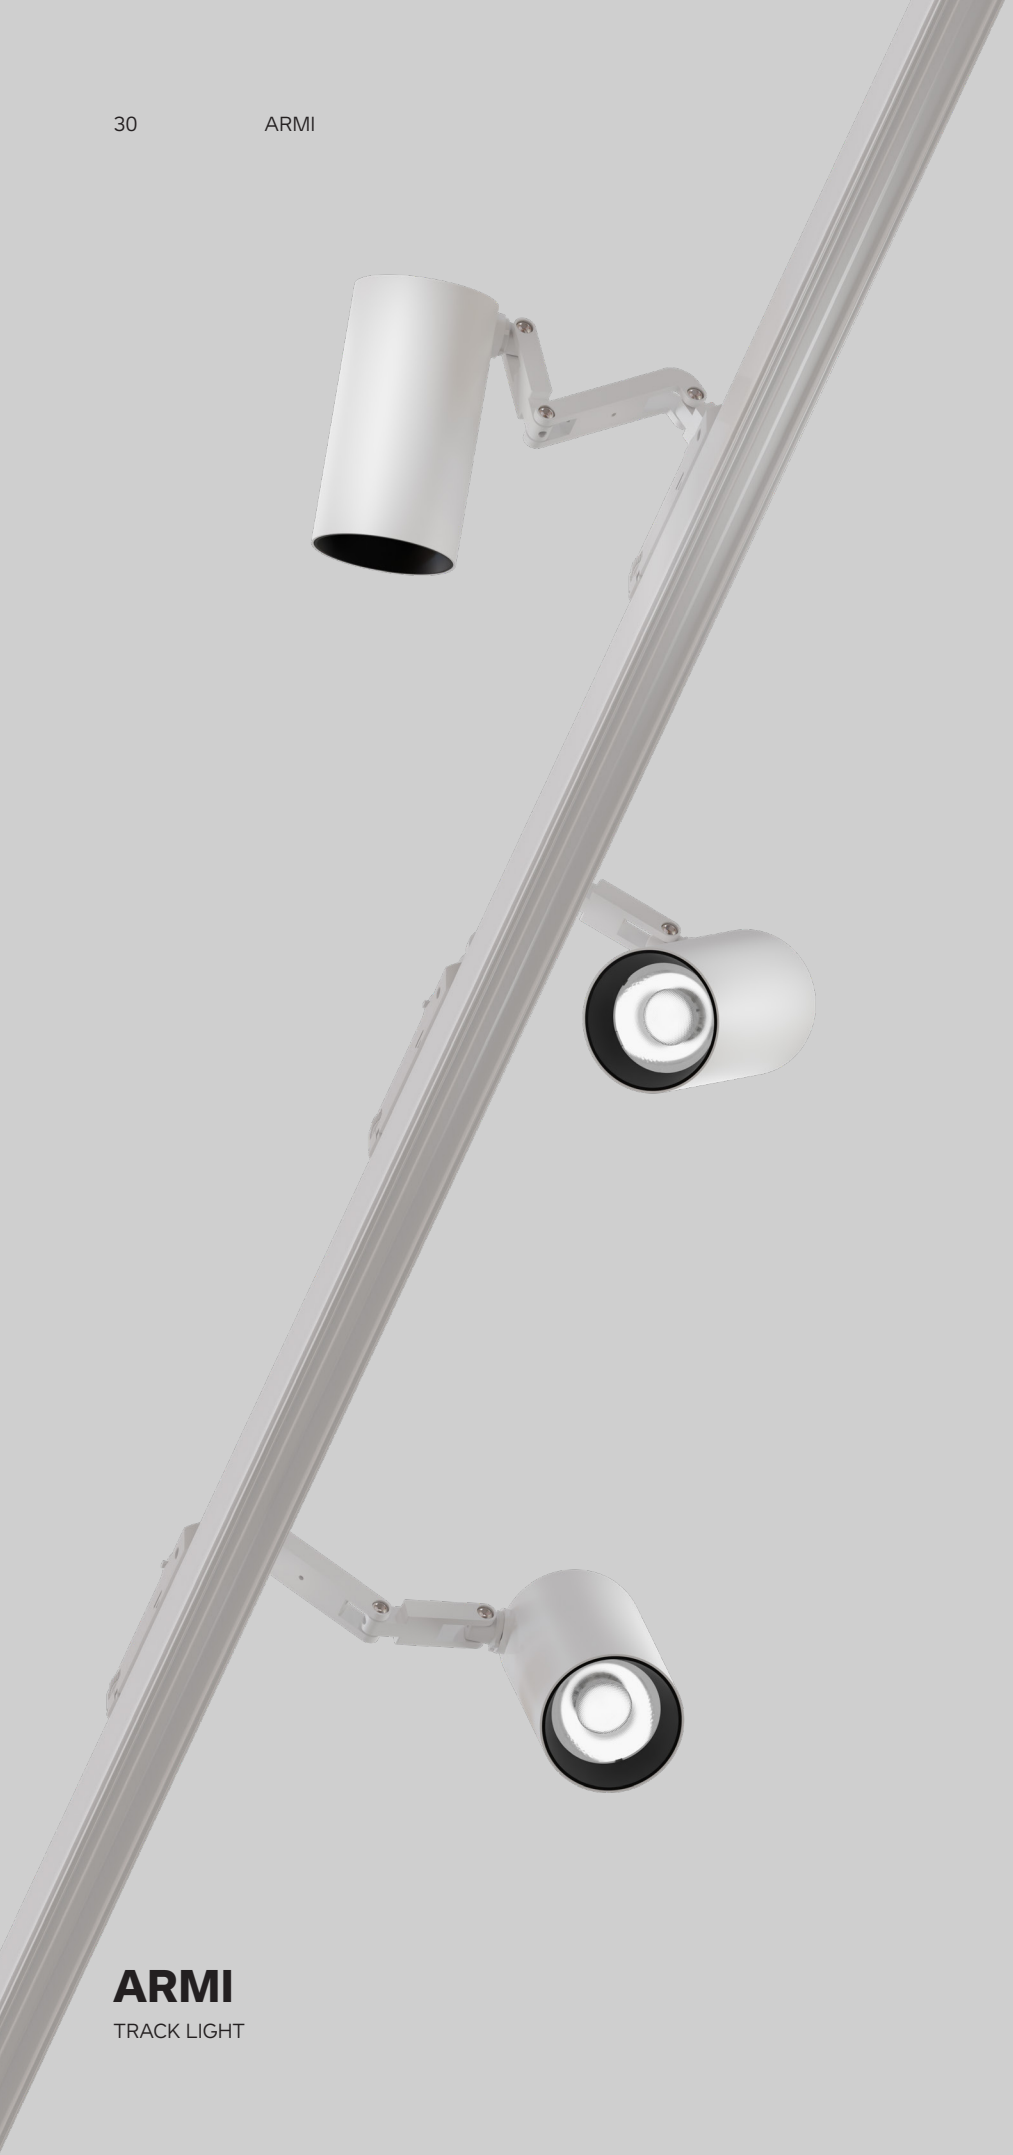

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE ARMI 45

spot 19°

medium 29°

flood 44°

wide flood 56°

BEAM ANGLE ARMI 65

spot 18°

medium 27°

flood 38°

wide flood 54°

BEAM ANGLE ARMI 73

spot 14°

medium 28°

flood 40°

wide flood 50°



ARMI 45




CRI
>90

COB



IP20

DALI



TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
11W 36V 250MA	3000K	935lm	32.04530
	4000K	981lm	



ARMI 65




CRI
>90

COB




IP20

DALI



TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1627lm	32.06528
	4000K	1708lm	



ARMI 73




CRI
>90

COB




IP20

DALI



TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
25W 36V 600MA	3000K	2963lm	32.07326
	4000K	3111lm	

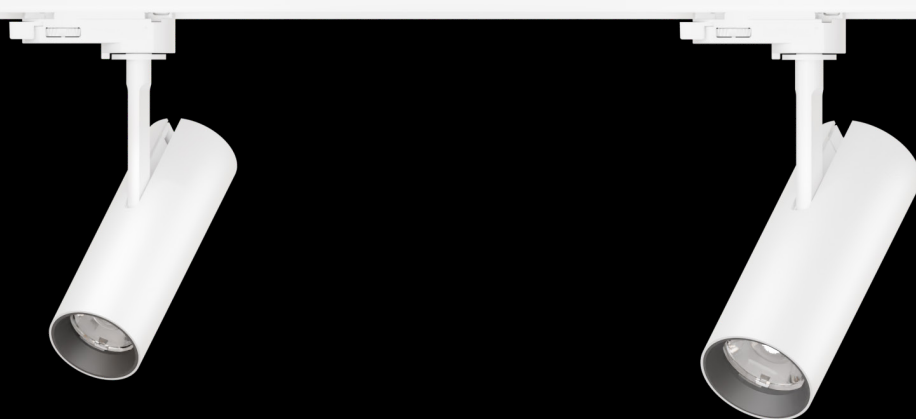

Ø 45mm

Ø 55mm

SPECTRUM


TRACK LIGHT



Ø 65mm




Ø 90mm

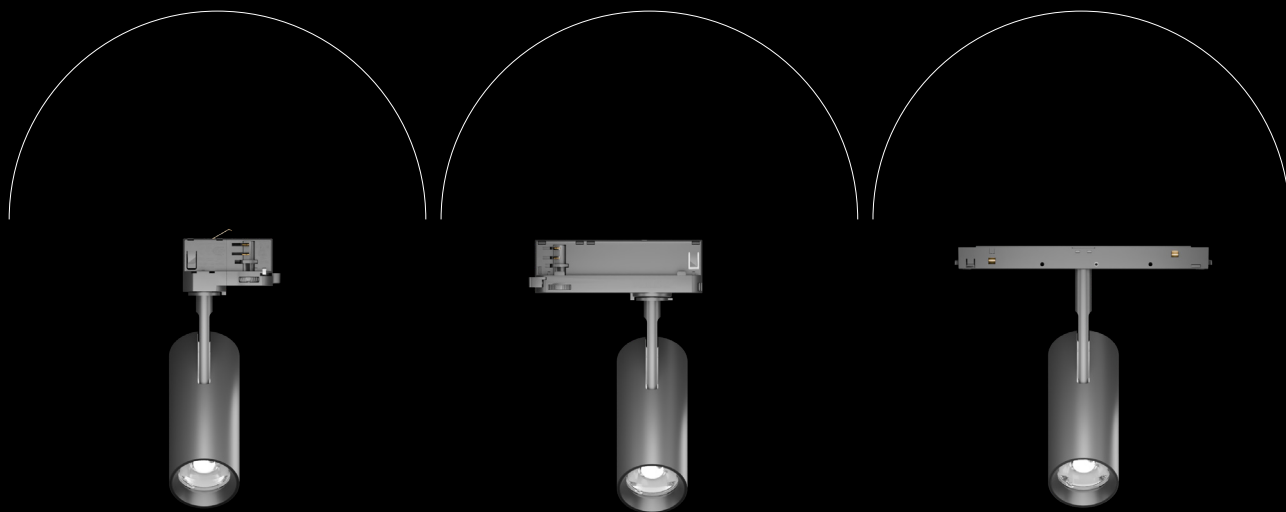

Built-in driver track light

Intrack driver track light

Magnetic

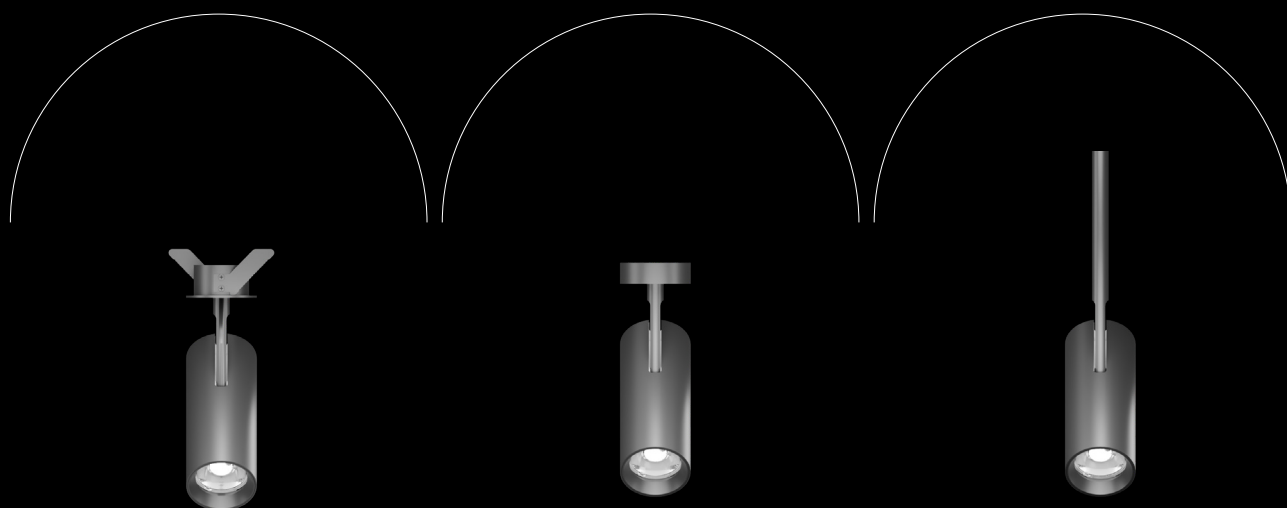

Recessed

Surface-mounted

Rod Suspension



SPECTRUM

TRACK LIGHT



Internal and external
convection structure design



All in one aluminum
extrusion with a thermal
conductivity of 230–237 W/
(m·K)



8-piece assembly design
ensures no loosening, with
200 adjustment cycles
without loosening




SPECTRUM

TRACK LIGHT

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE SPECTRUM 45

spot 20°

medium 25°

flood 39°

wide flood 51°

BEAM ANGLE SPECTRUM 55

spot 17°

medium 28°

flood 39°

wide flood 49°

BEAM ANGLE SPECTRUM 65

spot 19°

medium 24°

flood 39°

wide flood 51°

BEAM ANGLE SPECTRUM 90

spot 18°


medium 25°

flood 38°

wide flood 51°



SPECTRUM 45




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	655lm	32.04526
	4000K	688lm	



SPECTRUM 55




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1244lm	32.05522
	4000K	1306lm	



SPECTRUM 65




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	2388lm	32.06519
	4000K	2507lm	




SPECTRUM 90




TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
37W 36V 900MA	3000K	4573lm	32.09017
	4000K	4802lm	




Anti-glare Brandoor

Ultra-narrow Angle Optical
Accessory



+ Anti-glare Cover




Zoom optical accessory




SPECTRUM
TRACK LIGHT

Optical accessories




Narrow Angle

TYPE	BEAM ARGLE(°)	LES(mm)	SIZE(mm)	ORDER CODE
SPECTRUM 35	--	--	--	--
SPECTRUM 45	5.4	4	40*50	73.04511
SPECTRUM 55	6.4	6	52*36	73.05511
SPECTRUM 65	5.4	6	62*42	73.06511
SPECTRUM 90	7.5	9	86*55	73.09011




"+" Anti-glare

TYPE	SIZE(mm)	ORDER CODE
SPECTRUM 35	32*18	73.03511
SPECTRUM 45	42*15	73.04512
SPECTRUM 55	52*17	73.05512
SPECTRUM 65	62*21	73.06512
SPECTRUM 90	86*23	73.09012




Anti-glare Cover

TYPE	CUT-OFF ANGLE(°)	SIZE(mm)	ORDER CODE
SPECTRUM 35	31	35*26	73.03512
SPECTRUM 45	30	42*24	73.04513
SPECTRUM 55	24	55*31	73.05513
SPECTRUM 65	30	65*34	73.06513
SPECTRUM 90	27	90*43	73.09013



Zoom Module

TYPE	BEAM ARGLE(°)	LES(mm)	SIZE(mm)	ORDER CODE
SPECTRUM 35	8-38	3	35*38	73.03513
SPECTRUM 45	13-44	4	45*40	73.04515
SPECTRUM 55	14-50	6	55*65	73.05515
SPECTRUM 65	16-46	6	65*68	73.06515
SPECTRUM 90	10-55	9	90*73	73.09015




Brandoor

TYPE	SIZE(mm)	ORDER CODE
SPECTRUM 35	--	--
SPECTRUM 45	71*71*69	73.04516
SPECTRUM 55	86*86*79	73.05516
SPECTRUM 65	93*93*88	73.06516
SPECTRUM 90	113*113*89	73.09016

**Quickinfo**

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

HIGH LUMEN PRO

TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

Sandy white

Sandy black

BEAM ANGLE 84

medium 21°

medium --

flood 40°

wide flood 60°

BEAM ANGLE 101

spot 22°

medium 33°

flood 55°

wide flood 68°




HIGH LUMEN PRO 84

CRI >90

COB

IP20

DALI



TRACK LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
23W 36V 600MA	3000K	2980lm	32.08423
	4000K	3129lm	




HIGH LUMEN PRO 101

CRI >90

COB

IP20

DALI



TRACK LIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
39W 36V 1050MA	3000K	5274lm	32.10111
	4000K	5537lm	



Wall-Washer Anti-Glare Cover



60° Cut-Off Angle Anti-Glare Cover



50° Cut-Off Angle Anti-Glare Cover



+ Anti-Glare Accessory



Honeycomb




Stretched Textured Glass

HIGH LUMEN PRO


TRACK LIGHT

Optical accessories




50D Cut-off Angle Glare Cover

TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	84*27	73.08411
HIGH LUMEN PRO 101	101*28	73.10111




60D Cut-off Angle Glare Cover

TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	84*40	73.08412
HIGH LUMEN PRO 101	101*40	73.10112




Wall Washer

TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	84*44	73.08413
HIGH LUMEN PRO 101	101*52	73.10113




Honeycomb Louvre

TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	80*17	73.08415
HIGH LUMEN PRO 101	96*18	73.10115



"+" Anti-glare

TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	80*17	73.08416
HIGH LUMEN PRO 101	96*18	73.10116



Linear spread glass


TYPE	SIZE(mm)	ORDER CODE
HIGH LUMEN PRO 84	80*17	73.08417
HIGH LUMEN PRO 101	90*18	73.10117





Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood



Video

EMMA
TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE EMMA 45

spot 19°

medium 29°

flood 44°

wide flood 56°

BEAM ANGLE EMMA 62

spot 18°

medium 27°

flood 38°

wide flood 54°

BEAM ANGLE EMMA 73

spot 14°

medium 28°

flood 40°

wide flood 50°

BEAM ANGLE EMMA 90

spot 16°


medium 20°

flood 30°

wide flood 45°



EMMA 45



TRACK LIGHT

SYSTEM POWER

11W 36V 250MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

935lm


981lm

ORDER CODE

32.04515



EMMA 62



TRACK LIGHT

SYSTEM POWER

14W 36V 350MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

1627lm


1708lm

ORDER CODE

32.06219



EMMA 73



TRACK LIGHT

SYSTEM POWER

24W 36V 600MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

2963lm


3111lm

ORDER CODE

32.07313



EMMA 90



TRACK LIGHT

SYSTEM POWER

36W 36V 900MA

COLOUR TEMP

3000K

4000K

LUMINOUS FLUX

4509lm

4734lm


ORDER CODE

32.09013




Video



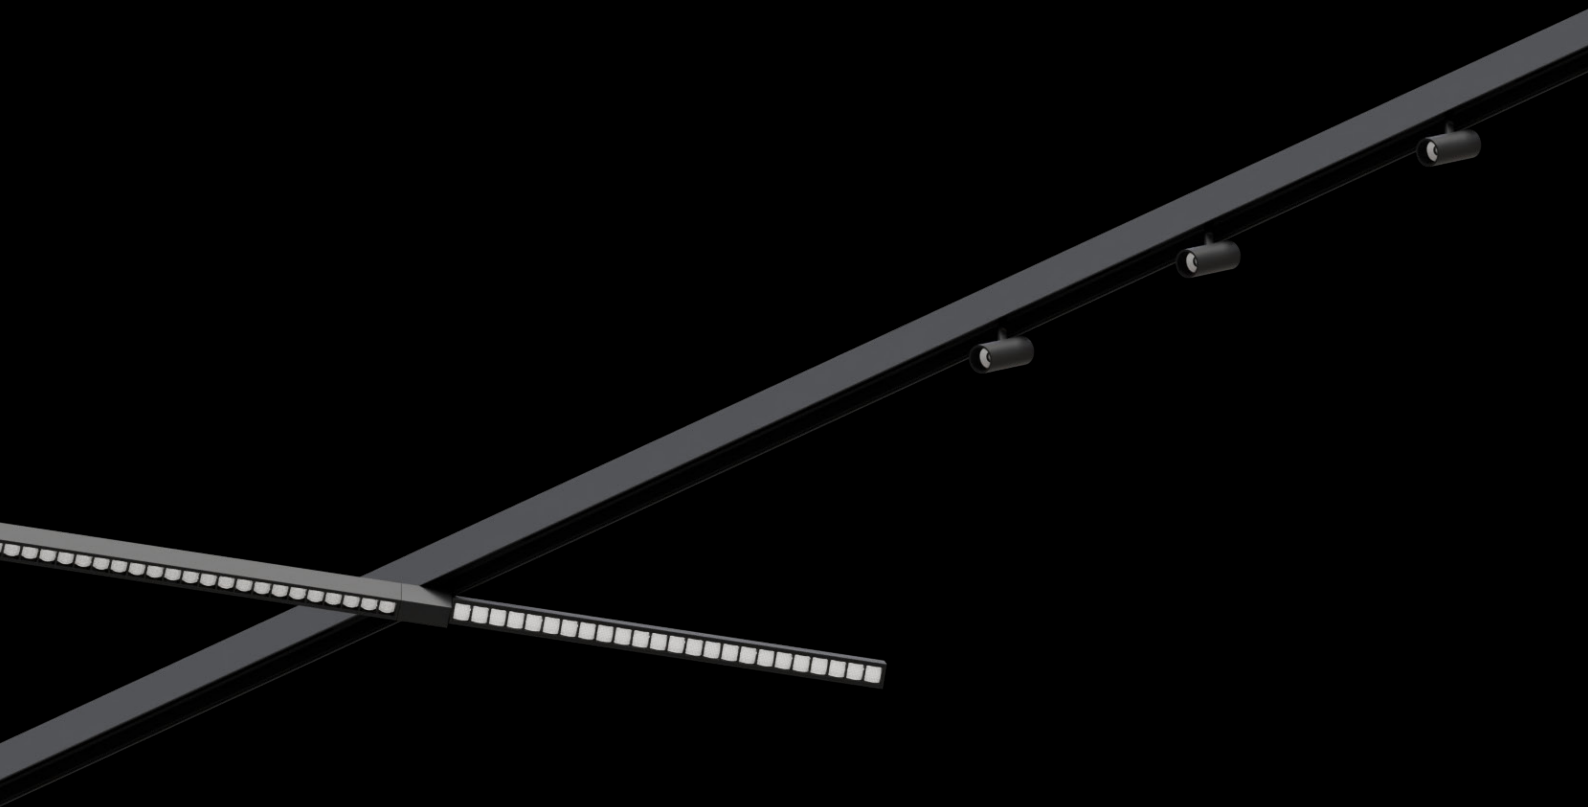

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

BEAMX

LOW VOLTAGE TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE BEAMX 45

spot 20°

medium 27°

flood 40°

wide flood 55°

BEAM ANGLE BEAMX 53

spot 18°

medium 31°

flood 41°

wide flood 53°

BEAM ANGLE BEAMX 62

spot 17°

medium 27°

flood 37°

wide flood 51°

BEAMX 45



CRI
>90

COB

48V


360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	903lm	62.04539
	4000K	948lm	



BEAMX 53



CRI
>90

COB

48V


360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1396lm	62.05312
	4000K	1465lm	



BEAMX 62



CRI
>90

COB

48V


360°
90°

IP20

DALI


LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	1958lm	62.06226
	4000K	2055lm	



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

SPECTRUM

LOW VOLTAGE TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE SPECTRUM 25

spot 17°

medium 26°

flood 31°

wide flood 53°

BEAM ANGLE SPECTRUM 35

spot 16°

medium 23°

flood 38°

wide flood 49°

BEAM ANGLE SPECTRUM 45

spot 19°

medium 24°

flood 36°

wide flood 43°

BEAM ANGLE SPECTRUM 55

spot 20°

medium 31°

flood 43°

wide flood 52°

SPECTRUM 25



CRI
>90

COB

48V

360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
4W 36V 80MA	3000K	197lm	62.02513
	4000K	207lm	

SPECTRUM 35



CRI
>90

COB

48V

360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
9W 36V 200MA	3000K	612lm	62.03517
	4000K	643lm	

SPECTRUM 45



CRI
>90

COB

48V

360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1083lm	62.04531
	4000K	1137lm	

SPECTRUM 55



CRI
>90

COB

48V


360°
90°

IP20

DALI

LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
25W 36V 600MA	3000K	2615lm	62.05518
	4000K	2743lm	






Quickinfo

2700K, 3000K, 4000K
 CRI90, 3 SDCM
 L85/50000h
 non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
 flood

EMMA

LOW VOLTAGE TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE EMMA 45

spot 19°

medium 29°

flood 44°

wide flood 56°

BEAM ANGLE EMMA 62

spot 18°

medium 27°

flood 38°

wide flood 54°

BEAM ANGLE EMMA 73

spot 14°

medium 28°

flood 40°

wide flood 50°



EMMA 45



CRI
>90


COB

48V

360°
90°

IP20

DALI



LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
11W 36V 250MA	3000K	935lm	62.04512
	4000K	981lm	



EMMA 62



CRI
>90


COB

48V

360°
90°

IP20

DALI



LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1627lm	62.06217
	4000K	1708lm	



EMMA 73



CRI
>90


COB

48V

360°
90°

IP20

DALI



LOW VOLTAGE TRACK LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
24W 36V 600MA	3000K	2963lm	62.07312
	4000K	3111lm	