



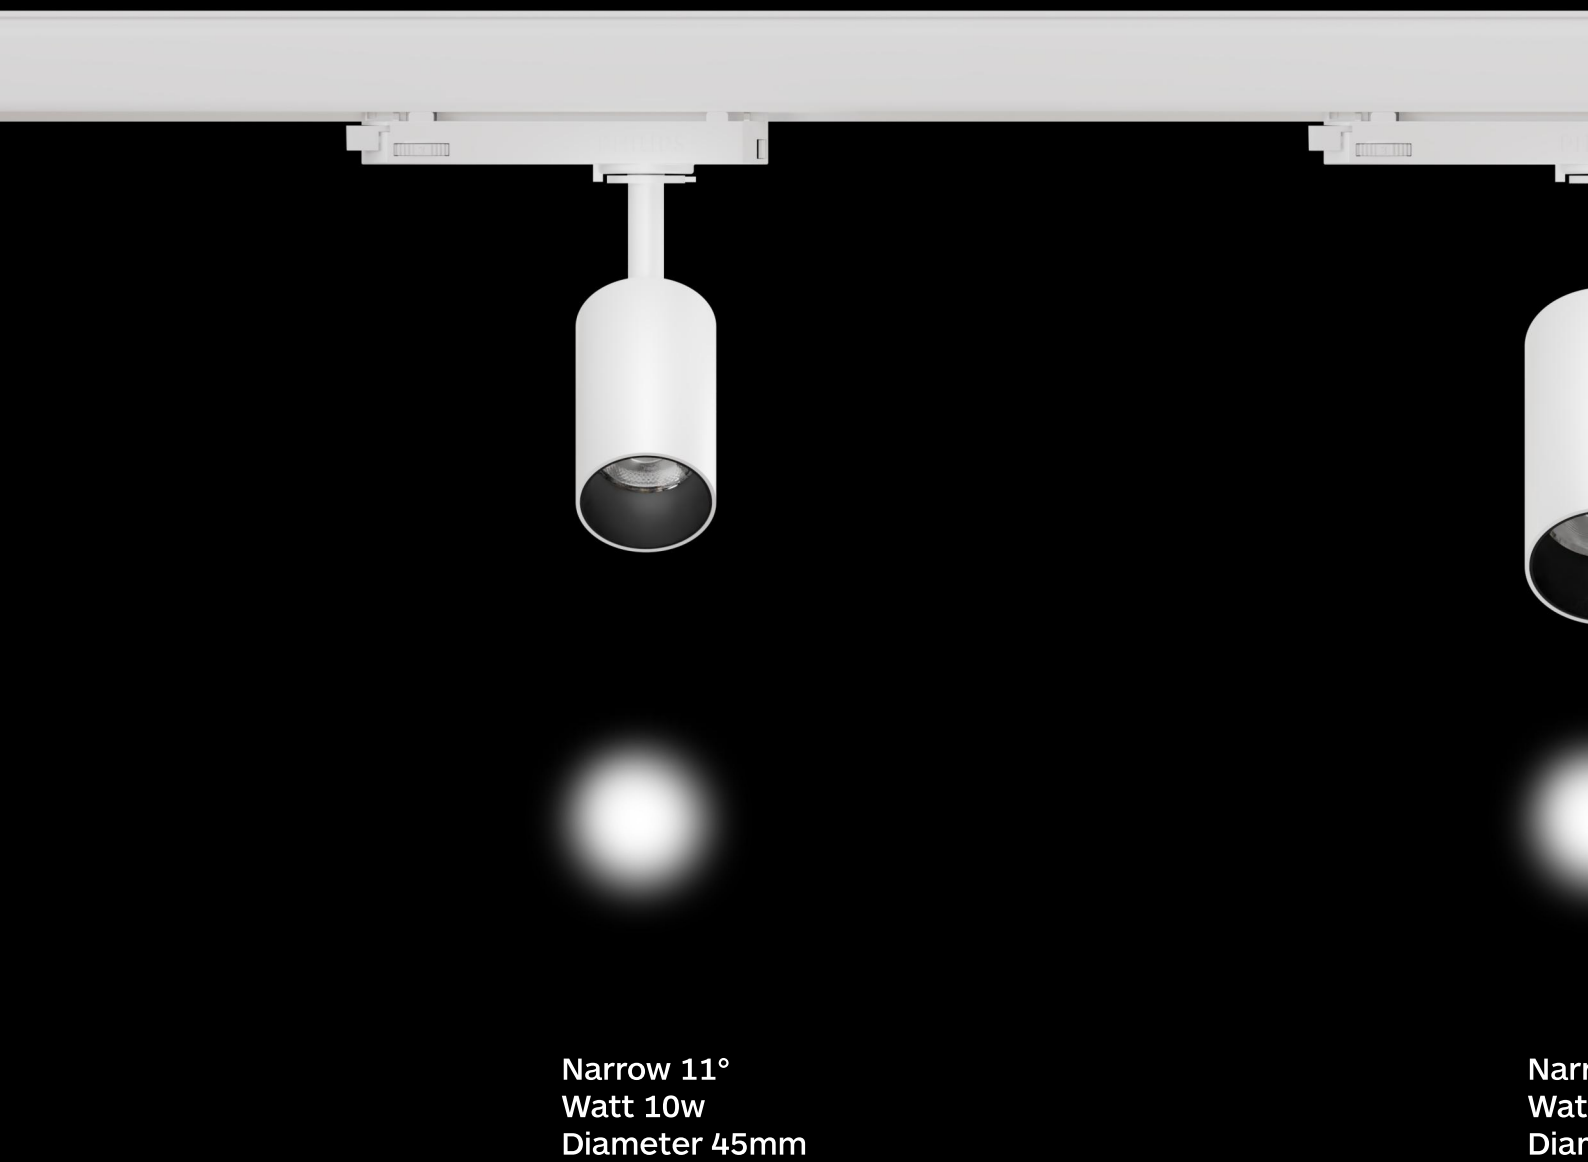

Narrow 11°
Watt 10w
Diameter 45mm

Narrow 11°
Watt 10w
Diameter 45mm

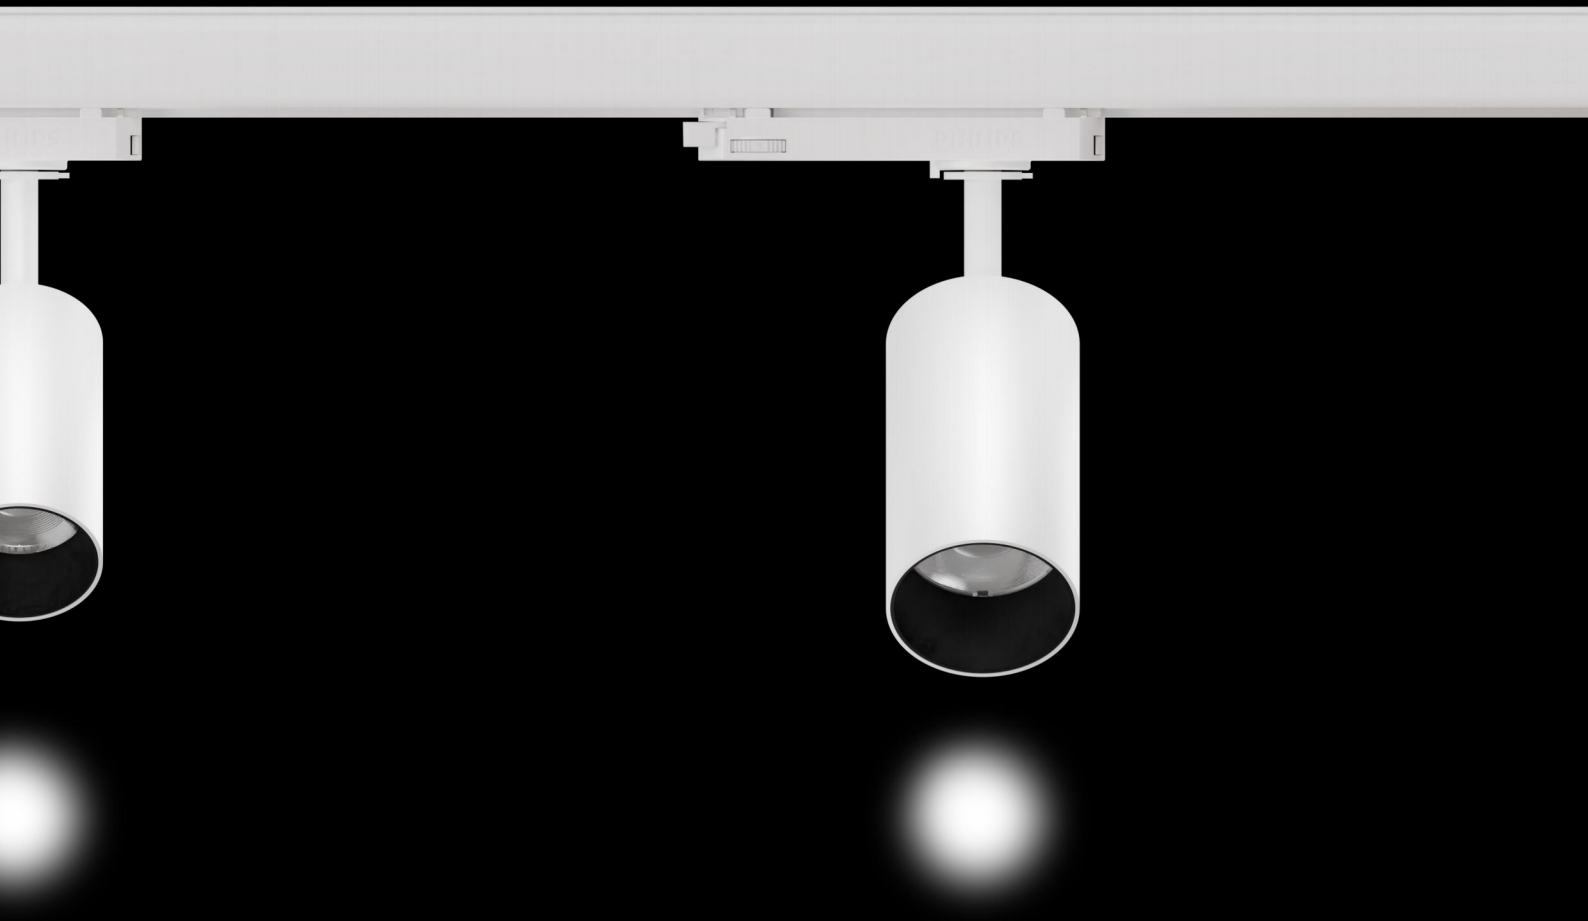


Narrow 8°
Watt 15w
Diameter 53mm

Narrow 8°
Watt 20w
Diameter 62mm

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types**Colours**

White Black

Light distributions

spot med. flood wide
flood

BEAMX

TRACK LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE BEAMX 45

narrow 11°

spot 20°

medium 27°

flood 40°

wide flood 55°

BEAM ANGLE BEAMX 53

narrow 8°

spot 18°

medium 31°

flood 41°

wide flood 53°

BEAM ANGLE BEAMX 62

narrow 8°

spot 17°

medium 27°

flood 37°

wide flood 51°



BEAMX 45



CRI
>90


COB



350°
90°

IP20

DALI



TRACK LIGHT

SYSTEM POWER

COLOUR TEMP

LUMINOUS FLUX

ORDER CODE

10W 36V 250MA

3000K

903lm

32.04536

4000K

948lm



BEAMX 53



CRI
>90


COB



350°
90°

IP20

DALI



TRACK LIGHT

SYSTEM POWER

COLOUR TEMP

LUMINOUS FLUX

ORDER CODE

15W 36V 350MA

3000K

1396lm

32.05315

4000K

1465lm



BEAMX 62



CRI
>90


COB



350°
90°

IP20

DALI



TRACK LIGHT

SYSTEM POWER

COLOUR TEMP

LUMINOUS FLUX

ORDER CODE

20W 36V 500MA

3000K

1958lm

32.06229

4000K

2055lm