



Video

FIXED

WALL W




FLEXI

RECESSED DOWNLIGHT

/ASHER

ADJUSTABLE

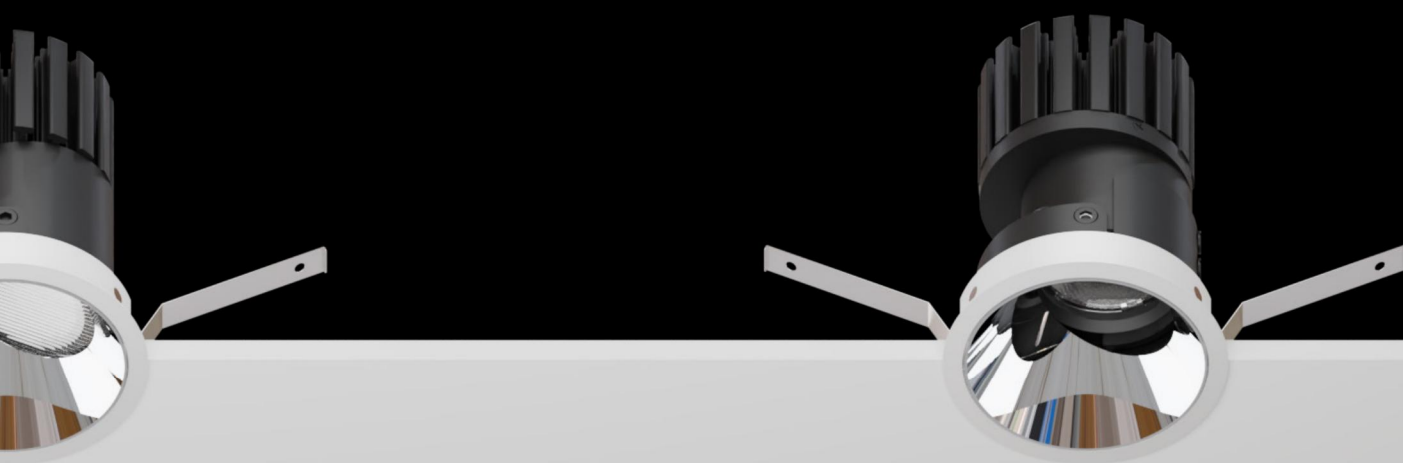




Secondary Optics Supported Processes
Electroplating, Brushing, Spray Coating,
Anodizing



Fixed

FLEXI



WALL WASHER RECESSED DOWNLIGHT

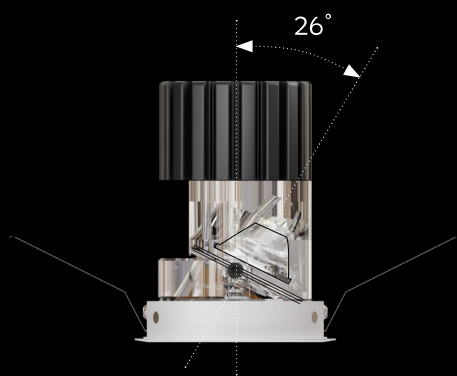

26D tilt design
Four optical design (lens, stretch lens,
optical film, anti-glare cover)



Shared Mounting Components

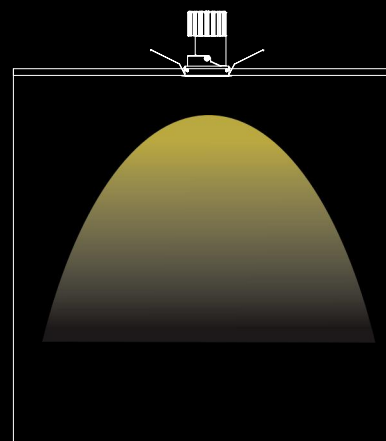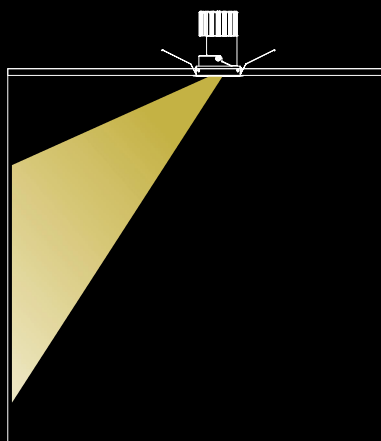



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



WW

FLEXI

WALL WASHER RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE
2700K
3000K
4000K

FINISH COLOUR
matte white
matte black


BEAM ANGLE FLEXI 55
ww Tilted 20° Beam 48°

BEAM ANGLE FLEXI 75
ww Tilted 20° Beam 72°

BEAM ANGLE FLEXI 100
ww Tilted 22° Beam 52°



FLEXI 55




WALL WASHER DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
9W 36V 200MA	3000K 4000K	400lm 420lm	51.05522



FLEXI 75




WALL WASHER DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K 4000K	1123lm 1179lm	51.07526



FLEXI 100



WALL WASHER DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
28W 36V 700MA	3000K 4000K	1754lm 1842lm	51.10013




Secondary Optics Supported Processes
Electroplating, Brushing, Spray Coating,
Anodizing



Vertical 30°, Horizontal 350°
With Fall Protection Wire

FLEXI

ADJUSTABLE RECESSED DOWNLIGHT

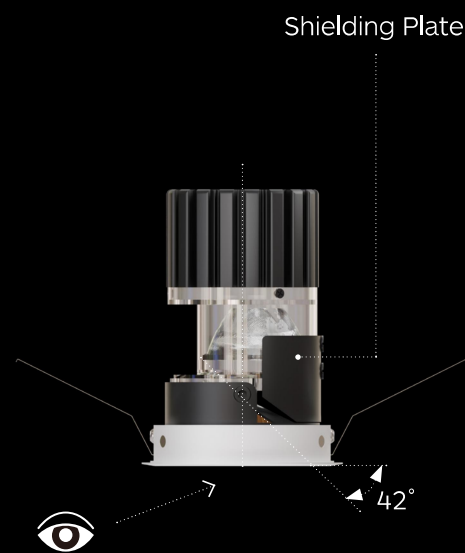

Light Leak Prevention Design
Cut-off Angle 42°
Optical eccentric design, boosting
efficiency by 10%



Shared Mounting Components
Supports Lenses and Reflector



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

FLEXI

ADJUSTABLE RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE
2700K
3000K
4000K

FINISH COLOUR
matte white
matte black

BEAM ANGLE FLEXI 55
spot 15°
medium 23°
flood 35°
wide flood 51°

BEAM ANGLE FLEXI 75
spot 19°
medium 29°
flood 40°
wide flood 50°

BEAM ANGLE FLEXI 100
spot 25°
medium 32°
flood 44°
wide flood 52°



FLEXI 55


CRI
>90

COB

IP20

DALI

≤19
UGR



ADJUSTABLE DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	620lm	52.05535
	4000K	651lm	



FLEXI 75


CRI
>90

COB

IP20

DALI

≤19
UGR



ADJUSTABLE DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1528lm	52.07529
	4000K	1604lm	



FLEXI 100


CRI
>90

COB

IP20

DALI

≤19
UGR




ADJUSTABLE DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
28W 36V 700MA	3000K	3021lm	52.10029
	4000K	3172lm	



Secondary Optics Supported Processes
Electroplating, Brushing, Spray Coating,
Anodizing



Fixed

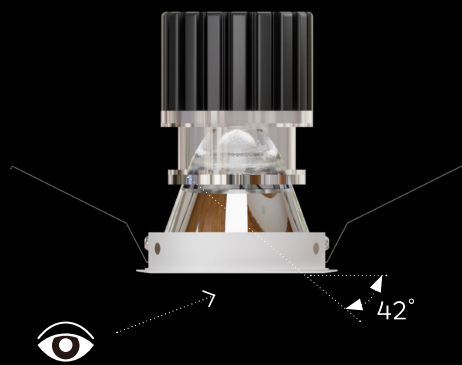

Light Leak Prevention Design
Cut-off Angle 42°
Optical eccentric design, boosting
efficiency by 10%



Shared Mounting Components
Supports Lenses and Reflector



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

FLEXI

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE FLEXI 55

spot 15°

medium 22°

flood 37°

wide flood 49°

BEAM ANGLE FLEXI 75

spot 19°

medium 29°

flood 40°

wide flood 50°

BEAM ANGLE FLEXI 100

spot 25°

medium 31°

flood 42°

wide flood 49°



FLEXI 55


CRI >90

COB

IP20

DALI

≤19 UGR



RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
9W 36V 250MA	3000K	625lm	51.05521
	4000K	656lm	



FLEXI 75


CRI >90

COB

IP20

DALI

≤19 UGR



RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
15W 36V 350MA	3000K	1547lm	51.07525
	4000K	1624lm	



FLEXI 100


CRI >90

COB

IP20

DALI

≤19 UGR



RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
28W 36V 700MA	3000K	3081lm	51.10012
	4000K	3235lm	