

Recessed lighting fixtures for high-ceiling use, with a maximum output of 9500 lumens.



Video



40W



60W

HICORE

RECESSED DOWNLIGHT



80W



Metal Base reflector
Aluminum Anod Optical



Three mounting clips support 8-25mm
ceiling

HICORE

RECESSED DOWNLIGHT

Dust cover




Dust cover design protects light source
Secondary optics secured by mechanical structure

anti-drop safety hook



Fixture anti-drop safety hook
1070 heat sink with ultra-fast thermal conductivity

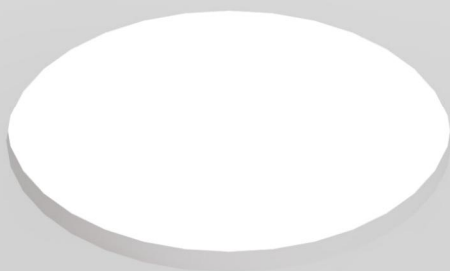

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

HICORE

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE HICORE 110

spot 22°

medium --°

flood 42°

wide flood 60°

BEAM ANGLE HICORE 135

spot 21°

medium 38°

flood 56°

wide flood 66°


BEAM ANGLE HICORE 160

spot 26°


medium 36°

flood 46°

wide flood 70°



110



HICORE 110

CRI >90

COB

IP20

DALI


≤17 UGR

RECESSED DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
40W 36V 1050MA	3000K	4769lm	51.11011
	4000K	5007lm	



135



HICORE 135

CRI >90

COB

IP20

DALI


≤19 UGR

RECESSED DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
60W 36V 1500MA	3000K	7546lm	51.13511
	4000K	7923lm	



160



HICORE 160

CRI >90

COB

IP20

DALI

≤22 UGR

RECESSED DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
80W 36V 2100MA	3000K	9122lm	51.16011
	4000K	9578lm	