



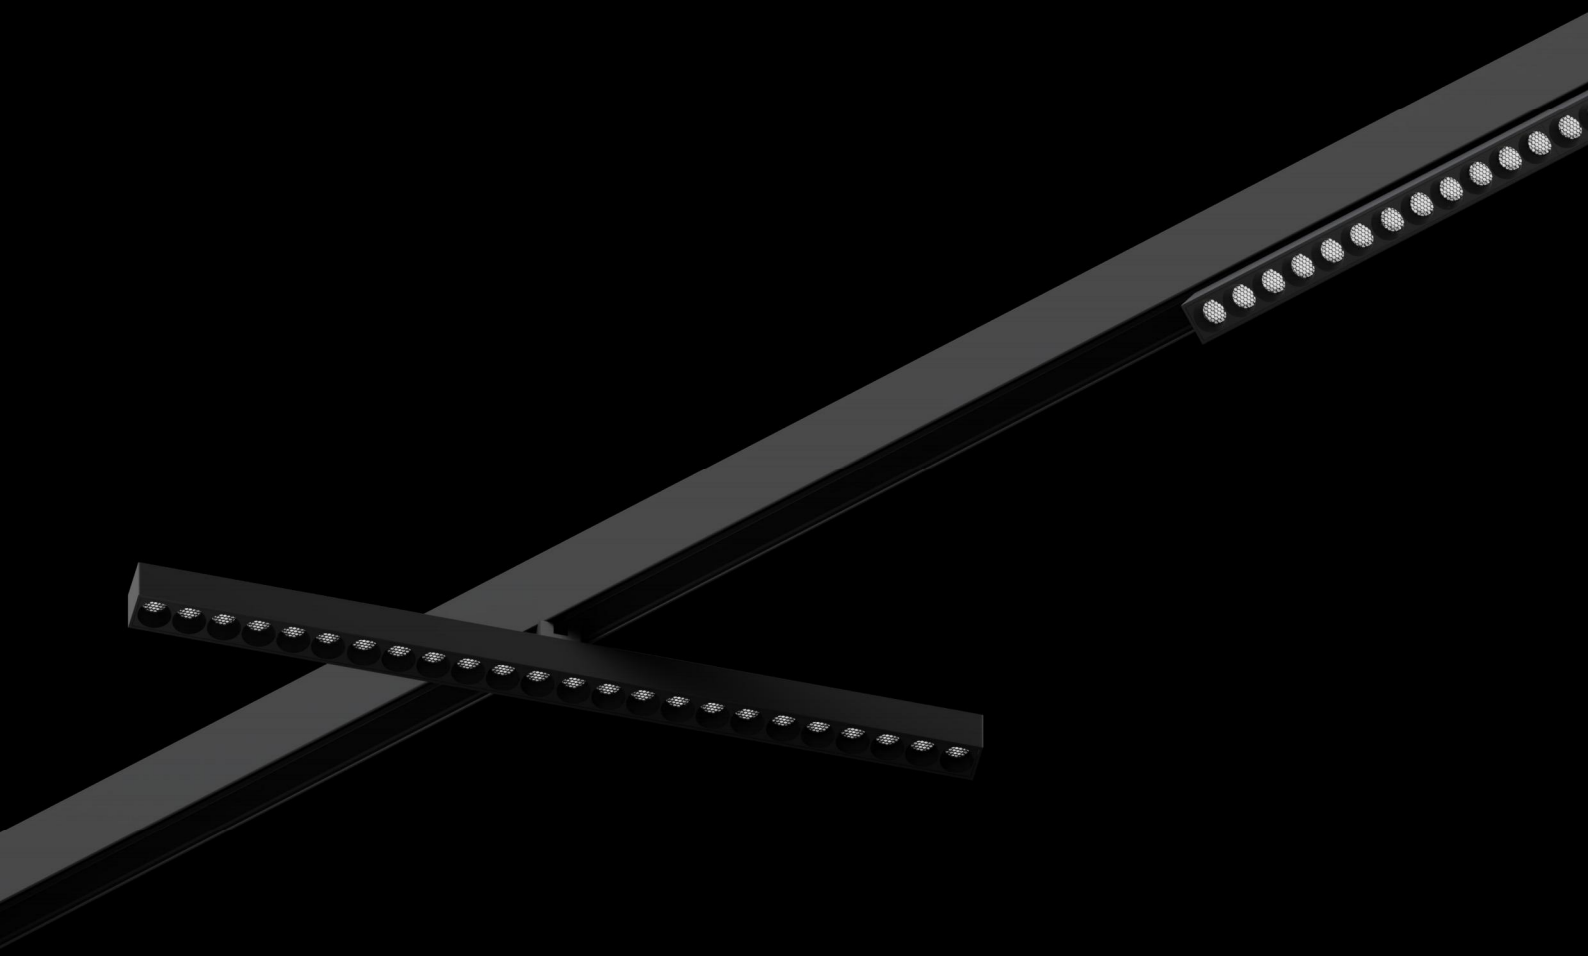


MAGENTRA

LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

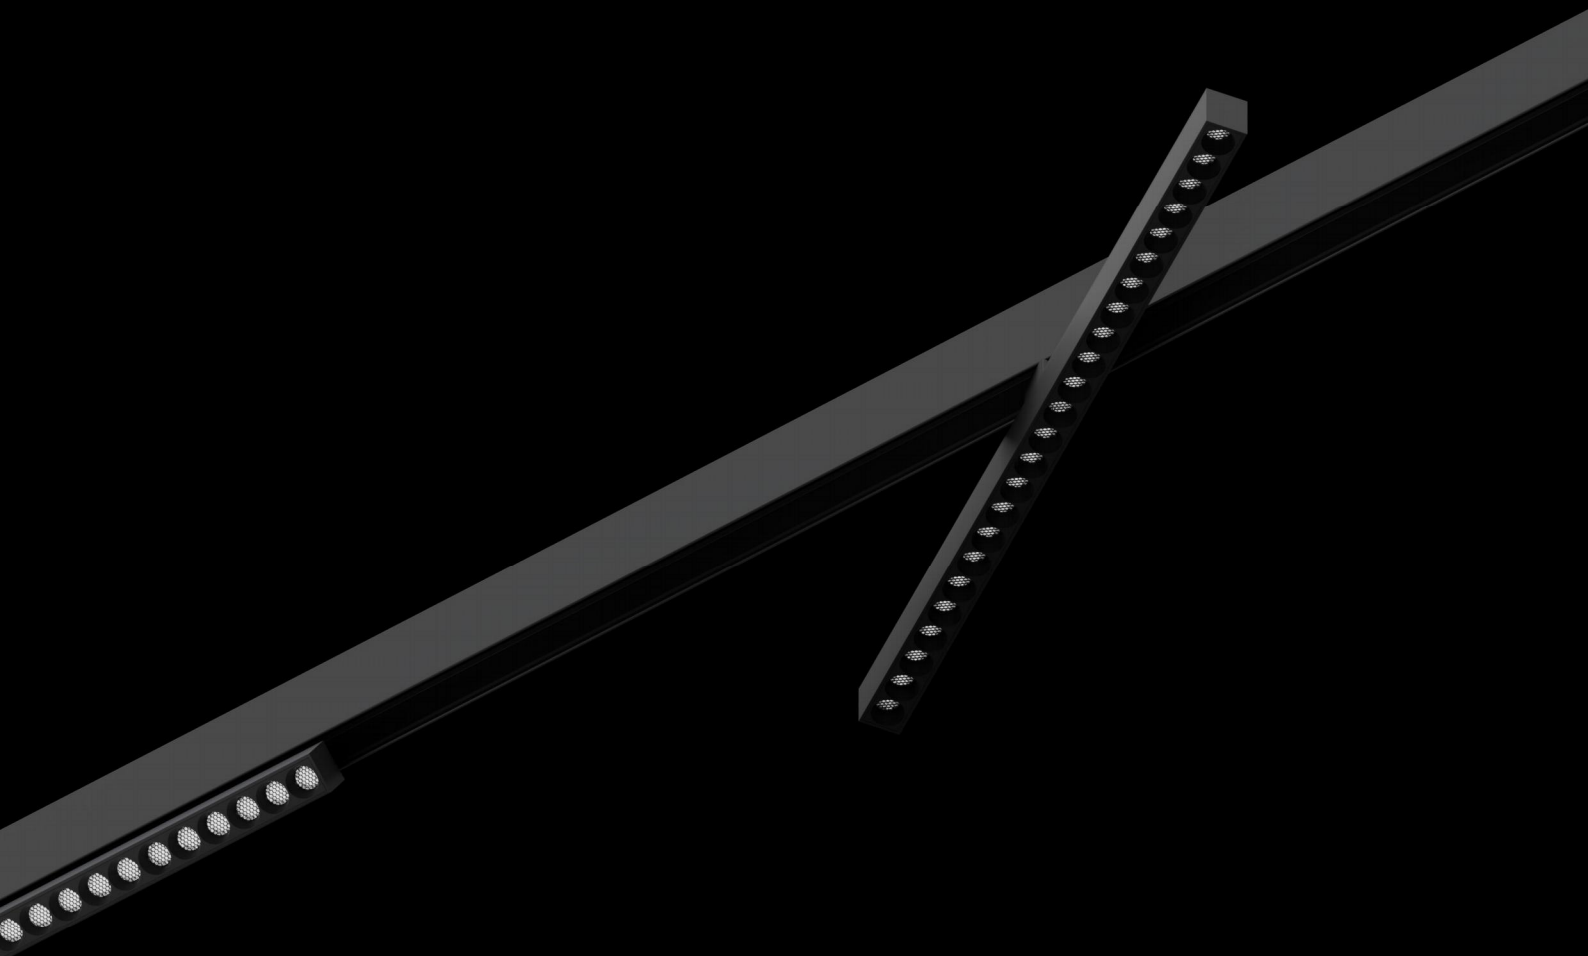

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types

L=220/436/652

Colours

White Black

Light distributions

spot med. flood

MAGENTRA

LOW VOLTAGE REAR LIGHT ULTRA-ANTI-GLARE

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE L220

spot 19°

medium 28°

flood 40°

BEAM ANGLE L436

spot 21°

medium 29°

flood 41°

BEAM ANGLE L652

spot 21°

medium 29°

flood 41°



MAGENTRA ACCENT LIGHTING

CRI
>90


SMD

48V

IP20

DALI

≤8
UGR



LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
11W 36V 250MA	3000K	1018lm	61.02359
	4000K	1068lm	



MAGENTRA ACCENT LIGHTING

CRI
>90


SMD

48V

IP20

DALI

≤8
UGR



LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	2041lm	61.02360
	4000K	2143lm	



MAGENTRA ACCENT LIGHTING

CRI
>90


SMD

48V

IP20

DALI

≤8
UGR




LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
27W 36V 700MA	3000K	2691lm	61.02361
	4000K	2825lm	

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types

L=220/436

Colours

White Black

Light distributions

spot med. flood

MAGENTRA

LOW VOLTAGE REAR LIGHT ULTRA-ANTI-GLARE

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE L220

spot 19°

medium 28°

flood 40°

BEAM ANGLE L436

spot 21°

medium 29°

flood 41°



MAGENTRA ACCENT LIGHTING

CRI >90


SMD

48V

IP20

DALI

≤8 UGR



LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
11W 36V 250MA	3000K	1018lm	61.02362
	4000K	1068lm	



MAGENTRA ACCENT LIGHTING

CRI >90


SMD

48V

IP20

DALI

≤8 UGR



LOW VOLTAGE LINEAR LIGHT ULTRA-ANTI-GLARE

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	2041lm	61.02363
	4000K	2143lm	