




Video

Modular, press-to-open

---



**MINI PRO**

RECESSED DOWNLIGHT



Fully modular with push-to-release design




Horizontal and vertical  
adjustment across all models



Trim installation with glare  
reflector



Trimless installation with ultimate glare

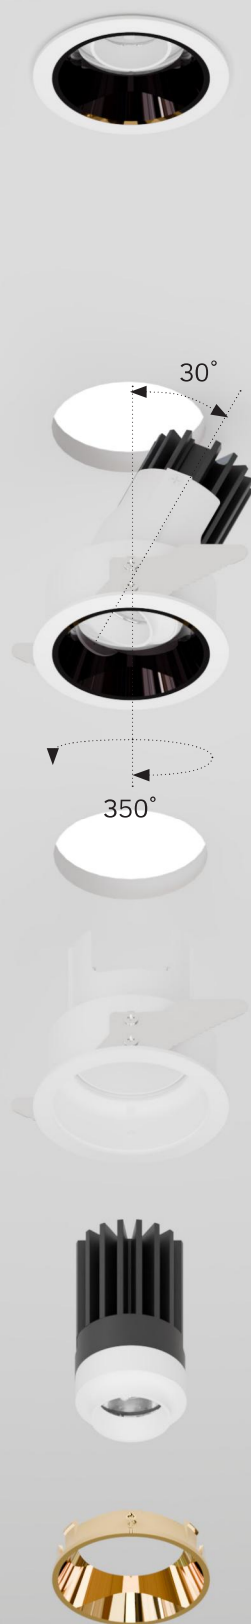

### Quickinfo

2700K, 3000K, 4000K  
CRI90, 3 SDCM  
L85/50000h  
non DIM, 0-10V DIM, DALI-2

### Types



### Colours



White Black

### Light distributions



spot med. flood wide  
flood

## MINI PRO

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE MINI PRO 55

spot 17°

medium 23°

flood 34°

wide flood 55°

BEAM ANGLE MINI PRO 55

spot 17°

medium 23°

flood 34°

wide flood 55°

BEAM ANGLE MINI PRO 65

spot 17°

medium 23°

flood 34°

wide flood 55°


BEAM ANGLE MINI PRO 55

spot 18°


medium 23°

flood 35°

wide flood 50°



55



MINI PRO 55

CRI >90

COB

IP20

DALI


≤9 UGR

ADJUSTABLE DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 684lm         | 52.05527   |
|              | 4000K       | 718lm         |            |



55



MINI PRO 55

CRI >90

COB

IP20

DALI


≤9 UGR

ADJUSTABLE DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 627lm         | 52.05526   |
|              | 4000K       | 659lm         |            |



65



MINI PRO 65

CRI >90

COB

IP20

DALI


≤9 UGR

ADJUSTABLE DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 627lm         | 57.06511   |
|              | 4000K       | 659lm         |            |



55



MINI PRO 55

CRI >90

COB

IP20

DALI

≤19 UGR

ADJUSTABLE DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 547lm         | 57.05516   |
|              | 4000K       | 574lm         |            |

## Full range of ball-bearing



structure, removable and share  
modules



Trim installation





### Quickinfo

2700K, 3000K, 4000K  
CRI90, 3 SDCM  
L85/50000h  
non DIM, 0-10V DIM, DALI-2

### Types



### Colours



White Black

### Light distributions



spot med. flood wide  
flood

## MINI PRO

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE MINI PRO 45

spot 18°

medium 23°

flood 32°

wide flood 45°

BEAM ANGLE MINI PRO 45

spot 18°

medium 23°

flood 32°

wide flood 45°

BEAM ANGLE MINI PRO 45

spot 18°


medium 23°

flood 32°

wide flood 45°



45



MINI PRO 45

CRI >90

COB

IP20

DALI


≤18 UGR

RECESSED DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 608lm         | 51.04523   |
|              | 4000K       | 638lm         |            |



45



MINI PRO 45

CRI >90

COB

IP20

DALI


≤18 UGR

RECESSED DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 608lm         | 60.04513   |
|              | 4000K       | 638lm         |            |



43



MINI PRO 45

CRI >90

COB

IP20

DALI

≤18 UGR

RECESSED DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 608lm         | 60.04515   |
|              | 4000K       | 638lm         |            |

Narrow-trim recessed lights, with  
custom spring clips designed for  
different ceiling types.







### Quickinfo

2700K, 3000K, 4000K  
CRI90, 3 SDCM  
L85/50000h  
non DIM, 0-10V DIM, DALI-2

### Types



### Colours



White Black

### Light distributions



spot med. flood wide  
flood

## MINI PRO

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE MINI PRO 38

spot 18°

medium 23°

flood 32°

wide flood 45°


BEAM ANGLE MINI PRO 38

spot 18°


medium 23°

flood 32°

wide flood 45°



38



MINI PRO 38

CRI  
>90

COB

IP20

DALI


≤18  
UGR

RECESSED DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 608lm         | 51.03825   |
|              | 4000K       | 638lm         |            |



38



MINI PRO 38

CRI  
>90

COB

IP20

DALI

≤18  
UGR

RECESSED DOWNLIGHT

| SYSTEM POWER | COLOUR TEMP | LUMINOUS FLUX | ORDER CODE |
|--------------|-------------|---------------|------------|
| 8W 36V 180MA | 3000K       | 608lm         | 51.03823   |
|              | 4000K       | 638lm         |            |