



30-degree adjustable



Low glare



OPTIMAX
RECESSED DOWNLIGHT



Fixed, fixed



Fixed






Heat sink is a module,
interchangeable




Structural supports
ens and reflector



Mounting module,
interchangeable

OPTIMAX

RECESSED DOWNLIGHT

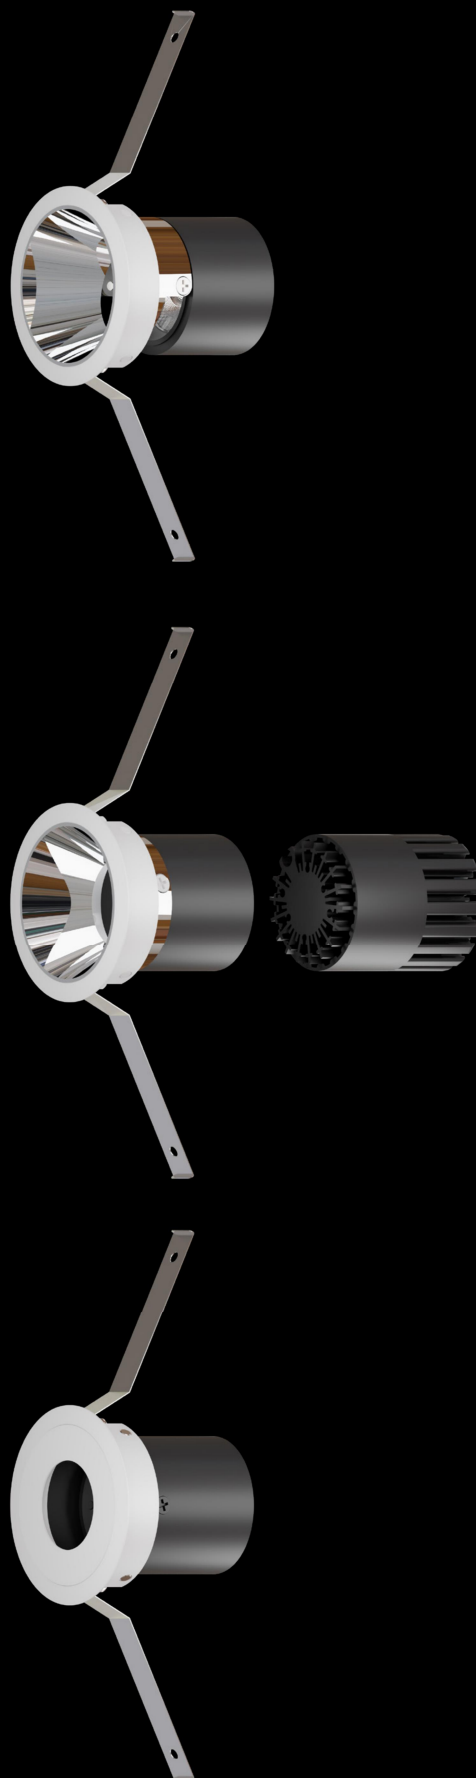




Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

OPTIMAX

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE ROUND 50

spot 17°

medium 25°

flood 38°

wide flood 47°

BEAM ANGLE FIXED 50

spot 19°

medium 28°

flood 40°

wide flood 52°


BEAM ANGLE ADJUSTABLE 50

spot 19°

medium 28°

flood 41°

wide flood 51°



OPTIMAX 50 Round

CRI >90


COB

IP20

DALI

≤6 UGR

RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	514lm	51.05012
	4000K	539lm	



OPTIMAX 50 Fixed

CRI >90


COB

IP20

DALI

≤10 UGR

RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	589lm	51.05011
	4000K	618lm	



OPTIMAX 50 Adjustable

CRI >90

COB

350°
30°

IP20

DALI

≤12 UGR


ADJUSTABLE DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	601lm	52.05015
	4000K	631lm	



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

OPTIMAX

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE
2700K
3000K
4000K

FINISH COLOUR
sandy white
sandy black


BEAM ANGLE ROUND 65
spot 18°
medium 27°
flood 39°
wide flood 45°

BEAM ANGLE FIXED 65
spot 21°
medium 31°
flood 42°
wide flood 51°

BEAM ANGLE ADJUSTABLE 65
spot 20°
medium 30°
flood 42°
wide flood 51°




OPTIMAX 65 Round



RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	963lm	51.06513
	4000K	1011lm	





OPTIMAX 65 Fixed



RECESSED DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1147lm	51.06512
	4000K	1204lm	



OPTIMAX 65 Adjustable



ADJUSTABLE DOWNLIGHT			
SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
14W 36V 350MA	3000K	1175lm	52.06513
	4000K	1233lm	