


SILO RECESSED DOWNLIGHT



SILO

Recessed Downlight

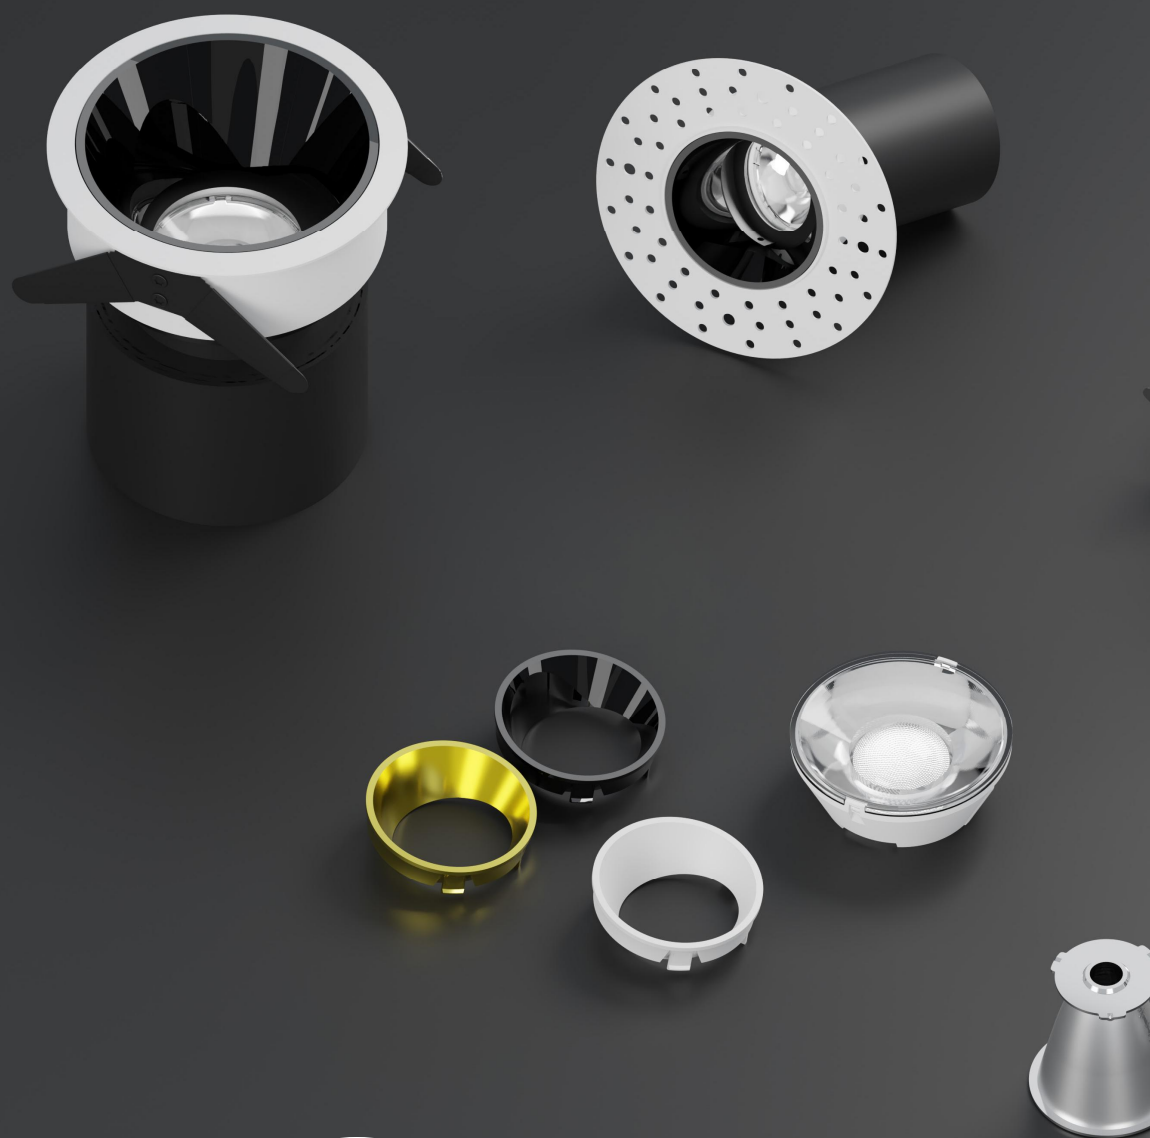

SILO RECESSED DOWNLIGHT



1. Remove the bottom reflector



2. Take the pull ring out, as marking A, tilt angle horizontally with pull ring, which is more easily.








3. After adjusted, it can be folded back to the original position



4. A pull ring allows the luminaire to be pulled down by hands without any tooling, providing great convenience for the maintenance of the luminaire

SILO RECESSED DOWNLIGHT

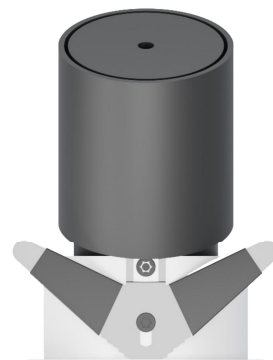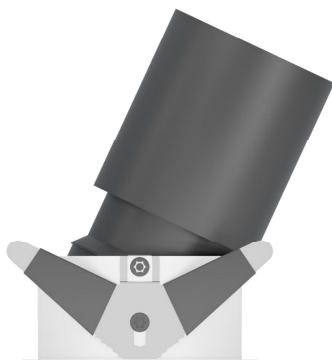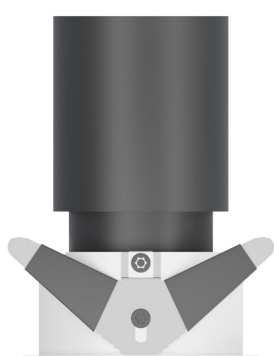

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




SILO 55 **52.05518**

Trim




SILO 75 **52.07517**

Trim



SILO 95 **52.09526**

Trim



Code Ordering Example: 5 2 . 0 5 5 1 8 - 9 0 3 0 1 7 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Recessed Downlight	52.05518	CA COB LED	90	30 3000K	11W	734 lm	17°/20°/29°/40°	D0 No Dim	10 ☐ WH
				40 4000k		767 lm		DA Dali Dim	20 ☒ BK
SILO 75 Recessed Downlight	52.07517	CA COB LED	90	30 3000K	14W	1618 lm	18°/32°/42°/52°	DC 0-10V Dim	
				40 4000k		1699 lm		DT Triac Dim	
SILO 95 Recessed Downlight	52.09526	CA COB LED	90	30 3000K	28 W	2974 lm	19°/25°/39°/48°		
				40 4000k		3122 lm			
SILO 75-N Recessed Downlight	52.07517	CA COB LED	90	30 3000K	14.8W	813 lm	6.4°		
				40 4000k		854 lm			

SILO RECESSED DOWNLIGHT



Stainless steel marble structure + steel wire insurance line, double protection

Body

Offer the flexibility of interchangeable optics and come in both trim and trimless options. They are available in two wattage options for each size, providing you with choices to meet your specific lighting needs.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with external driver.
Dimming Options: 0-10v Dim, Dali Dim, Triac Dim.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass




Honeycomb louvre




SILO 55
Trimless

57.05511




SILO 75
Trimless

57.07502



SILO 95
Trimless

57.09516



Code Ordering Example: 57.05511-903017D010

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
SILO 55 Recessed Downlight	57.05511	CA COB LED	90	30 3000K	11W	734 lm	17°/20°/29°/40°	D0 No Dim	10 ☐ WH
				40 4000k		767 lm		DA Dali Dim	20 ☒ BK
SILO 75 Recessed Downlight	57.07502	CA COB LED	90	30 3000K	14W	1618 lm	18°/32°/42°/52°	DC 0-10V Dim	
				40 4000k		1699 lm		DT Triac Dim	
SILO 95 Recessed Downlight	57.09516	CA COB LED	90	30 3000K	28 W	2974 lm	19°/25°/39°/48°		
				40 4000k		3122 lm			
SILO 75-N Recessed Downlight	57.07502	CA COB LED	90	30 3000K	14.8W	813 lm	6.4°		
				40 4000k		854 lm			