


Luminaire height: 15mm
Maximum vertical tilt angle: 15°
Horizontal rotation: 350°
UGR: ≤ 10




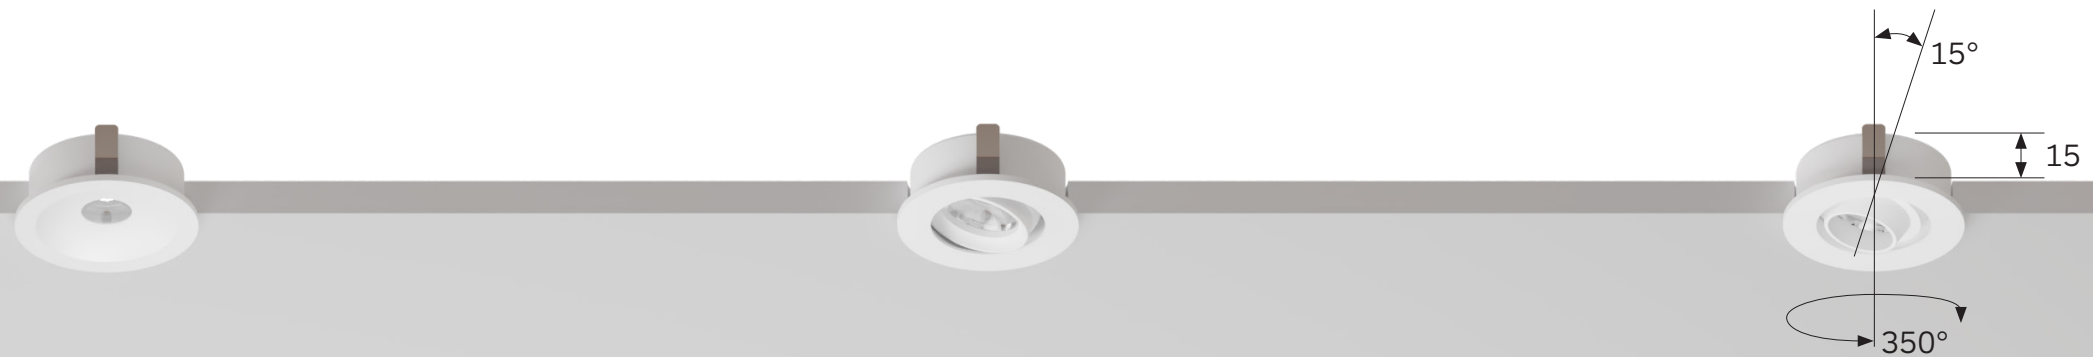

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

ULTRA-SLIM

CABINET LIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE 35-1

spot 19°

medium 23°

flood 29°

wide flood 53°

BEAM ANGLE 35-2

spot 18°

medium 26°

flood 30°

wide flood 52°


BEAM ANGLE 35-3

spot 18°

medium 26°

flood 30°

wide flood 52°




35

ULTRA-SLIM 35-1



CABINET LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
3W 12V 150MA	3000K	106lm	51.03520
	4000K	111lm	




35

ULTRA-SLIM 35-2



CABINET LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
3W 12V 150MA	3000K	129lm	52.03525
	4000K	136lm	



35

ULTRA-SLIM 35-3



CABINET LIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
3W 12V 150MA	3000K	129lm	52.03526
	4000K	136lm	

