



TLA SURFACE MOUNTED LIGHT



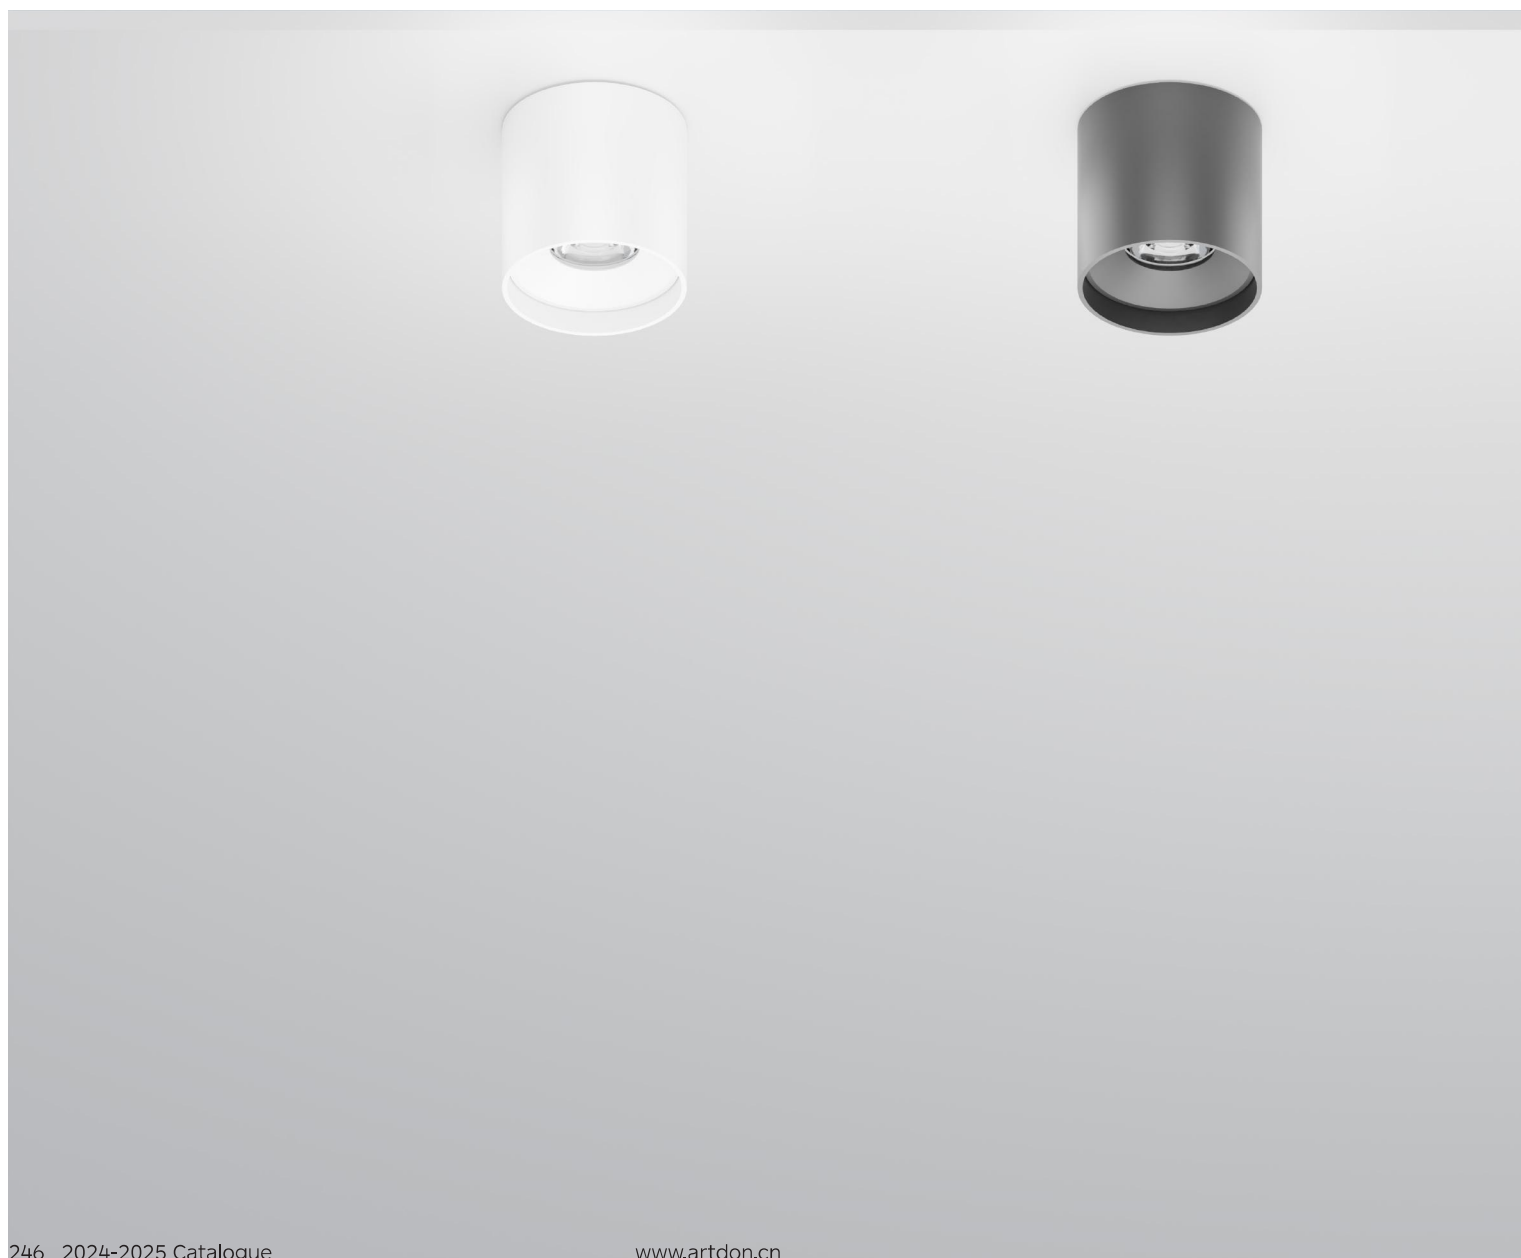

TLA SURFACE MOUNTED LIGHT

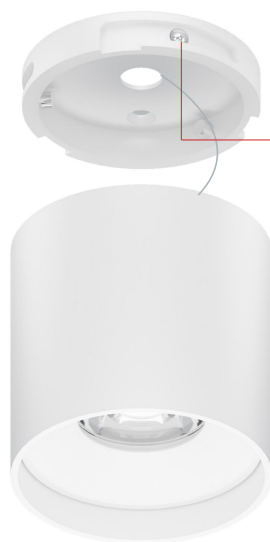

Triple safety construction, spin buckle, marble anti-backlash, steel wire safety cord (or optional screw fastening)

Body

Blends seamlessly into various environments with practical styles.

Available in different wattages and sizes to meet diverse needs.

Classic appearance, simple, durable and practical, the best choice for commercial space.

Accessories

Honeycomb louvre, Linear Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options are available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with Built-in driver.
Dimming Options: Dali Dim, 0-10V Dim, Triac Dim.

Applications

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.


Suitable Accessories




Linear Spread glass




Glass




Honeycomb louvre




TLA 62 91.06215



TLA 84 91.08412



TLA 105 91.10511



Code Ordering Example: 9 1 . 0 6 2 1 5 - 9 0 3 0 1 8 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
TLA 62 Surface Mounted Light	91.06215	CA	COB LED	90	30 3000K	6W 617 lm	18°/24°/36°/62°	D0 No Dim	10 ☐ WH
					40 4000k	647 lm		DA Dali Dim	20 ☒ BK
TLA 84 Surface Mounted Light	91.08412	CA	COB LED	90	30 3000K	9W 1092 lm	21°/23°/35°/60°	DC 0-10V Dim	
					40 4000k	1146 lm		DT Triac Dim	
TLA 105 Surface Mounted Light	91.10511	CA	COB LED	90	30 3000K	13.5W 1484 lm	17°/26°/34°/58°		
					40 4000k	1558 lm			